AXOR



PRODUCT BOOK 2020/2021 FORM FOLLOWS PERFECTION

This Product Book renders all preceding ones void. Measurements within scale drawings are in mm.

PRODUCT BOOK 2020/2021

FORM FOLLOWS PERFECTION

For over 25 years, AXOR has stood for customized bathroom design. Customers can select from an impressively wide range of products – about 2,000 – from AXOR collections and AXOR programs. In recent years, the brand has increased emphasis on the development of an extensive shower product range with exclusive items reflecting classic to avant-garde design.

The philosophy and the stories behind the individual collections are unique. Reflecting the designers' personal inspirations, the bathroom collections offer a wide range of styles in design languages ranging from classic to modern. Numerous international design awards – including many Best of the Best and Gold awards – demonstrate the high quality of AXOR design.

Modern bathroom planning is increasingly about expressing a customer's own particular style. With AXOR FinishPlus and AXOR Signature, AXOR can offer even more options for customizing design to create unique, individual bathrooms.

axor-design.com

AXOR Brand

NDEX AXOR	AXOR Edge	48
	AXOR MyEdition	72
	AXOR Starck	90
	AXOR Starck Organic	116
	AXOR Citterio	134
	AXOR Citterio E	160
	AXOR Citterio M	182
	AXOR Urquiola	198
	AXOR Massaud	214
	AXOR Uno	220
	AXOR Montreux	246
	AXOR Showers / Flow diagrams	268
	AXOR Accessories	354
	AXOR Electronic mixers	390
	AXOR Wash basins, bath tubs	398
	AXOR Kitchen mixers	402

AVANT-GARDE

FORGE AHEAD AND SET TRENDS

- Pathbreaking: Development, construction and production of completely new designs and innovative technologies
- Interdisciplinary: Cooperation with internationally renowned designers, architects and interior designers
- History: AXOR has been a trendsetter for bathrooms for more than 25 years, as demonstrated by such timeless icons as the bestselling AXOR Starck
- / Validation: Numerous renowned, international design awards substantiate the AXOR design philosophy
- / Avant-garde use of water: from water design to water conservation to the experience of water on the skin
- / Visionary concepts: With AXOR WaterDreams, designers visualize the bathroom of the future ______





INDIVIDUALIZATION

EXPRESS YOUR PERSONALITY

- A wide variety of styles: The personal styles of various designers create a broad range of design languages, from classic to avant-garde
- Product range depth: Products for all areas of the bathroom from wash basin to shower and bathtub – and for the kitchen
- Refinement: Mixers, showers and accessories in metallic AXOR FinishPlus PVD surfaces from Polished Gold Optic to Brushed Black Chrome
- / Product customization: We respond to individual requests and requirements with AXOR Signature Service
- New dimensions: by using exclusive materials, AXOR offers individualization at a completely new level with the new AXOR MyEdition collection

PERFECTION

PURSUING UNIQUENESS IN EVERY DIMENSION

- Perfection in each and every detail: The AXOR philosophy is demonstrated in design, planning and production
- High-tech and craftsmanship: AXOR brings the two together in production thanks to innovative thinking and German engineering
- A tradition of progress: As a brand of the Hansgrohe Group, a company rich in tradition, AXOR can access over 100 years of expertise in the sanitary industry
- / Extensive support: As a specialist sales partner, you have the support of AXOR experts from consultation to sales to after-sales service



AXOR Brand

THE AXOR SUCCESS STORY

The history of AXOR is closely tied to the design history of the bathroom and the evolution of this space from a washroom towards an oasis of wellness. The history of AXOR, the design brand of the Hansgrohe Group, started when Hans Grohe founded the company in 1901. It was successfully established as a manufacturer in the sanitary industry when Klaus Grohe, Hans Grohe's youngest son, took over at the end of the 1960s. While the typical water tap during the 1980s was functional and shaped like all the others, Klaus Grohe increasingly brought his passion for design into the company. In 1981, Klaus Grohe oversaw the first design mixer, Allegroh, made in cooperation with Esslinger Design, the forerunner of the internationally renowned design office Frog Design. Uno - later called AXOR Uno - was the first mixer collection in color and received international recognition. In the 1990s, design developed into a sign of prestige and Klaus Grohe discovered its potential for the sanitary industry. In so doing, he laid the foundation for the success story of AXOR as a design brand for luxurious products that bring individuality to bathrooms and kitchens.



ESTABLISHMENT OF THE AXOR BRAND



1994 / AXOR Starck: Presentation with Salon d'eau by Philippe Starck
2000 / AXOR WaterDream with PHOENIX - an innovative concept bathroom



2003 / AXOR Citterio 2004 / AXOR Starck – Redesign

AXOR WATERDREAM WITH PATRICIA URQUIOLA, JEAN-MARIE MASSAUD AND RONAN & ERWAN BOUROULLEC

2005



- 2006 / AXOR Massaud and AXOR Montreux
- 2007 / AXOR Citterio M
- 2008 / AXOR ShowerCollection the first shower product range
- 2009 / AXOR Urquiola
- 2012 / AXOR Starck Organic
- 2013 / AXOR WaterDream and product launch of AXOR Showers designed by Front and Nendo

"IF YOU WANT TO BE PART OF CHANGING THE BATHROOM, IT S BEST TO WORK TOGETHER WITH DESIGNER, INTERIOR DESIGNERS AND ARCHITECTS."

Klaus Grohe, 1994



2014

AXOR STARCK V, AXOR CITTERIO E AND AXOR UNIVERSAL ACCESSORIES



AXOR EDGE

2019

2015 / AXOR One shower products designed by Barber & Osgerby and AXOR WaterDream with the ÉCAL design school

2016 / AXOR WaterDream "Create your own spout"



2017 / AXOR Uno redesign and AXOR Showers with the innovative PowderRain spray mode

2018 / AXOR MyEdition

SIX REASONS TO CHOOSE AXOR



DESIGN DIVERSITY

AXOR works with internationally renowned designers. With their utterly personal approaches, they shape the extensive variety of styles and vast depth of the AXOR product range. Their designs continue to set benchmarks with regard to their avantgarde forms, which are simultaneously innovative and timeless. In the context of AXOR WaterDreams, designers from completely different disciplines develop their vision of the bathroom of the future, fully disconnected from product-oriented development. Their ideas provide new momentum for developing the space, understanding how it will be used and creating complementary products. In the following collections, unique water designs create extraordinary experiences in look and feel, with innovative spray modes and a completely new way to present water:

- AXOR Massaud with a waterfall that seems real
 AXOR Starck Organic with a gentle shower spray –
- for the first time on a mixer
- / AXOR Starck V with a powerful water vortex
- AXOR MyEdition with PowderRain, matching the mixer design

2 INDIVIDUALIZATION

The exclusive AXOR FinishPlus and AXOR Signature services provide individualization, meeting the increasing demands of customers for more options for personalizing bathroom products. With colored PVD surfaces and customized solutions, AXOR products become unmistakably one-of-a-kind.





4 WORLDWIDE PRESENCE

As part of the Hansgrohe Group, which has 33 subsidiaries and 22 sales offices, AXOR is represented worldwide and delivers its products to more than 140 countries. AXOR mixers, showers and kitchen mixers can be found in top residences, hotels and restaurants around the world. International architects, planners and builders trust AXOR product quality and consultation with our experts.



3 MADE IN GERMANY

The high-end products made in our AXOR plant in Schiltach, Germany, owe their excellence to German engineering quality and deep commitment to precision in every detail. This expertise is based on more than 118 years of experience gathered by the Hansgrohe Group and the knowledge of each individual production specialist. AXOR is also a pioneer in innovative manufacturing technologies such as the newest generation diamonding machine for the ultra-precise milling of surfaces for the AXOR Edge collection.



5 UNDERSTANDING SUSTAINABILITY Using resources wisely is important to AXOR – from products that save water and production materials that protect resources to durability in design, functionality and quality. One example: The AXOR Starck Organic wash basin mixer, with its especially low water consumption.

6 INTERNATIONAL DESIGN AWARDS

Validation of our design achievements by independent, internationally renowned industry experts: The numerous awards for top quality product design that AXOR has received since its beginnings confirm the brand's excellence. Among others, these awards include:

- / Red Dot Best of Best for AXOR Edge
- / Iconic Award for AXOR MyEdition
- / iF Design Award in Gold for AXOR Uno
- / Green Design Award for AXOR Starck Organic





THE MAXIMUM IN SERVICES



AXOR FINISHPLUS AND AXOR SIGNATURE

These individualization services allow AXOR to meet the personal requirements of customers as well as their expectations for unique design.







FIVE-YEAR MANUFACTURER'S GUARANTEE*

The manufacturer's guarantee exceeds the legally required period, emphasizing AXOR's quality standards. In addition, strict quality management is applied during the production process so that the products comply with the high requirements of independent testing institutes and legal regulations. Manufacturer's guarantees can vary from country to country. For further information about country-specific conditions, contact your local AXOR partner.



FIFTEEN-YEAR AVAILABILITY GUARANTEE


A 15-year guarantee that spare parts for AXOR products will be available for purchase ensures the safety of your investment. All of the products and related information can be found quickly and easily online in the spare parts catalog: spares.hansgrohe.com





WEB SITE FOR PROFESSIONALS

In the "pro" portal, specialized dealers, architects and installers can find information, planning advice and prices for all products as well as practical tips and tools for professional bathroom planning and consultation. Find out more at: pro.hansgrohe-int.com



PLANNING INFORMATION

Assembly and service instructions, dimension drawings, BIM planning data and 3D data for optimum bathroom planning with AXOR products can also be found in the "pro" portal: pro.hansgrohe-int.com



COMFORTZONE TEST



The perfect combinations of mixers and wash basins are determined in our internal test center. In addition, the corresponding wash basins of leading manufacturers are also tested with AXOR products to ensure optimum functionality and appearance. All of the recommended combinations can be found on the respective AXOR website on the page each respective collection: axor-design.com





MEISTERSERVICE

AXOR service specialists are trained masters in the sanitary trade. They provide advice with regard to technical issues – by telephone, e-mail or chat. In certain cases, a specialist for home technology provides consultation on site. Local partners can be contacted by telephone or e-mail: service@axor-design.com



PROJECT CONSULTATION

AXOR offers professional support and consultation worldwide with regard to project tenders and planning. Please contact your local partner or send an e-mail to service@axor-design.com



BATHROOM EXHIBITION

Experience AXOR worldwide, live: Showrooms and WaterStudios in urban centers of architecture and design serve as sources of inspiration as well as meeting places and design and training centers for business partners, architects and interior designers. In the Aquademie at Hansgrohe Group headquarters in Schiltach, Germany, visitors and sales partners can experience a bathroom and kitchen landscape that extends across 1,000 square meters, with a museum covering bathroom, company and brand history, regular events, and a Shower World with test showers.




AXOR COLLECTIONS

AXOR Basic sets, wastes and overflows

STYLISTIC VARIATION. IN PURSUIT OF PERFECTION.

From classic to modern: AXOR faucets, showers, washbasins, bathtubs and accessories. Unique, avant-garde pieces and complete collections. Created with world-renowned designers. Uncompromising in quality. Full of pioneering innovations. In pursuit of perfection.

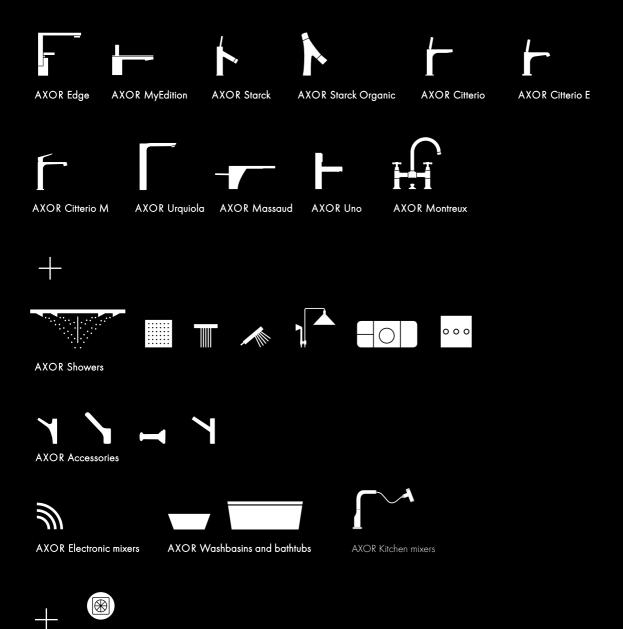

AXOR TECHNOLOGIES

INNOVATION. IN PERFECTION.

Pioneering ideas. Shaping water into invigorating jets, enveloping cocoons and sensual flows. Intuitive systems. Simple to use, easy to clean and ecologically responsible. Promoting conscious and conscientious water use. The result of intensive research and development, AXOR technologies are made in Germany to the highest quality standards – our own. In pursuit of perfection.

CHROME CAN ALSO BE GOLD-PLATED



AirPower technology: Enriching water with air produces plump droplets for a velvety touch on the skin.



PowderRain technology: The finest silicone nozzles, with several openings per nozzle, provide a uniquely fine mist of water.




QuickClean technology: Remove limescale deposits quickly and easily with flexible silicone nozzles.



Select technology: Use the Select button to switch spray modes or shower heads; switch on and off the water at the mixer.



Eco-Smart technology: Faucets and showers consume up to 60 percent less water than conventional products.



ComfortZone: Defines the space between the wash basin and mixer. The larger the ComfortZone, the greater the variety of uses.



CoolStart technology: Cold water flows automatically when in the neutral handle position. Brushed Brass -950

Polished Gold Optic -990

Brushed Gold Optic -250

Brushed Bronze -140

Polished Red Gold -300

Brushed Red Gold -310 AVAILABLE FROM QUANTITY

AVAILABLE FROM QUANTITY 30

Brushed Nickel -820

Stainless Steel Optic -800

Polished Black Chrome -330

Brushed Black Chrome -340

Polished Chrome -020

Brushed Chrome -260

Polished Nickel -830

Polished Bronze -130

Polished Brass -930 AXOR Brand

AXOR FINISHPLUS

REFINED. TO PERFECTION.

Exceptionally radiant, robust and resistant, AXOR FinishPlus surfaces offer outstanding color brilliance. Their incomparable shine is the result of a state-of-the-art process for coating surfaces: Physical Vapor Deposition (PVD), the evaporation of Zirconium molecules in a vacuum. The results are particularly impressive on the brushed variants.

AXOR FinishPlus. Available in exclusive surfaces. Also available according to individual specifications. In theory, any color preference is possible. In practice, a feasibility test must be conducted. Once approved by AXOR experts, a special product is transformed into a unique original.

AVAILABLE FROM QUANTITY 1



Brushed Brass -950



Polished Gold Optic -990



Brushed Gold Optic -250



Brushed Bronze -140



Polished Red Gold -300



Polished Black Chrome -330



Brushed Red Gold -310



Brushed Black Chrome -340



Brushed Nickel -820



Stainless Steel Optic -800

AVAILABLE FROM QUANTITY 30



Polished Chrome -020



Brushed Chrome -260



Polished Nickel -830



Polished Bronze -130



Polished Brass -930

"WITH ITS POLISHED BLACK CHROME FINISH, AXOR CITTERIO E EXUDES A PERSO-NAL TOUCH AND HARMONIZES PERFECTLY WITH THE HOTEL'S INTERIOR."

Dietmar Funk, proprietor, Hotel Liberty



The luxurious Hotel Liberty in Offenburg, Germany. A former prison converted into a true design-original. The hotel's 38 rooms and suites are fitted with AXOR Citterio E faucets in Polished Black Chrome, and furnished with washbasins and baths from the AXOR Urquiola collection.





Il Sereno luxury hotel on the shore of Lake Como in Northern Italy. A modern interpretation of the Italian rationalism of the 1920s and '30s. The hotel's 30 suites, which offer fascinating views over the lake, all feature AXOR Urquiola faucets at the washbasin and bath. In Brushed Nickel and Brushed Red Gold. The embodiment of Italian glamour.

"AXOR ALLOWED US TO CUSTOMIZE THE COLOR SO THAT THE FAUCETS WOULD HARMONIZE WITH THE BROWN AND SILVER TRAVERTINE STONE. CREATING THIS DESIGN WITH SUCH A RICH ARRAY OF MATERIALS WOULD NOT HAVE BEEN POS-SIBLE WITHOUT CUSTOMIZATION."

Luis Contreras, proprietor, Il Sereno




AXOR SIGNATURE

FROM UNIQUE PRODUCTS TO ONE-OFF SPECIMENS.

AXOR transforms faucets into unique works of art. Transforms designer visions into truly personalized showers. Tailored to the needs and tastes of the customer. Lengthening, shortening, inscribing-these are the exclusive services AXOR Signature offers.

Be it the desire for modified handles or the need for a longer extension between wall and washbasin, AXOR Signature makes one-of-a-kind bathroom items a reality. An original faucet is the expression of a unique personality. Even more so when inscribed with one's initials or signet. AXOR Signature. Manufactured and customized by AXOR experts. To perfection.

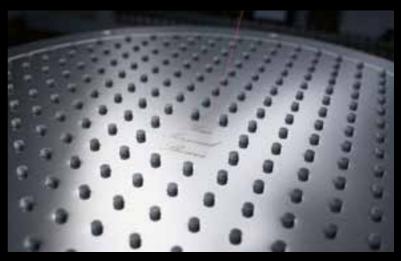



The extension of a ceiling fixture – custom-fitted to the height of the room.





The addition of inscriptions – monograms or larger symbols for better legibility.

The extension of a faucet – custom-fitted to the height of the washbowl.

"EXTENDING OR SHORTENING A FAUCET OR SHOWERHEAD IS COMPLETED IN THE AXOR FACTORY BY HAND, WITH THE UT-MOST PRECISION AND AN EYE TO DETAIL. THE RESULT IS PERFECTION."

Thomas Kandora development engineer for AXOR



Timeless luxury with an Alpine twist: The Chedi in Andermatt, Switzerland. 169 rooms, suites and residences. Ingeniously fitted with AXOR Starck faucets for the washbasins and baths. The faucets for the baths were extended by 6 cm to fulfill an original vision of perfection.



Campbell's Pocket Residence in Australia. A private villa with ten rooms and three luxury bathrooms. Custom-made shower heads and faucets with bi-color surfaces in Brushed Bronze/Matt Black. The ceiling fixtures for the shower heads were extended by 50 cm. Custom-fitted to the height of the room.

AXOR DESIGNER

INDIVIDUAL SIGNATURES FOR AVANT-GARDE AXOR DESIGN OBJECTS.



In addition to perfection in manufacture and finishes, AXOR adheres to principles: Everything starts with an idea. Developing an idea authentically is what turns it into a groundbreaking product. An iconic product for the washbasin, shower or bath. Timeless. With radical twists, sometimes invisible to the human eye. Each new idea poses its own challenge for the AXOR research and development teams. Construction processes are no less ingenious than the designer's idea itself. Both come together at the AXOR headquarters, where world-leading development expertise shapes the inspiration of globally renowned design talents.



axor-design.com: The ultimate on the web



AXOR ONLINE

INSPIRATION AND INFORMATION. IN PERFECTION.

Out of form and function, an experience. One that appeals to the senses. Touching people, invoking new feelings, inspiring new visions. An experience that begins on the AXOR website. For impressions of and information about all products. Bathroom inspiration and planning. Possibilities for individualization and refinement. Background about the brand, the design and the technology.



P

f

AXOR

AXOR Design

O axordesign

AXOR

axor.design

COLLECTIONS

AXOR Edge

	AXOR MyEdition	72	
k	AXOR Starck	90	
k	AXOR Starck Organic	116	
r	AXOR Citterio	134	
r	AXOR Citterio E	160	
ŕ	AXOR Citterio M	182	
Γ	AXOR Urquiola	198	
7-	AXOR Massaud	214	
F	AXOR Uno	220	
	AXOR Montreux	246	

48

Phase-out products

Phase out products	Code no.	available up to	Phase out products	Code no. availab up
AXOR MyEdition			AXOR Massaud	
For the complete AXOR MyEdition collection	1	09/30/2020	4-hole tile mounted bath mixer	18453000 12/31/202
finishes -350 (Satin Black) and -360 (Satin Black , Brushed Bronze) are phasing out	/		Single lever bath mixer for concealed installation	18455000 12/31/202
AXOR Complementary products in Satin	Black		Basic set for bath spout	18471180 12/31/202
For all AXOR Complementary products the finish	DIGCK	09/30/2020	Bath spout	18472000 12/31/202
-350 (Satin Black) is phasing out (fitting the AXOR MyEdition collection)		077 007 2020	2-hole rim mounted thermostatic bath mixer	18480000 12/31/202
			Single lever shower mixer for concealed installation	18655000 12/31/202
AXOR Starck 3-hole basin mixer for concealed installation	10313000	12/31/2021	Shut-off/ diverter valve Trio/ Quattro for concealed installation	18730000 12/31/202
wall-mounted with spout 125 mm			Thermostat HighFlow for concealed installation	18741000 12/31/202
2-handle bath mixer floor-standing Shower column with thermostat		12/31/2021	Thermostat for concealed installation with shut-off valve	18745000 12/31/202
and plate overhead shower 240 1 jet			Thermostat for concealed installation with shut-off/ diverter valve	18750000 12/31/202
AXOR Starck Classic			Shut-off valve for concealed installation	18770000 12/31/202
Single lever basin mixer 60	10015000	12/31/2021	Bath tub 1,900/1,500	18950000 12/31/202
for hand washbasins with pop-up waste set Single lever basin mixer 220 for wash bowls with pop-up waste set	10020000	12/31/2021	Built-in wash basin 585/469 with 1-boreholing	42310000 12/31/202
Single lever basin mixer 220	10028000	12/31/2021	AXOR Showers	
or wash bowls with waste set		, ,	Overhead showers	
3-hole basin mixer 90 with pop-up waste set	10133000	12/31/2021	Overhead shower 460/300 1 jet	35277350 09/30/202
Single lever bidet mixer with pop-up waste set	10200000	12/31/2021	with ceiling connection	
Single lever bath mixer for concealed installation	10415000	12/31/2021	Overhead shower 460/300 1 jet with shower arm and square escutcheon	35278350 09/30/202
Single lever shower mixer for concealed installation	10615000	12/31/2021	Overhead shower 460/300 3jet with ceiling connection	35281350 09/30/202
			Overhead shower 460/300 3jet with shower arm and square escutcheon	35282350 09/30/202
AXOR Starck Organic Thermostat for concealed installation	10710000	12/31/2021	Overhead shower 250/580 3jet	35283350 09/30/202
memosial for concedied insidiation	12710000	12/31/2021	Overhead shower 250/250 1 jet with shower arm	35306350 09/30/202
AXOR Citterio Porter unit 120/120 with baton hand shower	12626350	09/30/2020	Overhead shower 250/250 1 jet with ceiling connection	35308350 09/30/202
2jet and shower hose	12020000	0,, 00, 2020	Overhead shower 250/250 1 jet ceiling	35309350 09/30/202
AXOR Urquiola			Overhead shower 250/250 2jet with shower arm	35310350 09/30/202
Thermostat for concealed installation	11730000	12/31/2021	Overhead shower 250/250 2jet with ceiling connection	35312350 09/30/202
			Overhead shower 250/250 2jet ceiling	35313350 09/30/202
AXOR Massaud	10010000	12/31/2021	Hand showers	
3-hole basin mixer 80 with pop-up waste set			Baton hand shower 2jet	28532350 09/30/202
3-hole basin mixer for concealed installation wall-mounted with spout 170 mm	10112000	12/31/2021	Porter Units	
3-hole basin mixer for concealed installation wall-mounted with spout 262 mm	18115000	12/31/2021	Porter unit 120/120 with baton hand shower 2jet and shower hose	12626350 09/30/202
Single lever bidet mixer with pop-up waste set	18210000	12/31/2021	Shower hoses	
4-hole rim mounted bath mixer	1844000C	12/31/2021	Metal effect shower hose 1.25 m	28282350 09/30/202

Phase-out products

Phase out products	Code no. available up to	Phase out products	Code no.	available up to
AXOR Showers		AXOR Accessories		
Shower systems		AXOR Massaud Accessories		
Shower column with thermostat and plate overhead shower 240 1 jet	10912000 12/31/2020	Cosmetic box		12/31/2021
Thermostatic module Select		Vase		12/31/2021
Thermostatic module Select 460/90 for concealed installation for 2 functions	18355350 09/30/2020	Bath towel rail 800 mm	42280000	12/31/2021
Thermostatic module Select 530/90 for concealed installation for 3 functions	18356350 09/30/2020	AXOR Wash basins, bath tubs AXOR Massaud Wash basin		
Thermostatic module Select 600/90 for concealed installation for 4 functions	18357350 09/30/2020	Built-in wash basin 585/469 with 1-boreholing	42310000	12/31/2021
ShowerSelect Square		AXOR Massaud Bath tub		
Thermostat for concealed installation square for 1 function	36714350 09/30/2020	Bath tub 1,900/1,500	18950000	12/31/2021
Thermostat for concealed installation square for 2 functions	36715350 09/30/2020	AXOR Kitchen mixers		
Thermostat HighFlow for concealed installation square for 1 function and additional outlet	36716350 09/30/2020	AXOR Uno Single lever kitchen mixer 230 with swivel spout	14850000	12/31/2021
Valve for concealed installation square for 3 functions	36717350 09/30/2020	Single lever kitchen mixer 250 with swivel spout		12/31/2021 12/31/2021
Thermostat HighFlow for concealed installation square	36718350 09/30/2020			
		AXOR Wastes and overflow		
AXOR Accessories		Bath filler with wastes and overflow for b	ath tubs	
AXOR Universal Accessories		Finish set bath filler		12/31/2021 12/31/2021
Single hook	42801350 09/30/2020	Waste set push-open for bath tubs		12/31/2021
Liquid soap dispenser with shelf	42819350 09/30/2020	Wastes for shower trays		
Towel holder twin-handle	42821350 09/30/2020	Complete set waste set 52	60030000	12/31/2021
Rail grab bar 300 mm	42830350 09/30/2020	Complete set waste set 90 XXL		12/31/2021
Rail bath towel holder 600 mm	42832350 09/30/2020	Complete set waste set 90		12/31/2021
Rail bath towel holder 800 mm	42833350 09/30/2020	Bath tub trap		12/31/2021
Toilet brush holder wall-mounted	42835350 09/30/2020	Traps		
Roll holder with cover	42836350 09/30/2020	Design trap Flowstar	51303350	09/30/2020
Shelf 300	42838350 09/30/2020	Accessories		, ,
Shelf 150	42840350 09/30/2020	Curved pipe 300 mm	51316000	12/31/2021
Adapter set	42870350 09/30/2020			
AXOR Massaud Accessories				
Grab bar	42230000 12/31/2021			
Soap dish	42233000 12/31/2021			
Toothbrush tumbler	42234000 12/31/2021			
Toilet brush holder floor-standing	42235000 12/31/2021			
Roll holder	42236000 12/31/2021			
Single hook	42237000 12/31/2021			
Mirror	42240000 12/31/2021			
Bath towel rail 600 mm	42260000 12/31/2021			
Towel holder floor-standing	42270000 12/31/2021			
Candle holder	42271000 12/31/2021			

New products

New product	Code no.
AXOR MyEdition	
Mounting plate 200	47921000
Mounting plate 245	47922000
Mounting plate 150	47923000
Template 150	47924000
Template 200	47925000
Template 245	47926000

AXOR Kitchen mixers

Accessories	
Liquid soap dispenser/ washing-up liquid dispenser	42018330 42018340
Liquid soap dispenser/ washing-up liquid dispenser	42818330 42818340

PACKAGING UNIT

Please consider the packaging units when placing your order.

code no.	Number Of Items Per PackingUnit								
01		10821800	3	12174000	6	16518000	6	16974180	50
01700180	10	10822000	6	12210000	4	16518820	5	16982180	20
01750180	10	10822800	5	12231000	3	16520000	3	18	
10		10823000	30	12232000	6	16520820	3	18010000	2
10001000	8	10823800	30	12410000	4	16526000	5	18020000	4
10003000	8	10902180	20	12602000	4	16526820	5	19	
10007000	8	10921180	9	12626000	10	16532000	5	19418000	4
10010000	8	10924000	4	12680000	27	16532820	5	26	
10018000	8	10930000	20	12716000	4	16535000	4	26023000	:
10030000	6	10932000	5	12717000	3	16536000	4	26025000](
10101000	10	10941180	9	12771000	10	16540000	6	26032000	,
10102000	6	10942000	3	13		16540820	6	26034000	4
10103000	8	10970000	20	13089000	18	16541000	8	26035000	4
10106000	10	10971180	11	13586000	50	16541820	8	26050000	1.
10111000	8	10972000	5	13587000	50	16544000	5	26051000	1.
10116000	8	10973180	8	13623180	25	16544820	5	26431000	(
10117000	8	11		15		16546000	5	26432000	24
10123000	10	11020000	6	15480180	2	16546820	5	26433000](
10129000	8	11021000	6	15484180	10	16549180	6	26909180	÷
10140000	4	11024000	3	15485180	2	16551000	6	27	
10145000	4	11025000	5	16		16551820	6	27348000](
10211000	8	11026000	8	16180180	4	16560000	6	27419000	1(
10303180	14	11040000	4	16182180	3	16560820	6	27451000	100
10410000	20	11220000	8	16261000	6	16580000	4	27515000	160
10411000	3	11420000	5	16261820	8	16580800	4	27830000	(
10414000	6	11425000	7	16320000	14	16581000	4	27980000	(
10416000	10	11430000	10	16320820	14	16581800	4	27982000	(
10452180	6	11445000	2	16325000	40	16582000	5	27982820	(
10465000	3	11620000	5	16325820	38	16582800	5	27987000	
10531000	25	11625000	10	16502000	3	16800000	9	27989000	(
10611000	7	11626000	20	16502820	3	16800820	9	27991000	;
10614000	10	11731000	10	16505000	3	16801000	9	28	
10616000	10	11732000	10	16505820	2	16801820	9	28112000](
10650180	10	11733000	10	16506000	3	16810000	10	28112820](
10651000	5	11925000	10	16506820	3	16810820	10	28116000	1.
10665000	10	11960000	25	16510000	6	16815000	10	28120000](
10700000	10	12		16510820	7	16820000	10	28127000	2
10710000	10	12010000	4	16511000	7	16820820	10	28128000	2
10715000	10	12011000	4	16511820	7	16821000	6	28282000	3
10720000	10	12012000	5	16513000	4	16821820	6	28284000	2
10750180	3	12013000	5	16513820	4	16830000	20	28286000	2
10751000	3	12014000	4	16515000	7	16830820	20	28464000	8
10754180	11	12112000	5	16515820	5	16884000	100	28469000	8
10755000	5	12112450	5	16516000	5	16884820	80	28470180	
10820000	3	12171000	6	16516820	5	16930180	25	28474000	(
10820800	3	12172000	6	16517000	6	16970180	25	28486180	ć
10821000	5	12173000	6	16517820	6	16973180	50	28487000	8

PACKAGING UNIT

Please consider the packaging units when placing your order.

code no.	Number Of Items Per PackingUnit								
28489000	8	35313000	2	36731000	110	39		39850800	4
28491000	12	35316000	2	36732000	110	39010000	10	39860000	4
28494000	7	35318000	2	36733000	40	39015000	10	39860800	8
28532000	50	35320000	2	36734000	40	39018000	10	39861000	4
28622000	25	35321000	2	36735000	4	39020000	4	39861800	7
28624000	25	35361180	6	36770180	7	39031000	7	39920000	10
28626000	25	35363180	10	36771000	7	39032000	5	39925000	10
34		36		36772000	5	39035000	5	40	
34010000	10	36100000	5	36773000	9	39037000	4	40068000	48
34016000	10	36101000	6	36822000	12	39112000	10	40088000	48
34017000	10	36102000	5	38		39113000	10	40806000	21
34112000	8	36103000	4	38010000	5	39115000	10	40808000	10
34113000	10	36104000	4	38021000	5	39116000	10	40819000	10
34115000	10	36105000	6	38021820	6	39117000	8	40820000	9
34116000	10	36106000	8	38023000	5	39118000	8	40821000	20
34127000	4	36107000	10	38026000	6	39133000	4	40830000	17
34210000	10	36110000	5	38026820	6	39134000	4	40833000	20
34313000	10	36111000	6	38032000	4	39135000	4	40834000	38
34315000	10	36114000	8	38034000	4	39136000	4	40835000	6
34410000	20	36115000	10	38036000	6	39143000	10	40836000	20
34420000	8	36116000	4	38054000	4	39144000	8	40837000	40
34425000	10	36120000	4	38112000	9	39147000	10	40840000	10
34435000	7	36140000	7	38113000	4	39148000	8	40872000	5
34620000	8	36410000	5	38115000	4	39210000	7	40873000	5
34625000	10	36411000	5	38116000	4	39313000	10	40877180	10
34635000	10	36425000	17	38119000	6	39314000	9	40878180	10
34705000	9	36702000	5	38120000	4	39315000	10	41	
34715000	9	36703000	3	38121000	4	39400000	4	41519000	10
34716000	10	36704000	5	38121820	9	39410000	9	41520000	9
34725000	9	36705000	9	38122000	4	39441000	5	41521000	15
34820000	6	36706000	9	38122820	9	39442000	6	41521820	15
34820800	6	36707000	9	38130000	10	39455000	9	41528000	48
34822000	3	36708180	3	38211000	5	39457000	9	41530000	16
34822800	4	36711000	9	38375000	10	39525000	50	41533000	20
35		36712000	2	38411000	25	39600000	2	41534000	20
35286000	2	36714000	9	38421000	6	39655000	10	41535000	10
35296000	2	36715000	9	38426000	6	39700000	9	41536000	10
35297000	2	36716000	9	38428000	6	39705000	9	41537000	160
35298000	2	36717000	9	38480000	40	39711000	10	41538000	20
35300000	2	36718000	9	38621000	6	39716000	10	41550000	8
35301000	2	36721000	9	38626000	6	39720000	9	41560000	20
35302000	2	36722000	9	38700000	9	39725000	9	41580000	11
35303000	2	36723000	9	38715000	10	39835000	4	41719000	10
35304000	2	36724000	27	38720000	10	39835800	4	41721000	15
35305000	2	36725000	30	38815000	10	39840000	3	41730000	16
35308000	2	36726000	9	38815800	4	39840800	3	41733000	20
35312000	2	36727000	9	38933000	10	39850000	4	41734000	28

PACKAGING UNIT Please consider the packaging units when placing your order.

code no.	Number Of Items Per PackingUnit	code no.
41735000	10	42720000
41738000	20	42730000
41760000	13	42733000
41780000	7	42734000
42		42735000
42018000	15	42736000
42018800	15	42737000
42019000	10	42801000
42019820	10	42802000
42020000	9	42803000
42020820	9	42818000
42021000	10	42818800
42021820	10	42819000
42028000	48	42821000
42028820	48	42830000
42030000	24	42832000
42030820	8	42833000
42033000	20	42834000
42033820	20	42835000
42035000	10	42836000
42035820	10	42837000
42036000	20	42838000
42036820	20	42840000
42060000	9	42841000
42060820	9	42842000
42065000	10	42846000
42065820	10	42870000
42066000	10	42871000
42066820	10	45
42080000	5	45001000
42080820	6	45002000
42090000	10	45002820
42090820	10	45003000
42134000	15	45004000
42134820	20	45005000
42137000	160	45010000
42137820	160	45012000
42401000	50	45012820
42430000	16	45013000
42433000	20	45014000
42434000	20	45015000
42435000	5	45016000
42436000	10	45110000
42460000	14	45111000
42480000	10	45112000
42706000	10	45112820
42708000	6	45113000

Number Of Items Per PackingUnit	 code no.	Number Of Items Per PackingUnit
9	45113820	9
10	45130000	10
10	45133000	4
10	45200000	5
5	45210000	5
10	45405000	6
40	45407000	9
45	45410000	25
9	45420000	4
9	45440000	4
15	45442180	14
15	45600000	6
9	45605000	6
4	45710180	6
18	45711000	2
6	45712000	2
8	45713000	2
9	45720000	10
4	45721000	40
15	45722000	5
10	45723000	29
10	45770180	5
11	45771000	10
10	47	
6	47010000	7
10	47010600	7
28	47020000	3
100	47020600	3
	47060000	3
5	47060600	3
5	47210000	7
5	47210600	7
7	47410000	7
4	47410600	7
5	47903000	16
5	47909000	16
5	51	
5	51300000	30
5	51300820	50
7	51301000	80
5	51303000	18
6	51304000	20
4	51305000	30
4	51307000	50
4	51309000	100
9	51310000	100
4	51312000	25

code no.	Number Of Items Per PackingUnit
51320000	25
51321000	25
58	
58300000	50
58304000	50
58306180	10
58308000	20
58311000	20
58313180	10
58314180	10
93	
93171000	30
96	
96186000	400
96259000	80
96441000	6

brand	code no.	EAN	page
01			
AX	01700180	4059625032343	57
AX	01750180	4059625032350	421
10			
AX	10001000	4011097754260	93
AX	10003000	4011097754277	93
AX	10007000	4011097760803	94
AX	10010000	4011097177847	109
AX	10018000	4011097329406	109
AX	10030000	4011097239071	94
AX	10101000	4011097545370	392
AX	10102000	4011097754284	93
AX	10103000	4011097754291	94
AX	10106000	4011097545394	392
AX	10111000	4011097436685	92
AX	10116000	4011097436722	92
AX	10117000	4011097436746	92
AX	10123000	4011097676883	92
AX AX	10129000 10140000	4011097436807 4011097545615	93 392
AX	10140000	4011097545639	392 392
AX	10143000	4011097436821	392 95
AX	10211000	4011097785103	95
AX	10300000	4011097493701	95
AX	10303180	4011097342597	54
AX	10410000	4011097177939	99
AX	10411000	4011097436845	96
AX	10414000	4011097815893	99
AX	10416000	4011097365893	98
AX	10418000	4011097381633	98
AX	10427000	4011097815886	99
AX	10444000	4011097180366	101
AX	10451000	4011097243641	101
AX	10452180	4011097254104	55
AX	10455000	4011097815862	97
AX	10456000	4011097436869	97
AX	10465000	4011097815855	96
AX	10480000	4011097377728	100
AX	10495000	4011097189437	100
AX	10531000	4011097678016	107
AX	10611000	4011097436883	102
AX	10614000	4011097815831	103
AX	10616000	4011097365916	102
AX	10621800	4011097585758	277
AX	10623800	4011097585765	277
AX	10625800	4011097585772	278
AX	10627800	4011097585789	278
AX AX	10628000 10629000	4059625029831 4059625030196	274 275
AX	10637000	4059625030196	275 275
AX	10650180	4011097594309	332
AX	10651000	4011097594309	332
AX	10658000	4011097655406	331
AX	10665000	4011097815817	102
AX	10700000	4011097338040	102
AX	10710000	4011097338064	104
AX	10715000	4011097478425	104
AX	10720000	4011097338101	104
AX	10750180	4011097594286	105
AX	10751000	4011097593760	327
	10754180	4011097625690	128
AX			
AX	10755000	4011097625706	328
	10755000 10790000	4011097625706 4011097625683	328 329

brand	code no.	EAN	page
AX	10820800	4059625144817	407
AX	10821000	4011097688565	406
AX	10821800	4011097688572	406
AX	10822000	4011097688541	406
AX	10822800	4011097688558	406
AX	10823000	4011097693712	413
AX	10823800	4011097694566	413
AX	10902180	4011097306414	120
AX	10921180	4011097678542	297
AX	10922180	4011097814186	275
AX	10924000	4011097677910	296
AX	10925000	4011097679747	297
AX	10929000	4011097679754	296
AX	10930000	4011097342061	106
AX	10932000	4011097594323	330
AX	10941180	4011097678535	298
AX	10941180	4011097678559	290
AX			
AX AX	10970000 10971180	4011097342085 4011097594279	105 129
AX	10972000	4011097594316	329
AX	10973180	4011097606446	333
AX AX	10980000	4011097270326 4011097270494	120
AX	10981000	4011097270494	98
AX	11020000	4011097598512	200
AX	11021000	4011097598529	200 200
AX	11024000	4011097634340	201
AX	11025000	4011097604503	200
AX	11026000	4011097613123	201
AX	11035000	4011097684949	200
AX	11040000	4011097613130	202
AX	11041000	4011097613109	202
AX	11042000	4011097597782	203
AX	11043000	4011097597775	203
AX	11220000	4011097598574	204
AX	11300000	4011097598581	204
AX	11301000	4011097598598	204
AX	11302000	4011097619811	204
AX	11420000	4011097604510	205
AX	11422000	4011097604527	205
AX	11425000	4011097598604	206
AX	11430000	4011097598635	206
AX	11436000	4011097652641	206
AX	11440000	4011097598659	208
AX	11443000	4011097637969	207
AX	11445000	4011097637976	208
AX	11620000	4011097604541	209
AX	11625000	4011097598666	209
AX	11626000	4011097598673	192
AX	11731000	4011097598697	210
AX	11732000	4011097597546	210
AX	11733000	4011097597560	211
AX	11925000	4011097613178	212
AX	11960000	4011097598734	211
AX	11980000	4011097667607	202
12			
AX	12010000	4011097700618	118
AX	12011000	4011097700625	118
AX	12012000	4011097700632	118
AX	12013000	4011097700649	119
AX	12014000	4011097700656	118
AX	12015000	4011097702308	119
AX	12016000	4011097727929	122
AX	12110000	4011097700663	119

brand	code no.	EAN	page
AX	14970000	4011097759913	423
AX	14971000	4011097759920	423
AX	14972000	4011097759937	423
AX	14973000	4011097759944	424
AX	14974000	4011097759951	424
15			
AX	15480180	4059625077498	86
AX	15481180	4059625077528	101
AX	15482180	4059625077566	124
AX	15483180	4059625077580	124
AX	15484180	4059625077603	148
AX	15485180	4059625077627	237
AX	15486180	4059625077658	100
AX	15487180	4059625190241	58
AX	15490180	4059625202883	58
16			
AX	16180180	4011097678894	231
AX	16182180	4011097797427	232
AX	16261000	4011097515137	258
AX	16261820	4011097518237	258
AX	16320000	4011097518527	264
AX	16320820	4011097518534	264
AX	16325000	4011097515144	257
AX	16325820	4011097518558	257
AX	16502000	4011097515168	249
AX	16502820	4011097515175	249
AX	16505000	4011097515229	248
AX	16505820	4011097515236	248
AX	16506000	4011097515250	249
AX	16506820	4011097515267	249
AX	16510000	4011097515281	249
AX	16510820	4011097515298	249
AX	16511000	4011097785035	249
AX	16511820	4011097808451	249
AX	16513000	4011097509747	250
AX	16513820	4011097515311	250
AX	16514000	4011097784762	250
AX	16514820	4011097808444	250
AX	16515000	4011097823317	248
AX	16515820	4011097823300	248
AX	16516000	4011097823294	248
AX	16516820	4011097823287	248
AX	16517000	4011097823270	248
AX	16517820	4011097823263	248
AX	16518000	4011097823256	248
AX	16518820	4011097823249	248
AX	16520000	4011097515366	252
AX	16520820	4011097515373	252
AX	16526000	4011097823232	252
AX	16526820	4011097823225	252
AX	16530000	4011097515427	249
AX	16530820	4011097517919	249
AX	16532000	4011097509556	251
AX	16532820	4011097515441	251
AX	16534000	4011097785028	251
AX	16534820	4011097808437	251
AX	16535000	4011097822273	250
AX	16535820	4011097822259	250
AX	16536000	4011097822228	250
4.37	16536820	4011097822204	250
AX		4011097515496	253
AX AX	16540000	4011097313490	200
	16540000 16540820	4011097515502	
AX			253 253 255

brand	code no.	EAN	page
AX	12112000	4011097734309	112
AX	12112450	4011097760810	112
AX	12114000	4011097771489	113
AX	12115000	4011097777382	114
AX	12122000	4059625000014	112
AX	12122990	4011097785066	112
AX	12123000	4011097775456	113
AX	12123990	4011097785059	113
AX	12171000	4011097760797	393
AX AX	12172000 12173000	4011097760780 4011097760773	393 393
AX	12173000	4011097760766	393
AX	121/4000	4011097702315	120
AX	12231000	4011097789446	131
AX	12232000	4011097788081	125
AX	12410000	4011097704654	121
AX	12415000	4011097700670	121
AX	12416000	4011097700687	121
AX	12417000	4011097703909	122
AX	12422000	4011097702322	122
AX	12425000	4011097704661	123
AX	12426000	4011097706320	124
AX AX	12602000 12605000	4011097706658 4011097702339	124 125
AX	12626000	4011097702339	123
AX	12680000	4011097776095	132
AX	12711000	4011097702353	126
AX	12712000	4011097703916	128
AX	12715000	4011097702360	127
AX	12716000	4011097702377	127
AX	12717000	4011097743752	126
AX	12731000	4011097702384	129
AX	12771000	4011097702391	129
AX	12790000	4011097712239	128
AX AX	12800000 12800800	4059625198131 4059625311233	406 406
AX	12801000	4059625198148	400
AX	12801800	4059625311370	406
AX	12803000	4059625198476	407
AX	12803800	4059625312032	407
AX	12918000	4011097703930	120
13			
AX	13089000	4059625032305	100
AX	13586000	4059625032220	80
AX	13587000	4059625032367	421
AX HG	13594000 13601000	4011097702100 4011097783727	231 340
AX	13603000	4059625080078	276
AX	13623180	4059625032213	80
14			
AX	14960000	4011097759777	421
AX	14960820	4011097759784	421
AX	14961000	4011097759791	422
AX	14961820	4011097759807	422
AX	14962000	4011097759814	422
AX	14962820	4011097759821	422
AX AX	14963000 14963820	4011097759838 4011097759845	422 422
AX	14964000	4011097759852	422
AX	14965000	4011097759869	422
AX	14966000	4011097759876	422
AX	14967000	4011097759883	423
AX	14968000	4011097759890	423
AX	14969000	4011097759906	423

brand	code no.	EAN	page
AX	16544000	4011097509525	256
AX	16544820	4011097515571	256
AX	16546000	4011097509587	255
AX	16546820	4011097515595	255
AX	16547000	4011097515618	254
AX	16547820	4011097515625	254
AX	16549180	4011097527062	254
AX	16550000	4011097785011	255
AX	16550820	4011097808420	255
AX	16551000	4011097785004	253
AX	16551820	4011097808413	253
AX	16553000	4011097784885	254
AX	16553820	4011097808390	254
AX	16554000	4011097784878	256
AX	16554820	4011097808383	256
AX	16560000	4011097515649	257
AX	16560820	4011097515656	257
AX	16572000	4011097809694	264
AX	16572820	4011097823218	264
AX	16580000	4011097823201	411
AX AX	16580800 16581000	4011097822891	411
AX	16581800	4011097822884 4011097822877	411 411
AX	16582000	4011097822860	411
AX	16582800	4011097822853	412
AX	16585000	4059625198483	412
AX	16585800	4059625312179	412
AX	16800000	4011097515724	259
AX	16800820	4011097515731	259
AX	16801000	4011097784861	260
AX	16801820	4011097808314	260
AX	16810000	4011097509570	258
AX	16810820	4011097515755	258
AX	16815000	4011097515779	258
AX	16815820	4011097515786	258
AX	16820000	4011097513935	260
AX	16820820	4011097515809	260
AX	16821000	4011097784854	261
AX	16821820	4011097808307	261
AX	16823000	4011097809687	259
AX	16823820	4011097809670	259
AX	16824000	4011097784847	259
AX	16824820	4011097808291	259
AX	16830000	4011097513928	262
AX	16830820	4011097515823	262
AX	16871000	4011097509518	261
AX AX	16871820 16872000	4011097515847 4011097784823	261 262
AX	16872820	4011097784823	262
AX	16882000	4011097515885	202
AX	16882820	4011097515892	257
AX	16883000	4011097784816	257
AX	16883820	4011097808246	257
AX	16884000	4011097515915	257
AX	16884820	4011097515922	257
AX	16930180	4059625032190	106
AX	16970180	4059625032404	70
AX	16973180	4059625032381	70
AX	16974180	4059625032398	70
AX	16982180	4059625032183	106
18			
AX	18010000	4011097519876	216
AX	18020000	4011097523002	216
AX	18310180	4059625036082	63

brand	code no.	EAN	page
AX	18311180	4059625036099	64
AX	18312180	4059625037805	65
AX	18313180	4059625037812	66
AX	18355000	4059625032879	324
AX	18356000	4059625032862	324
AX	18357000	4059625032855	325
AX	18358000	4059625032848	326
AX	18450000	4011097529561	217
19			
AX	19418000	4011097664637	100
26			
AX	26020000	4011097726045	316
AX	26021000	4011097726052	300
AX	26022000	4011097726069	300
AX	26023000	4011097726076	307
AX	26025000	4011097726083	306
AX	26031000	4011097726090	299
AX	26032000	4011097726106	298
AX	26034000	4059625030165	295
AX	26034820	4059625030158	295
AX	26035000	4059625030134	296
AX	26035820	4059625030127	296
AX	26050000	4011097822846	306
AX	26051000	4011097822839	306
AX	26431000	4059625030103	302
AX	26431820	4059625030097	302
AX	26432000	4059625030073	302
AX	26432820	4059625030066	302
AX	26433000	4059625030042	302
AX	26433820	4059625030035	302
AX	26434180	4059625032176	290
AX	26909180	4011097734224	299
27 AX	27240000	4011007000000	302
AX	27348000 27419000	4011097822822	302
AX	27419000	4011097401218 4011097265377	303
AX	27431000	4011097245201	312
AX	27830000	4011097484914	108
AX	27831000	4011097484891	108
AX	27980000	4011097262574	108
AX	27982000	4011097523453	264
AX	27982820	4011097526539	264
AX	27983000	4011097678023	108
AX	27984000	4059625025710	316
AX	27987000	4011097733098	310
AX	27989000	4011097398792	309
AX	27991000	4011097733104	157
28			107
AX	28011000	4059625206683	429
AX	28012000	4059625203019	427
AX	28014000	4059625206669	428
AX	28022000	4059625202999	428
HG	28071000	4011097115498	427
AX	28112000	4011097523835	315
AX	28112820	4011097523842	315
AX	28116000	4011097525556	257
AX	28116820	4011097525563	257
AX	28120000	4011097525587	257
AX	28120820	4011097525594	257
AX	28127000	4059625025659	315
AX	28128000	4059625025628	315
AX	28128820	4059625025611	315
AX	28282000	4011097239156	315
AX	28284000	4011097239187	107

	code no.	EAN	page
AX	35283000	4059625003527	290
AX	35284000	4059625184684	285
AX	35286000	4059625184967	286
AX	35287000	4059625185209	286
AX	35288000	4059625033296	295
AX	35296000	4059625184691	284
AX	35297000	4059625184974	284
AX	35298000	4059625185216	285
AX	35300000	4059625184707	280
AX	35301000	4059625184981	280
AX	35302000	4059625185223	280
AX	35303000	4059625184950	200
AX	35304000	4059625184998	270
AX	35305000	4059625185230	279
AX	35306000	4059625185247	2/ 9
AX	35308000	4059625185285	289
AX	35309000	4059625185322	289
AX	35310000	4059625185254	287
AX	35312000	4059625185292	287
AX	35313000	4059625185339	288
AX	35314000	4059625185261	282
AX	35316000	4059625185308	283
AX	35317000	4059625185346	283
AX	35318000	4059625185278	281
AX	35320000	4059625185315	281
AX	35321000	4059625185353	282
AX	35361180	4059625184639	289
AX	35363180	4059625184646	290
36 AX	36100000	4011097751573	162
AX	36101000	4011097751566	162
AX	36102000	4011097751559	162
AX	36103000	4011097751542	162
AX	36104000	4011097751535	162
AX	36105000	4011097751528	164
AX	36106000	4011097751511	165
AX	36107000	4011097751504	167
AX	36108000	4011097751498	166 163
A V		4011097755946	
AX	36110000	1011007755050	
AX	36111000	4011097755953	163
AX AX	36111000 36112000	4011097755960	163 163
AX AX AX	36111000 36112000 36113000	4011097755960 4011097755977	163 163 164
AX AX AX AX	36111000 36112000 36113000 36114000	4011097755960 4011097755977 4011097751603	163 163 164 164
AX AX AX AX AX	36111000 36112000 36113000 36114000 36115000	4011097755960 4011097755977 4011097751603 4011097751580	163 163 164 164 166
AX AX AX AX AX AX	36111000 36112000 36113000 36114000 36115000 36116000	4011097755960 4011097755977 4011097751603 4011097751580 4011097751597	163 163 164 164 166 165
AX AX AX AX AX AX AX AX	36111000 36112000 36113000 36114000 36115000 36116000 36120000	4011097755960 4011097755977 4011097751603 4011097751580 4011097751597 4011097751467	163 163 164 164 166 165 168
AX AX AX AX AX AX AX AX AX	36111000 36112000 36113000 36114000 36115000 36116000 36120000 36121000	4011097755960 4011097755977 4011097751603 4011097751580 4011097751597 4011097751467 4011097755984	163 163 164 164 166 165 168 168
AX AX AX AX AX AX AX AX AX AX	36111000 36112000 36113000 36114000 36115000 36116000 36120000 36121000 36130000	4011097755960 4011097755977 4011097751603 4011097751580 4011097751597 4011097751467 4011097755984 4011097785134	163 163 164 164 166 165 168 168 168
AX AX AX AX AX AX AX AX AX AX AX	36111000 36112000 36113000 36114000 36115000 36116000 36120000 36121000 36130000 36140000	4011097755960 4011097755977 4011097751603 4011097751580 4011097751597 4011097751467 4011097755984 4011097785134 4011097751443	163 163 164 164 166 165 168 168 168 168
AX AX AX AX AX AX AX AX AX AX AX AX	36111000 36112000 36113000 36114000 36115000 36116000 36120000 36120000 36130000 36140000 36410000	4011097755960 4011097755977 4011097751603 4011097751580 4011097751597 4011097751467 4011097755984 4011097755984 4011097751443 4011097751429	163 163 164 164 165 165 168 168 168 173 171
AX AX AX AX AX AX AX AX AX AX AX AX AX	36111000 36112000 36113000 36114000 36115000 36116000 36120000 36120000 36130000 36140000 36410000 36411000	4011097755960 4011097755977 4011097751603 4011097751580 4011097751597 4011097751467 4011097755984 4011097751443 4011097751429 4011097751412	163 163 164 164 165 168 168 168 173 171 171
AX AX AX AX AX AX AX AX AX AX AX AX AX A	36111000 36112000 36113000 36114000 36115000 36116000 36120000 36120000 36130000 36140000 36410000 36411000 36412000	4011097755960 4011097755977 4011097751603 4011097751580 4011097751597 4011097751467 4011097755984 4011097751443 4011097751443 4011097751429 4011097751412 4011097751405	163 163 164 164 165 168 168 168 173 171 171 171
AX AX AX AX AX AX AX AX AX AX AX AX AX A	36111000 36112000 36113000 36114000 36115000 36116000 36120000 36121000 36130000 36140000 36410000 36411000 36412000 36416000	4011097755960 4011097755977 4011097751603 4011097751580 4011097751597 4011097751467 4011097755984 4011097751443 4011097751429 4011097751429 4011097751429 4011097751405 4011097751399	163 163 164 164 165 168 168 168 173 171 171 171 170 169
AX AX AX AX AX AX AX AX AX AX AX AX AX A	36111000 36112000 36113000 36114000 36115000 36116000 36120000 36120000 36140000 36410000 36411000 36412000 36416000 36425000	4011097755960 4011097755977 4011097751603 4011097751580 4011097751597 4011097751467 4011097755984 4011097751443 4011097751443 4011097751429 4011097751412 4011097751405	163 163 164 164 165 168 168 168 173 171 171 170 169 168
AX	36111000 36112000 36113000 36114000 36115000 36116000 36120000 36121000 36130000 36140000 36410000 36411000 36412000 36416000	4011097755960 4011097755977 4011097751603 4011097751580 4011097751597 4011097751467 4011097755984 4011097751443 4011097751429 4011097751429 4011097751429 4011097751405 4011097751399	163 163 164 164 165 168 168 168 173 171 171 170 169 168
AX AX AX AX AX AX AX AX AX AX AX AX AX A	36111000 36112000 36113000 36114000 36115000 36116000 36120000 36120000 36140000 36410000 36411000 36412000 36416000 36425000	4011097755960 4011097755977 4011097751603 4011097751580 4011097751597 4011097751467 4011097755984 4011097751443 4011097751429 4011097751412 4011097751405 4011097751399 4011097751382	163 163 164 164 165 168 168 168 173 171 171 170 169 168 169
AX	36111000 36112000 36113000 36114000 36115000 36116000 36120000 36120000 36120000 36140000 36410000 36411000 36412000 36416000 36425000	4011097755960 4011097755977 4011097751603 4011097751580 4011097751597 4011097751467 4011097751467 4011097751443 4011097751429 4011097751412 4011097751405 4011097751399 4011097751382 4011097751382	163 163 164 164 165 168 168 168 173 171 171 170 169 168 169
AX AX AX AX AX AX AX AX AX AX AX AX AX A	36111000 36112000 36113000 36114000 36115000 36116000 36120000 36120000 36120000 36140000 36410000 36410000 36412000 36416000 36425000 36455000	4011097755960 4011097755977 4011097751603 4011097751580 4011097751597 4011097751467 4011097751467 4011097751443 4011097751429 4011097751429 4011097751405 4011097751399 4011097751382 4011097751382	163 163 164 164 165 168 168 168 173 171 171 170 169 169 169
AX AX AX AX AX AX AX AX AX AX AX AX AX A	36111000 36112000 36113000 36114000 36115000 36116000 36120000 36120000 36120000 36410000 36410000 36410000 36412000 36412000 36455000 36455000	4011097755960 4011097755977 4011097751603 4011097751580 4011097751597 4011097751467 4011097751467 401109775143 4011097751429 4011097751429 4011097751429 4011097751399 4011097751399 4011097751382 4011097815800 4011097815794 4011097815770	163 163 164 164 166 165 168 168 168 173 171 171 170 169 168 169 169
AX AX AX AX AX	36111000 36112000 36113000 36114000 36115000 36116000 36120000 36120000 3612000 36140000 36410000 36410000 36416000 36425000 36455000 36455000 36655000 36655000	4011097755960 4011097755977 4011097751603 4011097751580 4011097751587 4011097751467 4011097751467 4011097751443 4011097751429 4011097751429 4011097751429 4011097751382 4011097751382 4011097751382 4011097815794 4011097815770 4011097755588	163 163 164 164 166 165 168 168 168 173 171 171 170 169 169 169 169 172 173
AX AX AX AX AX AX AX AX AX AX AX AX AX A	36111000 36112000 36113000 36114000 36115000 36116000 36120000 36120000 36120000 36140000 36410000 36410000 36416000 36425000 36455000 36455000 36655000 36655000 36701180	4011097755960 4011097755977 4011097751603 4011097751580 4011097751587 4011097751467 4011097751467 401109775134 4011097751412 4011097751429 4011097751382 4011097751382 4011097751382 401109781570 4011097815770 4011097755588 4011097755571	163 164 164 166 165 168 168 168 173 171 171 170 169 169 169 169 172 173 174
AX AX AX AX AX AX AX AX AX AX AX AX AX A	36111000 36112000 36113000 36114000 36115000 36116000 36120000 36120000 36140000 36410000 36410000 36410000 36412000 36416000 36455000 36455000 36455000 36457000 36655000 36701180	4011097755960 4011097755977 4011097751603 4011097751580 4011097751597 4011097751467 4011097751467 4011097751443 4011097751443 4011097751429 4011097751429 4011097751405 4011097751382 4011097751382 4011097815794 4011097815770 4011097755588 4011097755571 4011097755564	163 164 164 164 165 168 168 168 168 173 171 170 169 169 169 169 172 173 174
AX AX	36111000 36112000 36113000 36114000 36115000 36116000 36120000 36120000 36120000 36410000 36410000 36410000 36410000 36416000 36416000 36455000 36455000 36455000 36655000 366701180 36702000 36703000	4011097755960 4011097755977 4011097751603 401109775180 401109775180 4011097751467 4011097751467 4011097751443 4011097751429 4011097751429 4011097751429 4011097751405 4011097751382 4011097751382 4011097815770 4011097815770 4011097755588 4011097755571 4011097755564 401109775557	163 164 164 164 165 168 168 168 168 173 171 171 170 169 169 169 169 172 173 174 173 174

brand	code no.	EAN	page
AX	28286000	4011097239163	107
AX	28464000	4011097554266	304
AX	28469000	4011097556963	304
AX	28470180	4011097601762	178
AX	28474000	4011097434902	263
AX			178
	28486180	4011097603308	
AX	28487000	4011097404905	263
AX	28489000	4011097400242	157
AX	28491000	4011097593784	303
AX	28494000	4011097434025	107
AX	28532000	4011097488516	107
AX	28622000	4059625032145	315
AX	28624000	4059625032169	152
AX	28626000	4059625032152	152
AX	28693000	4011097413433	309
34	200700000		
AX	34010000	4011097559414	184
AX	34016000	4011097559438	
			184
AX	34017000	4011097559407	184
AX	34112000	4011097559902	185
AX	34113000	4011097559919	186
AX	34115000	4011097559926	185
AX	34116000	4011097559933	185
AX	34127000	4011097559452	184
AX	34130000	4011097655536	184
AX	34132000	4011097705422	185
AX	34133000	4011097559582	186
AX	34210000	4011097559469	188
AX	34313000	4011097559605	187
AX	34315000	4011097559629	187
AX	34410000	4011097559476	189
AX	34420000	4011097559490	188
	34425000		189
AX		4011097559506	
AX	34427000	4011097559513	189
AX	34435000	4011097559841	192
AX	34444000	4011097559643	190
AX	34454000	4011097559995	190
AX	34620000	4011097559520	191
AX	34625000	4011097559537	191
AX	34635000	4011097559728	193
AX	34705000	4011097559797	193
AX	34715000	4011097559544	193
AX	34716000	4011097559551	193
AX	34725000	4011097559803	194
AX	34820000	4011097539803	410
AX	34820800	4011097688633	410
AX	34822000	4011097688664	410
AX	34822800	4011097688671	410
AX	34823000	4059625198179	410
AX	34823800	4059625311776	410
AX	34824000	4059625198216	410
AX	34824800	4059625311875	410
AX	34920000	4011097559810	195
AX	34960000	4011097559827	194
35			
AX	35274000	4059625003671	294
AX	35275000	4059625003664	293
AX	35276000	4059625003657	291
AX	35277000	4059625003640	294
AX	35278000	4059625003626	294
AX	35279000	4059625003602	293
AX	35280000	4059625003589	292 292
A \/			·)()')
AX AX	35281000 35282000	4059625003565 4059625003541	292

brand	code no.	EAN	page
AX	36708180	4011097755519	174
AX	36711000	4011097755502	333
AX	36712000	4011097790268	340
AX	36714000	4011097779416	339
AX	36715000	4011097779409	339
AX	36716000	4011097779393	338
AX	36717000	4011097779386	338
AX	36718000	4011097779379	338
AX	36721000	4011097779362	336
AX	36721820	4011097906539	336
AX	36722000	4011097779355	337
AX	36722820	4011097906683	337
AX	36723000	4011097779348	337
AX	36723820	4011097841458	337
AX	36724000	4011097755496	179
AX AX	36725000	4011097755489	179
AX	36726000	4011097779331	336
AX	36726820 36727000	4011097906980 4011097779324	336 336
AX	36727820	4011097907130	330
AX	36731000	4059625031490	312
AX	36732000	4059625031490	312
AX	36733000	4059625031957	312
AX	36734000	4059625031933	313
AX	36735000	4011097755472	179
AX	36736000	4011097789330	180
AX	36770180	4011097755465	130
AX	36771000	4011097755458	175
AX	36772000	4011097755441	176
AX	36773000	4011097755434	334
AX	36822000	4011097755427	178
38			
AX	38010000	4011097806518	232
AX AX	38021000	4011097823522	224 224
AX	38021820 38023000	4011097982380 4011097823515	224
AX	38023820	4011097982403	225
AX	38026000	4011097825700	225
AX	38026820	4011097982427	225
AX	38032000	4011097823508	225
AX	38032820	4011097982441	225
AX	38034000	4011097823492	226
AX	38034820	4011097982465	226
AX	38036000	4011097982489	225
AX	38036820	4011097982496	225
AX	38037000	4011097849355	230
AX	38037820	4011097982915	230
AX	38054000	4011097849348	229
AX	38054820	4011097982779	229
AX	38112000	4011097412979	227
AX	38112820	4011097909523	227
AX	38113000	4011097413051	228
AX AX	38113820	4011097841854	228
AX	38115000 38115820	4011097413013 4011097909677	227 227
AX	38115820	4011097413099	227
AX	38116820	4011097842202	227
AX	38119000	4011097677873	394
AX	38120000	4011097677880	394
AX	38121000	4011097849331	227
AX	38121820	4011097982816	227
AX	38122000	4011097849324	227
AX	38122820	4011097982830	227
AX	38130000	4011097366142	94

brand	code no.	EAN	page
AX	38130820	4011097910123	94
AX	38211000	4011097823485	232
AX	38211820	4011097982953	232
AX	38375000	4011097345154	242
AX	38411000	4011097849317	239
AX	38411820	4011097989556	239
AX	38412000	4011097849300	238
AX	38412820	4011097989518	238
AX	38421000	4011097849294	234
AX	38421820	4011097983325	234
AX	38426000	4011097849287	235
AX	38426820	4011097983349	235
AX	38428000	4011097849270	235
AX	38428820	4011097983363	235
AX AX	38436000 38436820	4011097849263 4011097983226	237 237
AX	38442000	4011097983220	237
AX	38442000	4011097983301	233
AX	38445000	4011097849232	233
AX	38445820	4011097983264	238
AX	38480000	4011097377742	236
AX	38480820	4011097911731	236
AX	38621000	4011097849225	239
AX	38621820	4011097983011	239
AX	38626000	4011097849218	240
AX	38626820	4011097983189	240
AX	38700000	4011097345116	242
AX	38715000	4011097478456	242
AX	38720000	4011097345130	243
AX	38815000	4011097688701	410
AX AX	38815800	4011097688718	410 245
AX	38882000 38933000	4011097331188 4011097331164	245
AX	38959000	4011097705101	53
AX	38960000	4011097704647	185
AX	38976000	4011097331133	243
39			
AX	39010000	4011097391274	136
AX	39015000	4011097391281	136
AX	39018000	4011097485461	136
AX	39020000	4011097480640	137
AX	39031000	4011097648910	137
AX	39032000	4011097648927	137
AX	39034000 39035000	4011097648941	137
AX AX	39035000	4011097648903 4011097646626	136 137
AX	3903/000	4011097488608	132
AX	39112000	4011097488622	138
AX	39115000	4011097488646	138
AX	39116000	4011097488660	138
AX	39117000	4011097677897	394
AX	39118000	4011097678009	394
AX	39133000	4011097400563	140
AX	39134000	4011097400587	140
AX	39135000	4011097400600	139
AX	39136000	4011097400624	139
AX	39143000	4011097400686	142
AX	39144000	4011097400709	141 141
AX AX	39147000 39148000	4011097400365 4011097400389	141
AX	39148000	4011097648958	140
AX	39313000	4011097400648	143
AX	39314000	4011097400662	142
AX	39315000	4011097400723	141

brand	code no.	EAN	page
AX	40821000	4011097177991	370
AX	40830000	4011097177953	369
AX	40833000	4011097178011	369
AX	40834000	4011097178004	369
AX	40835000	4011097177984	370
AX	40836000	4011097177977	370
AX	40837000	4011097178035	370
AX	40840000	4011097239200	370
AX	40872000	4011097594002	332
AX	40873000	4011097594217	332
AX	40877180	4011097601755	332
AX	40878180	4011097601748	333
41			
AX	41519000	4011097331041	382
AX	41519820	4011097496108	382
AX	41520000	4011097331065	383
AX	41520820	4011097931623	383
AX	41521000	4011097332307	383
AX	41521820	4011097496115	383
AX	41528000	4011097331089	376
AX	41528820	4011097561158	376
AX	41530000	4011097334042	382
AX	41530820	4011097496139	382
AX	41533000	4011097331034	382
AX	41533820	4011097496146	382
AX	41534000	4011097331027	382
AX	41534820	4011097496160	382
AX	41535000	4011097331102	384
AX	41535820	4011097496177	384
AX	41536000	4011097331096	376
AX	41536820	4011097561165	376
AX	41537000	4011097331119	376
AX	41537820	4011097493381	376
AX	41538000	4011097331072	384
AX	41538820	4011097493398	384
AX	41550000	4011097331058	375
AX	41550820	4011097496207	375
AX	41560000	4011097334066	383
AX	41560820	4011097496214	383
AX	41580000	4011097334080	383
AX	41580820	4011097496221	383
AX	41719000	4011097397252	375
AX	41721000	4011097397269	376
AX	41730000	4011097401324	375
AX	41733000	4011097397276	375
AX	41734000	4011097397283	375
AX	41735000	4011097397290	377
AX	41738000	4011097397306	376 375
AX AX	41760000 41780000	4011097401348 4011097401362	375 375
42	41/ 60000	4011097401302	3/3
AX	42010000	1050625121610	412
AX	42018000 42018330	4059625131640 4059625297421	412
AX	42018330	4059625297414	412
AX	42018340	4059625131657	412
AX	42018800	4011097516127	386
AX	42019000	4011097516134	386
AX	42019820	4011097516158	387
AX	42020820	4011097516165	387
AX	42020820	4011097516189	387
AX	42021820	4011097516196	387
AX	42028000	4011097516219	387
AX	42028820	4011097516226	387
AX	42030000	4011097516240	386
7.01	12000000	101107/010240	000

brand	code no.	EAN	page
AX	39400000	4011097400495	143
AX	39410000	4011097400761	147
AX	39436000	4011097650852	148
AX	39441000	4011097488769	145
AX	39442000	4011097488783	145
AX	39445000	4011097400785	149
AX	39446000	4011097400808	149
AX	39447000	4011097488806	146
AX	39448000	4011097488820	146
AX	39449000	4011097486079	207
AX	39451000	4011097545691	143
AX	39453000	4011097399638	150
AX	39454000	4011097400846	150
AX	39455000	4011097400501	144
AX	39457000	4011097400525	144
AX	39480000	4011097488844	147
AX	39482000	4011097488868	147
AX	39525000	4011097488882	152
AX	39600000	4011097400884	151
AX AX	39620000	4011097400914 4011097400891	158
AX	39655000 39670000	4011097545707	151 158
AX	39700000	4011097400983	153
AX	39705000	4011097400969	153
AX	39711000	4011097478388	153
AX	39716000	4011097478470	152
AX	39720000	4011097401027	152
AX	39725000	4011097401003	154
AX	39832000	4059625196779	409
AX	39832800	4059625304105	409
AX	39835000	4011097518763	409
AX	39835800	4011097527215	409
AX	39840000	4011097518770	409
AX	39840800	4011097520506	409
AX	39842000	4059625195963	409
AX	39842800	4059625311479	409
AX	39850000	4011097518756	409
AX	39850800	4011097519012	409
AX	39853000	4059625195949	409
AX	39853800	4059625311578	409
AX	39860000	4011097783277	408
AX	39860800	4011097783284	408
AX	39861000	4011097783291	408
AX	39861800	4011097783307	408
AX	39862000	4059625176320	408
AX	39862800	4059625176306	408
AX AX	39863000 39863800	4059625257890 4059625257906	407 407
AX	39864000	4059625196724	407
AX	39864800	4059625311677	408
AX	39882000	4011097401140	157
AX	39883000	4011097401126	156
AX	39920000	4011097401102	156
AX	39925000	4011097401089	155
AX	39960000	4011097401065	155
AX	39965000	4011097401041	155
40			
HG	40068000	4011097218939	370
HG	40088000	4011097120461	364
AX	40806000	4011097177946	369
AX	40808000	4011097177960	369
AX	40819000	4011097286495	369
AX	40820000	4011097239194	369
AX	40820820	4011097561141	369

brand	code no.	EAN	page
AX	42030820	4011097516257	386
AX	42033000	4011097516257	386
AX	42033820	4011097516288	386
AX	42035000	4011097516332	388
AX	42035820	4011097516349	388
AX	42036000	4011097516363	387
AX	42036820	4011097516370	387
AX	42060000	4011097516400	387
AX	42060820	4011097516417	387
AX	42065000	4011097516431	386
AX	42065820	4011097516448	386
AX	42066000	4011097516462	386
AX	42066820	4011097516479	386
AX	42080000	4011097516493	387
AX	42080820	4011097516509	387
AX	42090000	4011097516523	388
AX	42090820	4011097516530	388
AX	42134000	4011097516554	386
AX	42134820	4011097516561	386
AX AX	42137000 42137820	4011097516585 4011097516592	387 387
AX	4213/820	4011097535302	38/ 216
AX	42305000	4011097535319	210
AX	42401000	4011097598758	379
AX	42430000	4011097598765	379
AX	42433000	4011097608617	379
AX	42434000	4011097598772	379
AX	42435000	4011097613185	380
AX	42436000	4011097598789	379
AX	42460000	4011097598796	379
AX	42480000	4011097598802	379
AX	42706000	4011097704692	372
AX	42708000	4011097704708	372
AX	42720000	4011097704715	372
AX	42730000	4011097704722	372
AX	42733000	4011097704746	372
AX	42734000	4011097704739	372
AX	42735000	4011097704760	373
AX	42736000	4011097704753	373
AX	42737000	4011097704685	372
AX	42801000	4011097752396	363
AX	42802000	4011097752389	361
AX	42803000	4011097752372	360
AX	42818000	4059625182840	412
AX	42818330	4059625297407	412
AX	42818340	4059625297391	412
AX	42818800	4059625182857	412
AX	42819000	4011097755601 4011097752365	360
AX AX	42821000 42830000	4011097752358	363 362
AX	42832000	4011097752341	362
AX	42833000	4011097752334	362
AX	42833000	4011097752334	362
AX	42835000	4011097752310	364
AX	42836000	4011097752303	363
AX	42837000	4059625026915	362
AX	42838000	4011097752198	361
AX		4059625026694	361
AX	42840000 42841000	4039023020094	301 364
AX	42841000	4011097755595 4059625026908	364 363
AX	42842000	4059625026908	303
AX	42840000	4011097753706	363
	42870000	4011097753690	304 180
AX		4011097789323	
AX	42890000	401109/709323	365


EAN

page

brand	code no.	EAN	page
AX	47022000	4059625186121	79
AX	47040000	4059625161364	82
AX	47040600	4059625161517	82
AX	47042000	4059625186114	82
AX	47050000	4059625161340	81
AX	47050600	4059625161494	81
AX	47052000	4059625186138	81
AX	47060000	4059625161326	79
AX	47060600	4059625161470	79
AX	47062000	4059625186145	80
AX AX	47210000	4059625161302	83
AX	47210600 47212000	4059625161456 4059625186152	83 83
AX	47410000	4059625161296	86
AX	47410600	4059625161449	86
AX	47412000	4059625186169	87
AX	47430000	4059625161289	85
AX	47430600	4059625161432	85
AX	47432000	4059625186176	86
AX	47440000	4059625161272	84
AX	47440600	4059625161425	84
AX	47442000	4059625186183	84
AX	47900000	4059625189023	87
AX	47900600	4059625189030	87
AX	47901000	4059625189047	79
AX	47901600	4059625189054	79
AX	47902000	4059625189061	83
AX AX	47902600 47903000	4059625189221 4059625189214	83 87
AX	47904000	4059625189207	0/ 79
AX	47905000	4059625189191	83
AX	47906000	4059625189184	87
AX	47907000	4059625189177	3, 79
AX	47908000	4059625189160	83
AX	47909000	4059625189153	87
AX	47910000	4059625189146	79
AX	47911000	4059625189139	83
AX	47913000	4059625189122	88
AX	47914000	4059625189115	79
AX	47915000	4059625189108	83
AX	47916000	4059625189092 4059625189085	88
AX AX	47917000 47918000	4059625189085	79 83
AX	47921000	4059625306529	88
AX	47922000	4059625306536	89
AX	47923000	4059625306512	89
AX	47924000	4059625306543	89
AX	47925000	4059625306550	89
AX	47926000	4059625306567	89
51			
AX	51300000	4059625077788	431
AX	51300820	4059625130049	431
AX	51301000	4059625032244	431
AX	51302000	4059625032237	430
AX AX	51303000 51303820	4059625077795 4059625147863	431 431
AX	51304000	4059625077801	431
AX	51304820	4059625147887	431
AX	51305000	4059625077818	431
AX	51305820	4059625147900	431
AX	51306000	4059625077689	431
AX	51307000	4059625079263	432
AX	51307820	4059625147924	432
AX	51308000	4059625077696	432

brand	code no.	EAN	page
AX	45713000	4011097788975	343
AX	45720000	4011097790022	305
AX	45721000	4011097788968	312
AX	45722000	4011097790039	307
AX	45723000	4011097789910	314
AX	45770180	4011097789903	344
AX	45771000	4011097789798	344
AX	45790000	4011097807980	343
46			
AX	46010000	4059625149034	52
AX	46011000	4059625149041	52
AX	46020000	4059625149379	52
AX	46021000	4059625149362	52
AX	46030000	4059625149355	53
AX	46031000	4059625149348	53
AX	46040000	4059625149331	55
AX	46041000	4059625149324	55
AX	46050000	4059625149317	53
AX	46051000	4059625149300	53
AX	46060000	4059625149294	54
AX	46061000	4059625149287	54
AX	46140000	4059625149270	62
AX	46141000	4059625149263	62
AX	46210000	4059625190227	56
AX	46211000	4059625190210	56
AX	46240000	4059625149256	61
AX	46241000	4059625149249	61
AX AX	46410000 46411000	4059625190081 4059625190074	59 59
AX	46420000	4059625190067	56
AX	46421000	4059625190007	56
AX	46430000	4059625149232	57
AX	46431000	4059625149225	57
AX	46440000	4059625149218	59
AX	46441000	4059625149201	59
AX	46450000	4059625149195	56
AX	46451000	4059625149188	56
AX	46470000	4059625203958	58
AX	46520000	4059625149171	60
AX	46521000	4059625149164	60
AX	46650000	4059625189962	60
AX	46651000	4059625189955	60
AX	46700000	4059625149157	63
AX	46701000	4059625149140	63
AX	46710000	4059625149133	64
AX	46711000	4059625149126	64
AX	46720000	4059625149119	65
AX	46721000	4059625189948	65
AX	46730000	4059625149102	66
AX	46731000	4059625149096	66
AX	46740000	4059625189931	67
AX	46741000	4059625189924	67
AX	46750000	4059625149089	68
AX	46751000	4059625149072	68
AX	46760000	4059625149065	69
AX	46761000	4059625149058	69 70
AX AX	46770000 46771000	4059625189917 4059625189900	70 70
47	40/71000	4039023169900	/0
AX	47010000	4059625161401	78
AX	47010000	4059625161555	78
AX	47012000	4059625186190	78
AX	4702000	4059625161388	78
AX	47020600	4059625161531	78
, , , ,	020000		,0


brand	code no.	EAN	page
AX	51309000	4059625077719	432
AX	51310000	4059625077726	432
AX	51312000	4059625077702	432
AX	51315000	4059625077757	433
AX	51320000	4059625077733	432
AX	51321000	4059625077740	433
58			
AX	58300000	4059625077771	425
AX	58301180	4059625077467	425
AX	58302180	4059625077481	425
AX	58303000	4059625077504	425
AX	58304000	4059625077511	426
AX	58304820	4059625147948	426
AX	58305180	4059625077535	426
AX	58306180	4059625077542	426
AX	58307000	4059625077559	427
AX	58308000	4059625032299	427
AX AX	58311000	4059625077610	429
AX	58312000 58312820	4059625077634 4059625147962	429 429
AX	58313180	4059625077641	429
AX	58314180	4059625077665	429
AX	58315000	4059625077672	430
AX	58316000	4059625077474	430
AX	58316820	4059625147986	430
92	00010020	1007020117700	100
AX	92726000	4011097788111	362
AX	92990000	4059625032206	70
93			
AX	93171000	4059625032374	424
AX	93307000	4059625163368	327
AX	93308000	4059625163375	327
AX	93309000	4059625163382	327
AX	93310000	4059625163399	327
AX	93311000	4059625164303	327
AX	93312000	4059625164310	327
HG	93571610	4059625142684	341
HG	93572610	4059625142691	341
HG	93573610	4059625142714	341
HG HG	93574610 93575610	4059625142721 4059625142738	341 341
HG	93576610	4059625142738	341
HG	93577610	4059625142745	341
HG	93578610	4059625142752	341
HG	93579610	4059625142776	341
AX	93663000	4059625261323	327
96			
HG	96186000	4011097161754	108
AX	96259000	4011097422640	54
AX	96383000	4011097350707	55
AX	96397000	4011097369570	309
AX	96441000	4011097432717	55
HG	96500000	4011097380018	99
AX	96660000	4011097404745	120
97			
AX	97686000	4011097502779	59
98	0000/000	(0)1007570000	
HG	98806000	4011097570822	86
AX	98860000	4011097571065	421

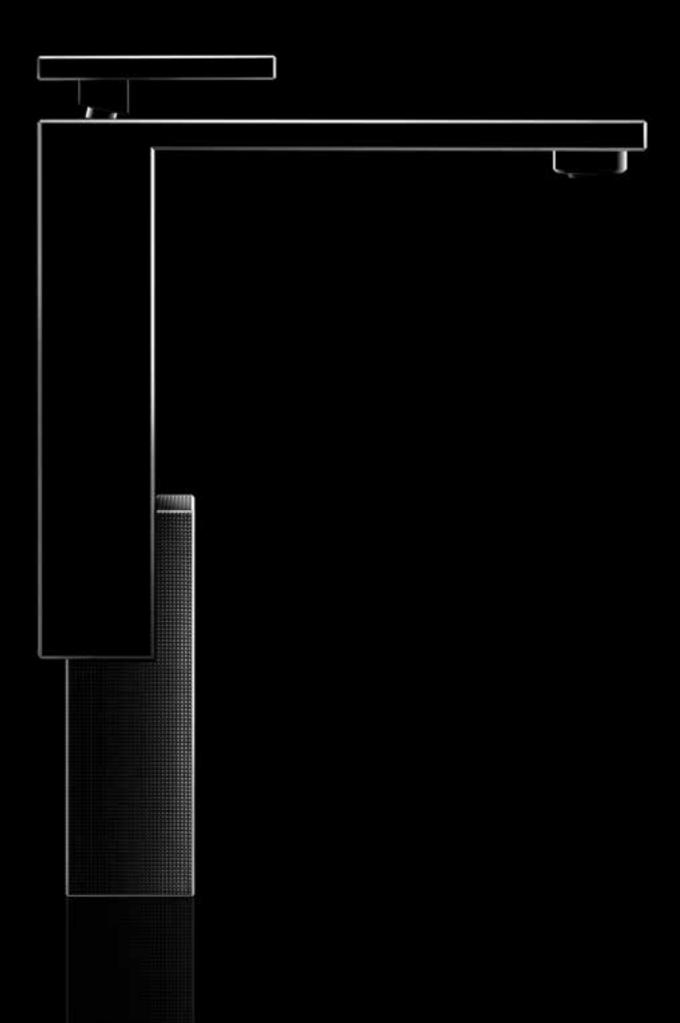

AXOR EDGE

asin	52
det	56
ath	56
nower	60
ermostatic mixers / valves / diverters	61

B B

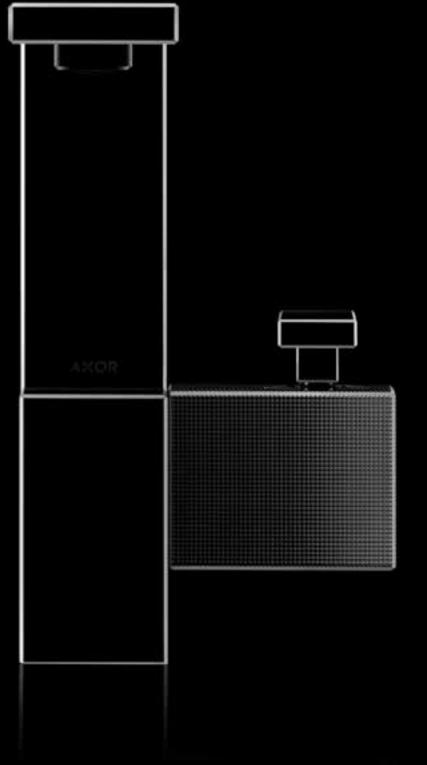

AXOR EDGE

ARCHITECTONICS. IN PERFECTION.

The cube. Ushered into art by the avant-garde of the early 20th century. Taken to a new level by AXOR Edge. An asymmetrical arrangement of rectangular prisms, crafted with ultraprecision. A masterpiece through and through. Cube by cube. Transcending aesthetic and technical boundaries. Cut with diamonds, for edges and surfaces that verge on perfection.


AXOR Edge takes exclusivity to new heights. Bold yet refined. With flawlessly smooth surfaces that reflect light evenly. Intensely. Enlivened with structured surfaces that act as a counterpart. Enhancing the effect of the high-gloss surfaces. Creating fascinating contrasts. Expressing individual personality. With a level of precision achieved only with state-of-the-art diamond-cutting technology.

With AXOR FinishPlus, the collection becomes an even more personal statement. A testimony to the discerning taste of its owner. Particulary in Polished Black Chrome or Polished Gold Optic. AXOR Edge consists of 25 products. For the washbasin. For the bathtub. For the shower. In perfection.


Design: Jean-Marie Massaud



Refinement finds its personal expression in the choice of exclusive AXOR FinishPlus surfaces. Four lucent finishes enhance the natural brilliance of AXOR Edge. From Polished Gold Optic to Polished Black Chrome. Manufactured to the highest technical standards. Finished using PVD (Physical Vapor Deposition) in AXOR's vacuum chambers. Cutting-edge technology that gives the finish more resistance, greater longevity and, above all, unprecedented brilliance and color. Ultra-radiance for an ultra-luxurious bathroom. Basin "





	finish	code no.
Single lever basin mixer 130 with push-open waste set / consists of: single lever basin mixer, waste set / ComfortZone 130 / projection 160 mm / normal spray / flow rate at 3 bar: 5 l/min / ceramic cartridge / temperature limitation adjustable / suitable for continuous flow water heaters / push-open waste set G 11/4 / material waste set: metal / connection type: G 3/8 connections / connection dimension: DN15 This product is not available in brushed special finishes.	Chrome Special Finishes*	46010000 46010XXX
Alternative products: / Single lever basin mixer 130 with push-open waste set - diamond cut This product is not available in brushed special finishes.	Chrome Special Finishes*	46011000 46011XXX
Single lever basin mixer 190 with push-open waste set / consists of: single lever basin mixer, waste set / ComfortZone 190 / projection 175 mm / normal spray / flow rate at 3 bar: 5 l/min / ceramic cartridge / temperature limitation adjustable / suitable for continuous flow water heaters / push-open waste set G 11/4 / material waste set: metal / connection type: G 3/8 connections / connection dimension: DN15 This product is not available in brushed special finishes. Alternative products: / Single lever basin mixer 190	Chrome Special Finishes*	
 / Single lever basin mixer 190 with push-open waste set - diamond cut 	Chrome Special Finishes*	46021000 46021XXX




€50-

This product is not available in brushed special finishes.

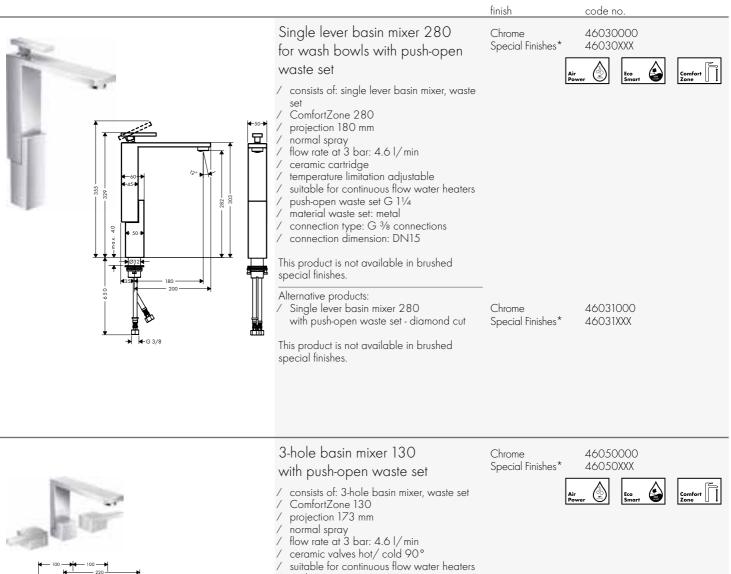







 ContortZone 130 projection 173 mm normal spray flow rate at 3 bar: 4.6 l/min ceramic valves hot/ cold 90° suitable for continuous flow water heaters push-open waste set G 11/4 material waste set: metal 		
 connection type: G ¾ connections connection dimension: DN15 This product is not available in brushed special finishes. 		
Alternative products: / 3-hole basin mixer 130 with push-open waste set - diamond cut	- Chrome Special Finishes*	46051000 46051XXX
This product is not available in brushed special finishes.	_	
Optional parts: / Hose extension set for 3-hole basin mixer		38959000




Hose extension set for 3-hole basin mixer

length of hoses 700 mm for free positioning of spout and handles





	finish	code no.
3-hole basin mixer for concealed installation wall-mounted with spout 190 mm	Chrome Special Finishes*	46060000 46060XXX Air Control
and push-open waste set		
 consists of: 3-hole basin mixer, waste set projection 190 mm normal spray flow rate at 3 bar: 4.6 l/min ceramic valves hot/ cold 90° suitable for continuous flow water heaters push-open waste set G 11/4 material waste set: metal connection type: basic set connection dimension: DN15 		
This product is not available in brushed special finishes.		
Alternative products: / 3-hole basin mixer for concealed installation wall-mounted with spout 190 mm and push-open waste set - diamond cut	Chrome Special Finishes*	46061000 46061XXX
This product is not available in brushed special finishes.		
Required parts: / Basic set for 3-hole basin mixer for concealed installation wall-mounted		10303180
Optional parts: / Seal / Extension set 25 mm for basic set for 3-hole basin mixer wall-mounted		96383000 96259000



25 4

Product Book 2020/2021

j}≖ j}≖

Basic set for 3-hole basin mixer for concealed installation wall-mounted	10303180
 / suitable for all 3-hole wash basin mixers for wall mounting / connection from above or below / connection dimension: DN15/DN20 	
Optional parts: / Seal / Extension set 25 mm for basic set for 3-hole basin mixer wall-mounted	96383000 96259000

Extension set 25 mm for basic set for 3-hole basin mixer wall-mounted

/ connection dimension: DN15/ extension length: 25 mm

96259000

Technico

AXOR Edge




*For additional information please refer to the "special finish" overview.

Ridat			finish	code no.	
Bidet		Single lever bidet mixer with push-open waste set / consists of: single lever bidet mixer, waste set / projection 149 mm / aerator with ball pivot / normal spray / flow rate at 3 bar: 6.7 l/min / ceramic cartridge / temperature limitation adjustable / suitable for continous flow water heaters / push-open waste set G 11/4 / material waste set: metal / connection dimension: DN15 This product is not available in brushed special finishes.	Chrome Special Finishes*	46210000 46210XXX	Air Power
		 Alternative products: / Single lever bidet mixer with push-open waste set - diamond cut This product is not available in brushed special finishes. 	Chrome Special Finishes*	46211000 46211XXX	
Bath	59.87	Single lever bath mixer for concealed installation / connection type: basic set / flow rate at 3 bar: 23.8 l/min / flow rate for bath spout at 3 bar: 25.3 l/min / flow rate of hand shower at 3 bar: 23.8 l/min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / diverter with automatic resetting / with silencer / suitable for continous flow water heaters This product is not available in brushed special finishes. Alternative products:	Chrome Special Finishes*	46450000 46450XXX	
		 / Single lever bath mixer for concealed installation - diamond cut This product is not available in brushed special finishes. / Single lever bath mixer for concealed installation with integrated security combination according to EN1717 	Chrome Special Finishes* Chrome Special Finishes*	46451000 46451XXX 46420000 46420XXX	
		 This product is not available in brushed special finishes. / Single lever bath mixer for concealed installation with integrated security combination according to EN1717 - diamond cut This product is not available in brushed special finishes. Required parts: / Basic set iBox universal Optional parts: / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal 	Chrome Special Finishes*	46421000 46421XXX 01700180 13587000 93171000	

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.


		finish	code no.
	Basic set iBox universal / suitable for all shower, bath tub and thermostat finish sets for concealed installation / connection thread / Rp ³ / ₄ / rotationally-symmetric installation / sound-decoupled installation / connection dimension: DN20 Optional parts: / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal		01700180 13587000 93171000
<image/>	3-hole rim mounted bath mixer / consists of: 3-hole rim mounted single lever bath mixer, baton hand shower, shower holder / projection 210 mm / connection type: basic set / spray type mixer: normal spray / spray type hand shower: Rain, Mono / maximum pull-out length of hand shower: 1.45 m / sBox for quiet, smooth and protected hose guidance / flow rate at 3 bar: 20.2 l/min / flow rate of bath spout at 3 bar: 20.2 l/min / flow rate of hand shower at 3 bar: 9.5 l/min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / non-return valve / suitable for continous flow water heaters / connection dimension: DN15 This product is not available in brushed special finishes. Consisting of: / Baton hand shower 2jet (# 28532000) Alternative products: / 3-hole rim mounted bath mixer - diamond cut This product is not available in brushed special finishes. Required parts: / Basic set for 3-hole rim mounted single lever bath mixer	Chrome Special Finishes*	46430000 46430XXX

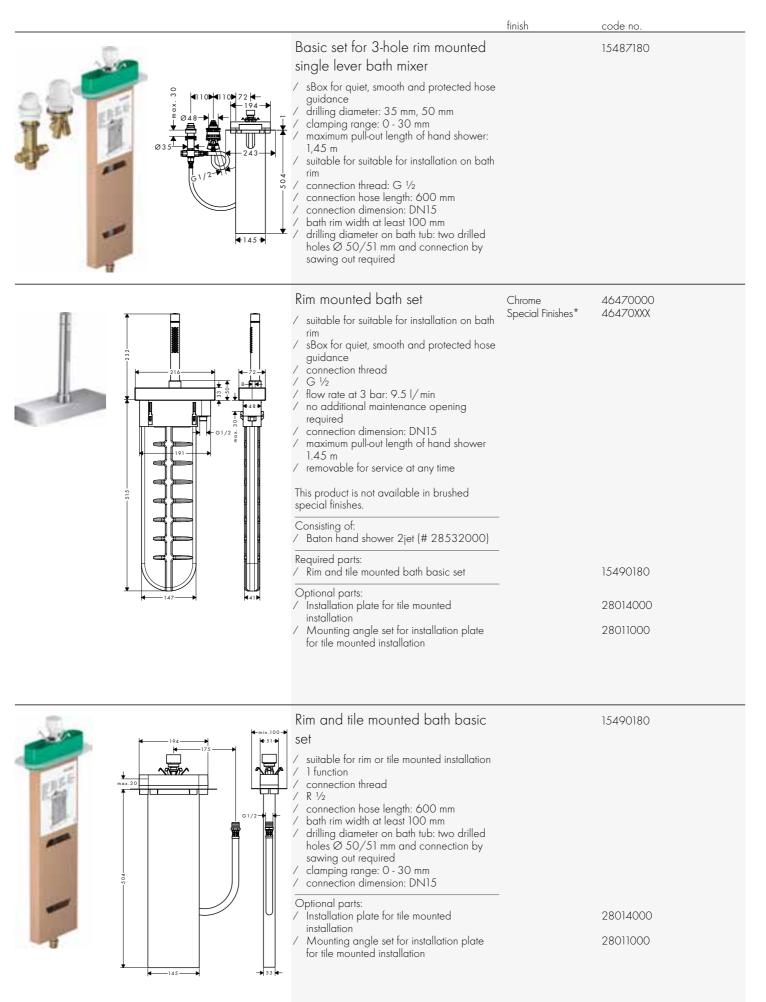

		finish	code no.	
	Single lever bath mixer floor-standing / consists of: single lever bath mixer floor standing, baton hand shower, shower hose, shower holder / projection 255 mm / connection type: basic set / spray type mixer: normal spray / spray type hand shower: Rain, Mono / flow rate at 3 bar: 23 l/min / flow rate of bath spout at 3 bar: 23 l/min / flow rate of hand shower at 3 bar: 13 l/min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / diverter with automatic resetting / non-return valve / suitable for continous flow water heaters / connection dimension: DN15	Chrome Special Finishes*	46440000 46440XXX	Air Power
35 275 255 255 00 078 026 078 026 078 026 078 026 078 026 078 026 078 026 078 026 078 026 078 026 078 026 078 026 078 078 078 078 078 078 078 078	 Connection dimension. Draid This product is not available in brushed special finishes. Consisting of: Baton hand shower 2jet (# 28532000) Metal effect shower hose 1.25 m (# 28282000) Alternative products: Single lever bath mixer floor-standing - diamond cut This product is not available in brushed special finishes. Required parts: Basic set for mixers floor-standing Optional parts: Extension 60 mm for pipe Sealing foil for basic set bath mixer floor-standing 	Chrome Special Finishes*	46441000 46441XXX 10452180 97686000 96441000	
	Basic set for mixers floor-standing / for mounting on unfinished floor / suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing / connection dimension: DN15 Optional parts: / Sealing foil for basic set bath mixer floor-standing		10452180 96441000	
		Chrome Special Finishes* Chrome Special Finishes*	46410000 46410XXX 46411000 46411000 46411XXX	Air Power

Shower		finish	code no.	
unowei	Single lever shower mixer for concealed installation / 1 function / connection type: basic set / flow rate at 3 bar: 29.3 l/min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / with silencer / suitable for continous flow water heaters This product is not available in brushed special finishes. Alternative products: / Single lever shower mixer for concealed installation - diamond cut This product is not available in brushed special finishes. Required parts: / Basic set iBox universal Optional parts: / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	Chrome Special Finishes* Chrome Special Finishes*	46650000 46650XXX 46651000 46651XXX 01700180 13587000 93171000	
	Basic set iBox universal / suitable for all shower, bath tub and thermostat finish sets for concealed installation / connection thread / Rp ³ / ₄ / rotationally-symmetric installation / sound-decoupled installation / connection dimension: DN20	-	01700180	

_		
C	Optional parts:	
/	Extension 25 mm for basic set iBox	13587000
	universal	
/	Fastening rail set for iBox universal	93171000

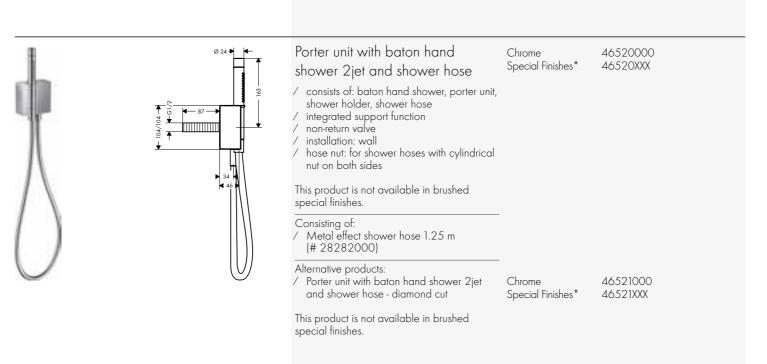


Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

Product Book 2020/2021

Thermostatic mixers,	/ valves/	diverters -
----------------------	-----------	-------------






 	finish	code no.	
Thermostat for exposed/ concealed installation for 2 functions ⁄ depending on volume flow and installation	Chrome Special Finishes*	46240000 46240XXX	Select
 depending on volume now and installation situation approx. 50% flow rate reduction 2 functions simultaneous use of several outlets Select push-button on/off control for 2 outlets maximum flow rate at 3 bar: 24.4 l/min thermostat cartridge min. operating pressure: 1 bar max. operating pressure: 1 bar max. operating pressure: 10 bar safety lock at 40° C temperature limitation adjustable non-return valve shelf made of safety glass connection type: basic set connection type: basic set connection dimension: DN15 Thermostat is delivered with buttons hand shower and Rain large 			
Alternative products: / Thermostat for exposed/ concealed installation for 2 functions - diamond cut	Chrome Special Finishes*	46241000 46241XXX	
This product is not available in brushed special finishes.			

45442180

45442180


Required parts: / Basic set for thermostat for exposed/ concealed installation for 2 functions





Basic set for thermostat for exposed/ concealed installation for 2 functions

/ sound-decoupled installation
 / connection dimension: Rp ¹/₂



	finish	code no.	
Thermostat for exposed/ concealed installation for 3 functions	Chrome Special Finishes*	46140000 46140XXX	Select
 / depending on volume flow and installation situation approx. 50% flow rate reduction / 3 functions / simultaneous use of several outlets / Select push-button on/off control for 3 outlets / maximum flow rate at 3 bar: 21.5 l/min / thermostat cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / non-return valve / shelf made of safety glass / scheft finish: frosted grey glass / connection type: basic set / connection dimension: DN15 / Thermostat is delivered with buttons handshower, PowderRain, Rain large 			
This product is not available in brushed special finishes.			
Alternative products: / Thermostat for exposed/ concealed installation for 3 functions - diamond cut	Chrome Special Finishes*	46141000 46141XXX	
This product is not available in brushed special finishes.			
Required parts: / Basic set for thermostat for exposed/ concealed installation for 3 functions		45443180	

	Basic set for thermostat for exposed/ concealed installation for 3 functions		
4 50 + 50 + 50 + 60 + 70 + 70 + 70 + 70 + 70 + 70 + 7	 / suitable for AXOR Edge Thermostat for 3 functions exposed/concealed installation / sound-decoupled installation / connection dimension: Rp ¹/₂ 		
46 ► 46 ► 40 mox. 74 ► 40 91 →	Required parts: / Thermostat for exposed/ concealed installation for 3 functions	- Chrome Special Finishes*	
	This product is not available in brushed special finishes. / Thermostat for exposed/ concealed installation for 3 functions - diamond cut	Chrome Special Finishes*	
	This product is not available in brushed		

Basic set for thermostat

This product is r special finishes.


45443180

46140000 46140XXX

46141000 46141XXX

		finish	code no.	
	Thermostatic module Select 470/100 for concealed installation for 2 functions consists of: Thermostatic module, shower holder, baton hand shower, shower hose depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function 2 functions simultaneous use of several outlets Select push-button on/off control for 2 outlets maximum flow rate at 3 bar: 34.5 l/min flow rate at 3 bar: 34.5 l/min flow rate hand shower connection at 3 bar: 14 l/min thermostat cartridge, Select valve min. operating pressure: 1 bar max. operating pressure: 1 bar max. operating pressure: 10 bar safety lock at 40 ° C temperature limitation adjustable hose nut: for shower hoses with cylindrical nut on both sides connection type: basic set Thermostat is delivered with buttons hand shower and Rain large This product is not available in brushed special finishes. Consisting of: Metal effect shower hose 1.25 m (# 28282000) Alternative products: Thermostatic module Select 470/100 for concealed installation for 2 functions - diamond cut This product is not available in brushed special finishes. Required parts: Basic set for thermostatic module Select for 2 functions	Chrome Special Finishes*	46700000 46700XXX	Select
$\begin{array}{c} & & & & & \\ & & & & & \\ & & & & & \\ \hline & & & &$	Basic set for thermostatic module Select for 2 functions / 2 functions / connection thread / Rp ³ / ₄ / installation depth: 87 - 122 mm / horizontal installation / sound-decoupled installation / connection dimension: DN15/DN20		18310180	

		finish	code no.
	Thermostatic module Select 540/100 for concealed installation for 3 functions	Chrome Special Finishes*	46710000 46710XXX
	 consists of: Thermostatic module, shower holder, baton hand shower, shower hose depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function 3 functions simultaneous use of several outlets Select push-button on/off control for 3 outlets maximum flow rate at 3 bar: 37.5 l/min flow rate at 3 bar: 37.5 l/min flow rate hand shower connection at 3 bar: 14 l/min thermostat cartridge, Select valve min. operating pressure: 1 bar max. operating pressure: 10 bar safety lock at 40° C temperature limitation adjustable hose nut: for shower hoses with cylindrical nut on both sides connection type: basic set Thermostat is delivered with buttons handshower, PowderRain, Rain large This product is not available in brushed special finishes. 		Select
	 / Metal effect shower hose 1.25 m (# 28282000) Alternative products: / Thermostatic module Select 540/100 for concealed installation for 3 functions - diamond cut This product is not available in brushed 	Chrome Special Finishes*	46711000 46711XXX
	special finishes. Required parts: / Basic set for thermostatic module Select for 3 functions		18311180
	Basic set for thermostatic module Select for 3 functions		18311180
	 / 3 functions / connection thread / Rp ³/₄ / installation depth: 87 - 122 mm / horizontal installation / sound-decoupled installation / connection dimension: DN15/DN20 		
575 580 			



		finish	code no.	
1	Thermostatic module Select 610/100 for concealed installation for 4 functions	Chrome Special Finishes*	46720000 46720XXX	Select SELECT
	 consists of: Thermostatic module, shower holder, baton hand shower, shower hose depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function 4 functions simultaneous use of several outlets Select push-button on/off control for 4 outlets maximum flow rate at 3 bar: 38.7 l/min flow rate at 3 bar: 38.7 l/min flow rate hand shower connection at 3 bar: 14 l/min thermostat cartridge, Select valve min. operating pressure: 1 bar max. operating pressure: 10 bar safety lock at 40° C temperature limitation adjustable hose nut: for shower hoses with cylindrical nut on both sides connection type: basic set Thermostat is delivered with buttons hand shower, Waterfall, Rain large, Mono This product is not available in brushed special finishes. Consisting of: 			Select
	/ Metal effect shower hose 1.25 m (# 28282000) Alternative products:			
	 Thermostatic module Select 610/100 for concealed installation for 4 functions - diamond cut 	Chrome Special Finishes*	46721000 46721XXX	
	This product is not available in brushed special finishes.			
	Required parts: / Basic set for thermostatic module Select for 4 functions		18312180	
	Basic set for thermostatic module Select for 4 functions / 4 functions / connection thread / Rp ³ / ₄		18312180	
	 / installation depth: 87 - 122 mm / horizontal installation / sound-decoupled installation / connection dimension: DN15/DN20 			


Basic set for thermostatic module Select for 5 functions

5 functions connection thread

Rp 3⁄4








	finish	code no.
 Thermostat HighFlow for concealed installation	Chrome Special Finishes*	46740000 46740XXX
 / maximum flow rate at 3 bar: 59 l/min / thermostat cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / non-return valve / with silencer / connection type: basic set 		
This product is not available in brushed special finishes.		
Alternative products: / Thermostat HighFlow for concealed installation - diamond cut	Chrome Special Finishes*	46741000 46741XXX
This product is not available in brushed special finishes.		
Required parts: / Basic set iBox universal	-	01700180
Optional parts: / Extension 25 mm for basic set iBox universal		13587000
 / Fastening rail set for iBox universal 		93171000
Basic set iBox universal		01700180
/ suitable for all shower, bath tub and thermostat finish sets for concealed		





	 suitable for all shower, bath tub and thermostat finish sets for concealed installation 	
	/ connection thread	
	/ Rp ³ / ₄	
	/ rotationally-symmetric installation	
	/ sound-decoupled installation	
8	/ connection dimension: DN20	
	Optional parts:	
	/ Extension 25 mm for basic set iBox	13587000
	universal	
	/ Fastening rail set for iBox universal	93171000


			finish	code no.
10		Thermostat for concealed installation with shut-off valve / 1 function / maximum flow rate at 3 bar: 26 l/min / thermostat cartridge, ceramic valves 90° / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / non-return valve / with silencer / connection type: basic set	Chrome Special Finishes*	46750000 46750XXX
		This product is not available in brushed special finishes.		
		Alternative products: / Thermostat for concealed installation with shut-off valve - diamond cut	- Chrome Special Finishes*	46751000 46751XXX
		This product is not available in brushed special finishes.		
		Required parts: / Basic set iBox universal	-	01700180
		Optional parts: / Extension 25 mm for basic set iBox universal	-	13587000
		 / Fastening rail set for iBox universal 		93171000
	151 114 31/41/51 80 28 80 28 80 28 80 28 80 28 80 28 80 28 80 28 80 28 80 28 80 28 80 17 17 17 17 17 17 17 17 17 17	Basic set iBox universal / suitable for all shower, bath tub and thermostat finish sets for concealed installation / connection thread / Rp ³ / ₄ / rotationally-symmetric installation / sound-decoupled installation / connection dimension: DN20 Optional parts:		01700180
		/ Extension 25 mm for basic set iBox universal		13587000
		/ Fastening rail set for iBox universal		93171000

code no.

11		Thermostat for concealed installation with shut-off/ diverter valve / 2 functions / maximum flow rate at 3 bar: 26 l/min / thermostat cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / non-return valve / with silencer / connection type: basic set	Chrome Special Finishes*	46760000 46760XXX
		This product is not available in brushed special finishes. Alternative products: / Thermostat for concealed installation with shut-off/ diverter valve - diamond cut This product is not available in brushed special finishes. Required parts: / Basic set iBox universal Optional parts: / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	Chrome Special Finishes*	46761000 46761XXX 01700180 13587000 93171000
	$\begin{array}{c} 151\\ 114\\ \hline 0 \ominus 0\\ 0 \ominus 0\\ \hline 0\\ 0\\ 0\\ 0\\ 0\\ 0\\ 0\\ 0\\ 0\\ 0\\ 0\\ 0\\ 0\\ $	Basic set iBox universal / suitable for all shower, bath tub and thermostat finish sets for concealed installation / connection thread / Rp ³ / ₄ / rotationally-symmetric installation / sound-decoupled installation / connection dimension: DN20 Optional parts: / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal		01700180 13587000 93171000

finish


			finish	code no.	
	◀ 40▶	Shut-off valve for concealed installation / connection type: DN15/DN20	Chrome Special Finishes*	46770000 46770XXX	
		/ 1 functionThis product is not available in brushed			
		special finishes.			
	I	Alternative products: / Shut-off valve for concealed installation - diamond cut	Chrome Special Finishes*	46771000 46771XXX	
		This product is not available in brushed special finishes.			
		Required parts: / Basic set 52 l/ min for shut-off valve	-	16973180	
		for concealed installation spindle / Basic set 40 l/ min for concealed		16974180	
		installation for shut-off valve ceramic / Basic set 130 l/min for shut-off valve for concealed installation spindle		16970180	
		Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro	-	92990000	
	≼ 58 → 28 <	Basic set 52 l/min for shut-off valve for concealed installation		16973180	
Rp 1/2→ ←	Rp 1/2-	spindle / connection type: DN15 2 suitable for all shut-off valves finish sets			
		 / flow rate: 52 l/min / connection dimension: DN15 			
	Alternative products: / Basic set 40 l/min for concealed	-	16974180		
		installation for shut-off valve ceramic / Basic set 130 l/min for shut-off valve for concealed installation spindle		16970180	
	Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro	-	92990000		
howers ————					
T T		For matching shower products, refer to the AXOR Showers chapter.			
XXX - A TOURDH					
ccessories					
		For matching accessories, refer to	the AXOR Acce	essories chapter.	

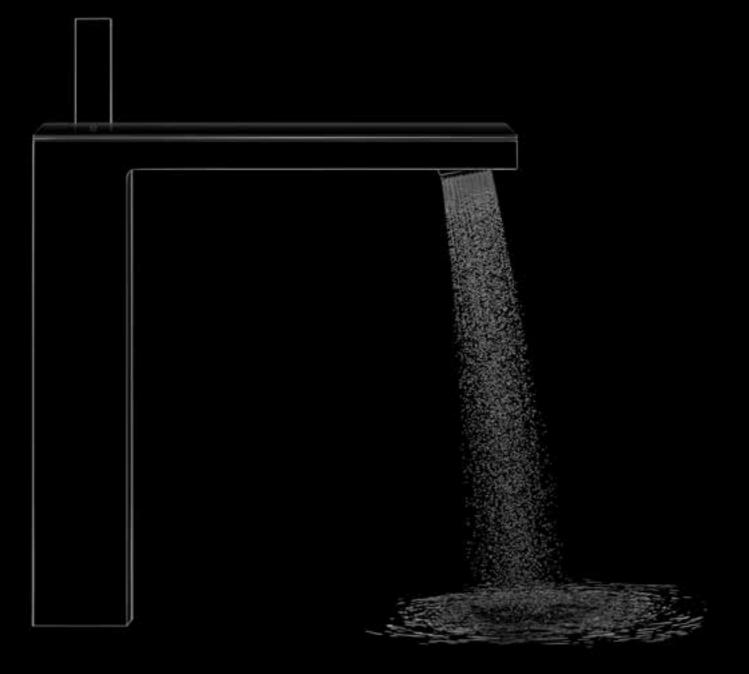

AXOR MYEDITION

Basin	78
Bidet	83
Bath	84
Plates	87





AXOR MYEDITION

A PERSONAL Statement. In perfection.

Setting oneself apart from the masses. Gratifying the need for uniqueness. Striking out in a new direction. This is the mission statement of AXOR MyEdition. Clear, linear design sets the stage for personal fulfilment. For one's own creativity. With a wide range of plates. Upon request available in exclusive materials. Individualisation. In perfection.


True luxury is all about fulfilling personal dreams. The exclusive PVD surfaces of AXOR FinishPlus set new standards. Surfaces of exceptional lustre, robustness and durability. Manufactured with state-of-the-art engineering. From unique specimens to large-scale production. From Polished Gold Optic to Brushed Black Chrome. Uni or bicolour. Brushed or polished. Numerous ways to express one's own personality. Individualisation par excellence.

An avant-garde concept and an ingenious connection: a metal body, chrome-plated or with one of different AXOR FinishPlus surfaces. Crowned with a fascinating plate: with an exclusive portfolio of materials, AXOR Signature opens the door to path-breaking possibilities. Glass, metal, wood, marble, leather. More radiance. New sensual experiences. Thanks to special materials from Mother Nature. A new concept for mixers. Premiere for AXOR MyEdition. Black Walnut

Black Marble (Nero Marquina) —— from the Basque region

Plate in Black Glass

Plate in Mirror Glass

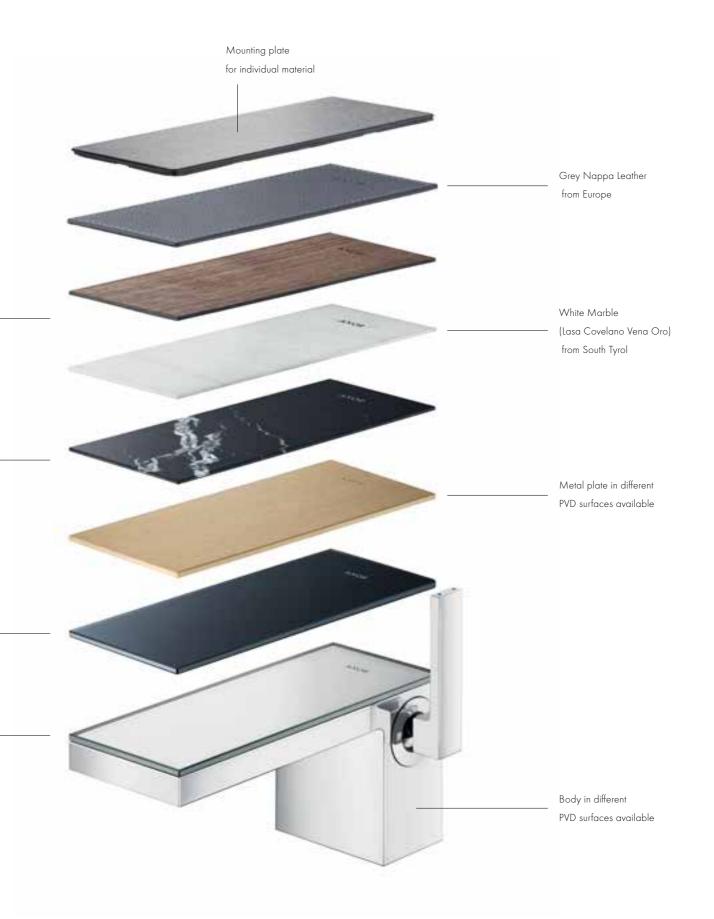

ASSORTMENT LOGIC

The versions Chrome (body) / Mirror Glass (plate) and Chrome / Black Glass are available as standard with own article number for all 9 AXOR MyEdition products. Additionally to the standard versions the products can be configured individually and ordered with separate article number for the product body and the plate. (see next page)

COLLECTION OVERVIEW AND C OPTIO

16

J

15

F


"I


1

Product body

ection over combinatio dns													
			4						1			No. of No.	
			Mirror Glass			Black Glass			Chrome		1	5 PVD surface	s
		Plate 200	Plate 245	Plate 150	Plate 200	Plate 245	Plate 150	Plate 200	Plate 245	Plate 150	Plate 200	Plate 245	Plate 150
Single lever basin mixer 70	Standard product Chrome	47010000			47010600								
Single lever basin mixer 70 without plate	Chrome	47012000 47900000			47012000 47900600			47012000 47903000			47012000 47903xxx		
	15 PVD surfaces	47012xxx 47900000			47012xxx 47900600			47012xxx 47903000			47012xxx 47903xxx		
Single lever basin mixer 230	Standard product Chrome		47020000			47020600							
Single lever basin mixer 230 without plate	Chrome		47022000 47901000			47022000 47901600			47022000 47904000			47022000 47904xxx	
	15 PVD surfaces		47022xxx 47901000			47022xxx 47901600			47022xxx 47904000			47022xxx 47904xxx	
3-hole basin mixer 70	Standard product Chrome	47050000			47050600								
3-hole basin mixer 70	Chrome	47052000 47900000			47052000 47900600			47052000 47903000			47052000 47903xxx		
without plate	15 PVD surfaces	47052xxx 47900000			47052xxx 47900600			47052xxx 47903000			47052xxx 47903xxx		
Single lever basin mixer for concealed installati	Standard product ion Chrome		47060000			47060600							
Single lever basin mixer for	Chrome		47062000 47901000			47062000 47901600			47062000 47904000			47062000 47904xxx	
concealed installati without plate	ion 15 PVD surfaces		47062xxx 47901000			47062xxx 47901600			47062xxx 47904000			47062xxx 47904xxx	
Single lever bath mixer floor-standing	Standard product Chrome		47040000			47040600							
Single lever bath mixer floor-standing	Chrome		47042000 47901000			47042000 47901600			47042000 47904000			47042000 47904xxx	
without plate	15 PVD surfaces		47042xxx 47901000			47042xxx 47901600			47042xxx 47904000			47042xxx 47904xxx	
Single lever bidet mixer	Standard product Chrome			47210000			47210600						
Single lever bidet mixer without plate	Chrome			47212000 47902000			47212000 47902600			47212000 47905000			47212000 47905xxx
	15 PVD surfaces			47212XXX 47902000			47212XXX 47902600			47212xxx 47905000			47212xxx 47905xxx
4-hole rim-mounted bath mixer	Standard product Chrome	47430000			47430600								
4-hole rim-mounted bath mixer without plate	Chrome	47432000 47900000			47432000 47900600			47432000 47903000			47432000 47903xxx		
without plate	15 PVD surfaces	47432xxx 47900000			47432xxx 47900600			47432xxx 47903000			47432xxx 47903xxx		
Single lever bath mixer floor-standing	Standard product Chrome		47440000			47440600							
Single lever bath mixer floor-standing	Chrome	│	47442000 47901000			47442000 47901600			47442000 47904000			47442000 47904xxx	
without plate	15 PVD surfaces		47442xxx 47901000			47442xxx 47901600			47442xxx 47904000			47442XXX 47904xxx	
Tub filler	Standard product Chrome	47410000			47410600								
Tub filler without plate	Chrome	47412000 47900000			47412000 47900600			47412000 47903000			47412000 47903xxx		
	15 PVD surfaces	47412xxx 47900000			47412xxx 47900600			47412xxx 47903000			47412xxx 47903xxx		

Product Plates														
				1			1							
W	ood: Black Wal	nut	Lasa	White marble: Covelano Vena	Oro		Black Marble: Nero Marquina		Leathe	r: grey Nappa	leather	Mounting pl	ate for individ	ual material
Plate 200	Plate 245	Plate 150	Plate 200	Plate 245	Plate 150	Plate 200	Plate 245	Plate 150	Plate 200	Plate 245	Plate 150	Plate 200	Plate 245	Plate 150
47012000 47906000			47012000 47909000			47012000 47913000			47012000 47916000			47012000 47921000*		
47012xxx			47012xxx			47012xxx			47012xxx			47012xxx		
47906000			47909000			47913000			47916000			47921000*		
	47022000 47907000			47022000 47910000			47022000 47914000			47022000 47917000			47022000 47922000*	
	47022xxx			47022xxx			47022xxx			47022xxx			47022xxx 47922000*	
	47907000			47910000			47914000			47917000				
47052000 47906000			47052000 47909000			47052000 47913000			47052000 47916000			47052000 47921000*		
47052xxx 47906000			47052xxx 47909000			47052xxx 47913000			47052xxx 47916000			47052xxx 47921000*		
	47062000			47062000			47062000			47062000			47062000	
	47907000 47062xxx			47910000 47062xxx			47914000 47062xxx			47917000 47062xxx			47922000* 47062xxx	
	47907000			47910000			47914000			47917000			47922000*	
	47042000 47907000			47042000 47910000			47042000 47914000			47042000 47917000			47042000 47922000*	
	47042xxx 47907000			47042xxx 47910000			47042xxx 47914000			47042xxx 47917000			47042xxx 47922000*	
		47212000			47212000			47212000			47212000			47212000
		47908000 47212xxx			47911000 47212xxx			47915000 47212xxx			47918000 47212xxx			47923000* 47212xxx
		47908000			47911000			47915000			47918000			47923000*
47432000 47906000			47432000 47909000			47432000 47913000			47432000 47916000			47432000 47921000*		
47432xxx 47906000			47432xxx 47909000			47432xxx 47913000			47432xxx 47916000			47432xxx 47921000*		
	47442000			47442000			47442000			47442000			47442000	
	47907000 47442xxx			47910000 47442xxx			47914000 47442xxx			47917000 47442xxx			47922000*	
	47907000			47910000			47914000			47917000			47922000*	
47412000 47906000			47412000 47909000			47412000 47913000			47412000 47916000			47412000 47921000*		
47412xxx 47906000			47412xxx 47909000			47412xxx 47913000			47412xxx 47916000			47412xxx 47921000*		

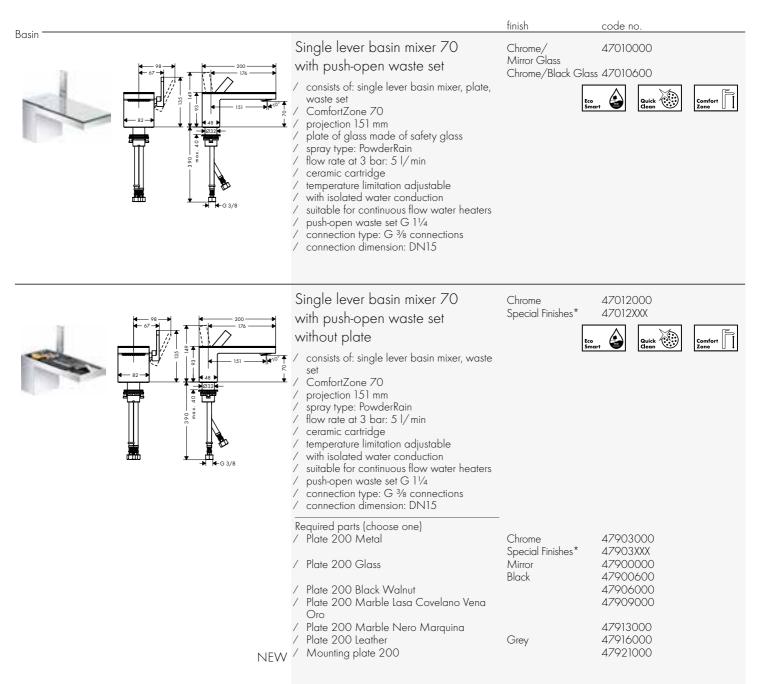

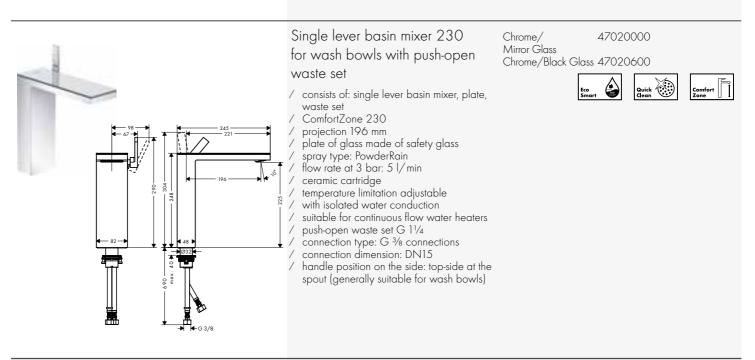


Measurements within scale drawings are in mm.


Technical specifications and units of measure are subject to change.

	finish	code no.
Single lever basin mixer 230 for wash bowls with push-open waste set without plate / consists of: single lever basin mixer, waste set / ComfortZone 230 / projection 196 mm / spray type: PowderRain / flow rate at 3 bar: 5 1/min / ceramic cartridge / temperature limitation adjustable / with isolated water conduction / suitable for continuous flow water heaters / push-open waste set G 11/4 / connection type: G 3/s connections / connection on the side: top-side at the spout (generally suitable for wash bowls) Required parts (choose one) / Plate 245 Glass / Plate 245 Black Walnut / Plate 245 Marble Lasa Covelano Vena Oro	Chrome Special Finishes*	47022000 47022XXX Somer Ouick Oor Comfort Image: Comfort 47904000 47904000 47904000 47904000 47901000 47901600 47901000 47901000 47901000 47901000 47901000 47901000
/ Plate 245 Marble Nero Marquina / Plate 245 Leather NEW / Mounting plate 245	Grey	47914000 47917000 47922000







Single lever basin mixer	Chrome/ Mirror Glass	47060000	
for concealed installation wall-mounted with spout 221 mm	Chrome/Black Glass	s 47060600	
 consists of: single lever basin mixer for concealed installation wall-mounted, plate, waste set projection 221 mm plate of glass made of safety glass spray type: PowderRain flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable with isolated water conduction suitable for continuous flow water heaters non-closing waste set connection type: basic set connection dimension: DN15 handle can be positioned on the right or left, depends on the basic set installation 		Eo Smart	Quick
Required parts: / Basic set for single lever basin mixer for concealed installation wall-mounted		13623180	
Optional parts: / Extension set 25 mm for single lever basin mixer wall-mounted		13586000	



		finish	code no.
	Single lever basin mixer for concealed installation wall-mounted with spout 221 mm without plate	Chrome Special Finishes*	47062000 47062XXX <u>Eco</u> Quick Cean
	 consists of: single lever basin mixer for concealed installation wall-mounted, waste set projection 221 mm spray type: PowderRain flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable with isolated water conduction suitable for continuous flow water heaters non-closing waste set connection type: basic set connection dimension: DN15 handle can be positioned on the right or left, depends on the basic set installation 		
	Required parts (choose one) / Plate 245 Metal / Plate 245 Glass	Chrome Special Finishes* Mirror	47904000 47904XXX 47901000
	 / Plate 245 Black Walnut / Plate 245 Marble Lasa Covelano Vena Oro 	Black	47901600 47907000 47910000
NEW	 Plate 245 Marble Nero Marquina Plate 245 Leather Mounting plate 245 	Grey	47914000 47917000 47922000
	Required parts: / Basic set for single lever basin mixer for concealed installation wall-mounted		13623180
	Optional parts: / Extension set 25 mm for single lever basin mixer wall-mounted		13586000

Rp 1/2- 6 2 7 5 7 5 7 5 7 5 7 5 7 5 7 5 7 5	Basic set for single lever basin mixer for concealed installation wall-mounted / variable positioning of the mixer system, can be left or right of the spout / connection dimension: DN15 Optional parts:	13623180
	 Extension set 25 mm for single lever basin mixer wall-mounted 	13586000
	Extension set 25 mm for single lever basin mixer wall-mounted	13586000
	/ extension length: 25 mm	
8 🗆 🕴 📑		
- 28		

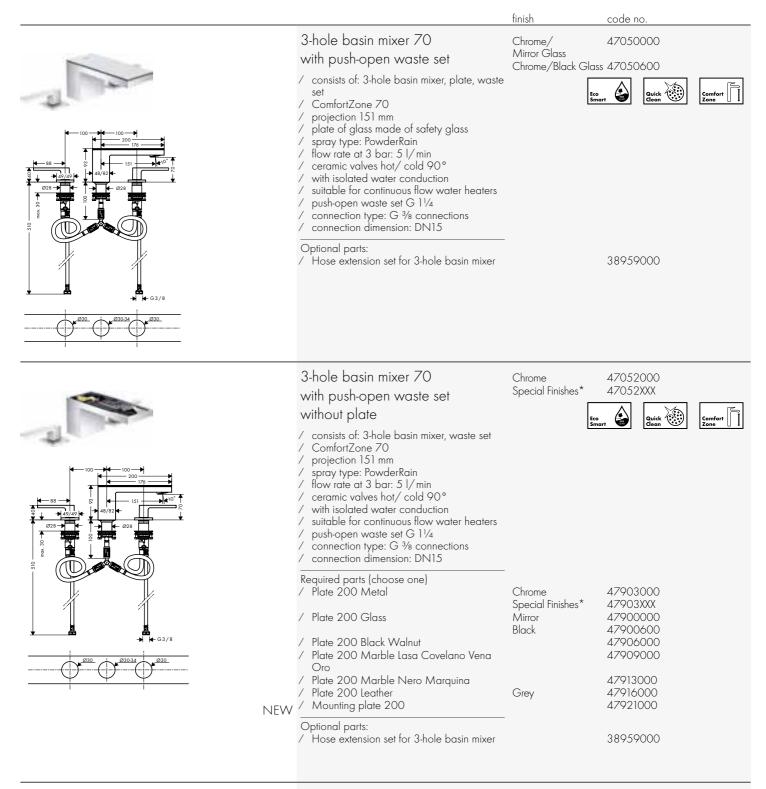




Hose extension set for 3-hole

38959000

basin mixer

length of hoses 700 mm

for free positioning of spout and handles

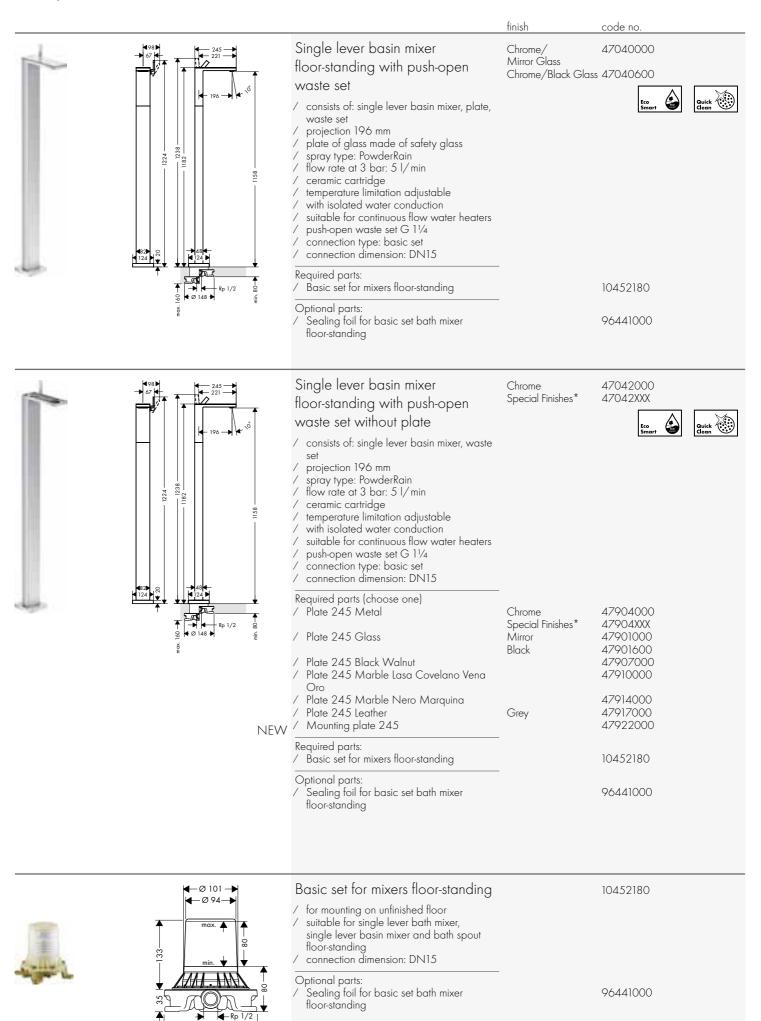


Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

Product Book 2020/2021

Ø 148

82

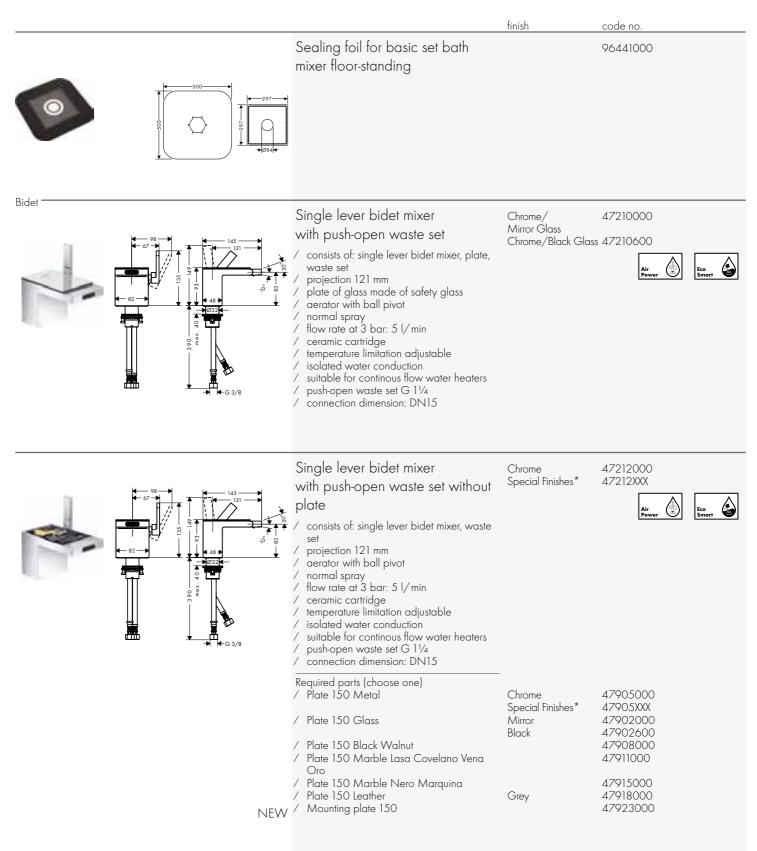

Bath		finish	code no.	
Bath	Single lever bath mixer floor-standing / consists of: single lever bath mixer floor standing, plate, baton hand shower, shower hose, shower holder / projection 196 mm / connection type: basic set / plate of glass made of safety glass / spray type mixer: normal spray / spray type hand shower: Rain, Mono / flow rate at 3 bar: 20 l/min / Ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / diverter with automatic resetting / non-return valve / connection dimension: DN15 Consisting of: / Metal effect shower hose 1.25 m (# 28282000) / Baton hand shower 2 jet (# 28532000) Required parts: / Basic set for mixers floor-standing Optional parts: / Sealing foil for basic set bath mixer floor-standing	Chrome/ Mirror Glass Chrome/Black Glo	47440000 nss 47440600 10452180 96441000	Quick Ceen
	Single lever bath mixer floor-standing without plate / consists of: single lever bath mixer floor standing, baton hand shower, shower hose, shower holder / projection 196 mm / connection type: basic set / spray type mixer: normal spray / spray type hand shower: Rain, Mono % / flow rate at 3 bar: 20 l/min / Ceramic cartridge / min. operating pressure: 10 bar / max. operating pressure: 10 bar	Chrome Special Finishes*	47442000 47442XXX	Quick dean

temperature limitation adjustable

diverter with automatic resetting non-return valve connection dimension: DN15

Consisting of: / Metal effect shower hose 1.25 m (# 28282000)

Required parts (choose one) / Plate 245 Metal

Plate 245 Black Walnut

Plate 245 Glass

Plate 245 Leather

Oro

NEW / Mounting plate 245

Required parts:

Optional parts:

/

Baton hand shower 2jet (# 28532000)

Plate 245 Marble Lasa Covelano Vena

Plate 245 Marble Nero Marquina

/ Basic set for mixers floor-standing

Sealing foil for basic set bath mixer floor-standing

Chrome

Mirror

Black

Grey

Special Finishes*

/

шi.

2a nax. 160 🚽 -

🗲 Ø 148 🕨

G 1/2

Technical specifications and units of measure are subject to change.

47904000

47904XXX

47901000 47901600

47907000

47910000

47914000

47917000

47922000

10452180

96441000

		finish code no.	
© 101 © 94 max. © 0 min. © 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Basic set for mixers floor-standing / for mounting on unfinished floor / suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing / connection dimension: DN15 Optional parts: / Sealing foil for basic set bath mixer floor-standing	10452180 96441000	
	Sealing foil for basic set bath mixer floor-standing	96441000	
	 4-hole rim mounted bath mixer consists of: 4-hole rim mounted bath mixer, plate, baton hand shower, Secuflex hose set, shower holder projection 150 mm connection type: basic set plate of glass made of safety glass spray type mixer: normal spray spray type hand shower: Rain, Mono maximum pull-out length of hand shower: 1.10 m flow rate for bath spout at 3 bar: 22 l/min flow rate of hand shower at 3 bar: 16 l/min ceramic valves hot/ cold 90° min. operating pressure: 10 bar diverter with automatic resetting connection dimension: DN15 Consisting of: Baton hand shower 2jet (# 28532000) Required parts: 	Chrome/ 47430000 Mirror Glass Chrome/Black Glass 47430600	Qurick Cerem
	/ Basic set for 4-hole rim mounted bath mixer	15480180	
	Optional parts: / Secuflex insert extension	98806000	

			finish	code no.	
		4-hole rim mounted bath mixer without plate	Chrome Special Finishes*	47432000 47432XXX	
		 consists of: 4-hole rim mounted bath mixer, baton hand shower, shower holder projection 150 mm connection type: basic set spray type mixer: normal spray spray type hand shower: Rain, Mono maximum pull-out length of hand shower: 1.10 m flow rate for bath spout at 3 bar: 22 l/min flow rate of hand shower at 3 bar: 16 l/min ceramic valves hot/ cold 90° min. operating pressure: 1 bar max. operating pressure: 10 bar diverter with automatic resetting connection dimension: DN15 			Quick Geon
		Consisting of: / Baton hand shower 2jet (# 28532000)			
		Required parts (choose one) / Plate 200 Metal	Chrome	47903000	
		/ Plate 200 Glass	Special Finishes* Mirror	47903XXX 47900000	
		/ Plate 200 Black Walnut/ Plate 200 Marble Lasa Covelano Vena Oro	Black	47900600 47906000 47909000	
	NEW	/ Plate 200 Marble Nero Marquina / Plate 200 Leather	Grey	47913000 47916000 47921000	
		Required parts: / Basic set for 4-hole rim mounted bath mixer		15480180	
		Optional parts: / Secuflex insert extension		98806000	
		Basic set for 4-hole rim mounted bath mixer		15480180	
		 / maximum pull-out length of hand shower: 1.10 m / connection dimension: DN15 			
		Optional parts: / Secuflex insert extension		98806000	
		Secuflex insert extension		98806000	
4 — 82 →		Bath spout	Chrome/ Mirror Glass	47410000	





- /
- consists of: bath spout, plate projection 176 mm wall-mounted plate of metal flow rate: 20 l/min connection dimension: DN15 spray type: normal spray /
- /

Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.

G 1/2 →

200

å


86

~

			finish	code no.	
AN ANA		Bath spout without plate / projection 176 mm / wall-mounted / flow rate: 20 l/min / connection dimension: DN15 / spray type: normal spray Required parts (choose one)	Chrome Special Finishes*	47412000 47412XXX	Quick Clean
		 / Plate 200 Metal / Plate 200 Glass / Plate 200 Black Walnut / Plate 200 Marble Lasa Covelano Vena Oro 	Chrome Special Finishes* Mirror Black	47903000 47903XXX 47900000 47900600 47906000 47909000	
DI	NEW	/ Plate 200 Marble Nero Marquina / Plate 200 Leather	Grey	47913000 47916000 47921000	
Plates	↓ 200 ↓	Plate 200 Metal / length 200 mm / material: metal / removable	Chrome Special Finishes*	47903000 47903XXX	
	82	Alternative sizes: / Plate 245 Metal / Plate 150 Metal	Chrome Special Finishes* Chrome Special Finishes*	47904000 47904XXX 47905000 47905XXX	
	200	Plate 200 Glass / length 200 mm / material: glass / removable	Mirror Black	47900000 47900600	
	■ 82	Alternative sizes: / Plate 245 Glass / Plate 150 Glass	Mirror Black Mirror Black	47901000 47901600 47902000 47902600	
	200 → Comparison C	Plate 200 Black Walnut / length 200 mm / material: walnut / Since wood is a natural material, each piece is unique, and wood markings may vary / removable Alternative sizes:		47906000	
		/ Plate 245 Black Walnut/ Plate 150 Black Walnut		47907000 47908000	
ana		Plate 200 Marble Lasa Covelano Vena Oro / length 200 mm / material: marble / Since marble is a natural material, each piece is unique, and marbling markings may vary / removable		47909000	
		Alternative sizes: / Plate 245 Marble Lasa Covelano Vena Oro / Plate 150 Marble Lasa Covelano Vena Oro		47910000 47911000	


			finish	code no.
1 July		Plate 200 Marble Nero Marquina / length 200 mm / material: marble / Since marble is a natural material, each piece is unique, and marbling markings may vary / removable Alternative sizes: / Plate 245 Marble Nero Marquina / Plate 150 Marble Nero Marquina		47913000 47914000 47915000
	200 200	Plate 200 Leather / length 200 mm / material: leather / removable Alternative sizes: / Plate 245 Leather / Plate 150 Leather	Grey Grey Grey	47916000 47917000 47918000
NEN	NEW NEW	Mounting plate 200 / the mounting plate is required to attach an individual material to the AXOR MyEdition products without plate / the template can be used several times / dimension: 200 x 82 mm (individual material) / material thickness: recommended 3-5 mm (individual material) / with rubber seal for tight fit / removable / the corresponding AXOR MyEdition template is required for exact positioning of the individual material on the mounting plate / not included: individual material, glue Alternative sizes: / Mounting plate 245 / Mounting plate 150 Required parts:		47921000 47922000 47923000
	NEW	Required parts: / Template 200		47925000


		finish	code no.
NEW	Mounting plate 245		47922000
	 / the mounting plate is required to attach an individual material to the AXOR MyEdition products without plate / the template can be used several times / dimension: 245 x 82 mm (individual material) / material thickness: recommended 3-5 mm (individual material) / with rubber seal for tight fit / removable / the corresponding AXOR MyEdition template is required for exact positioning of the individual material on the mounting plate / not included: individual material, glue 		
NEW NEW	Alternative sizes: / Mounting plate 200 / Mounting plate 150		47921000 47923000
NEW	Required parts: / Template 245		47926000
	Mounting plate 150		47923000
	 / the mounting plate is required to attach an individual material to the AXOR MyEdition products without plate / the template can be used several times / dimension: 117 x 82 mm (individual material) / material thickness: recommended 3-5 mm (individual material) / with rubber seal for tight fit / removable / the corresponding AXOR MyEdition template is required for exact positioning of the individual material on the mounting plate / not included: individual material, glue 		
NEW NEW	Mounting plate 245 Mounting plate 200		47922000 47921000
NEW	Required parts: / Template 150		47924000
NEW	Template 200 / for exact positioning during gluing of the individual material on the AXOR MyEdition mounting plate / the template can be used several times / not included: individual material, glue		47925000
NEW NEW	Alternative sizes: / Template 245		47926000 47924000

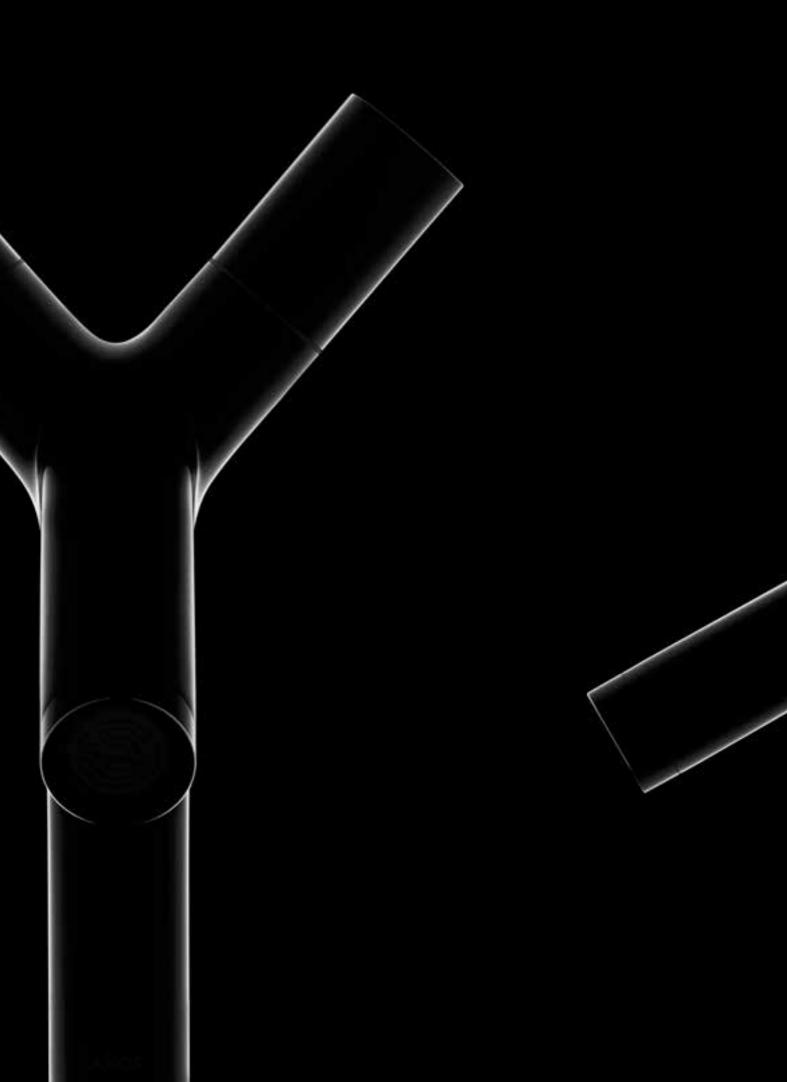


AXOR STARCK

Basin	92
Bidet	95
Bath	96
Shower	102
Thermostatic mixers / valves / diverters	104
Overhead showers	107
Hand showers	107
Shower sets	108
AXOR Starck Classic	109
AXOR Starck V	110

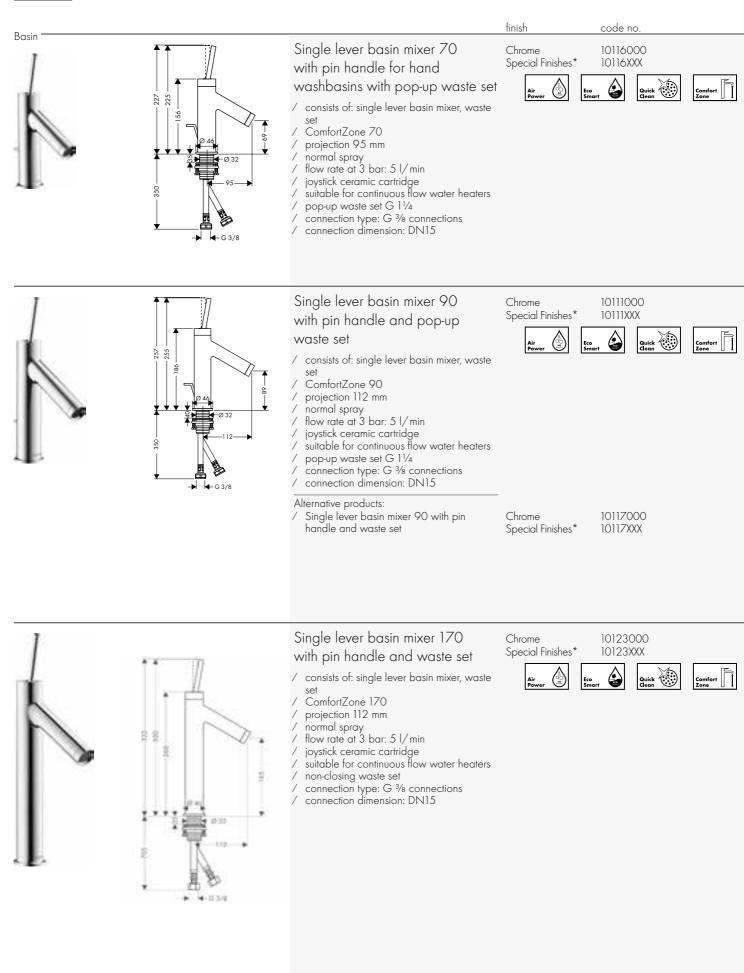


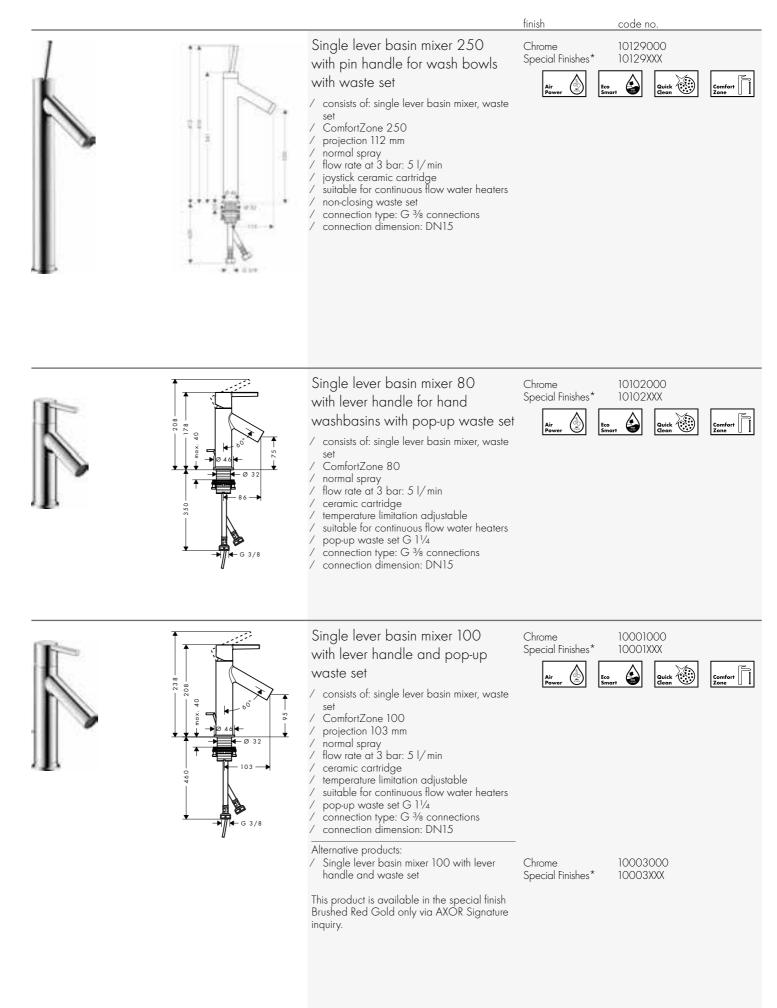

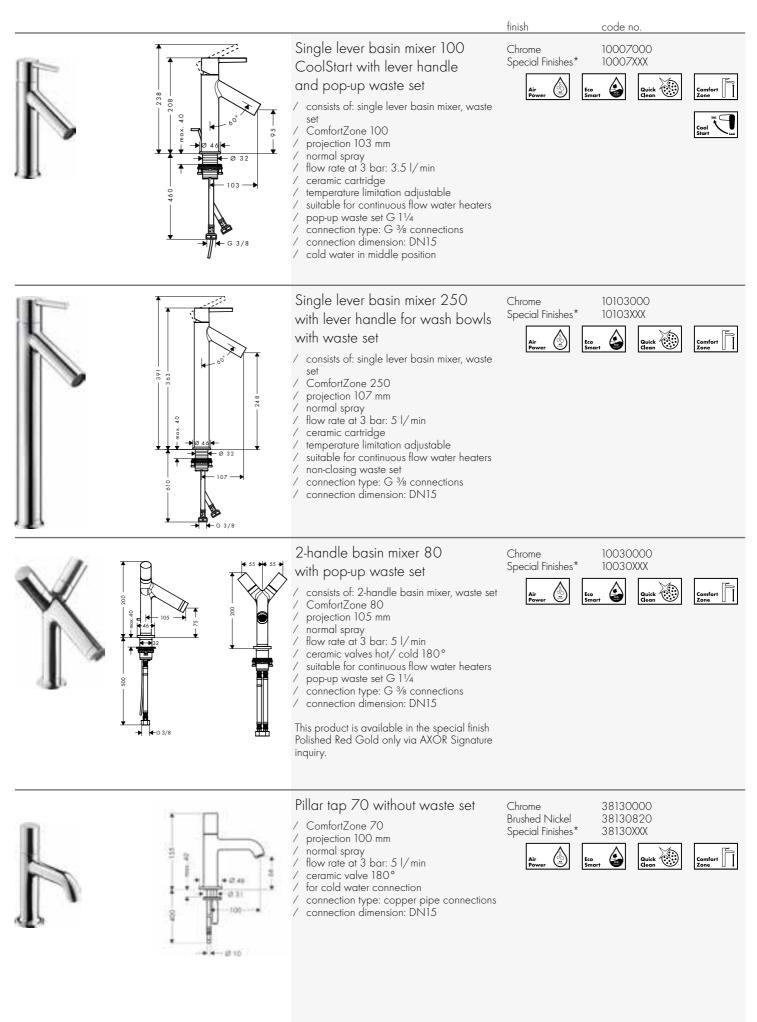

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

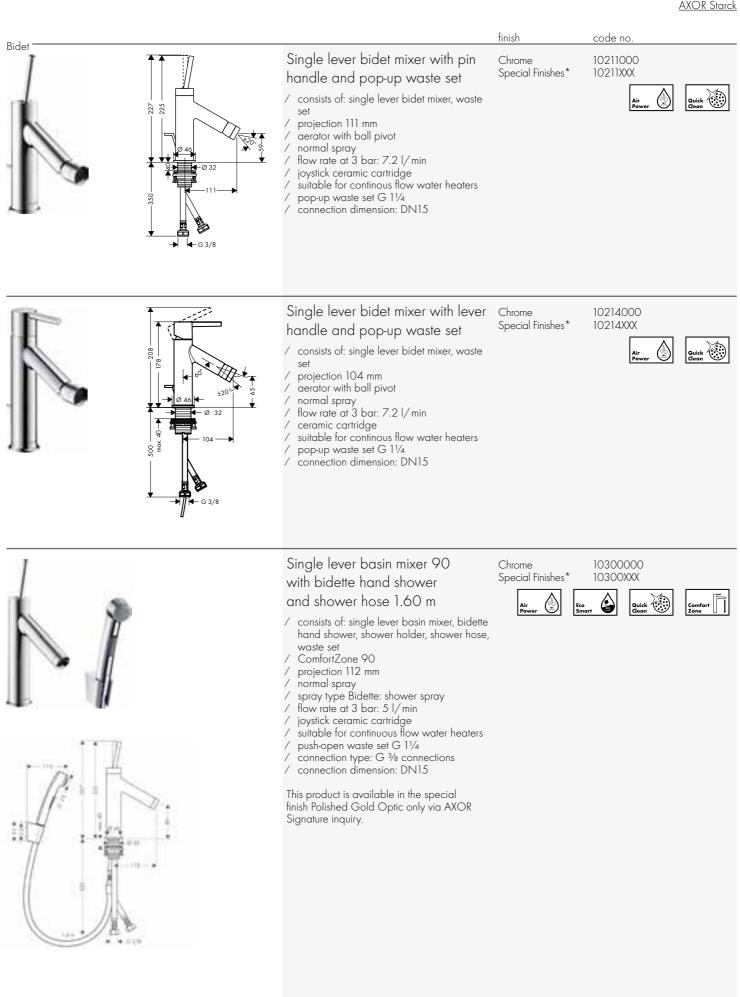

*For additional information please refer to the "special finish" overview.


Dath		finish	code no.	
Bah	Single lever bath mixer for exposed installation with pin handle / projection 200 mm / connection type: sshaped connections / centre distance: 150 ± 16 mm / spray type mixer: normal spray / flow rate at 3 bar: 221/min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / diverter with automatic resetting / non-return valve / with silencer / suitable for continous flow water heaters / connection dimension: DN15	Chrome Special Finishes*	10411000 10411XXX	Air Power
	Single lever bath mixer for exposed installation with lever handle / projection 200 mm / connection type: sshaped connections / centre distance: 150 ± 16 mm / spray type mixer: normal spray / flow rate at 3 bar: 22 l/min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / diverter with automatic resetting / non-return valve / with silencer / suitable for continous flow water heaters / connection dimension: DN15 / matching handle design for the AXOR Starck basin mixers with lever handles	Chrome Special Finishes*	10465000 10465XXX	Air Dover Dover Dover

Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.


		finish	code no.	
	Single lever bath mixer floor-standing with lever handle / consists of: single lever bath mixer floor standing, baton hand shower, shower hose, shower holder / projection 156 mm / connection type: basic set / spray type mixer: normal spray / spray type hand shower: Rain, Mono / flow rate at 3 bar: 22 I/min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / diverter with automatic resetting / non-return valve / suitable for continous flow water heaters / connection dimension: DN15 / matching handle design for the AXOR Starck basin mixers with lever handles Consisting of: / Metal effect shower hose 1.25 m (# 28282000) / Baton hand shower 2jet (# 28532000) Required parts: / Basic set for mixers floor-standing	Chrome Special Finishes*	10455000 10455XXX 10452180	Air Power
	Optional parts: / Sealing foil for basic set bath mixer floor-standing / Extension 60 mm for spout / Extension 60 mm for pipe	Chrome Special Finishes*	96441000 10981000 10981XXX 97686000	
	Single lever bath mixer floor-standing with pin handle / consists of: single lever bath mixer floor standing, baton hand shower, shower holder / projection 156 mm / connection type: basic set / spray type mixer: normal spray / spray type hand shower: Rain, Mono / flow rate at 3 bar: 22 l/min / ceramic cartridge / min. operating pressure: 10 bar / max. operating pressure: 10 bar / temperature limitation adjustable / diverter with automatic resetting / non-return valve / suitable for continous flow water heaters / connection dimension: DN15 Consisting of: / Metal effect shower hose 1.25 m (# 28282000) / Baton hand shower 2jet (# 28532000)	Chrome Special Finishes*	10456000 10456XXX	Air Power
	Required parts: / Basic set for mixers floor-standing Optional parts: / Sealing foil for basic set bath mixer floor-standing / Extension 60 mm for spout / Extension 60 mm for pipe	Chrome Special Finishes*	10452180 96441000 10981000 10981XXX 97686000	

97

			finish	code no.
		 Basic set for mixers floor-standing for mounting on unfinished floor suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing connection dimension: DN15 Optional parts: Sealing foil for basic set bath mixer floor-standing 		10452180 96441000
	¥ + 93 + 103	Extension 60 mm for spout / extension length: 60 mm Optional parts: / Single lever bath mixer floor-standing with pin handle / Single lever bath mixer floor-standing with lever handle	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	10981000 10981XXX 10456000 10456XXX 10455000 10455XXX
	→ 56-84 ← 0/1/0 + 56-84 ←	Single lever bath mixer for concealed installation with pin handle / connection type: basic set / flow rate at 3 bar: 26 l/min / ceramic cartridge / temperature limitation adjustable / diverter with automatic resetting / suitable for continous flow water heaters	Chrome Special Finishes*	10416000 10416XXX
→ 54:82 ≮ ← 86-114 →	€ 86-114 →	 Alternative products: / Single lever bath mixer for concealed installation with pin handle and integrated security combination according to EN1717 This product is available in the special finish Polished Gold Optic only via AXOR Signature inquiry. 	Chrome Special Finishes*	10418000 10418XXX
		Required parts: / Basic set iBox universal		01700180
		Optional parts: / Extension element round 2-hole / Extension 25 mm for basic set iBox universal	Chrome Brushed Nickel Special Finishes*	14961000 14961820 14961XXX 13587000

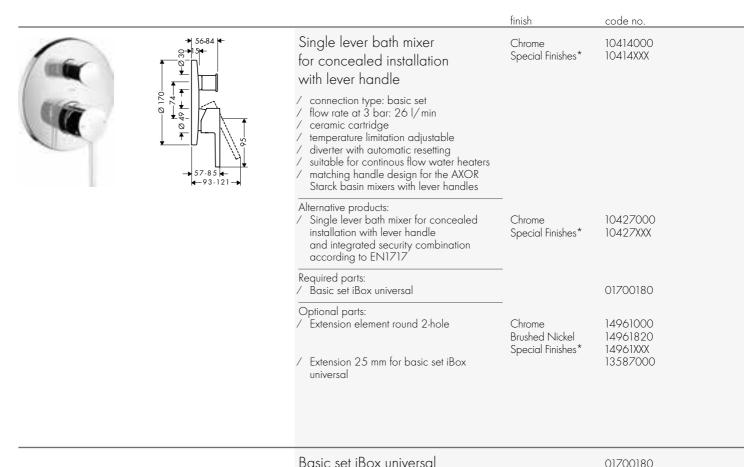

-	-
64	6
	1
-	10.000



dasic set ibox universal	01/00180
suitable for all shower, bath tub and thermostat finish sets for concealed installation connection thread Rp ³ / ₄ rotationally-symmetric installation sound-decoupled installation connection dimension: DN20	
Dptional parts: Extension 25 mm for basic set iBox	13587000
universal Fastening rail set for iBox universal	93171000





Extension set 2.5 cm / extension length: 25 mm


(

96500000



*For additional information please refer to the "special finish" overview.

			finish	code no.
		Extension 50 mm for bath spout / extension length: 50 mm	Chrome Special Finishes*	10495000 10495XXX
	Optional parts: / Bath spout	– Chrome Special Finishes*	10410000 10410XXX	
		2-hole rim mounted thermostatic bath mixer with zero handles	Chrome Special Finishes*	10480000 10480XXX
		 2 functions safety lock at 38° C temperature limitation adjustable suitable for remote spout connection type: basic set connection dimension: DN15 		
		Required parts: / Basic set for 2-hole rim mounted thermostatic bath mixer	_	15486180
		Optional parts: / Flexible connection tube 800 mm / Connection tube set for 2-hole rim mounted thermostatic bath mixer	_	58308000 13089000
		Basic set for 2-hole rim mounted thermostatic bath mixer		15486180
B C		 / suitable for remote spout / connection thread: G 1/2 / connection dimension: DN15 Optional parts: / Rim mounted bath set with hand shower / Finish set square / Finish set oval / Rim and tile mounted bath basic set 	- Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	19418000 19418XXX 28012000 28012XXX 28022000 28022XXX 15490180

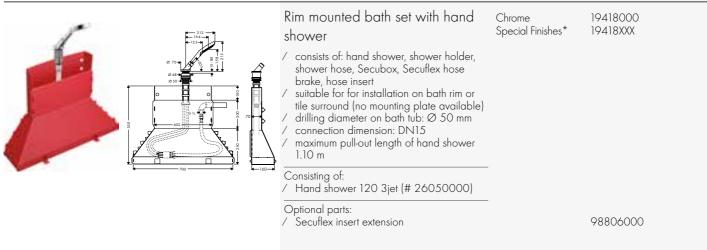

Technical specifications and units of measure are subject to change.

 	finish	code no.
4-hole rim mounted bath mixer with zero handles	Chrome Special Finishes*	10444000 10444XXX
 consists of: 4-hole rim mounted bath mixer, hand shower, shower hose, shower holder projection 140 mm connection type: basic set spray type mixer: normal spray spray type hand shower: Rain, RainAir, WhirlAir maximum pull-out length of hand shower: 1.10 m flow rate at 3 bar: 22 l/min ceramic valves hot/ cold 180° min. operating pressure: 1 bar max. operating pressure: 10 bar diverter with automatic resetting non-return valve connection dimension: DN15 		Air Power
Consisting of: / Hand shower 120 3jet (# 26050000)		
Required parts: / Basic set for 4-hole rim mounted bath mixer		15480180
Basic set for 4-hole rim mounted bath mixer / maximum pull-out length of hand shower: 1.10 m / connection dimension: DN15		15480180
Optional parts: / Secuflex insert extension		98806000
4-hole tile mounted bath mixer with zero handles	Chrome Special Finishes*	10451000 10451XXX
 consists of: 4-hole tile mounted bath mixer, hand shower, shower hose, shower holder projection 242 mm connection type: basic set spray type mixer: normal spray spray type hand shower: Rain, RainAir, WhirlAir maximum pull-out length of hand shower: 1.10 m flow rate at 3 bar: 22 l/min ceramic valves hot/ cold 180° diverter with automatic resetting non-return valve connection dimension: DN15 		Air Power
/ Hand shower 120 3jet (# 26050000) Required parts:		
/ Basic set for 4-hole tile mounted bath mixer		15481180
Basic set for 4-hole tile mounted bath mixer / maximum pull-out length of hand shower: 1.10 m / connection dimension: DN15		15481180
Optional parts: / Secuflex insert extension		98806000

*For additional information please refer to the "special finish" overview.

ci		finish	code no.
Shower	Single lever shower mixer for exposed installation with pin handle / 1 function / connection type: s-shaped connections / centre distance: 150 ± 16 mm / flow rate at 3 bar: 22 I/min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / non-return valve / with silencer / suitable for continous flow water heaters / hose connection DN15 / connection dimension: DN15	Chrome Special Finishes*	10611000 10611XXX
	Single lever shower mixer for exposed installation with lever handle / 1 function / connection type: s-shaped connections / centre distance: 150 ± 16 mm / flow rate at 3 bar: 22 l/min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / non-return valve / with silencer / suitable for continous flow water heaters / hose connection DN15 / connection dimension: DN15 / matching handle design for the AXOR	Chrome Special Finishes*	10665000 10665XXX

Starck basin mixers with lever handles

Single lever shower mixer for concealed installation with pin handle	Chrome Special Finishes*	10616000 10616XXX
 1 function connection type: basic set flow rate at 3 bar: 29.3 l/min ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable with silencer suitable for continous flow water heaters 		
Required parts: / Basic set iBox universal		01700180
Optional parts: / Extension element round 1-hole / Extension 25 mm for basic set iBox	Chrome Brushed Nickel Special Finishes*	14960000 14960820 14960XXX 13587000
universal / Fastening rail set for iBox universal		93171000

Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.


► 54-82 ← ● 86-114 ●

---Ø 170---

		finish	code no.
	Single lever shower mixer for concealed installation with lever handle / 1 function / connection type: basic set / flow rate at 3 bar: 29.3 l/min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / with silencer / suitable for continous flow water heaters / matching handle design for the AXOR Starck basin mixers with lever handles This product is available in the special finish Brushed Red Gold only via AXOR Signature inquiry. Required parts: / Basic set iBox universal Optional parts: / Extension element round 1-hole / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	Chrome Special Finishes* Chrome Brushed Nickel Special Finishes*	10614000 10614XXX 01700180 14960000 14960820 14960820 14960XXX 13587000 93171000
151 114 31/41/31 8p ³ /41/31 527 28 14 14 14 14 14 14 14 14 14 14	Basic set iBox universal / suitable for all shower, bath tub and thermostat finish sets for concealed installation / connection thread / Rp 3/4 / rotationally-symmetric installation / sound-decoupled installation / connection dimension: DN20 Optional parts: / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal		01700180 13587000 93171000

TI		finish	code no.
Thermostatic mixers/ valves/ diverters	Thermostat HighFlow for concealed installation	Chrome Special Finishes*	10715000 10715XXX
	 / maximum flow rate at 3 bar: 59 l/min / thermostat cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 38 ° C / temperature limitation adjustable / non-return valve / with silencer / connection type: basic set 		
	Alternative products: / Thermostat for concealed installation	— Chrome Special Finishes*	10710000 10710XXX
	Required parts: / Basic set iBox universal	_	01700180
	Optional parts: / Extension element round 1-hole	– Chrome Brushed Nickel Special Finishes*	14960000 14960820 14960XXX
	 / Extension 25 mm for basic set iBox universal 		13587000
	/ Fastening rail set for iBox universal		93171000






Thermostat for concealed installation with shut-off valve	Chrome Special Finishes*	10700000 10700XXX
 / 1 function / flow rate at 3 bar: 26 l/min / thermostat cartridge, ceramic valves 90° / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 38° C / temperature limitation adjustable / non-return valve / with silencer / connection type: basic set 		
Required parts: / Basic set iBox universal	-	01700180
Optional parts: / Extension element round 2-hole arrow / Extension 25 mm for basic set iBox	Chrome Brushed Nickel Special Finishes*	14963000 14963820 14963XXX 13587000
universal / Fastening rail set for iBox universal		93171000

		finish	code no.
	Thermostat for concealed installation with shut-off/ diverter valve / 2 functions / flow rate at 3 bar: 26 l/min / thermostat cartridge, shut-off valve / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 38 ° C / temperature limitation adjustable / non-return valve / with silencer / connection type: basic set	Chrome Special Finishes*	10720000 10720XXX
	Required parts: / Basic set iBox universal	-	01700180
	Optional parts: / Extension element round 2-hole 0-1-2 / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	Chrome Brushed Nickel Special Finishes*	14962000 14962820 14962XXX 13587000 93171000
151 14/5/ 80 28 28 28 28 28 28 28 28 28 28	Basic set iBox universal / suitable for all shower, bath tub and thermostat finish sets for concealed installation / connection thread / Rp ³ / ₄ / rotationally-symmetric installation / sound-decoupled installation ^a / connection dimension: DN20		01700180
	Optional parts: / Extension 25 mm for basic set iBox universal	-	13587000
	 Fastening rail set for iBox universal 		93171000





Shut-off valve for concealed installation	Chrome Special Finishes*	10970000 10970XXX
/ connection type: DN15/DN20		
Required parts: / Basic set 52 /min for shut-off valve for concealed installation spindle / Basic set 40 /min for concealed installation for shut-off valve ceramic / Basic set 130 /min for shut-off valve for concealed installation spindle		16973180 16974180 16970180
Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000

			finish	code no.
	Rp 1/2-	Basic set 52 l/min for shut-off valve for concealed installation spindle / connection type: DN15 / suitable for all shut-off valves finish sets / flow rate: 52 l/min / connection dimension: DN15		16973180
		Alternative products: / Basic set 40 l/ min for concealed installation for shut-off valve ceramic / Basic set 130 l/ min for shut-off valve for concealed installation spindle		16974180 16970180
		Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000
(.2		Shut-off/ diverter valve Trio/ Quattro for concealed installation	Chrome Special Finishes*	10930000 10930XXX
	0154	Required parts: / Basic set for Quattro four-way diverter valve for concealed installation / Basic set for shut-off/ diverter valve Trio for concealed installation		16930180 16982180
	↓ 10	Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000
		Basic set for shut-off/ diverter valve Trio for concealed installation / 2 functions / simultaneous utilization by 2 outlets suitable for all Trio finish sets		16982180
	2 2 2 2 2 2 2 2 2 2 2 2 2 2	 / flow rate: 65 l/min / connection dimension: DN20 Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro 		92990000




4 ·60 → 28 4 90 →	in	۱S
		re 3 s fl
	1	_

	Basic set for Quattro four-way	16930180
	diverter valve for concealed installation	
Ŧ	 requires volume control 3 functions simultaneous utilization by 2 outlets suitable for all Quattro finish sets flow rate: 65 l/min connection dimension: DN20 	

Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro

92990000

Overhead showers		finish	code no.
Overheud showers	Plate overhead shower 240 1jet / spray type: RainAir / shower head size: 240 mm / ball-joint: overhead shower angle adjustable / maximum flow rate at 3 bar: 18 l/min / flow rate RainAir spray (at 3 bar): 18 l/min / material spray disc: metal installation: ceiling or wall / connection thread G ½ / connection dimension: DN15 / suitable for continuous flow water heaters with an output of 18 kW	Chrome Special Finishes*	28494000 28494XXX Air Courte Court Power
	Optional parts: / Shower arm 390 mm / Ceiling connector 100 mm / Ceiling connector 300 mm	Chrome Brushed Nickel Special Finishes* Chrome Brushed Nickel Special Finishes* Chrome Brushed Nickel Special Finishes*	26431000 26431820 26431XXX 26432000 26432820 26432XXX 26433000 26433820 26433XXX
Hand showers	Baton hand shower 2jet / spray type: Rain, Mono / spray type adjustment by turning spray disc / maximum flow rate at 3 bar: 16 l/min / rinseable dirt filter / connection thread G 1/2 / connection dimension: DN15 / suitable for continous flow water heaters / not recommended for rim-/ tile-mounted mixers	Chrome Special Finishes*	28532000 28532XXX Quick Clean
	Alternative products: / Baton hand shower 1jet Optional parts: / Metal effect shower hose 1.25 m / Metal effect shower hose 1.60 m	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	10531000 10531XXX 28282000 28282XXX 28286000 28286XXX
	/ Metal effect shower hose 2.00 m	Chrome Special Finishes*	28284000 28284XXX




Baton hand shower 1jet / spray type: Rain / maximum flow rate at 3 bar: 8 l/min / rinseable dirt filter / connection thread G ½ / connection dimension: DN15 / suitable for continous flow water heaters / not recommended for rim-/ tile-mounted	Chrome Special Finishes*	10531000 10531XXX	Quick Clean
Alternative products: / Baton hand shower 2jet	Chrome Special Finishes*	28532000 28532XXX	
Optional parts: / Metal effect shower hose 1.25 m / Metal effect shower hose 1.60 m / Metal effect shower hose 2.00 m	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	28282000 28282XXX 28286000 28286XXX 28284000 28284XXX	


۸

165

¥

Shower sets			finish	code no.
Shower sets		Shower set 0.90 m with baton hand shower 2jet / consists of: baton hand shower, shower bar, shower hose, slider / shower head size: 70 mm / spray type: Rain, Mono / spray type adjustment by turning spray disc / pivot connector prevent hose from tangling / nuts shower hose: shower hose with cylindrical nut on both ends / maximum flow rate at 3 bar: 16 l/min / wall supports of plastic	Chrome Special Finishes*	27980000 27980XXX
	∐ ∐ k —mox. 210 →	Consisting of: / Baton hand shower 2jet (# 28532000) / Metal effect shower hose 1.60 m (# 28286000) Alternative products: / Shower set 0.90 m with baton hand shower 1jet Optional parts: / Wall bar spacer for Unica wall bar D	Chrome Special Finishes* Chrome	27983000 27983XXX 96186000
	\$8 % 58 % 50 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Shower set 0.90 m with baton hand shower 1 jet / consists of: baton hand shower, shower bar, shower hose, slider / shower head size: 70 mm / spray type: Rain / pivot connector prevent hose from tangling / nuts shower hose: shower hose with cylindrical nut on both ends / maximum flow rate at 3 bar: 8 1/min / wall supports of plastic Consisting of: / Baton hand shower 1 jet (# 10531000) / Metal effect shower hose 1.60 m (# 28286000) Optional parts: / Wall bar spacer for Unica wall bar D	Chrome Special Finishes* Chrome	27983000 27983XXX Exercise Smart Collection Outer Collect

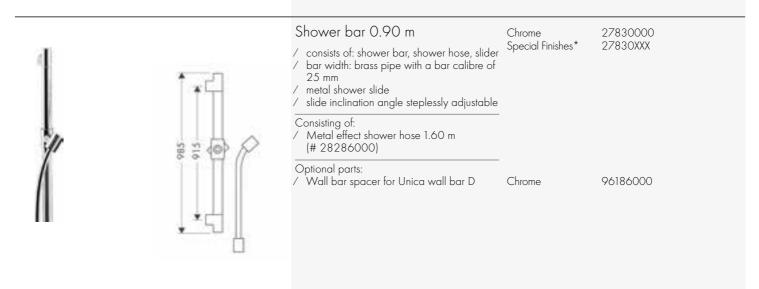

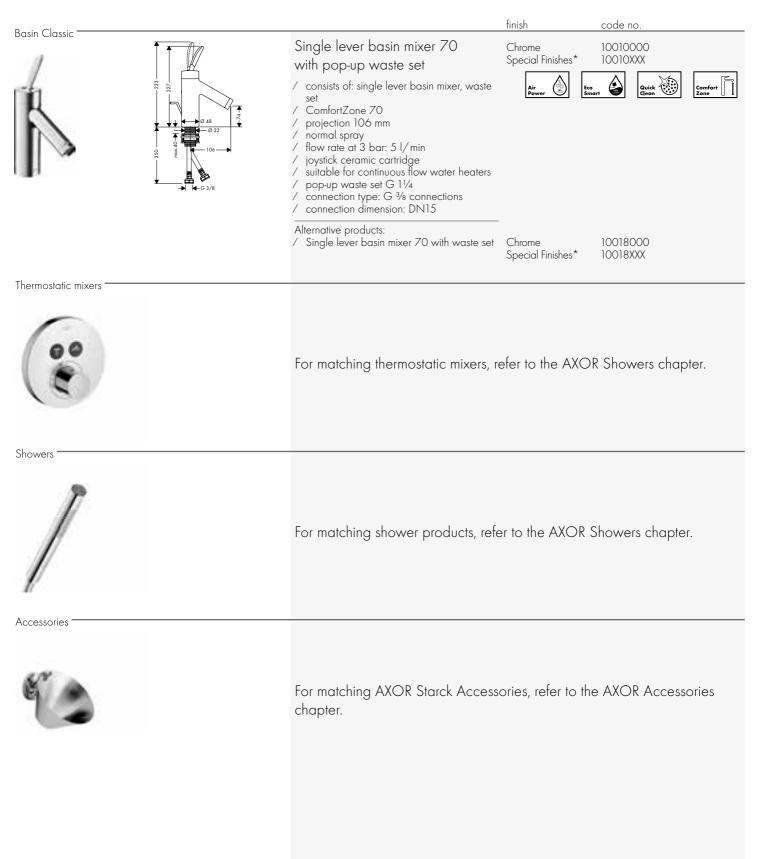

AXOR STARCK V

THE VITALITY OF WATER.




Water releases energy. Boldness channels it into a spectacular form. AXOR Starck V sets the water free, revealing an extraordinary natural spectacle: a vortex. In all its strength and glory. Vital and elemental. A daring idea.

Design: Philippe Starck




AXOR Starck V has received numerous awards:



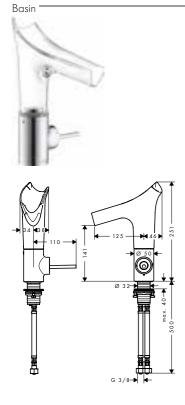

		finish	code no.	
	Single lever basin mixer 140 with glass spout and waste set ' consists of: single lever basin mixer, waste set ' ComfortZone 140 ' projection 125 mm ' swivel range adjustable in 3 steps 95°, 120° or 360° ' laminar spray ' EasyClick connection between body and spout with SafetyStop-function ' Spout is dishwasher safe ' material spout: crystal glass ' flow rate at 3 bar: 4 I/min ' joystick ceramic cartridge ' non-closing waste set ' connection type: G ¾ connections ' connection dimension: DN15 ' handle can be positioned on the right or left ' handle position on the side: bottom-side at the base body (not suitable for wash bowls) Alternative sizes: ' Single lever basin mixer 220 with glass	Chrome White Special Finishes*	12112000 12112450 12112XXX Exercise Smart Coll 12114000	Comfort T
	spout for wash bowls with waste set Alternative products:	Special Finishes*	12114XXX	
,	 Single lever basin mixer 140 with glass spout and waste set - diamond cut Single lever basin mixer 140 with glass spout and waste set - bevel cut 	Chrome Polished Gold Optic Special Finishes* Chrome Polished Gold Optic Special Finishes*	12122000 12122990 12122XXX 12123000 12123990 12123XXX	

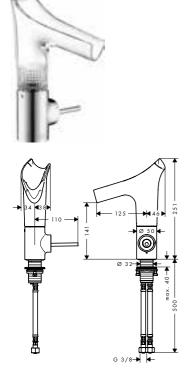


Single lever basin mixer 140 with glass spout and waste set - diamond cut	Chrome Polished Gold Optic Special Finishes*	12122000 12122990 12122XXX
 consists of: single lever basin mixer, waste set ComfortZone 140 projection 125 mm swivel range adjustable in 3 steps 95°, 120° or 360° laminar spray EasyClick connection between body and spout with SafetyStop-function Spout is dishwasher safe material spout: crystal glass flow rate at 3 bar: 4 l/min joystick ceramic cartridge non-closing waste set connection type: G 3/s connections connection dimension: DN15 handle can be positioned on the right or left handle position on the side: bottom-side at the base body (not suitable for wash bowls) 		Eco Smart
Alternative products: / Single lever basin mixer 140 with glass spout and waste set - bevel cut	Chrome Polished Gold Optic Special Finishes*	12123000 12123990 12123XXX
 / Single lever basin mixer 140 with glass spout and waste set 	Chrome White Special Finishes*	12112000 12112450 12112XXX

Product Book 2020/2021

AXOR Starck V

			<u>AXOR Starck V</u>
		finish	code no.
<image/>	Single lever basin mixer 140 with glass spout and waste set - bevel cut / consists of: single lever basin mixer, waste set / ComfortZone 140 / projection 125 mm / swivel range adjustable in 3 steps 95°, 120° or 360° / laminar spray / EasyClick connection between body and spout with SafetyStop-function / Spout is dishwasher safe / material spout: crystal glass / flow rate at 3 bar: 4 l/min / joystick ceramic cartridge / non-closing waste set / connection type: G ¾ connections / connection dimension: DN15 / handle can be positioned on the right or left / handle position on the side: bottom-side at the base body (not suitable for wash bowls) Alternative products: / Single lever basin mixer 140 with glass spout and waste set / Single lever basin mixer 140 with glass spout and waste set	Chrome Polished Gold Optic Special Finishes* Chrome Polished Gold Optic Special Finishes* Chrome White Special Finishes*	12123000 12123XXX Econor Confor Smarr Confor 200
	Single lever basin mixer 220 with glass spout for wash bowls with waste set / consists of: single lever basin mixer, waste set / ComfortZone 220 / projection 125 mm / swivel range adjustable in 3 steps 95°, 120° or 360° / laminar spray / EasyClick connection between body and spout with SafetyStop-function / Spout is dishwasher safe / material spout: crystal glass / flow rate at 3 bar: 4 l/min / joystick ceramic cartridge / non-closing waste set / connection type: G ¾ connections / connection dimension: DN15 / handle can be positioned on the right or left / not recommended for the public and semi- public area Alternative sizes: / Single lever basin mixer 140 with glass spout and waste set	Chrome Special Finishes*	12114000 12114XXX Ecoret Confert 1000 12112450 12112450 121122XXX

*For additional information please refer to the "special finish" overview.

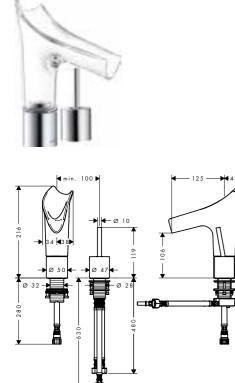

2-hole basin m	ixer 110 with waste	

set

X D C

- consists of: 2-hole basin mixer, waste set /
- ComfortZone 110 projection 125 mm /
- /
- swivel range adjustable in 3 steps 95°, 120° or 360°
- laminar spray
- EasyClick connection between body and spout with SafetyStop-function Spout is dishwasher safe

- material spout: crystal glass flow rate at 3 bar: 4 l/min joystick ceramic cartridge

- non-closing waste set connection type: G ³/₈ connections connection dimension: DN15 handle can be positioned on the right or left
- not recommended for the public and semipublic area



Special Finishes*

Chrome

12115XXX







AXOR STARCK ORGANIC



Basin	118
Bidet	120
Bath	121
Shower	126
Thermostatic mixers / valves / diverters	126
Hand showers	131
Shower sets	131

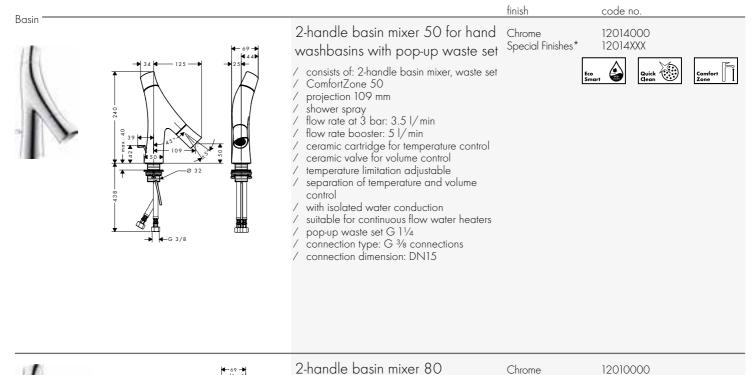

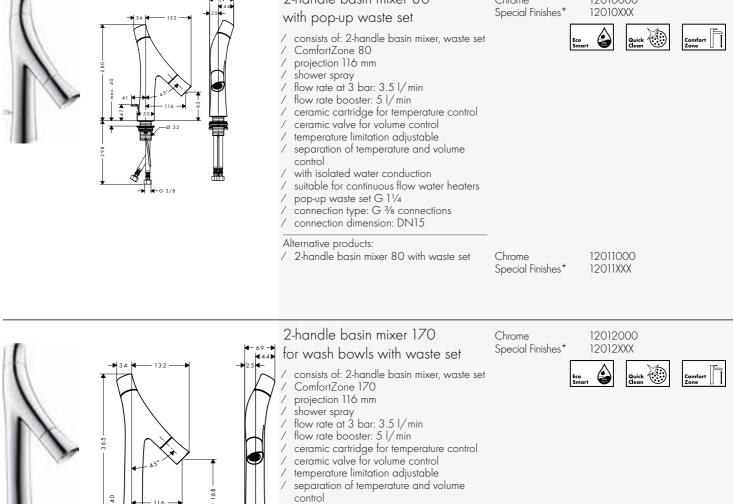


with isolated water conduction


connection type: G ³/₈ connections connection dimension: DN15

non-closing waste set

suitable for continuous flow water heaters



G 3/8

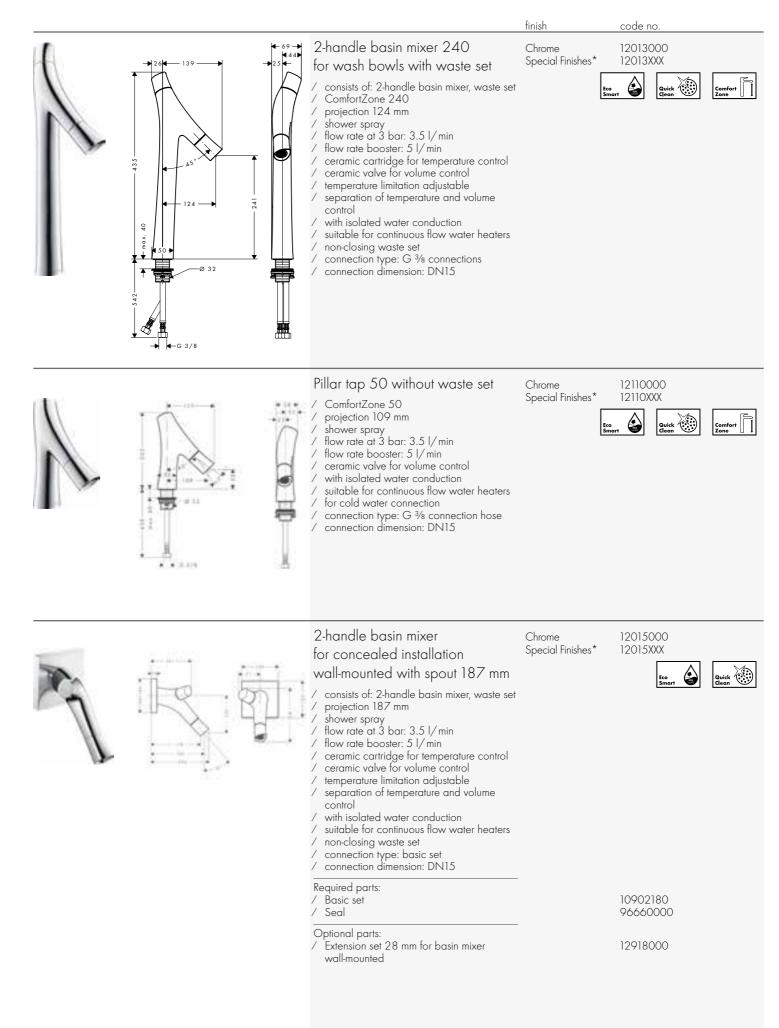

			finish	code no.
C		Basic set / connection dimension: G 1/2 Required parts: / Seal Optional parts: / Extension set 28 mm for shower columns / Extension set 28 mm for single lever basin mixer wall-mounted / Extension set 28 mm for basin mixer wall-mounted		10902180 96660000 10980000 11980000 12918000
		Extension set 28 mm for basin mixer wall-mounted / extension for basic set		12918000
0		Seal Optional parts: / Basic set		96660000 10902180
Bidet	Image: state	2-handle bidet mixer with pop-up waste set / consists of: 2-handle bidet mixer, waste set / projection 143 mm / aerator with ball pivot / normal spray / flow rate at 3 bar: 3.5 l/min / flow rate booster: 7.2 l/min / ceramic cartridge for temperature control, ceramic valve for volume control / temperature limitation adjustable / separation of temperature and volume control / isolated water conduction / suitable for continous flow water heaters / pop-up waste set G 11/4 / connection dimension: DN15	Chrome Special Finishes*	

Bath		finish	code no.
D	Bath thermostat for exposed installation / projection 218 mm / 2 functions / centre distance: 150 ± 12 mm / spray type mixer: laminar spray / flow rate for bath spout at 3 bar: 28 l/min / flow rate: 20 l/min / thermostat cartridge, shut-off/ diverter valve / min. operating pressure: 1 bar / max. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / non-return valve / with silencer / connection type: s-shaped connections / connection dimension: DN15	Chrome Special Finishes*	12410000 12410XXX
	Optional parts: / Metal effect shower hose 1.25 m	Chrome Special Finishes*	28282000 28282XXX
N.K.	Single lever bath mixer for concealed installation / connection type: basic set / flow rate at 3 bar: 22 l/min / flow rate for bath spout at 3 bar: 28 l/min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / diverter with automatic resetting / with silencer / suitable for continous flow water heaters	Chrome Special Finishes*	12415000 12415XXX
	Alternative products: / Single lever bath mixer for concealed installation with integrated security combination according to EN1717	Chrome Special Finishes*	12416000 12416XXX
	Required parts: / Basic set iBox universal		01700180
	Optional parts: / Extension element square 2-hole red blue / Fastening rail set for iBox universal / Extension 25 mm for basic set iBox universal	Chrome Special Finishes*	14968000 14968XXX 93171000 13587000

 Basic set iBox universal / suitable for all shower, bath tub and thermostat finish sets for concealed installation / connection thread / Rp ³/₄ / rotationally-symmetric installation / sound-decoupled installation / connection dimension: DN20 	01700180
Optional parts: / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	13587000 93171000

		finish	code no.	
39-44	Bath spout / projection 160 mm / flow rate: 25 l/min / connection dimension: device connection DN20 / spray type: laminar spray	Chrome Special Finishes*	12417000 12417XXX	
223	Bath thermostat floor-standing / consists of: bath thermostat floor standing, baton hand shower, shower hose, shower holder / projection 175 mm / 2 functions / spray type mixer: normal spray / spray type hand shower: Rain, Mono / flow rate: 20 I/min / thermostat cartridge, shut-off/ diverter valve / safety lock at 40° C / temperature limitation adjustable / non-return valve / connection type: basic set / consisting of: / Metal effect shower hose 1.25 m (# 28282000) / Baton hand shower 2jet (# 28532000)	Chrome Special Finishes*	12016000 12016XXX	Air Power
	Required parts: / Basic set for mixers floor-standing Optional parts: / Sealing foil for basic set bath mixer floor-standing / Extension 60 mm for pipe		10452180 96441000 97686000	
Ø 101 → Ø 94 → max. ↓ Ø min. ↓ Ø W W W W W W W W W W W W W	Basic set for mixers floor-standing / for mounting on unfinished floor / suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing / connection dimension: DN15 Optional parts: / Sealing foil for basic set bath mixer floor-standing	-	10452180 96441000	
	2-hole rim mounted thermostatic bath mixer / 2 functions / safety lock at 40° C / temperature limitation adjustable / suitable for remote spout / connection type: basic set / connection dimension: DN15 Required parts: / Basic set for 2-hole rim mounted	Chrome Special Finishes*	12422000 12422XXX 15486180	
	thermostatic bath mixer		10400100	

		finish	code no.
	Basic set for 2-hole rim mounted thermostatic bath mixer / suitable for remote spout / connection thread: G 1/2 / connection dimension: DN15 Optional parts: / Rim mounted bath set with hand shower / Finish set square / Finish set oval / Rim and tile mounted bath basic set	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	15486180 19418000 19418XXX 28012000 28012XXX 28022000 28022XXX 15490180
	Rim mounted bath set with hand shower / consists of: hand shower, shower holder, shower hose, Secubox, Secuflex hose brake, hose insert / suitable for for installation on bath rim or tile surround (no mounting plate available) / drilling diameter on bath tub: Ø 50 mm / connection dimension: DN15 / maximum pull-out length of hand shower 1.10 m Consisting of: / Hand shower 120 3jet (# 26050000) Optional parts: / Secuflex insert extension	Chrome Special Finishes*	19418000 19418XXX 98806000
<image/>	 4-hole rim mounted thermostatic bath mixer consists of: 4-hole rim mounted bath mixer, hand shower, shower hose, shower holder projection 190 mm 2 functions spray type mixer: laminar spray spray type hand shower: Rain, RainAir, WhirlAir maximum pull-out length of hand shower: 1.10 m flow rate: 20 l/min thermostat cartridge min. operating pressure: 10 bar safety lock at 40° C temperature limitation adjustable non-return valve with automatic resetting with silencer connection type: basic set connection dimension: DN15 Consisting of: Hand shower 120 3jet (# 26050000) Required parts: Basic set for 4-hole rim mounted thermostatic bath mixer 	Chrome Special Finishes*	12425000 12425XXX

		finish	code no.
	Basic set for 4-hole rim mounted thermostatic bath mixer / maximum pull-out length of hand shower: 1.10 m / connection dimension: DN15 Optional parts: / Secuflex insert extension		15482180 98806000
<image/>	 4-hole tile mounted thermostatic bath mixer consists of: 4-hole tile mounted bath mixer, hand shower, Secuflex hose set projection 190 mm 2 functions spray type mixer: laminar spray spray type hand shower: Rain, RainAir, WhirlAir maximum pull-out length of hand shower: 1.10 m flow rate for bath spout at 3 bar: 20 l/min flow rate for bath spout at 3 bar: 20 l/min flow rate: 20 l/min thermostat cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar safety lock at 40° C temperature limitation adjustable non-return valve with silencer connection type: basic set connection dimension: DN15 	Chrome Special Finishes*	12426000 12426XXX
	Required parts: / Basic set for 4-hole tile mounted thermostatic bath mixer		15483180
	Basic set for 4-hole tile mounted thermostatic bath mixer / maximum pull-out length of hand shower: 1.10 m / connection dimension: DN15 Optional parts: / Secuflex insert extension		98806000
Shower 280 280 280 200 200 200 200 200	Shower thermostat for exposed installation / 1 function / centre distance: 150 ± 12 mm / flow rate at 3 bar: 20 l/min / thermostat cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / non-return valve / with silencer / connection type: s-shaped connections / connection dimension: DN15 Optional parts:	Chrome Special Finishes*	12602000 12602XXX
	/ Metal effect shower hose 1.25 m	Chrome Special Finishes*	28282000 28282XXX

		finish	code no.
	Single lever shower mixer for concealed installation / 1 function / connection type: basic set / flow rate at 3 bar: 29.3 l/min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / with silencer / suitable for continous flow water heaters Required parts: / Basic set iBox universal Optional parts: / Extension element square 1-hole red blue / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	Chrome Special Finishes* Chrome Special Finishes*	12605000 12605XXX 01700180 14965000 14965XXX 13587000 93171000
	Basic set iBox universal / suitable for all shower, bath tub and thermostat finish sets for concealed installation / connection thread / Rp ³ / ₄ / rotationally-symmetric installation / sound-decoupled installation / connection dimension: DN20 Optional parts: / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal		01700180 13587000 93171000
BIL	Porter unit 120/120 with baton hand shower 2jet and shower hose / consists of: baton hand shower, porter unit, shower holder, shower hose / integrated support function / non-return valve / in a joined installation (10 mm distance) we recommend for perfect handling only the horizontal installation / in a joined installation / in a joined installation (10 mm distance), the basic set # 28486180 must be used / in a freely-arranged installation (distance greater than 10 mm), no basic set is required Consisting of: / Metal effect shower hose 1.25 m (# 28282000) Optional parts: / Basic set for shower module 120/120 for concealed installation	Chrome Special Finishes*	12232XXX 12232XXX 28486180

Thermestatic medule			finish	code no.
Thermostatic module		Thermostatic module 360/120 for concealed installation / 3 functions / simultaneous use of several outlets / thermostat cartridge / min. operating pressure: 1,5 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / non-return valve / connection type: basic set / connection dimension: DN20 Required parts: / Basic set for thermostatic module 360/120 for concealed installation Optional parts: / Extension set 25 mm	Chrome Special Finishes* - Chrome Special Finishes*	12717000 12717XXX 10750180 12790000 12790XXX
R R	Rp 1/2-	Basic set for thermostatic module 360/120 for concealed installation / connection from left or right / 3 outlets can be used simultaneously / flow rate at free through-flow: 59 l/min / spindle valves / horizontal or vertical installation / sound-decoupled installation / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning / connection dimension: DN20 Required parts: / Thermostatic module 360/120 for concealed installation / Thermostatic module 360/120 for concealed installation	Chrome Special Finishes* Chrome Special Finishes*	10750180 10751000 10751XXX 12717000 12717XXX
Thermostatic mixers/	valves/ diverters	Thormostat HighElow		12711000



•	Thermostat HighFlow for concealed installation	Chrome Special Finishes*	12711000 12711XXX	
- 100 •	 / flow rate at 3 bar: 59 l/min / thermostat cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / with silencer / connection type: basic set 			
	Required parts: / Basic set iBox universal	-	01700180	
5	Optional parts: / Extension element square 1-hole arrow / Extension 25 mm for basic set iBox	Chrome Special Finishes*	14966000 14966XXX 13587000	
	universal / Fastening rail set for iBox universal		93171000	

		finish	code no.
	Thermostat for concealed installation with shut-off valve / 1 function / flow rate at 3 bar: 26 l/min / thermostat cartridge, ceramic valves 90° / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / non-return valve / with silencer / connection type: basic set	Chrome Special Finishes*	12715000 12715XXX
	Required parts: / Basic set iBox universal Optional parts: / Extension element square 2-hole arrow	Chrome	01700180
	 Extension 25 mm for basic set iBox universal 	Special Finishes*	14970XXX 13587000
- b 73-102 d -	/ Fastening rail set for iBox universal		93171000
	Thermostat for concealed installation with shut-off/ diverter valve / 2 functions / flow rate at 3 bar: 26 l/min / thermostat cartridge, shut-off/ diverter valve / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / non-return valve / with silencer / connection type: basic set	Chrome Special Finishes*	12716000 12716XXX
	Required parts: / Basic set iBox universal Optional parts:		01700180
	/ Extension element square 2-hole 0-1-2/ Extension 25 mm for basic set iBox	Chrome Special Finishes*	14969000 14969XXX 13587000
→ 75 - 103 🖛	universal / Fastening rail set for iBox universal		93171000
	Basic set iBox universal / suitable for all shower, bath tub and thermostat finish sets for concealed installation / connection thread / Rp ³ / ₄ / rotationally-symmetric installation / sound-decoupled installation / connection dimension: DN20		01700180
$\begin{array}{c} \bullet & 106 \longrightarrow \\ \bullet & 0122 \longrightarrow \\$	 Optional parts: / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal 		13587000 93171000

		finish	code no.
	Thermostat HighFlow 120/120 for concealed installation / maximum flow rate at 3 bar: 59 l/min / flow rate at 3 bar: 59 l/min / thermostat cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / with silencer / connection type: basic set Required parts: / Basic set for thermostatic module 120/120 for concealed installation	Chrome Special Finishes*	12712000 12712XXX 10754180
	Optional parts: / Extension set 25 mm	Chrome Special Finishes*	12790000 12790XXX
	Extension set 25 mm / extension for basic set / extension length: 25 mm	Chrome Special Finishes*	12790000 12790XXX
	Basic set for thermostatic module 120/120 for concealed installation / flow rate at free through-flow: 59 l/min / horizontal or vertical installation / sound-decoupled installation / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning / connection dimension: DN20		10754180
	Optional parts: / Thermostat HighFlow 120/120 for concealed installation / Thermostatic module 120/120 for concealed installation square / Thermostat 120/120 for concealed installation	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	12712000 12712XXX 10755000 10755XXX 36702000 36702XXX

			finish	code no.
~	* 00 8	Shut-off valve 120/120 for concealed installation / connection type: DN15/DN20 / in a freely arranged installation, basic sets # 15973180, # 15974180 or # 15970180 can also be used	Chrome Special Finishes*	12771000 12771XXX
	*	 Required parts: / Basic set for shut-off valve 120/120 for concealed installation / Basic set 52 l/min for shut-off valve for concealed installation spindle / Basic set 40 l/min for concealed installation for shut-off valve ceramic / Basic set 130 l/min for shut-off valve for concealed installation spindle Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro 		10971180 16973180 16974180 16970180 92990000
	Rp1/2- Rp1/2-	Basic set for shut-off valve 120/120 for concealed installation / suitable for all shut-off valves finish sets / connection from left or right / flow rate at free through-flow: 55 l/min / sound-decoupled installation / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning / connection dimension: DN15 Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000
6	Rp 1/2→ ← 60→	Basic set 52 l/min for shut-off valve for concealed installation spindle / connection type: DN15 / suitable for all shut-off valves finish sets / flow rate: 52 l/min / connection dimension: DN15 Alternative products: / Basic set 40 l/min for concealed installation for shut-off valve ceramic / Basic set 130 l/min for shut-off valve for concealed installation spindle Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		16973180 16974180 16970180 92990000
		Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation Required parts: / Basic set for shut-off/ diverter valve Trio 120/120 for concealed installation / Basic set for shut-off/ diverter valve Trio for concealed installation / Basic set for Quattro four-way diverter valve for concealed installation	Chrome Special Finishes*	12731000 12731XXX 36770180 16982180 16930180

*For additional information please refer to the "special finish" overview.

		finish	code no.
	Basic set for shut-off/ diverter valve Trio 120/120 for concealed installation / 2 functions / 1 inlet/ 2 outlets / 2 outlets can be used simultaneously / connection thread / Rp ³ / ₄ / horizontal or vertical installation / sound-decoupled installation / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning / connection dimension: DN20		36770180
	Required parts: / Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation / Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation / Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	36772000 36772XXX 10932000 10932XXX 12731000 12731XXX 92990000
$R_{p3/4} \xrightarrow{76} 60$	Basic set for shut-off/ diverter valve Trio for concealed installation / 2 functions / simultaneous utilization by 2 outlets / suitable for all Trio finish sets / flow rate: 65 I/ min / connection dimension: DN20 Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000
Rp 3/4	Basic set for Quattro four-way diverter valve for concealed installation / requires volume control / 3 functions / simultaneous utilization by 2 outlets / suitable for all Quattro finish sets / flow rate: 65 I/min / connection dimension: DN20 Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000

Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.

 spray type: Kain, Mono spray type adjustment by turning spray disc maximum flow rate at 3 bar: 13 l/min rinseable dirt filter connection thread G 1/2 connection dimension: DN15 suitable for continous flow water heaters not recommended for rim-/ tile-mounted mixers Optional parts: Metal effect shower hose 1.25 m Chrome Specia Metal effect shower hose 1.60 m Chrome Specia Metal effect shower hose 2.00 m 	me 2828200 cial Finishes* 12680XXX me 28282XX me 2828600 cial Finishes* 2828400 cial Finishes* 2828400 cial Finishes* 28284XX me 12231000	0 Guide Gean Co Co Co Co Co Co Co Co
Optional parts: / Metal effect shower hose 1.25 m Chrome Specia / Metal effect shower hose 1.60 m Chrome Specia / Metal effect shower hose 2.00 m Chrome Specia / Metal effect shower hose 2.00 m Chrome Specia / Metal effect shower hose 2.00 m Chrome Specia / Metal effect shower hose 2.00 m Chrome Specia / Metal effect shower hose 2.00 m Chrome Specia / Metal effect shower hose, slider / consists of: baton hand shower, shower bar, shower hose, slider / shower head size: 70 mm / shower head size: 70 mm	cial Finishes* 28282XX me 2828600 cial Finishes* 282860X me 2828400 cial Finishes* 28284XX me 12231000	X 10 X 10 X
Shower set 0.90 m with baton hand shower 2jet / consists of: baton hand shower, shower bar, shower hose, slider / shower head size: 70 mm)
 Spicy Type. Rdm, Son spicy spray type adjustment by turning spray disc pivot connector prevent hose from tangling nuts shower hose: shower hose with cylindrical nut on both ends maximum flow rate at 3 bar: 16 l/min wall supports of plastic Consisting of: Baton hand shower 2jet (# 12680000) Metal effect shower hose 1.60 m (# 28286000) Optional parts: Wall bar spacer for Unica wall bar D 		Quick Com



For matching thermostatic mixers, refer to the AXOR Showers chapter.

Showers -




For matching shower products, refer to the AXOR Showers chapter.

Accessories -




For matching AXOR Starck Organic Accessories, refer to the AXOR Accessories chapter.

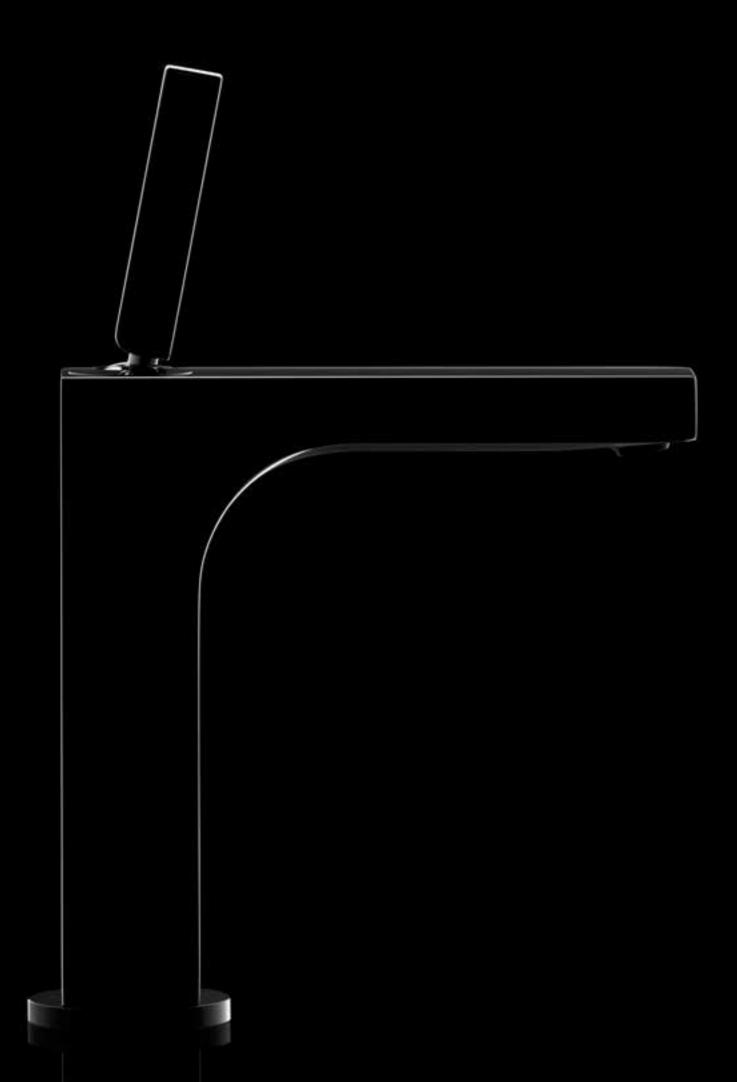



AXOR CITTERIO

Basin	136
Bidet	143
Bath	143
Shower	151
Thermostatic mixers / valves / diverters	152
Overhead showers	157
Shower sets	157
Shower systems	158




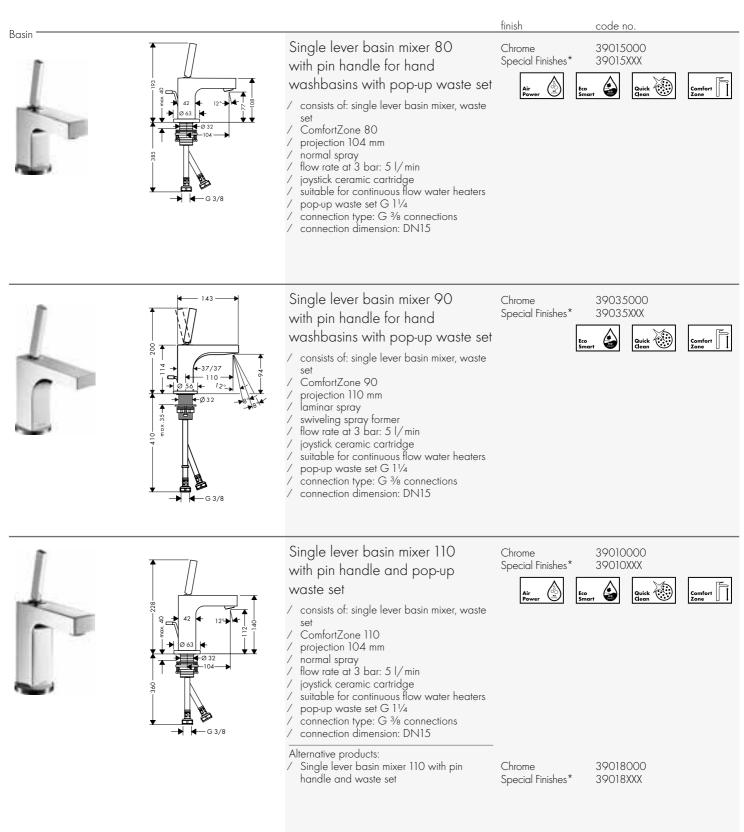

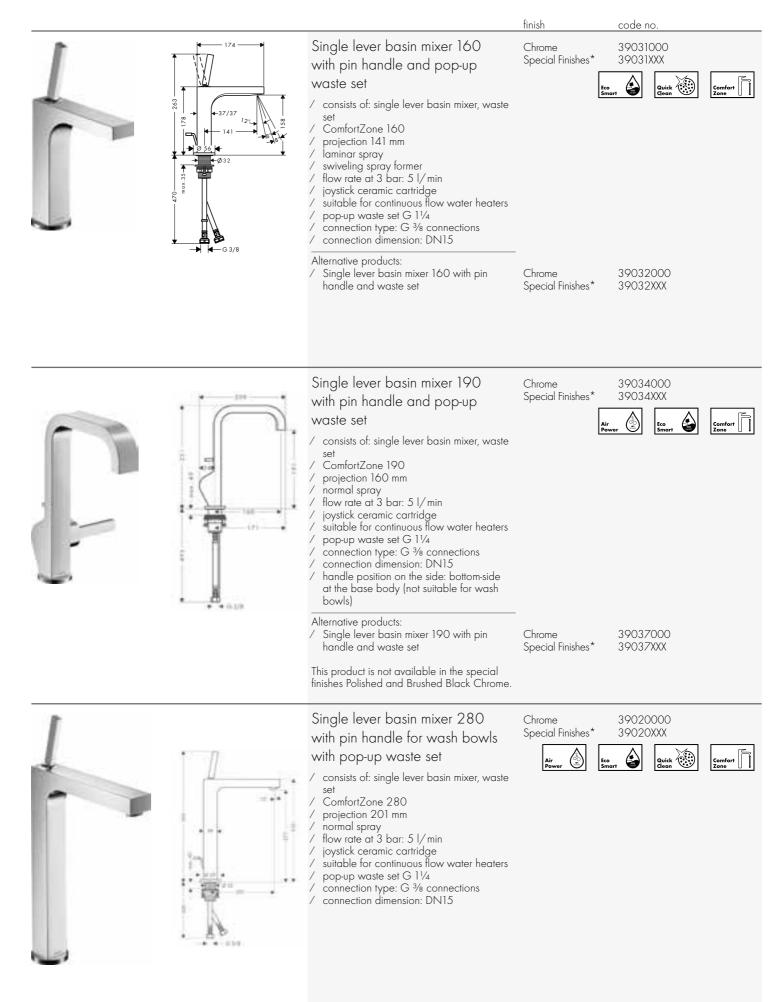









	finish	code no.	
Single lever basin mixer for concealed installation	Chrome Special Finishes*	39112000 39112XXX	
wall-mounted with pin handle, spout 160 mm and plate	Ai Po	ir 🔊 Eco Smart	Quick Clean
 consists of: single lever basin mixer for concealed installation wall-mounted, waste set projection 160 mm normal spray flow rate at 3 bar: 5 l/min joystick ceramic cartridge suitable for continuous flow water heaters non-closing waste set connection type: basic set connection dimension: DN15 handle can be positioned on the right or left, depends on the basic set installation 			
Alternative sizes: / Single lever basin mixer for concealed installation wall-mounted with pin handle, spout 220 mm and plate	Chrome Special Finishes*	39115000 39115XXX	
Alternative products: / Single lever basin mixer for concealed installation wall-mounted with pin handle, spout 160 mm and escutcheons	Chrome Special Finishes*	39113000 39113XXX	
 Single lever basin mixer for concealed installation wall-mounted with pin handle, spout 220 mm and escutcheons 	Chrome Special Finishes*	39116000 39116XXX	
Required parts: / Basic set for single lever basin mixer for concealed installation wall-mounted		13623180	
Optional parts: / Extension set 25 mm for single lever basin mixer wall-mounted		13586000	
Single lever basin mixer for concealed installation	Chrome Special Finishes*	39113000 39113XXX	
wall-mounted with pin handle, spout 160 mm and escutcheons	Ai Po	ir swer	Quick Clean
 consists of: single lever basin mixer for concealed installation wall-mounted, waste set projection 160 mm normal spray flow rate at 3 bar: 5 l/min joystick ceramic cartridge suitable for continuous flow water heaters non-closing waste set connection type: basic set connection dimension: DN15 handle can be positioned on the right or left, depends on the basic set installation 			
Alternative sizes: / Single lever basin mixer for concealed installation wall-mounted with pin handle, spout 220 mm and escutcheons	Chrome Special Finishes*	39116000 39116XXX	
Required parts: / Basic set for single lever basin mixer for concealed installation wall-mounted		13623180	
Optional parts: / Extension set 25 mm for single lever basin mixer wall-mounted		13586000	

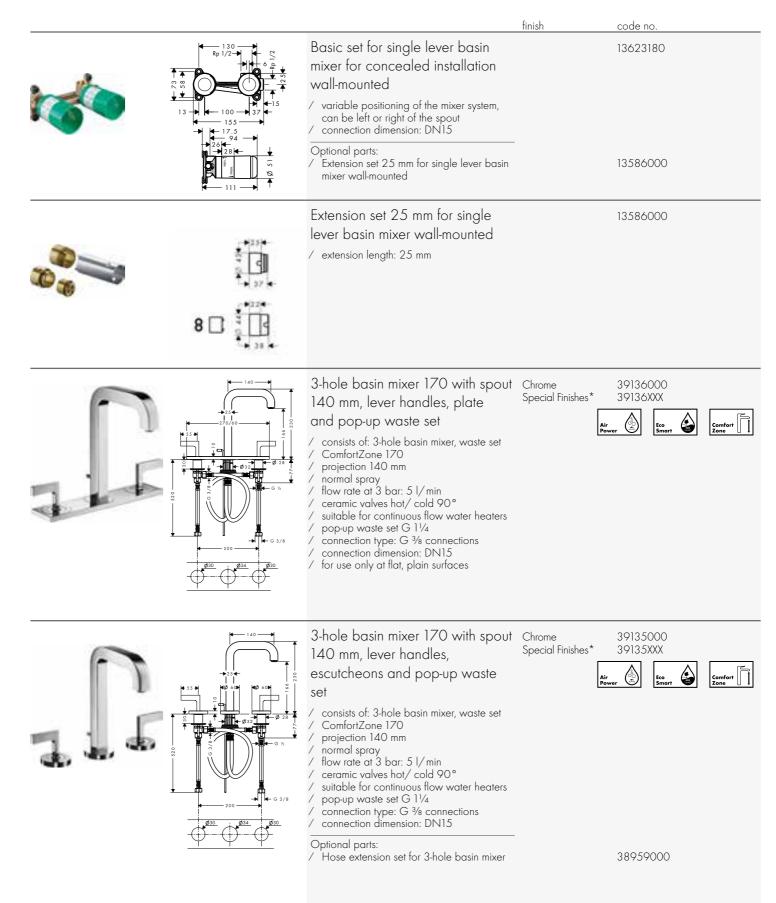

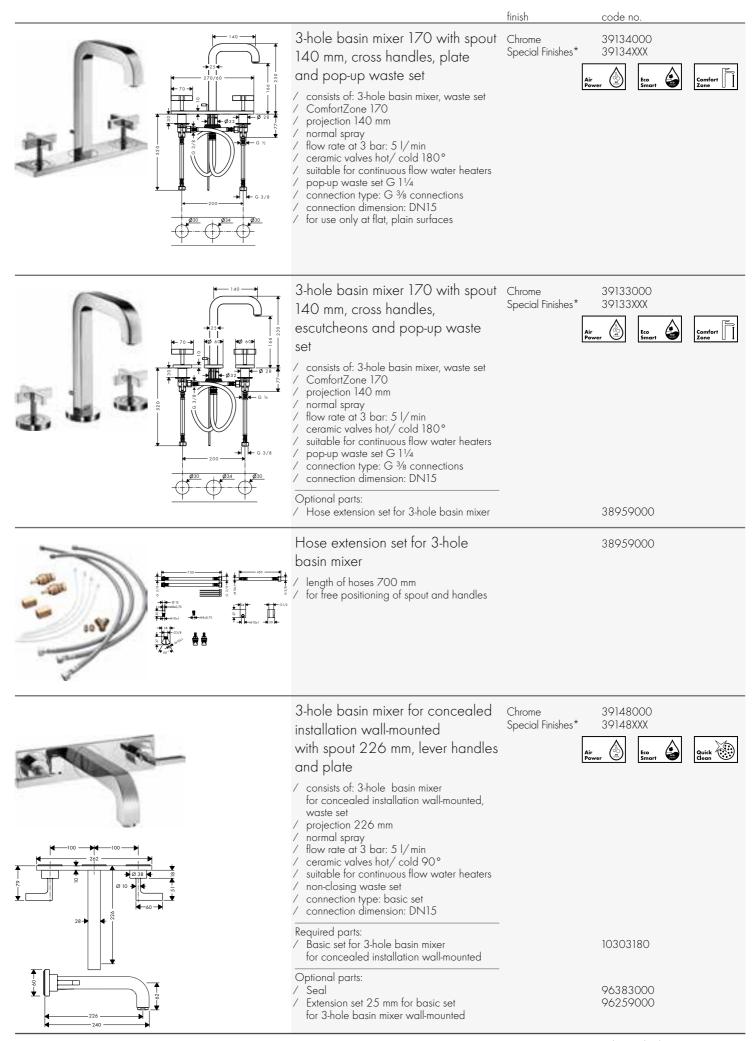

Technical specifications and units of measure are subject to change.

Product Book 2020/2021

		finish	code no.
	3-hole basin mixer for concealed installation wall-mounted with spout 162 mm, lever handles and escutcheons	Chrome Special Finishes* Air	39315000 39315XXX wer 🙆 🛐 🚱 Quick 🤯
	 consists of: 3-hole basin mixer for concealed installation wall-mounted, waste set projection 162 mm normal spray flow rate at 3 bar: 5 l/min ceramic valves hot/ cold 90° suitable for continuous flow water heaters non-closing waste set connection type: basic set connection dimension: DN15 		
	Alternative sizes: / 3-hole basin mixer for concealed installation wall-mounted with spout 222 mm, lever handles and escutcheons	Chrome Special Finishes*	39147000 39147XXX
162	Required parts: / Basic set for 3-hole basin mixer for concealed installation wall-mounted		10303180
	Optional parts: / Seal / Extension set 25 mm for basic set for 3-hole basin mixer wall-mounted		96383000 96259000
	3-hole basin mixer for concealed installation wall-mounted with spout 226 mm, cross handles	Chrome Special Finishes*	39144000 39144XXX wer
	 and plate consists of: 3-hole basin mixer for concealed installation wall-mounted, waste set projection 226 mm normal spray flow rate at 3 bar: 5 l/min ceramic valves hot/ cold 180° suitable for continuous flow water heaters non-closing waste set connection type: basic set connection dimension: DN15 		
	Alternative sizes: / 3-hole basin mixer for concealed installation wall-mounted with spout 166 mm, cross handles and plate	Chrome Special Finishes*	39314000 39314XXX
	Required parts: / Basic set for 3-hole basin mixer for concealed installation wall-mounted		10303180
	Optional parts: / Seal / Extension set 25 mm for basic set for 3-hole basin mixer wall-mounted		96383000 96259000

		finish	code no.
	 3-hole basin mixer for concealed installation wall-mounted with spout 162 mm, cross handles and escutcheons / consists of: 3-hole basin mixer for concealed installation wall-mounted, waste set / projection 162 mm / normal spray / flow rate at 3 bar: 5 l/min / ceramic valves hot/ cold 180° / suitable for continuous flow water heaters / non-closing waste set / connection type: basic set / connection dimension: DN15 	Chrome Special Finishes*	39313000 39313XXX Ver
	Alternative sizes: / 3-hole basin mixer for concealed installation wall-mounted with spout 222 mm, cross handles and escutcheons	Chrome Special Finishes*	39143000 39143XXX
	Required parts: / Basic set for 3-hole basin mixer for concealed installation wall-mounted		10303180
the transformed and transformed and the transf	Optional parts: / Seal / Extension set 25 mm for basic set for 3-hole basin mixer wall-mounted		96383000 96259000
6	Basic set for 3-hole basin mixer for concealed installation wall-mounted / suitable for all 3-hole wash basin mixers for wall mounting / connection from above or below / connection dimension: DN15/DN20		10303180
	Optional parts: / Seal / Extension set 25 mm for basic set for 3-hole basin mixer wall-mounted		96383000 96259000
* 25 • •	Extension set 25 mm for basic set for 3-hole basin mixer wall-mounted / connection dimension: DN15 / extension length: 25 mm		96259000
	Seal		96383000


Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.

Bidet		finish	code no.
	Single lever bidet mixer with pop-up waste set / consists of: single lever bidet mixer, waste set / projection 112 mm / aerator with ball pivot / laminar spray / flow rate at 3 bar: 7.2 l/min / joystick ceramic cartridge / suitable for continous flow water heaters / pop-up waste set G 11/4 / connection dimension: DN15	Chrome Special Finishes*	39210000 39210XXX
Bah	Single lever bath mixer for exposed installation with lever handle / projection 241 mm / connection type: G 1/2 / centre distance: 150 ± 16 mm / spray type mixer: normal spray / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / diverter with automatic resetting / non-return valve / with silencer / suitable for continous flow water heaters / connection dimension: DN15	Chrome Special Finishes*	39400000 39400XXX <u>Air vor</u> Quick Constants
	Single lever bath mixer floor-standing with pin handle / consists of: single lever bath mixer floor standing, baton hand shower, shower hose, shower holder / projection 200 mm / connection type: basic set spray type mixer: normal spray / spray type hand shower: Rain, Mono / flow rate at 3 bar: 17 I/min / joystick ceramic cartridge / min. operating pressure: 10 bar / max. operating pressure: 10 bar / diverter with automatic resetting / intrinsically safe against backflow / connection dimension: DN15 Consisting of: / Baton hand shower 2jet (# 28532000) Required parts:	Chrome Special Finishes*	39451000 39451XXX <u>Air Power</u> Quick Ceen
	 / Basic set for mixers floor-standing / Dytional parts: / Extension 60 mm for pipe / Sealing foil for basic set bath mixer floor-standing 		10452180 97686000 96441000

			finish	code no.
	© 101	 Basic set for mixers floor-standing / for mounting on unfinished floor / suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing / connection dimension: DN15 Optional parts: / Sealing foil for basic set bath mixer floor-standing 	-	10452180 96441000
No and the second secon		Single lever bath mixer for concealed installation with lever handle / connection type: basic set / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / diverter with automatic resetting / with silencer / suitable for continous flow water heaters	Chrome Special Finishes*	39455000 39455XXX
		Alternative products: / Single lever bath mixer for concealed installation with lever handle and integrated security combination according to EN1717	- Chrome Special Finishes* -	39457000 39457XXX
		Required parts: / Basic set iBox universal	_	01700180
		Optional parts: / Extension element square 2-hole / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	Chrome Special Finishes*	14967000 14967XXX 13587000 93171000

Basic set iBox universal





 suitable for all shower, bath tub and thermostat finish sets for concealed installation connection thread Rp ³/₄ rotationally-symmetric installation sound-decoupled installation connection dimension: DN20 	
Optional parts: / Extension 25 mm for basic set iBox universal	13587000
/ Fastening rail set for iBox universal	93171000


01700180


		finish	code no.
	3-hole bath mixer for concealed installation wall-mounted with cross handles and plate / consists of: 2-handle bath mixer, hand shower, shower holder, shower hose / projection 222 mm / connection type: basic set / spray type mixer: normal spray / spray type hand shower: Rain, RainAir, WhirlAir / ceramic valves hot/ cold 180° / min. operating pressure: 1 bar / max. operating pressure: 10 bar / diverter with automatic resetting / non-return valve / connection dimension: DN15 Consisting of: / Hand shower 120 3jet (# 26050000) / Shower holder round (# 39525000) / Shower hose 1.25 m (# 28622000) Required parts: / Basic set for 3-hole basin mixer for concealed installation wall-mounted Optional parts: / Seal / Extension set 25 mm for basic set	Chrome Special Finishes*	10303180 96383000 96259000
	for 3-hole basin mixer wall-mounted 3-hole bath mixer for concealed installation wall-mounted with lever handles and plate / consists of: 2-handle bath mixer, hand shower, shower holder, shower hose / projection 222 mm / connection type: basic set / spray type mixer: normal spray / spray type hand shower: Rain, RainAir, WhirlAir / ceramic valves hot/ cold 90° / min. operating pressure: 1 bar / max. operating pressure: 10 bar / diverter with automatic resetting / non-return valve / connection dimension: DN15 Consisting of: / Hand shower 120 3jet (# 26050000) / Shower holder round (# 39525000) / Shower hose 1.25 m (# 28622000) Required parts: / Basic set for 3-hole basin mixer for concealed installation wall-mounted Optional parts: / Seal / Extension set 25 mm for basic set for 3-hole basin mixer wall-mounted	Chrome Special Finishes*	39442000 39442XXX Inire Inire


		finish	code no.
	3-hole bath mixer for concealed installation wall-mounted with cross handles and escutcheons / consists of: 2-handle bath mixer, baton hand shower, shower holder, shower hose / projection 222 mm / connection type: basic set / spray type mixer: normal spray / spray type hand shower: Rain, RainAir, WhirlAir / ceramic valves hot/ cold 180° / min. operating pressure: 1 bar / max. operating pressure: 10 bar / diverter with automatic resetting / non-return valve / connection dimension: DN15 Consisting of: / Hand shower 120 3jet (# 26050000) / Shower holder round (# 39525000) / Shower hose 1.25 m (# 28622000) Required parts: / Basic set for 3-hole basin mixer	Chrome Special Finishes*	39447000 39447XXX Internet Internet Int
	for concealed installation wall-mounted Optional parts: / Seal / Extension set 25 mm for basic set for 3-hole basin mixer wall-mounted		96383000 96259000
	3-hole bath mixer for concealed installation wall-mounted with lever handles and escutcheons / consists of: 2-handle bath mixer, hand shower, shower holder, shower hose / projection 222 mm / connection type: basic set / spray type mixer: normal spray / spray type mixer: normal spray / spray type hand shower: Rain, RainAir, WhirlAir / ceramic valves hot/ cold 90° / min. operating pressure: 1 bar / max. operating pressure: 10 bar / diverter with automatic resetting / non-return valve / connection dimension: DN15 Consisting of: / Hand shower 120 3jet (# 26050000) / Shower hose 1.25 m (# 28622000) / Shower holder round (# 39525000) Required parts: / Basic set for 3-hole basin mixer	Chrome Special Finishes*	39448000 39448XXX Air Control Out of the second sec
	 Optional parts: / Seal / Extension set 25 mm for basic set for 3-hole basin mixer wall-mounted 		96383000 96259000

		finish	code no.
6	Basic set for 3-hole basin mixer for concealed installation wall-mounted / suitable for all 3-hole wash basin mixers for wall mounting / connection from above or below / connection dimension: DN15/DN20 Optional parts: / Seal / Extension set 25 mm for basic set for 3-hole basin mixer wall-mounted		10303180 96383000 96259000
	Bath spout / projection 165 mm / flow rate: 25 l/min / connection dimension: device connection DN20 / spray type: normal spray	Chrome Special Finishes*	39410000 39410XXX Air Power
ĨĨ	2-hole rim mounted thermostatic bath mixer with cross handles / 2 functions / safety lock at 38 ° C / temperature limitation adjustable / suitable for remote spout / connection type: basic set / connection dimension: DN15	Chrome Special Finishes*	39480000 39480XXX
	Required parts: / Basic set for 2-hole rim mounted thermostatic bath mixer Optional parts: / Flexible connection tube 800 mm / Connection tube set for 2-hole rim mounted thermostatic bath mixer		15486180 58308000 13089000
)) Je je	2-hole rim mounted thermostatic bath mixer with lever handles / 2 functions / safety lock at 38 ° C / temperature limitation adjustable / suitable for remote spout / connection type: basic set / connection dimension: DN15	Chrome Special Finishes*	39482000 39482XXX
	Required parts: / Basic set for 2-hole rim mounted thermostatic bath mixer Optional parts: / Flexible connection tube 800 mm / Connection tube set for 2-hole rim mounted thermostatic bath mixer		15486180 58308000 13089000

Basic set for 2 hole rim mounded humanitation by 15 Unitable for immediation by 15 Unitable for immediation by 15 Channel and the mounded basic work hole shows hole showshows hole shows hole shows hole shows hole shows hole shows hole			finish	code no.
shower Special Finishes* 19418000 inverted - consist of hand shower, shower holder, shower hose, seculox, Seculox Rose back, hose insert - inverted source hose insert - inverted source hose insert - inverted source hose insert isource hose insert - inverted source hose insert isource hose insert - invariante publication on both inno - invariante publication on both inno - connection dimension: DN15 - inverted source hose insert image: source hose insert - inverted source hose insert - inverted	The second	thermostatic bath mixer / suitable for remote spout / connection thread: G 1/2 / connection dimension: DN15 Optional parts: / Rim mounted bath set with hand shower / Finish set square / Finish set oval	Special Finishes* Chrome Special Finishes* Chrome	19418000 19418XXX 28012000 28012XXX 28022000 28022XXX
 Secuflex insert extension Secuflex insert extension Secuflex insert extension Shole rim mounted bath mixer with cross handles projection 190 mm connection type: basic set group type mixer: normal spray ceramic valves hot/ cold 180° min. operating pressure: 10 bar connection dimension: DN15 Required parts: Basic set for 3-hole rim mounted bath mixer 15484180 	B	 shower consists of: hand shower, shower holder, shower hose, Secubox, Secuflex hose brake, hose insert suitable for for installation on bath rim or tile surround (no mounting plate available) drilling diameter on bath tub: Ø 50 mm connection dimension: DN15 maximum pull-out length of hand shower 1.10 m Consisting of: Hand shower 120 3jet (# 26050000) 		
with cross handles Special Finishes* 39436XXX / projection 190 mm / connection type: basic set / spray type mixer: normal spray // ceramic valves hot/ cold 180° / ceramic valves hot/ cold 180° / min. operating pressure: 10 bar // connection dimension: DN15 // required parts: / Basic set for 3-hole rim mounted bath mixer // 15484180 // maintenance opening required / connection dimension: DN15 // 15484180		Secuflex insert extension		98806000
Basic set for 3-hole rim mounted 15484180 bath mixer / maintenance opening required / connection thread: G 1/2 / connection dimension: DN15 / ceramic valves hot/ cold 90°	in	with cross handles / projection 190 mm / connection type: basic set / spray type mixer: normal spray / ceramic valves hot/ cold 180° / min. operating pressure: 1 bar / max. operating pressure: 10 bar / connection dimension: DN15 Required parts:		39436XXX Air Power
		 / Basic set for 3-hole rim mounted bath mixer Basic set for 3-hole rim mounted bath mixer / maintenance opening required / connection thread: G ½ / connection dimension: DN15 		

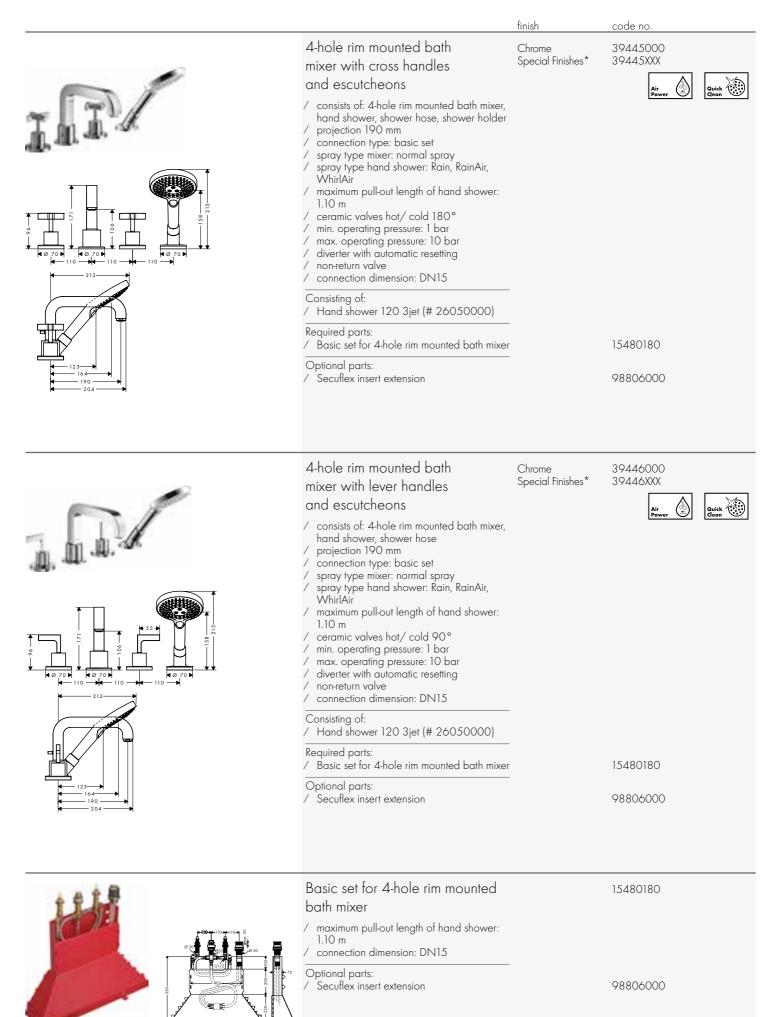


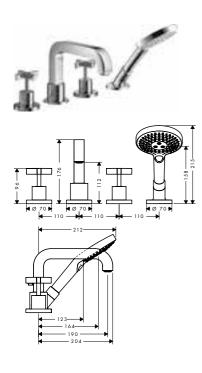

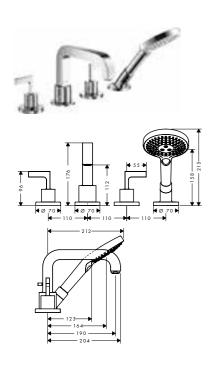

	finish	code no.	
4-hole tile mounted bath mixer with cross handles and escutcheons	Chrome Special Finishes*	39453000 39453XXX Air Power	Quick Clean
 consists of: 4-hole tile mounted hand shower, shower hose, sho projection 190 mm connection type: basic set spray type mixer: normal spray spray type hand shower: Rain, WhirlAir maximum pull-out length of har 1.10 m ceramic valves hot/ cold 180' min. operating pressure: 1 bar max. operating pressure: 10 bar diverter with automatic resetting non-return valve connection dimension: DN15 	ower holder / RainAir, nd shower: o		
Consisting of: / Hand shower 120 3jet (# 260	050000)		
Required parts: / Basic set for 4-hole tile mounte	d bath mixer	15481180	
Optional parts: / Secuflex insert extension		98806000	

_			
	4-hole tile mounted bath mixer with lever handles and escutcheons	Chrome Special Finishes*	39454000 39454XXX
 consists of: 4-hole tile mounted bath mixer, hand shower, Secuflex hose set projection 190 mm connection type: basic set spray type mixer: normal spray spray type hand shower: Rain, RainAir, WhirlAir maximum pull-out length of hand shower: 1.10 m ceramic valves hot/ cold 90° min. operating pressure: 1 bar max. operating pressure: 1 bar diverter with automatic resetting non-return valve connection dimension: DN15 			rewer C Lucan C
	Consisting of: / Hand shower 120 3jet (# 26050000)		
	Required parts: / Basic set for 4-hole tile mounted bath mixer		15481180
	Optional parts: / Secuflex insert extension		98806000

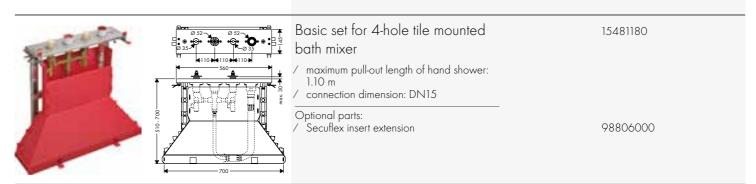

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

Shower			finish	code no.
Shower	*	Single lever shower mixer for exposed installation with lever handle / 1 function / connection type: s-shaped connections / centre distance: 150 ± 16 mm / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / non-return valve / with silencer / suitable for continous flow water heaters / hose connection DN15 / connection dimension: DN15	Chrome Special Finishes*	39600000 39600XXX
	021 01-89 + 91-119+	Single lever shower mixer for concealed installation with lever handle / 1 function / connection type: basic set / flow rate at 3 bar: 29.3 l/min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / with silencer / suitable for continous flow water heaters Required parts:	Chrome Special Finishes*	39655000 39655XXX
		 / Basic set iBox universal Optional parts: / Extension element square 1-hole red blue / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal 	Chrome Special Finishes*	01700180 14965000 14965XXX 13587000 93171000
		Basic set iBox universal / suitable for all shower, bath tub and thermostat finish sets for concealed installation / connection thread / Rp ³ / ₄ / rotationally-symmetric installation / sound-decoupled installation		01700180

sound-decoupled installation sound-decoupled installation connection dimension: DN20

0 /

Jptional parts:	
Extension 25 mm for basic set iBox	13587000
universal	
Fastening rail set for iBox universal	93171000

			finish	code no.
		Porter unit 120/120 with baton hand shower 2jet and shower hose / consists of: porter unit, baton hand shower, shower holder, shower hose / integrated support function / non-return valve / in a joined installation (10 mm distance) we recommend for perfect handling only the horizontal installation / in a joined installation / in a joined installation / in a joined installation / in a freely-arranged installation (distance greater than 10 mm), no basic set is required Consisting of: / Metal effect shower hose 1.25 m (# 28282000)	Chrome Special Finishes*	12626000 12626XXX
		Optional parts: / Basic set for shower module 120/120 for concealed installation		28486180
		Shower holder round / fixed holding position / for hoses with conical nut Optional parts: / Shower hose 1.25 m / Shower hose 1.60 m / Shower hose 2.00 m	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Special Finishes*	39525000 39525XXX 28622000 28622XXX 28626000 28626XXX 28624000 28624XXX
Thermostatic mixers/ valves/	diverters	Thermostat HighFlow for concealed installation with cross handle / maximum flow rate at 3 bar: 59 l/min / flow rate at 3 bar: 59 l/min / thermostat cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 38° C / temperature limitation adjustable / with silencer / connection type: basic set	Chrome Special Finishes*	39716000 39716XXX
		Required parts: / Basic set iBox universal Optional parts: / Extension element square 1-hole / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	Chrome Special Finishes*	01700180 14964000 14964XXX 13587000 93171000

			finish	code no.
R.		Thermostat HighFlow for concealed installation with lever handle / flow rate at 3 bar: 59 l/min / thermostat cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 38 ° C / temperature limitation adjustable / with silencer / connection type: basic set	Chrome Special Finishes*	39711000 39711XXX
		Required parts: / Basic set iBox universal	-	01700180
		 Optional parts: / Extension element square 1-hole / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal 	– Chrome Special Finishes*	14964000 14964XXX 13587000 93171000
A A	* 5381 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Thermostat for concealed installation with shut-off valve and cross handle / 1 function / flow rate at 3 bar: 26 l/min / thermostat cartridge, ceramic valves 90° / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 38° C / temperature limitation adjustable / with silencer / connection type: basic set	Chrome Special Finishes*	39705000 39705XXX
		Required parts: / Basic set iBox universal	-	01700180
		Optional parts: / Extension element square 2-hole arrow / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	- Chrome Special Finishes*	14970000 14970XXX 13587000 93171000
A A		Thermostat for concealed installation with shut-off valve and lever handle / 1 function / flow rate at 3 bar: 26 l/min / thermostat cartridge, ceramic valves 90° / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 38° C / temperature limitation adjustable / with silencer / connection type: basic set	Chrome Special Finishes*	39700000 39700XXX
		Required parts: / Basic set iBox universal		01700180
		Optional parts: / Extension element square 2-hole arrow / Extension 25 mm for basic set iBox universal	- Chrome Special Finishes*	14970000 14970XXX 13587000
		/ Fastening rail set for iBox universal		93171000

		finish	code no.
A A	Thermostat for concealed installation with shut-off/ diverter valve and cross handle / 2 functions / flow rate at 3 bar: 26 l/min / thermostat cartridge, shut-off valve / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 38 ° C / temperature limitation adjustable / with silencer / connection type: basic set	Chrome Special Finishes*	39725000 39725XXX
	Required parts: / Basic set iBox universal	_	01700180
	Optional parts: / Extension element square 2-hole 0-1-2 / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	- Chrome Special Finishes*	14969000 14969XXX 13587000 93171000
No W	Thermostat for concealed installation with shut-off/ diverter valve and lever handle / 2 functions / flow rate at 3 bar: 26 l/min / thermostat cartridge, shut-off valve / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 38 ° C / temperature limitation adjustable / with silencer / connection type: basic set	Chrome Special Finishes*	39720000 39720XXX
	Required parts: / Basic set iBox universal	_	01700180
	Optional parts: / Extension element square 2-hole 0-1-2 / Extension 25 mm for basic set iBox universal	Chrome Special Finishes*	14969000 14969XXX 13587000
	/ Fastening rail set for iBox universal		93171000
	Basic set iBox universal / suitable for all shower, bath tub		01700180
	and thermostat finish sets for concealed installation / connection thread / Rp ³ / ₄ / rotationally-symmetric installation / sound-decoupled installation / connection dimension: DN20		

Optional parts: / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal

13587000 93171000


code no.

finish

			1111511	code no.
		Shut-off valve for concealed installation with cross handle	Chrome Special Finishes*	39965000 39965XXX
	4 79 → 10 10 10 10 10 10 10 10 10 10 10 10 10 1	/ connection type: DN15/DN20		
Cer-		Required parts: / Basic set 52 l/min for shut-off valve for concealed installation spindle		16973180
		 / Basic set 40 l/min for concealed installation for shut-off valve ceramic 		16974180
		 / Basic set 130 l/min for shut-off valve for concealed installation spindle 		16970180
		Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000
		Shut-off valve for concealed	Chrome	39960000
	4 −79 − •	installation with lever handle / connection type: DN15/DN20	Special Finishes*	39960XXX
Co		Required parts: / Basic set 52 l/min for shut-off valve for concealed installation spindle		16973180
	→ ← ₀ □ →	 / Basic set 40 l/min for concealed installation for shut-off valve ceramic 		16974180
		Basic set 130 I/min for shut-off valve for concealed installation spindle		16970180
		Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000
6	Rp 1/2-	Basic set 52 l/min for shut-off valve for concealed installation spindle / connection type: DN15 / suitable for all shut-off valves finish sets / flow rate: 52 l/min / connection dimension: DN15 Alternative products: / Basic set 40 l/min for concealed installation for shut-off valve ceramic / Basic set 130 l/min for shut-off valve for concealed installation spindle		16973180 16974180 16970180
		Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000
		Shut-off/ diverter valve Trio/ Quattro for concealed installation with cross handle	Chrome Special Finishes*	39925000 39925XXX
the state	i hread :	Required parts: / Basic set for Quattro four-way diverter		16930180
Carl.		valve for concealed installation / Basic set for shut-off/ diverter valve Trio for concealed installation		16982180
		Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000

			finish	code no.
(0)	•101•	Shut-off/ diverter valve Trio/ Quattro for concealed installation with lever handle	Chrome Special Finishes*	39920000 39920XXX
ALL AL		Required parts: / Basic set for Quattro four-way diverter valve for concealed installation		16930180
		 / Basic set for shut-off/ diverter valve Trio for concealed installation 		16982180
		Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000
<u>a</u>	4 —104— ● 4 —70 →1 4 =70 →1 4 =0 → 12 84 −	Basic set for shut-off/ diverter valve Trio for concealed installation		16982180
10		 2 functions / simultaneous utilization by 2 outlets / suitable for all Trio finish sets / flow rate: 65 l/min / connection dimension: DN20 		
		Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000
		Basic set for Quattro four-way diverter valve for concealed installation / requires volume control / 3 functions		16930180
		 / simultaneous utilization by 2 outlets / suitable for all Quattro finish sets / flow rate: 65 l/min / connection dimension: DN20 Optional parts: 		
		/ Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000
		Wall outlet stop with non return valve, shut-off valve and cross handle / connection type: DN15 / hose connection DN15/DN20 / with non-return valve	Chrome Special Finishes*	39883000 39883XXX

			finish	code no.
		Wall outlet stop with non return valve, shut-off valve and lever handle / connection type: DN15 / hose connection DN15/DN20 / with non-return valve	Chrome Special Finishes*	39882000 39882XXX
Overhead showers	25	Overhead shower 180 1jet / spray type: RainAir / shower head size: 180 mm / ball-joint: overhead shower angle adjustable / maximum flow rate at 3 bar: 24 l/min / flow rate RainAir spray (at 3 bar): 24 l/min / material spray disc: metal / installation: ceiling or wall / connection thread G ½ / connection dimension: DN15 Optional parts: / Shower arm 390 mm	Chrome Special Finishes*	28489000 28489XXX Guide Control of Control o
	-▶	 / Ceiling connector 100 mm / Ceiling connector 300 mm 	Brushed Nickel Special Finishes* Chrome Brushed Nickel Special Finishes* Chrome Brushed Nickel Special Finishes*	26431000 26431820 26431XXX 26432000 26432820 26432XXX 26433000 26433820 26433XXX
Shower sets		Shower set 0.90 m with hand shower 120 3 jet / consists of: hand shower, shower bar, shower hose, slider / shower head size: 120 mm / spray type: Rain, RainAir, WhirlAir / convenient diversion via Select button / pivot connector prevent hose from tangling / wall bar 0.90 m / support for shower hose with conical nuts / inclination angle can be adjusted by 30° / maximum flow rate at 3 bar: 16 l/min / wall supports of metal Consisting of: / Hand shower 120 3 jet (# 26050000) / Shower hose 1.60 m (# 28626000)	Chrome Special Finishes*	27991000 27991XXX Meet States Air Power Contractions Clean States
		Shower bar 0.90 m / consists of: shower bar, shower hose, slider / pivot connector prevent hose from tangling / metal shower slide / slide with locking mechanism / wall supports of metal Consisting of: / Shower hose 1.60 m (# 28626000)	Chrome Special Finishes*	27831000 27831XXX

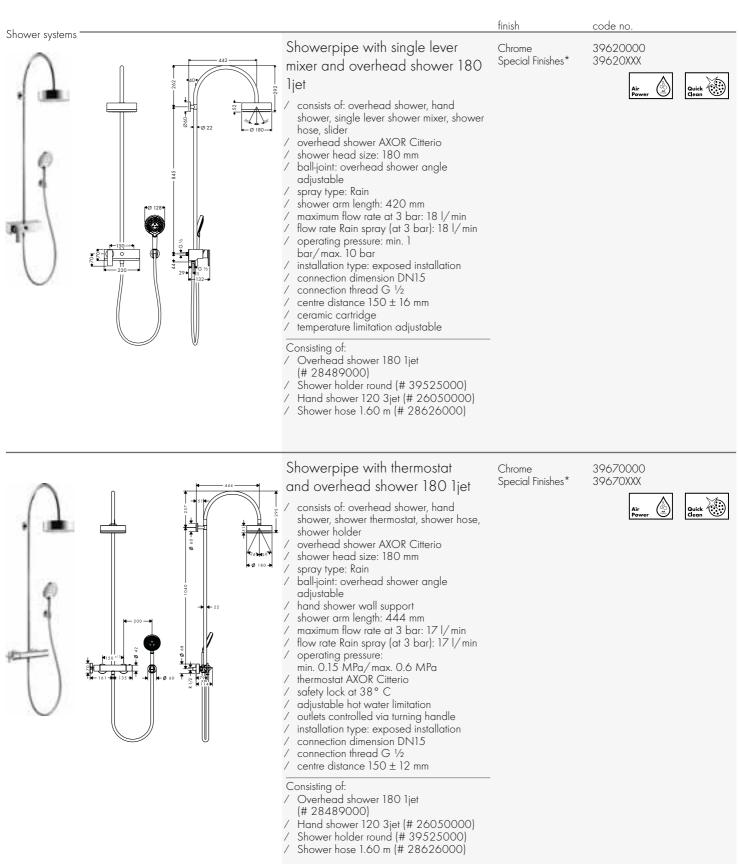

Thermostatic mixers



For matching thermostatic mixers, refer to the AXOR Showers chapter.

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.




Accessories




For matching shower products, refer to the AXOR Showers chapter.


For matching AXOR Citterio Accessories, refer to the AXOR Accessories chapter.

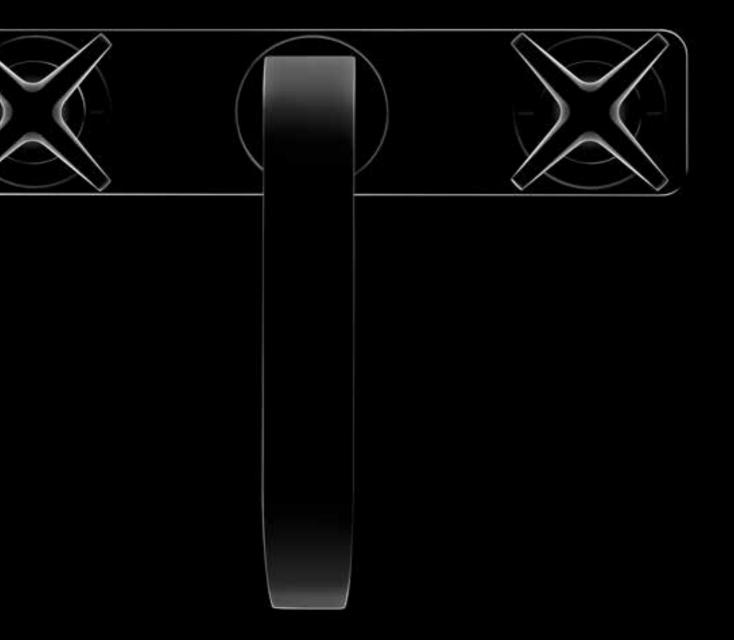


AXOR CITTERIO E



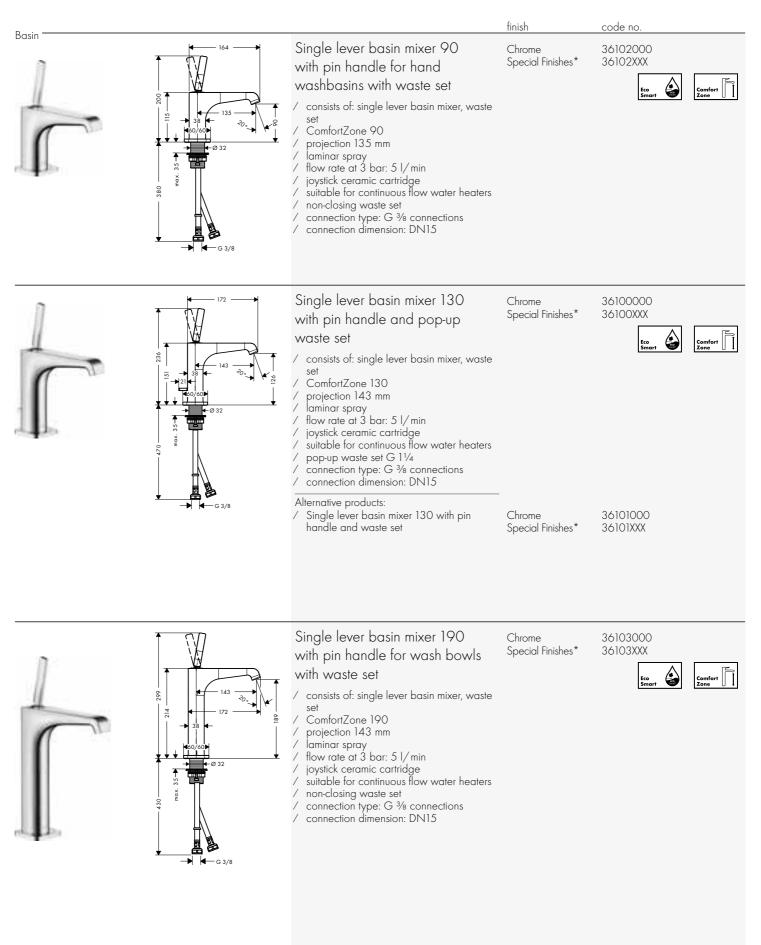

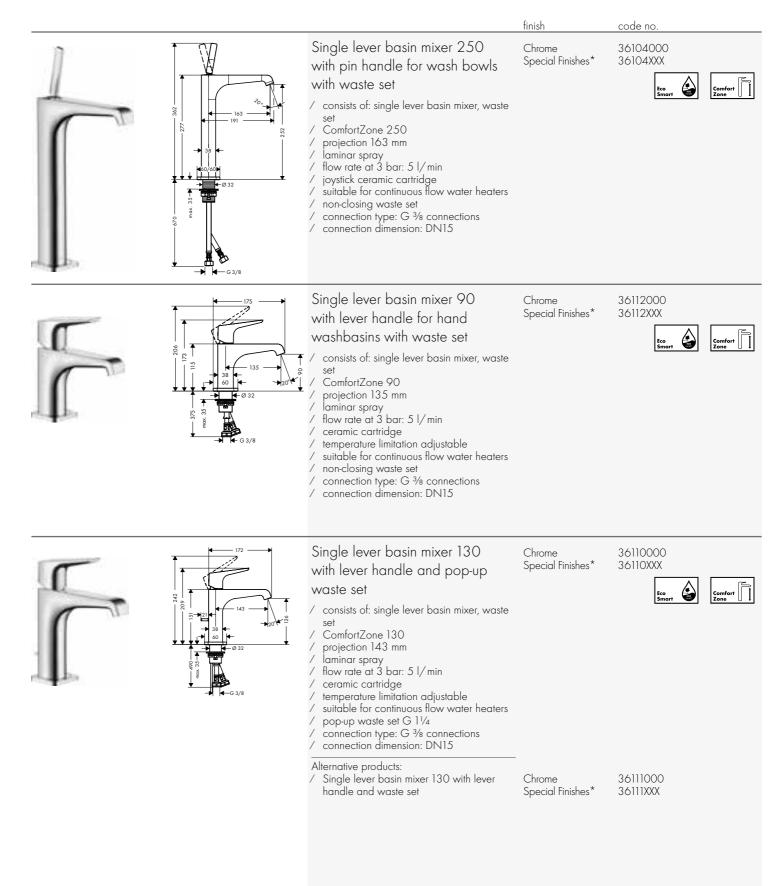

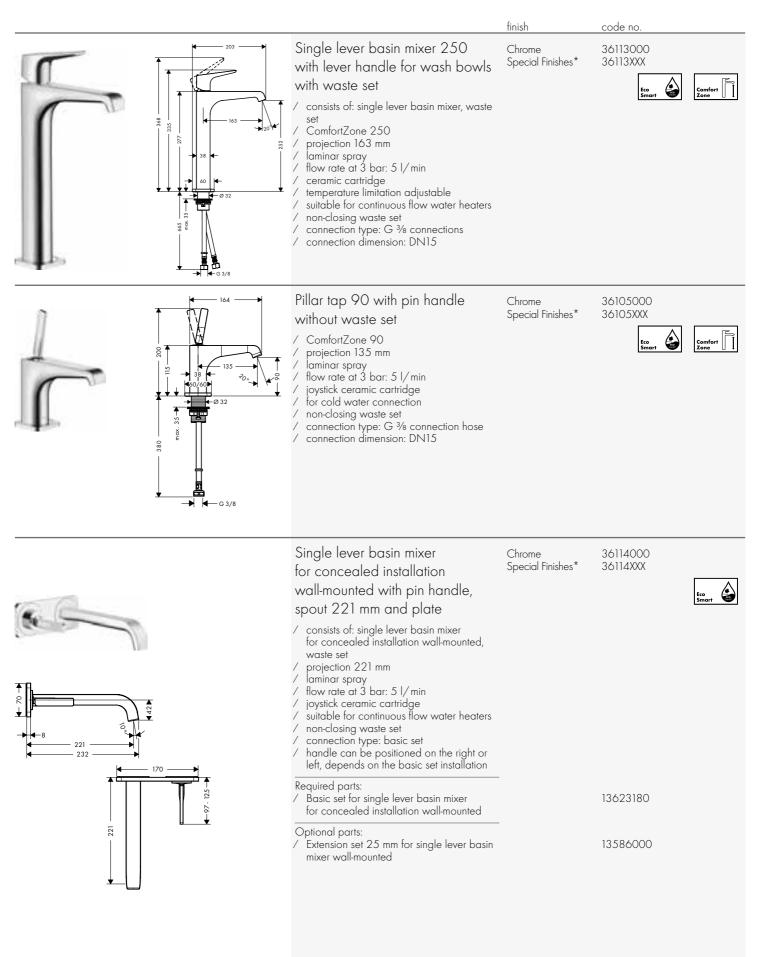


		finish	code no.
	Single lever basin mixer for concealed installation wall-mounted with pin handle, spout 221 mm and escutcheons	Chrome Special Finishes*	36106000 36106XXX Ese Smort
	 consists of: single lever basin mixer for concealed installation wall-mounted, waste set projection 221 mm laminar spray flow rate at 3 bar: 5 l/min joystick ceramic cartridge suitable for continuous flow water heaters non-closing waste set connection type: basic set handle can be positioned on the right or left, depends on the basic set installation 		
221	Required parts: / Basic set for single lever basin mixer for concealed installation wall-mounted Optional parts: / Extension set 25 mm for single lever basin		13623180
	mixer wall-mounted		13380000
Rp 1/2 Rp	Basic set for single lever basin mixer for concealed installation wall-mounted / variable positioning of the mixer system, can be left or right of the spout		13623180
	 / connection dimension: DN15 Optional parts: / Extension set 25 mm for single lever basin mixer wall-mounted 		13586000
	Extension set 25 mm for single lever basin mixer wall-mounted / extension length: 25 mm		13586000
8 🗆 🕯			
	3-hole basin mixer 170 with plate and pop-up waste set / consists of: 3-hole basin mixer, waste set / ComfortZone 170 / projection 165 mm / normal spray / flow rate at 3 bar: 5 l/min / ceramic valves hot/ cold 180° / suitable for continuous flow water heaters / pop-up waste set G 11/4 / connection type: G 3/6 connections / connection dimension: DN15 / for use only at flat, plain surfaces	Chrome Special Finishes*	36116000 36116XXX Eco Smort

 	finish	code no.
3-hole basin mixer 170 with escutcheons and pop-up waste set / consists of: 3-hole basin mixer, waste set / ComfortZone 170 / projection 165 mm / normal spray / flow rate at 3 bar: 5 l/min / ceramic valves hot/ cold 180° / suitable for continuous flow water heaters / pop-up waste set G 11/4 / connection type: G 3/8 connections / connection dimension: DN15 Optional parts: / Hose extension set for 3-hole basin mixer	Chrome Special Finishes*	36108000 36108XXX Escart Confor
Hose extension set for 3-hole basin mixer / length of hoses 700 mm / for free positioning of spout and handles		38959000
3-hole basin mixer for concealed installation wall-mounted with spout 220 mm and plate / consists of: 3-hole basin mixer for concealed installation wall-mounted, waste set / projection 220 mm / laminar spray / flow rate at 3 bar: 5 l/min / ceramic valves hot/ cold 180° / suitable for continuous flow water heaters / non-closing waste set / connection type: basic set / connection dimension: DN15	Chrome Special Finishes*	36115000 36115XXX <u>Fco</u> Smort
Required parts: / Basic set for 3-hole basin mixer for concealed installation wall-mounted Optional parts: / Seal / Extension set 25 mm for basic set for 3-hole basin mixer wall-mounted	-	10303180 96383000 96259000

Measurements within scale drawings are in mm.

	finish	code no.
 3-hole basin mixer for concealed installation wall-mounted with spout 220 mm and escutcheons consists of: 3-hole basin mixer for concealed installation wall-mounted, waste set projection 220 mm laminar spray flow rate at 3 bar: 5 l/min ceramic valves hot/ cold 180° suitable for continuous flow water heaters non-closing waste set connection type: basic set connection dimension: DN15 	Chrome Special Finishes*	36107000 36107XXX
Required parts: / Basic set for 3-hole basin mixer for concealed installation wall-mounted Optional parts: / Seal / Extension set 25 mm for basic set for 3-hole basin mixer wall-mounted		10303180 96383000 96259000
Basic set for 3-hole basin mixer for concealed installation wall-mounted / suitable for all 3-hole wash basin mixers for wall mounting / connection from above or below / connection dimension: DN15/DN20 Optional parts: / Seal / Extension set 25 mm for basic set for 3-hole basin mixer wall-mounted		10303180 96383000 96259000
Extension set 25 mm for basic set for 3-hole basin mixer wall-mounted / connection dimension: DN15 / extension length: 25 mm		96259000
Seal		96383000

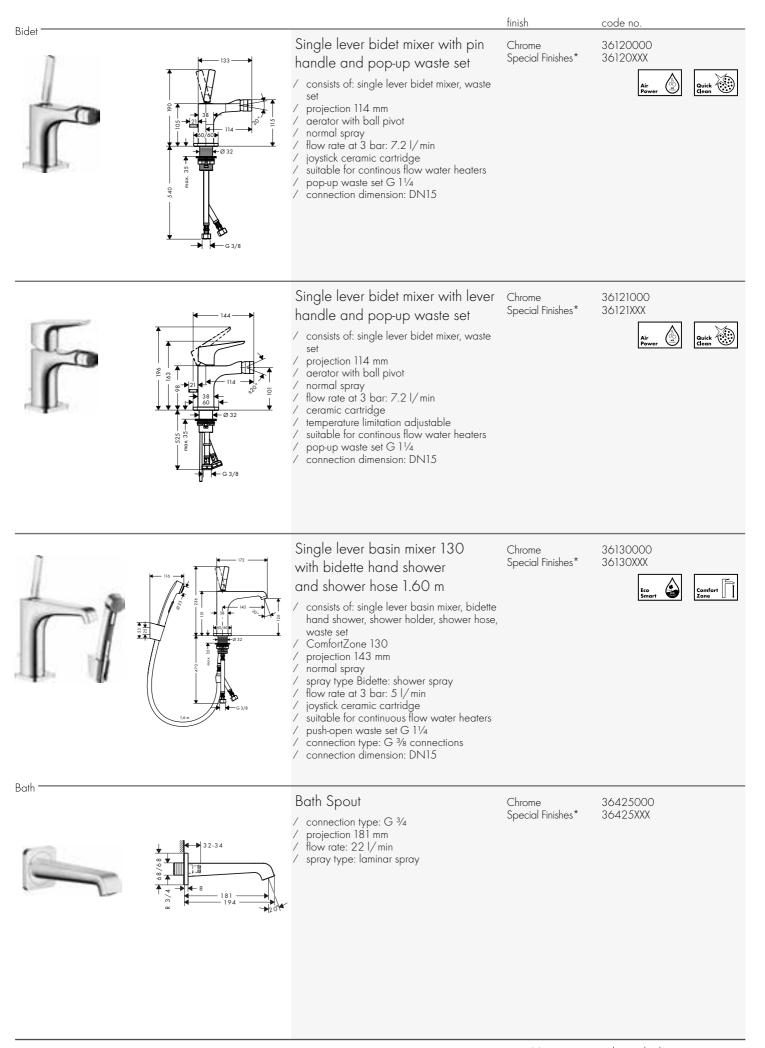

			finish	code no.
	284	Bath thermostat floor-standing / consists of: bath thermostat floor standing, baton hand shower, shower hose, shower holder / projection 190 mm 2 functions / will not run two outlets at same time / diversion between outlets via diverter knob / spray type mixer: laminar spray / spray type hand shower: Rain, Mono / flow rate: 20 I/min / thermostat cartridge, ceramic valve 180° / safety lock at 40° C / temperature limitation adjustable / non-return valve / with automatic resetting / connection type: basic set / connection dimension: DN15 Consisting of: / Baton hand shower 2jet (# 28532000) / Shower hose 1.25 m (# 28622000)	Chrome Special Finishes*	36416000 36416XXX
-		 Basic set for mixers floor-standing Optional parts: Sealing foil for basic set bath mixer floor-standing Extension 60 mm for pipe 		10452180 96441000 97686000
	© 101 max min. Sc min. CC CC CC CC CC CC CC CC CC C	Basic set for mixers floor-standing / for mounting on unfinished floor / suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing / connection dimension: DN15 Optional parts: / Sealing foil for basic set bath mixer floor-standing		96441000
	61-89 61	Single lever bath mixer for concealed installation / connection type: basic set / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / diverter with automatic resetting / with silencer / suitable for continous flow water heaters	Chrome Special Finishes*	36455000 36455XXX
		Alternative products: / Single lever bath mixer for concealed installation with integrated security combination according to EN1717 Required parts: / Basic set iBox universal	Chrome Special Finishes*	36457000 36457XXX 01700180
		 / Basic set ibox universal / Optional parts: / Extension element softcube 2-hole / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal 	Chrome Special Finishes*	14972000 14972XXX 13587000 93171000

		finish	code no.
	Basic set iBox universal / suitable for all shower, bath tub and thermostat finish sets for concealed installation / connection thread / Rp ³ / ₄ / rotationally-symmetric installation / sound-decoupled installation / connection dimension: DN20 Optional parts: / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal		01700180 13587000 93171000
T	2-hole rim mounted thermostatic bath mixer / 2 functions / will not run two outlets at same time / safety lock at 40° C / temperature limitation adjustable / suitable for remote spout / connection type: basic set / connection dimension: DN15 Required parts:	Chrome Special Finishes*	36412000 36412XXX
	 / Basic set for 2-hole rim mounted thermostatic bath mixer Optional parts: / Flexible connection tube 800 mm / Connection tube set for 2-hole rim mounted thermostatic bath mixer 		15486180 58308000 13089000
H	Basic set for 2-hole rim mounted thermostatic bath mixer / suitable for remote spout / connection thread: G 1/2 / connection dimension: DN15 Optional parts: / Rim mounted bath set with hand shower / Finish set square / Finish set oval / Rim and tile mounted bath basic set	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	15486180 19418000 19418XXX 28012000 28012XXX 28022000 28022XXX 15490180
B	Rim mounted bath set with hand shower / consists of: hand shower, shower holder, shower hose, Secubox, Secuflex hose brake, hose insert / suitable for for installation on bath rim or tile surround (no mounting plate available) / drilling diameter on bath tub: Ø 50 mm / connection dimension: DN15 / maximum pull-out length of hand shower 1.10 m Consisting of: / Hand shower 120 3jet (# 26050000) Optional parts:	Chrome Special Finishes*	19418000 19418XXX
	/ Secuflex insert extension		98806000

Measurements within scale drawings are in mm.


Technical specifications and units of measure are subject to change.

		finish	code no.
	4-hole rim mounted thermostatic bath mixer	Chrome Special Finishes*	36411000 36411XXX
	 consists of: 4-hole rim mounted bath mixer, hand shower, Secuflex hose set projection 190 mm 2 functions will not run two outlets at same time diversion between outlets via diverter knob spray type mixer: laminar spray spray type hand shower: Rain, RainAir, WhirlAir maximum pull-out length of hand shower: 1.10 m flow rate: 20 l/min min. operating pressure: 10 bar safety lock at 40 ° C temperature limitation adjustable non-return valve with automatic resetting with silencer connection type: basic set consisting of: 		
	 / Hand shower 120 3jet (# 26050000) Required parts: / Basic set for 4-hole rim mounted thermostatic bath mixer 		15482180
	Basic set for 4-hole rim mounted thermostatic bath mixer / maximum pull-out length of hand shower: 1.10 m / connection dimension: DN15 Optional parts: / Secuflex insert extension		15482180 98806000
<image/>	 4-hole tile mounted thermostatic bath mixer consists of: 4-hole tile mounted bath mixer, hand shower, Secuflex hose set projection 190 mm 2 functions will not run two outlets at same time diversion between outlets via diverter knob spray type mixer: laminar spray spray type hand shower: Rain, RainAir, WhirlAir maximum pull-out length of hand shower: 1.10 m flow rate: 20 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar safety lock at 40° C temperature limitation adjustable non-return valve with automatic resetting with silencer connection type: basic set connection dimension: DN15 Consisting of: Hand shower 120 3jet (# 26050000) 	Chrome Special Finishes*	36410000 36410XXX
	 Kequired parts: / Basic set for 4-hole tile mounted thermostatic bath mixer 		15483180

		finish	code no.
	Basic set for 4-hole tile mounted thermostatic bath mixer		15483180
The second	 / maximum pull-out length of hand shower: 1.10 m / connection dimension: DN15 	_	
	Optional parts: / Secuflex insert extension		98806000


Basic set iBox universal

Shower -



Single lever shower mixer for concealed installation	Chrome Special Finishes*	36655000 36655XXX
 1 function connection type: basic set flow rate at 3 bar: 29.3 l/min ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable with silencer suitable for continous flow water heaters 		
Required parts: / Basic set iBox universal		01700180
Optional parts: / Extension element softcube 1-hole / Extension 25 mm for basic set iBox universal	Chrome Special Finishes*	14971000 14971XXX 13587000
 / Fastening rail set for iBox universal 		93171000






	 suitable for all shower, bath tub and thermostat finish sets for concealed installation connection thread Rp ³/₄ rotationally-symmetric installation sound-decoupled installation connection dimension: DN20 	
,	Optional parts: / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	- 13587000 93171000

01700180

Thormate	ro (uralura - (-lii		finish	code no.
	rs/ valves/ diverters -	Bath thermostat for exposed installation / projection 177 mm / 2 functions / will not run two outlets at same time / centre distance: 150 ± 16 mm / spray type mixer: normal spray / flow rate: 20 l/min / thermostat cartridge, shut-off/ diverter valve / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / non-return valve / with silencer / connection type: s-shaped connections / connection dimension: DN15	Chrome Special Finishes*	36140000 Jeiwer Contraction of the second se
62		Thermostatic module 380/120 for concealed installation for 2 functions with plate / 2 functions with plate / 2 functions / simultaneous utilization by 2 outlets / thermostat cartridge / safety lock at 40° C / temperature limitation adjustable / combination of highflow thermostat with shut-off valve and Duo diverter valve for controlling 2 consumers / connection type: basic set / connection dimension: DN20 Required parts: / Basic set for thermostatic module 380/120 for concealed installation for 2 functions	Chrome Special Finishes*	36703000 36703XXX 36701180
		Basic set for thermostatic module 380/120 for concealed installation for 2 functions / 2 functions / 2 outlets can be used simultaneously / flow rate at free through-flow: 59 l/min / horizontal or vertical installation / sound-decoupled installation / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning / connection dimension: DN20 Required parts: / Thermostatic module 380/120 for concealed installation for 2 functions with plate	- Chrome Special Finishes*	36701180 36703000 36703XXX

		finish	code no.
· 64 69	Thermostatic module 380/120 for concealed installation for 3 functions with escutcheons / consists of: shower thermostat, shut-off/ diverter valve, shut-off valve / 3 functions / simultaneous utilization by 2 outlets / thermostat cartridge / safety lock at 40° C / temperature limitation adjustable / combination of highflow thermostat with shut-off valve and Quattro diverter valve for controlling 3 consumers / connection type: basic set / connection dimension: DN20	Chrome Special Finishes*	36704000 36704XXX
	Consisting of: / Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation (# 36772000) / Shut-off valve 120/120 for concealed installation (# 36771000) / Thermostat 120/120 for concealed installation (# 36702000) Required parts: / Basic set for thermostatic module 380/120 for concealed installation for 3 functions		36708180
	Basic set for thermostatic module 380/120 for concealed installation for 3 functions / 3 functions / 2 outlets can be used simultaneously / flow rate at free through-flow: 59 l/min / horizontal or vertical installation / sound-decoupled installation / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning / connection dimension: DN20 Required parts: / Thermostatic module 380/120 for concealed installation for 3 functions with escutcheons	Chrome Special Finishes*	36708180 36704000 36704XXX
	Thermostat 120/120 for concealed installation / maximum flow rate at 3 bar: 59 l/min / flow rate at 3 bar: 59 l/min / thermostat cartridge / min. operating pressure: 1,5 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / non-return valve / connection type: basic set / connection dimension: DN20 Required parts: / Basic set for thermostatic module 120/120 for concealed installation	Chrome Special Finishes*	36702000 36702XXX
	Optional parts: / Extension set 25 mm for thermostatic module	Chrome Special Finishes*	10790000 10790XXX

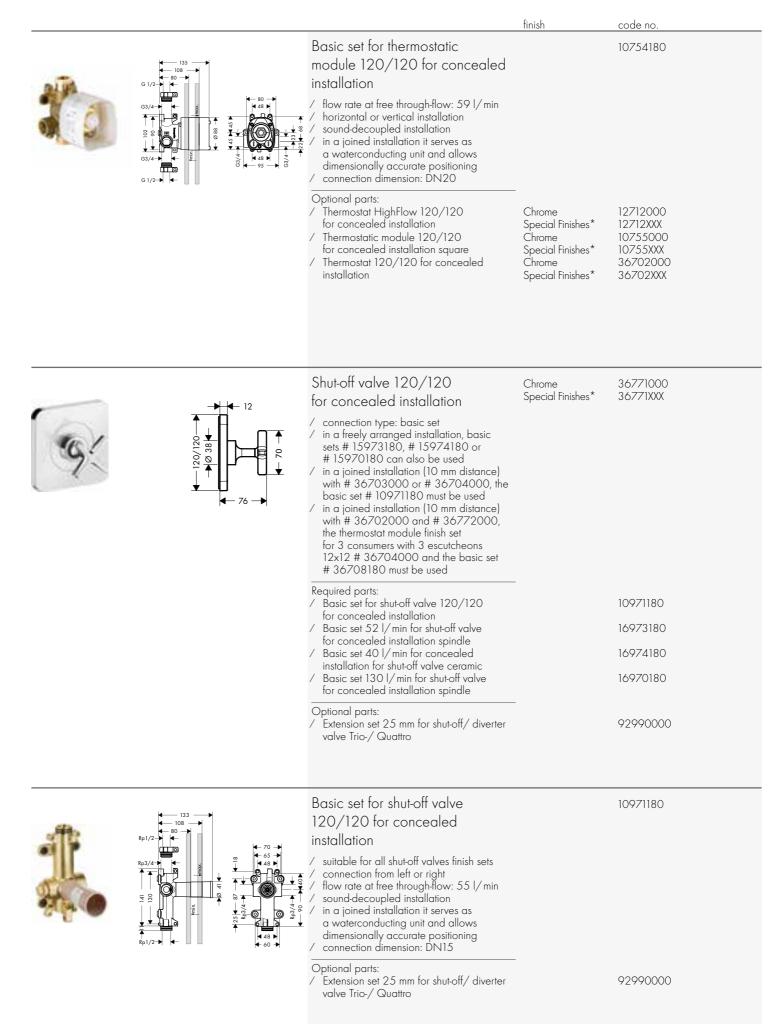


			finish	code no.
	Rp 1/2→	Basic set 52 l/min for shut-off valve for concealed installation spindle / connection type: DN15 / suitable for all shut-off valves finish sets / flow rate: 52 l/min / connection dimension: DN15		16973180
		Alternative products: / Basic set 40 l/ min for concealed installation for shut-off valve ceramic / Basic set 130 l/ min for shut-off valve for concealed installation spindle	-	16974180 16970180
		Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro	-	92990000
T		 Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation 3 consumers: in a joined installation (10 mm distance) with # 36702000 and # 36771000, please use the thermostat module finish set for 3 consumers with 3 escutcheons 12x12 # 36704000 and the basic set # 36708180 3 consumers: in a freely-arranged installation (distance greater than 10 mm), the basic set # 15930180 must be used 2 consumers: in a joined installation (10 mm distance) with # 36702000, the basic set # 36770180 must be used 2 consumers: in a freely-arranged installation (distance greater than 10 mm), the basic set # 15981180 must be used 2 consumers: in a freely-arranged installation (distance greater than 10 mm), the basic set # 15981180 must be used 3 functions simultaneous utilization by 2 outlets connection dimension: DN15 	Chrome Special Finishes*	36772000 36772XXX
		Required parts: / Basic set for shut-off/ diverter valve Trio 120/120 for concealed installation / Basic set for Quattro four-way diverter		36770180 16930180
		 Value set for accurate lost way diverted value for concealed installation / Basic set for shut-off/ diverter value Trio for concealed installation 		16982180
		Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro	-	92990000

		finish	code no.
	Basic set for shut-off/ diverter valve Trio 120/120 for concealed installation / 2 functions / 1 inlet/ 2 outlets / 2 outlets can be used simultaneously / connection thread Rp ³ / ₄ / horizontal or vertical installation / sound-decoupled installation / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning / connection dimension: DN20 Required parts: / Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation / Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	36770180 36772000 36772XXX 10932000 10932XXX 12731000 12731XXX 92990000
Rp3/4	Basic set for shut-off/ diverter valve Trio for concealed installation / 2 functions / simultaneous utilization by 2 outlets / suitable for all Trio finish sets / flow rate: 65 I/min / connection dimension: DN20 Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000
Rp 3/4	Basic set for Quattro four-way diverter valve for concealed installation / requires volume control / 3 functions / simultaneous utilization by 2 outlets / simultaneous utilization by 2 outlets / suitable for all Quattro finish sets / flow rate: 65 I/min / connection dimension: DN20 Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000

*For additional information please refer to the "special finish" overview.

				finish	code no.	
Showers			Shower module 120/120 for concealed installation softcube / shower head size: 120 mm / spray type: normal spray	Chrome Special Finishes*	36822000 36822XXX	Quick Clean
			 / spray angle adjustable in five steps / field of application: functions as overhead, shoulder or side shower / maximum flow rate at 3 bar: 5.3 l/min / flow rate normal spray (at 3 bar): 5.3 l/min / connection thread: G 1/2 / in a joined installation (10 mm distance) the use of basic set # 28486180 is recommended / in a freely arranged installation, connection via a G 1/2 connecting thread is possible / if installed as an overhead shower with several joint modules, the use of installation aid # 28470180 is recommended / connection dimension: DN15 / material: metal 			
			Optional parts: / Basic set for shower module 120/120		28486180	
			for concealed installation / Installation part		28470180	
<i>th</i> .			Basic set for shower module 120/120 for concealed		28486180	
			 installation / in a joined installation it serves as a waterconducting unit, allows dimensionally accurate positioning, connection right or left / sound-decoupled installation 			
	₹ _₽ 1/2→ ← Ш	4 48 ▶ 4 60 ▶	Required parts: / Shower module 120/120 for concealed installation square / Shower module 120/120 for concealed installation softcube	Chrome Special Finishes* Chrome Special Finishes*	28491000 28491XXX 36822000 36822XXX	





Installation part

- installation aid for overhead shower with several modules, allows dimensionally accurate positioning scope of supply: mounting screws sound-decoupled installation connection dimension: DN15 1

28470180

			finish	code no.
		 Porter unit 120/120 softcube / integrated support function / non-return valve / in a joined installation (10 mm distance) we recommend for perfect handling only the horizontal installation / in a joined installation (10 mm distance), the basic set # 28486180 must be used / in a freely-arranged installation (distance greater than 10 mm), no basic set is required / hose nut: for shower hoses with conical nut on both sides Optional parts: / Basic set for shower module 120/120 for concealed installation / Shower hose 1.60 m / Shower hose 2.00 m 	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	36724000 36724XXX 28486180 28622000 28622XXX 28626000 28622XXX 28626000 28624XXX
		Wall plate 120/120 Softcube / material: metal / wall-mounted Optional parts: / Shower arm 389 mm	Chrome Special Finishes* Chrome Special Finishes*	36725000 36725XXX 27348000 27348XXX
Shower sets	4	Shower set 0.90 m with hand shower 120 3 jet / consists of: hand shower, shower bar, shower hose, slider / shower head size: 120 mm / spray type: Rain, RainAir, WhirlAir / convenient diversion via Select button / pivot connector prevent hose from tangling / maximum flow rate at 3 bar: 15 l/min / bar width: 30 mm / wall supports of metal Consisting of: / Hand shower 120 3 jet (# 26050000) / Shower slider (# 92726000) / Shower hose 1.60 m (# 28626000) Alternative products:	Chrome Special Finishes*	36735000 36735XXX er Ouich Ceen Power O
U		Optional parts: / Cover for rail	Chrome Special Finishes* Chrome Special Finishes*	36736000 36736XXX 42871000 42871XXX

*For additional information please refer to the "special finish" overview.

Image: Shower bar 0.90 m Channe 36736000 Image: Shower bar 0.90 m Schower bar, shower bar, shower, s			finish	code no.
Image: Special Finishes* 4287100X Required parts: / Rail grab bor 300 mm Chrome 42830000 / Rail bath towel holder 600 mm / Rail bath towel holder 800 mm Special Finishes* 42832000 / Rail bath towel holder 800 mm / Rail bath towel holder 800 mm Special Finishes* 42833000 / Rail bath towel holder 800 mm / Shower set 0.90 m with hand shower 120 Special Finishes* 42833000 / Shower set 0.90 m Shower bar 0.90 m Special Finishes* 42833000 / Shower bar 0.90 m Special Finishes* 42833000 / Shower bar 0.90 m Special Finishes* 36735000 / Shower bar 0.90 m Special Finishes* 36735000 / Shower bar 0.90 m Special Finishes* 36735000 / Shower set Special Finishes* 36735000 / Showers Special Finishes* 36736000		 consists of: shower bar, shower hose, slider pivot connector prevent hose from tangling support for shower hose with conical nuts slider moves sideways,up/down and pivots bar width: 30 mm metal shower slide slide inclination angle steplessly adjustable silent inclination angle adjustment wall supports of metal Consisting of: Shower hose 1.60 m (# 28626000) Optional parts: 	Special Finishes*	36736XXX 42871000
 Rail grab bar 300 mm Rail grab bar 300 mm Rail bath towel holder 600 mm Rail bath towel holder 800 mm Shower set 0.90 m with hand shower 120 3jet Shower bar 0.90 m Shower bar 0.90 m Shower bar 0.90 m Shower bar 0.90 m Shower set 0.90 m Shower bar 0.90 m Shower bar 0.90 m Shower bar 0.90 m Shower bar 0.90 m Shower set 0.90 m Shower bar 0.90 m		Cover for rail		
For matching thermostatic mixers, refer to the AXOR Showers chapter.		 / Rail grab bar 300 mm / Rail bath towel holder 600 mm / Rail bath towel holder 800 mm / Shower set 0.90 m with hand shower 120 3 jet 	Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome	42830XXX 42832000 42832XXX 42833000 42833XXX 36735000 36735XXX 36736000
	hermostatic mixers	For matching thermostatic mixers, re	efer to the AXC	DR Showers chapter.
U. C.	Showers	For matching shower products, refe	er to the AXOR	Showers chapter.





For matching AXOR Universal accessories, refer to the AXOR Accessories chapter.



AXOR CITTERIO M

Basin	184
Bidet	188
3ath	188
Shower	191
Thermostatic mixers / valves / diverters	192



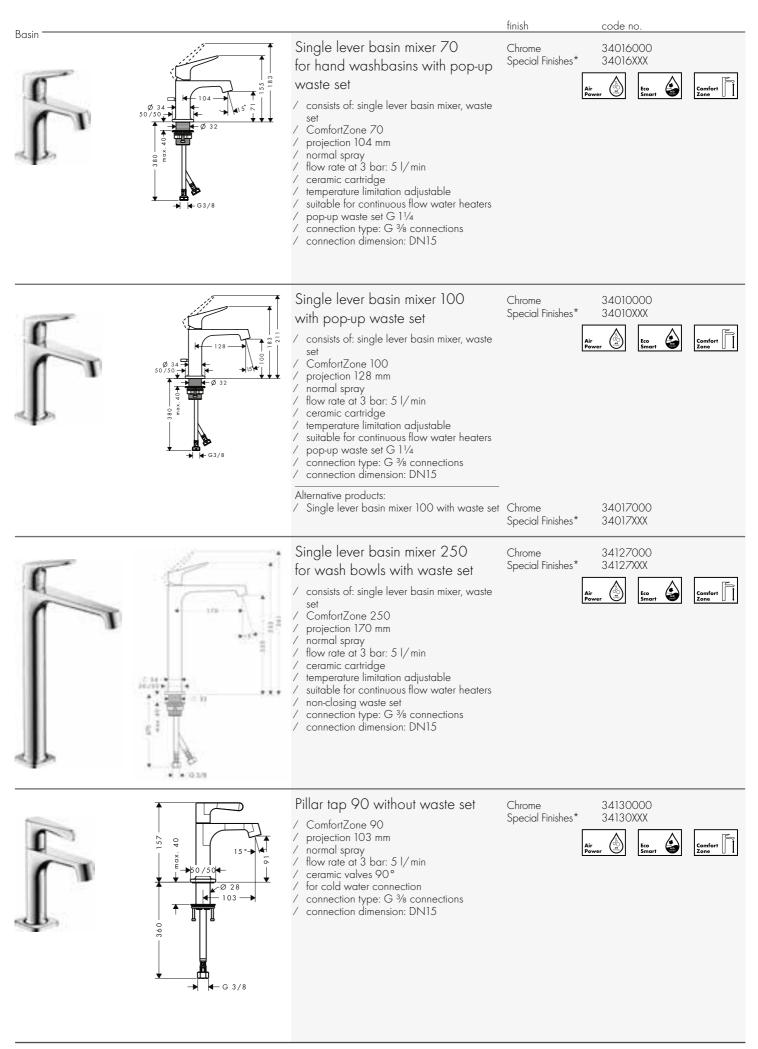


	finish	code no.
2-hole basin mixer 160 with pop-up waste set / consists of: 2-hole basin mixer, waste set / ComfortZone 160 / projection 135 mm / normal spray / flow rate at 3 bar: 5 l/min / ceramic cartridge / temperature limitation adjustable / suitable for continuous flow water heaters / pop-up waste set G 11/4 / connection type: G 3/8 connections / connection dimension: DN15 / flexible arrangement of control unit and spout possible Optional parts: / Hose extension set for 2-hole basin mixer	Chrome Special Finishes*	34132000 34132XXX www
Hose extension set for 2-hole basin mixer / length of hoses 700 mm / for free positioning of spout and handle		38960000
Single lever basin mixer for concealed installation wall-mounted with spout 167 mm and plate / consists of: single lever basin mixer for concealed installation wall-mounted, waste set / projection 167 mm / normal spray / flow rate at 3 bar: 5 1/min / ceramic cartridge / temperature limitation adjustable / suitable for continuous flow water heaters / non-closing waste set / connection type: basic set / connection type: basic set / connection dimension: DN15 / handle can be positioned on the right or left, depends on the basic set installation	Chrome Special Finishes*	34112000 34112XXX <u>Air Constant</u> <u>Ecostor</u>
Alternative sizes: / Single lever basin mixer for concealed installation wall-mounted with spout 227 mm and plate Alternative products:	Chrome Special Finishes*	34115000 34115XXX
 / Single lever basin mixer for concealed installation wall-mounted with spout 167 mm and escutcheons / Single lever basin mixer for concealed installation wall-mounted with spout 227 mm and escutcheons 	Chrome Special Finishes* Chrome Special Finishes*	34113000 34113XXX 34116000 34116XXX
Required parts: / Basic set for single lever basin mixer for concealed installation wall-mounted		13623180
Optional parts: / Extension set 25 mm for single lever basin mixer wall-mounted		13586000

		finish	code no.
	Single lever basin mixer for concealed installation wall-mounted with spout 167 mm and escutcheons / consists of: single lever basin mixer for concealed installation wall-mounted, waste set / projection 167 mm / normal spray / flow rate at 3 bar: 5 1/min / ceramic cartridge / temperature limitation adjustable / suitable for continuous flow water heaters / non-closing waste set / connection type: basic set / connection dimension: DN15 / handle can be positioned on the right or left, depends on the basic set installation	Chrome Special Finishes*	34113000 34113XXX <u>For Smart</u>
	Alternative sizes: / Single lever basin mixer for concealed installation wall-mounted with spout 227 mm and escutcheons Required parts: / Basic set for single lever basin mixer	Chrome Special Finishes*	34116000 34116XXX 13623180
• • ¥ • •	for concealed installation wall-mounted Optional parts: / Extension set 25 mm for single lever basin mixer wall-mounted		13586000
	Basic set for single lever basin mixer for concealed installation wall-mounted / variable positioning of the mixer system, can be left or right of the spout / connection dimension: DN15 Optional parts: / Extension set 25 mm for single lever basin mixer wall-mounted		13623180 13586000
	Extension set 25 mm for single lever basin mixer wall-mounted / extension length: 25 mm		13586000
	3-hole basin mixer 160 with lever handles, escutcheons and pop-up waste set / consists of: 3-hole basin mixer, waste set / ComfortZone 160 / projection 135 mm / normal spray / flow rate at 3 bar: 5 l/min / ceramic valves hot/ cold 90° / suitable for continuous flow water heaters / pop-up waste set G 11/4 / connection type: G 3/8 connections / connection dimension: DN15 Optional parts: / Hose extension set for 3-hole basin mixer	Chrome Special Finishes*	34133000 34133XXX Iver 🔊 🕵 Comfor T


Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.

	finish	code no.
Hose extension set for 3-hole basin mixer / length of hoses 700 mm / for free positioning of spout and handles		38959000
3-hole basin mixer for concealed installation wall-mounted with spout 166 mm, lever handles and escutcheons / consists of: 3-hole basin mixer for concealed installation wall-mounted, waste set / projection 166 mm / normal spray / flow rate at 3 bar: 5 l/min / ceramic valves hot/ cold 90° / suitable for continuous flow water heaters / non-closing waste set / connection type: basic set / connection dimension: DN15	Chrome Special Finishes*	34313000 34313XXX <u>Air Eco Eco Smart</u>
Alternative sizes: / 3-hole basin mixer for concealed installation wall-mounted with spout 226 mm, lever handles and escutcheons Required parts:	Chrome Special Finishes*	34315000 34315XXX
 / Basic set for 3-hole basin mixer for concealed installation wall-mounted Optional parts: / Seal / Extension set 25 mm for basic set for 3-hole basin mixer wall-mounted 		10303180 96383000 96259000
Basic set for 3-hole basin mixer for concealed installation wall-mounted / suitable for all 3-hole wash basin mixers for wall mounting / connection from above or below / connection dimension: DN15/DN20		10303180
Optional parts: / Seal / Extension set 25 mm for basic set for 3-hole basin mixer wall-mounted		96383000 96259000
Extension set 25 mm for basic set for 3-hole basin mixer wall-mounted / connection dimension: DN15 / extension length: 25 mm		96259000

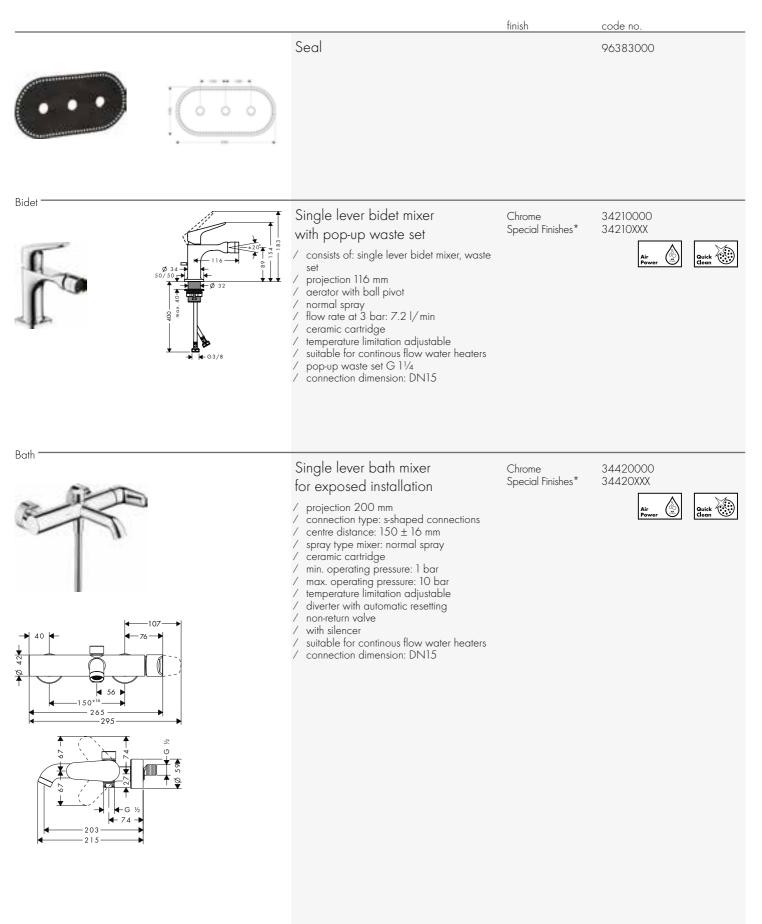


		finish	code no.
	Single lever bath mixer for concealed installation	Chrome Special Finishes*	34425000 34425XXX
	 connection type: basic set flow rate at 3 bar: 24 l/min ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable diverter with automatic resetting with silencer suitable for continous flow water heaters 		
	Alternative products: / Single lever bath mixer for concealed installation with integrated security combination according to EN1717	Chrome Special Finishes*	34427000 34427XXX
	Required parts: / Basic set iBox universal	-	01700180
	Optional parts: / Extension element softcube 2-hole / Fastening rail set for iBox universal / Extension 25 mm for basic set iBox universal	Chrome Special Finishes*	14972000 14972XXX 93171000 13587000

-	-
	6
	No.



Basic set iBox universal	01700180
 / suitable for all shower, bath tub and thermostat finish sets for concealed installation / connection thread / Rp ³/₄ / rotationally-symmetric installation / sound-decoupled installation / connection dimension: DN20 	
Optional parts: / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	13587000 93171000





Bath spout projection 182 mm flow rate: 22 l/min connection dimension: DN20

spray type: normal spray

Chrome Special Finishes*

34410000 34410XXX



	finish	code no.	
 4-hole rim mounted bath mixer with lever handles and escutcheons consists of: 4-hole rim mounted bath mixer, hand shower, shower hose, shower holder projection 135 mm connection type: basic set spray type mixer: normal spray spray type mixer: normal spray spray type hand shower: Rain, RainAir, WhirlAir maximum pull-out length of hand shower: 1.10 m ceramic valves hot/ cold 90° min. operating pressure: 1 bar max. operating pressure: 10 bar diverter with automatic resetting non-return valve connection dimension: DN15 	Chrome Special Finishes*	34444000 34444XXX	Air Power
/ Hand shower 120 3jet (# 26050000) Required parts:			
/ Basic set for 4-hole rim mounted bath mixer Optional parts:		15480180	
 Secuflex insert extension 		98806000	
Basic set for 4-hole rim mounted bath mixer / maximum pull-out length of hand shower: 1.10 m / connection dimension: DN15 Optional parts: / Secuflex insert extension		15480180 98806000	
 4-hole tile mounted bath mixer with lever handles and escutcheons / consists of: 4-hole tile mounted bath mixer, hand shower, shower holder / projection 190 mm / connection type: basic set 	Chrome Special Finishes*	34454000 34454XXX	Air Power
 / spray type mixer: normal spray / spray type hand shower: Rain, RainAir, WhirlAir / maximum pull-out length of hand shower: 1.10 m / ceramic valves hot/ cold 90° / min. operating pressure: 1 bar / max. operating pressure: 10 bar / diverter with automatic resetting / non-return valve / connection dimension: DN15 Consisting of: / Hand shower 120 3jet (# 26050000) Required parts: / Basic set for 4-hole tile mounted bath mixer Optional parts: / Secuflex insert extension 		15481180 98806000	

		finish	code no.
	Basic set for 4-hole tile mounted bath mixer / maximum pull-out length of hand shower: 1.10 m / connection dimension: DN15 Optional parts: / Secuflex insert extension	-	15481180 98806000
Shower	Single lever shower mixer for exposed installation / 1 function / connection type: s-shaped connections / certre distance: 150 ± 16 mm / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / non-return valve / with silencer / suitable for continous flow water heaters / hose connection DN15 / connection dimension: DN15	Chrome Special Finishes*	34620000 34620XXX
	Single lever shower mixer for concealed installation / 1 function / connection type: basic set / flow rate at 3 bar: 29.3 l/min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / with silencer / suitable for continous flow water heaters	Chrome Special Finishes*	34625000 34625XXX
	Required parts: / Basic set iBox universal Optional parts: / Extension element softcube 1-hole / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	- Chrome Special Finishes*	01700180 14971000 14971XXX 13587000 93171000
	Basic set iBox universal / suitable for all shower, bath tub and thermostat finish sets for concealed installation / connection thread / Rp ¾ / rotationally-symmetric installation / sound-decoupled installation / connection dimension: DN20 Optional parts: / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	_	01700180 13587000 93171000

			finish	code no.
	- 77 - • - • • • - 10 - • •	Porter unit integrated support function non-return valve hose nut: for shower hoses with conical nut on both sides 	Chrome Special Finishes*	11626000 11626XXX
		Optional parts: / Shower hose 1.25 m / Shower hose 1.60 m / Shower hose 2.00 m	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	28622000 28622XXX 28626000 28626XXX 28624000 28624XXX
		 / installation: wall / in a joined installation (10 mm distance) we recommend for perfect handling only the horizontal installation / in a joined installation (10 mm distance), the basic set # 28486180 must be used / in a freely-arranged installation (distance greater than 10 mm), no basic set is required / hose nut: for shower hoses with conical nut on both sides 	Chrome Special Finishes*	36724000 36724XXX
		Optional parts: / Basic set for shower module 120/120 for concealed installation / Shower hose 1.25 m / Shower hose 1.60 m / Shower hose 2.00 m	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	28486180 28622000 28622XXX 28626000 28626XXX 28626XXX 28624000 28624XXX
	ia⊩os-⊯i	Shower holder round / fixed holding position / for hoses with conical nut	Chrome Special Finishes*	39525000 39525XXX
		Optional parts: / Shower hose 1.25 m / Shower hose 1.60 m / Shower hose 2.00 m	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	28622000 28622XXX 28626000 28626XXX 28624000 28624XXX
hermostatic mixers/ valve		Bath thermostat for exposed installation / projection 180 mm / 2 functions / centre distance: 150 ± 12 mm / spray type mixer: normal spray / flow rate: 20 l/min / thermostat cartridge, shut-off/ diverter valve / min. operating pressure: 1 bar	Chrome Special Finishes*	34435000 34435XXX Air Power

Technical specifications and units of measure are subject to change.

/

1

/

/ ./

80


valve min. operating pressure: 1 bar max. operating pressure: 10 bar safety lock at 40° C temperature limitation adjustable non-return valve with silencer

connection type: s-shaped connections connection dimension: DN15

			finish	code no.
in the second se		Shower thermostat for exposed installation / 1 function / centre distance: 150 ± 12 mm / thermostat cartridge, ceramic valve 180° / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / non-return valve / with silencer / connection type: s-shaped connections / connection dimension: DN15	Chrome Special Finishes*	34635000 34635XXX
	0//0//0/	Thermostat HighFlow for concealed installation / maximum flow rate at 3 bar: 59 l/min / thermostat cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / with silencer / connection type: basic set	Chrome Special Finishes*	34716000 34716XXX
		Alternative products: / Thermostat for concealed installation Required parts:	Chrome Special Finishes* -	34715000 34715XXX
		 / Basic set iBox universal Optional parts: / Extension element softcube 1-hole / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal 	– Chrome Special Finishes*	01700180 14971000 14971XXX 13587000 93171000
	07 07 14 07 0 14 0 14 0 14 0 14 0 14 0 14 0 14 0 14	Thermostat for concealed installation with shut-off valve / 1 function / thermostat cartridge, ceramic valves 90° / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / with silencer / connection type: basic set	Chrome Special Finishes*	34705000 34705XXX
		Required parts: / Basic set iBox universal 	_	01700180
		Optional parts: / Extension element softcube 2-hole arrow / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	Chrome Special Finishes*	14974000 14974XXX 13587000 93171000
		č		

		finish	code no.
53.81 ·	Thermostat for concealed installation with shut-off/ diverter	Chrome Special Finishes*	34725000 34725XXX
• * * n	valve		
	 2 functions thermostat cartridge, shut-off valve min. operating pressure: 1 bar max. operating pressure: 10 bar safety lock at 40° C temperature limitation adjustable with silencer connection type: basic set 		
	Required parts: / Basic set iBox universal	_	01700180
	Optional parts: / Extension element softcube 2-hole 0-1-2 / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	- Chrome Special Finishes*	14973000 14973XXX 13587000 93171000
	 / Extension element softcube 2-hole 0-1-2 / Extension 25 mm for basic set iBox universal 		14973XXX 13587000

Basic set iBox universal	01700180
 suitable for all shower, bath tub and thermostat finish sets for concealed installation connection thread Rp ³/₄ rotationally-symmetric installation sound-decoupled installation connection dimension: DN20 	
Optional parts: / Extension 25 mm for basic set iBox universal	13587000
/ Fastening rail set for iBox universal	93171000



Shut-off valve for concealed installation with lever handle	Chrome Special Finishes*	34960000 34960XXX
/ connection type: DN15/DN20		
Required parts: / Basic set 52 I/min for shut-off valve for concealed installation spindle / Basic set 40 I/min for concealed installation for shut-off valve ceramic / Basic set 130 I/min for shut-off valve for concealed installation spindle		16973180 16974180 16970180
Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000

Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.

			finish	code no.
6	Rp 1/2→ ← 58→ 28 ← Rp 1/2→ ← 600 00000000000000000000000000000000	Alternative products:		16973180
		 / Basic set 40 l/min for concealed installation for shut-off valve ceramic / Basic set 130 l/min for shut-off valve for concealed installation spindle 		16974180 16970180
		Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000
-		Shut-off/ diverter valve Trio/ Quattro for concealed installation	Chrome Special Finishes*	34920000 34920XXX
10-	- 73 - 10	Required parts: / Basic set for Quattro four-way diverter		16930180
	▲ 100/100 ▲ 5 ¢ 1+	valve for concealed installation / Basic set for shut-off/ diverter valve Trio for concealed installation		16982180
	**	Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000
	Rp 3/4	Basic set for Quattro four-way diverter valve for concealed installation / requires volume control / 3 functions / simultaneous utilization by 2 outlets / suitable for all Quattro finish sets / flow rate: 65 l/min / connection dimension: DN20 Optional parts: / Extension set 25 mm for shut-off/ diverter		92990000
		valve Trio-/ Quattro		92990000
-	Rp3/4	Basic set for shut-off/ diverter valve Trio for concealed installation / 2 functions / simultaneous utilization by 2 outlets / suitable for all Trio finish sets / flow rate: 65 l/min / connection dimension: DN20 Optional parts:		16982180
		 / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro 		92990000



Accessories '




For matching AXOR Citterio M Accessories, refer to the AXOR Accessories chapter.




AXOR URQUIOLA

Basin	200
Wash bowls and wash basins	204
Bidet	204
Bath	205
Shower	209
Thermostatic mixers / valves / diverters	210



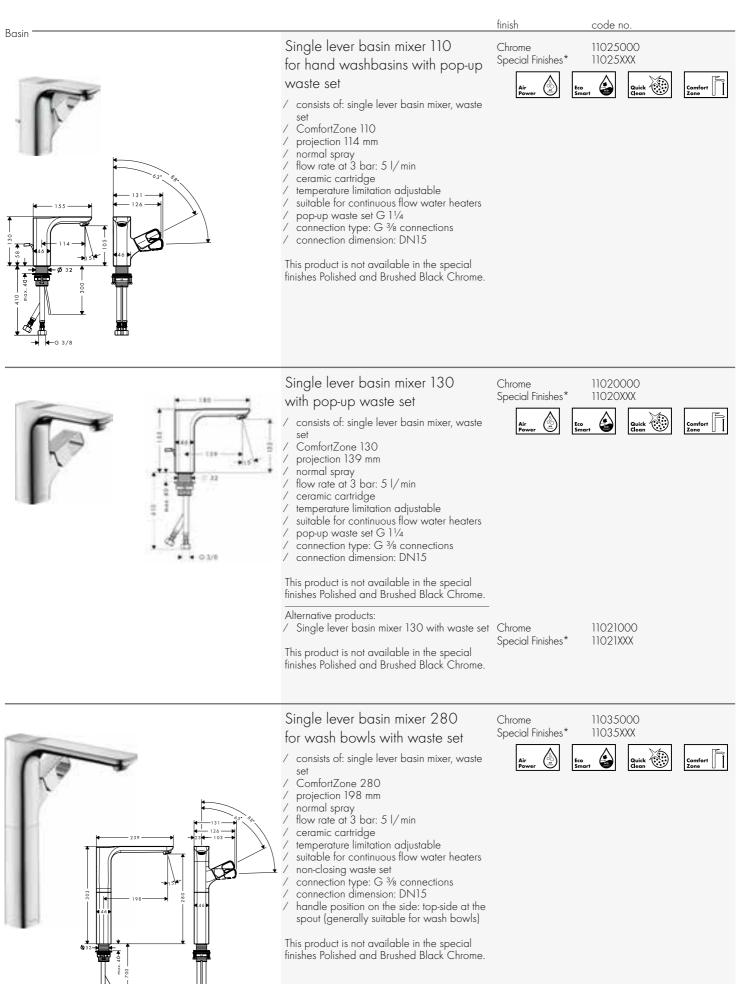

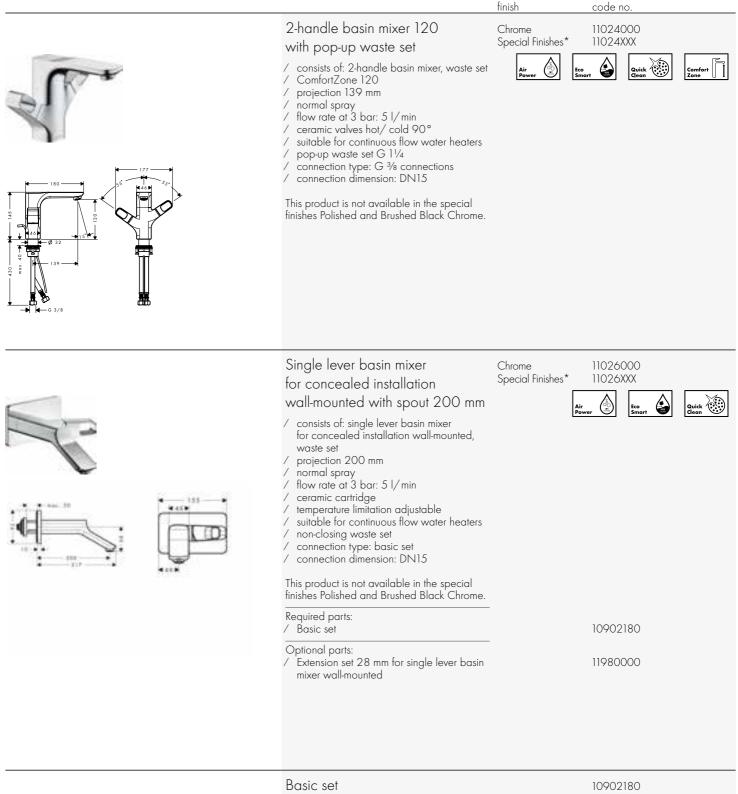

		Basic set	10902180
	i	/ connection dimension: G 1/2	
1		Required parts: / Seal	96660000
an		Optional parts: / Extension set 28 mm for shower columns / Extension set 28 mm for single lever basin	10980000 11980000
		mixer wall-mounted / Extension set 28 mm for basin mixer wall-mounted	12918000

		finish	code no.
0 10 - 0 12 - 0 12 - 0 12 - 0 12	Extension set 28 mm for single lever basin mixer wall-mounted Required parts: / Single lever basin mixer for concealed installation wall-mounted with spout 200 mm This product is not available in the special finishes Polished and Brushed Black Chrome.	Chrome Special Finishes*	11980000 11026000 11026XXX
	Seal Optional parts: / Basic set		96660000 10902180
	3-hole basin mixer 50 with plate and pop-up waste set / consists of: 3-hole basin mixer, waste set / ComfortZone 50 / projection 180 mm / normal spray / flow rate at 3 bar: 5 l/min / ceramic valves hot/ cold 90° / suitable for continuous flow water heaters / pop-up waste set G 11/4 / connection type: G 3/8 connections / connection dimension: DN15 / for use only at flat, plain surfaces This product is not available in the special finishes Polished and Brushed Black Chrome.	Chrome Special Finishes*	Internet
	3-hole basin mixer 50 with escutcheons and pop-up waste set / consists of: 3-hole basin mixer, waste set / ComfortZone 50 / projection 180 mm / normal spray / flow rate at 3 bar: 5 l/min / ceramic valves hot/ cold 90° / suitable for continuous flow water heaters / pop-up waste set G 1¼ / connection type: G ¾ connections / connection dimension: DN15 This product is not available in the special finishes Polished and Brushed Black Chrome. Optional parts: / Hose extension set for 3-hole basin mixer	Chrome Special Finishes*	11041000 11041XXX To Comfor To Comfo

 	finish	code no.
Hose extension set for 3-hole basin mixer / length of hoses 700 mm / for free positioning of spout and handles		38959000
 3-hole basin mixer for concealed installation wall-mounted with spout 168 mm consists of: 3-hole basin mixer for concealed installation wall-mounted, waste set projection 168 mm normal spray flow rate at 3 bar: 5 l/min ceramic valves hot/ cold 90° suitable for continuous flow water heaters non-closing waste set connection type: basic set connection dimension: DN15 	Chrome Special Finishes*	11042000 11042XXX wer
 This product is not available in the special finishes Polished and Brushed Black Chrome. Alternative sizes: / 3-hole basin mixer for concealed installation wall-mounted with spout 228 mm This product is not available in the special finishes Polished and Brushed Black Chrome. 	Chrome Special Finishes*	11043000 11043XXX
Required parts: / Basic set for 3-hole basin mixer for concealed installation wall-mounted		10303180
Basic set for 3-hole basin mixer for concealed installation wall-mounted / suitable for all 3-hole wash basin mixers for wall mounting / connection from above or below / connection dimension: DN15/DN20		10303180
Optional parts: / Seal / Extension set 25 mm for basic set for 3-hole basin mixer wall-mounted		96383000 96259000
Extension set 25 mm for basic set for 3-hole basin mixer wall-mounted / connection dimension: DN15 / extension length: 25 mm		96259000

			finish	code no.
		Seal		96383000
Washbasins and washbowls —	1	Wash bowl 624/408	White	11300000
	0	 counter top washbowl only in conjunction with basin mixers without pull rod mineral cast with gelcoat CE TÜV certified 		
		Optional parts: / Waste set non-closing for washbasins	— Chrome Special Finishes*	51301000 51301XXX
	·	Wash bowl 511	White	11301000
		 counter top washbowl only in conjunction with basin mixers without pull rod mineral cast with gelcoat CE TÜV certified 		
		Optional parts: / Waste set non-closing for washbasins	Chrome Special Finishes*	51301000 51301XXX
		Wash basin 624/399 wall-mounted	White	11302000
		 / wall mounted / only in conjunction with basin mixers without pull rod / mineral cast with gelcoat / CE / TÜV certified 		
		Optional parts: / Waste set non-closing for washbasins	— Chrome Special Finishes*	51301000 51301XXX

Bidet –



· · · · ·	Single lever bidet mixer with pop-up waste set	Chrome Special Finishes*	11220000 11220XXX
	 consists of: single lever bidet mixer, waste set projection 104 mm ball-pivot joint laminar spray flow rate at 3 bar: 7.2 l/min ceramic cartridge temperature limitation adjustable suitable for continous flow water heaters pop-up waste set G 11/4 connection dimension: DN15 This product is not available in the special finishes Polished and Brushed Black Chrome. 		

Measurements within scale drawings are in mm.

AXOR Urquiola

Dl		finish	code no.
Bath	Single lever bath mixer for exposed installation / projection 198 mm / connection type: s-shaped connections / centre distance: 150 ± 16 mm / spray type mixer: normal spray / flow rate at 3 bar: 22 l/ min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / diverter with automatic resetting / non-return valve / with silencer / suitable for continous flow water heaters / connection dimension: DN15 This product is not available in the special finishes Polished and Brushed Black Chrome.	Chrome Special Finishes*	11420000 Itazoxxx Power Constant Consta
	Bath thermostat floor-standing / consists of: bath thermostat floor standing, baton hand shower, shower hose, shower holder / projection 204 mm / 2 functions / spray type mixer: normal spray / spray type hand shower: Rain, Mono / flow rate: 20 l / min / thermostat cartridge, shut-off / diverter valve / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 38° C / temperature limitation adjustable / non-return valve / with automatic resetting / connection type: basic set / connection dimension: DN15 / dirt filter included This product is not available in the special finishes Polished and Brushed Black Chrome. Consisting of: / Baton hand shower 2jet (# 28532000) / Shower hose 1.25 m (# 28622000) Required parts: / Basic set for mixers floor-standing Optional parts: / Sealing foil for basic set bath mixer floor-standing Optional parts: / Sealing foil for basic set bath mixer floor-standing	Chrome Special Finishes*	11422000 11422XXX 10452180 96441000 97686000
	Basic set for mixers floor-standing / for mounting on unfinished floor / suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing / connection dimension: DN15 Optional parts: / Sealing foil for basic set bath mixer floor-standing		10452180 96441000

*For additional information please refer to the "special finish" overview.

			finish	code no.
		Single lever bath mixer for concealed installation / connection type: basic set / flow rate at 3 bar: 22 1/min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar	Chrome Special Finishes*	11425000 11425XXX
		 / temperature limitation adjustable / diverter with automatic resetting / with silencer / suitable for continous flow water heaters This product is not available in the special finishes Polished and Brushed Black Chrome. 		
		Required parts: / Basic set iBox universal		01700180
		Optional parts: / Extension element softcube 2-hole	Chrome Special Finishes*	14972000 14972XXX
		Basic set iBox universal / suitable for all shower, bath tub and thermostat finish sets for concealed		01700180
	31/41/31-32 28 31/41/31-32 28 28 28 28 28 28 28 28 28 2	installation / connection thread / Rp ¾ / rotationally-symmetric installation / sound-decoupled installation / connection dimension: DN20		
		Optional parts: / Extension 25 mm for basic set iBox universal		13587000
		/ Fastening rail set for iBox universal		93171000
6	25-30	Bath spout / projection 171 mm / flow rate: 21 I/min / connection dimension: DN20	Chrome Special Finishes*	11430000 11430XXX Air Power O
		 / spray type: normal spray This product is not available in the special finishes Polished and Brushed Black Chrome. 		
	34	3-hole rim mounted bath mixer / projection 198 mm / connection type: basic set	Chrome Special Finishes*	11436000 11436XXX
I fine		 / spray type mixer: normal spray / flow rate at 3 bar: 25 l/min / ceramic valves hot/ cold 90° / min. operating pressure: 1 bar / max. operating pressure: 10 bar / connection dimension: DN15 		Air Power
		This product is not available in the special finishes Polished and Brushed Black Chrome.		
		Required parts: / Basic set for 3-hole rim mounted bath mixer		15484180
		Optional parts: / Installation plate		39449000


Measurements within scale drawings are in mm.

Product Book 2020/2021

AXOR Urquiola

			finish	code no.
		Basic set for 3-hole rim mounted bath mixer / maintenance opening required / connection thread: G 1/2 / connection dimension: DN15 / ceramic valves hot/ cold 90°		15484180
		 4-hole rim mounted bath mixer consists of: 4-hole rim mounted bath mixer, hand shower, shower hose, shower holder projection 198 mm connection type: basic set spray type mixer: normal spray spray type hand shower: Rain, RainAir, WhirlAir maximum pull-out length of hand shower: 1.10 m flow rate at 3 bar: 22 l/min ceramic valves hot/ cold 90° min. operating pressure: 1 bar max. operating pressure: 10 bar diverter with automatic resetting non-return valve connection dimension: DN15 This product is not available in the special finishes Polished and Brushed Black Chrome. Consisting of: Hand shower 120 3jet (# 26050000) 	Chrome Special Finishes*	11443000 11443XXX Air Power
		Required parts: / Basic set for 4-hole rim mounted bath mixer		15480180
▲ 421	≯ `	Optional parts: / Installation plate		39449000





Basic set for 4-hole rim mounted bath mixer

/ maximum pull-out length of hand shower: 1.10 m


/ connection dimension: DN15

Optional parts: / Secuflex insert extension

15480180

98806000


		finish	code no.
	 4-hole tile mounted bath mixer consists of: 4-hole tile mounted bath mixer, hand shower, shower hose, shower holder projection 198 mm connection type: basic set spray type mixer: normal spray spray type hand shower: Rain, RainAir, WhirlAir maximum pull-out length of hand shower: 1.10 m flow rate at 3 bar: 22 l/min ceramic valves hot/ cold 90° min. operating pressure: 1 bar max. operating pressure: 10 bar diverter with automatic resetting non-return valve connection dimension: DN15 This product is not available in the special 	Chrome Special Finishes*	11445000 11445XXX Air Power
	finishes Polished and Brushed Black Chrome. Consisting of: / Hand shower 120 3jet (# 26050000) Required parts: / Basic set for 4-hole tile mounted bath mixer		15481180
	Basic set for 4-hole tile mounted bath mixer / maximum pull-out length of hand shower: 1.10 m / connection dimension: DN15 Optional parts: / Secuflex insert extension		15481180 98806000
ath tub	Bath tub 1,800/600 / free-standing bath tub / filling level: approx. 340 mm / filling capacity: approx. 180 (1 person 70 kg) / weigth with water (1 person 70 kg): approx. 440 kg / weight without water: 187 kg / material: mineral cast with gelcoat / CE / TÜV certified	White	11440000



Shower		finish	code no.
Shower	Single lever shower mixer for exposed installation / 1 function / connection type: s-shaped connections / centre distance: 150 ± 16 mm / flow rate at 3 bar: 22 l/min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / non-return valve / with silencer / suitable for continous flow water heaters / hose connection DN15 / connection dimension: DN15 This product is not available in the special finishes Polished and Brushed Black Chrome.	Chrome Special Finishes*	11620000 11620XXX
	Single lever shower mixer for concealed installation / 1 function / connection type: basic set / flow rate at 3 bar: 29.3 l/min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / with silencer / suitable for continous flow water heaters This product is not available in the special finishes Polished and Brushed Black Chrome.	Chrome Special Finishes*	11625000 11625XXX
	Required parts: / Basic set iBox universal		01700180
	Optional parts: / Extension 25 mm for basic set iBox universal		13587000
	/ Extension element softcube 1-hole/ Fastening rail set for iBox universal	Chrome Special Finishes*	14971000 14971XXX 93171000
	Basic set iBox universal / suitable for all shower, bath tub and thermostat finish sets for concealed installation / connection thread / Rp ¾ / rotationally-symmetric installation / sound-decoupled installation / connection dimension: DN20 Optional parts: / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal		01700180 13587000 93171000

	finish	code no.
Porter unit / integrated support function / non-return valve / hose nut: for shower hoses with conical nut on both sides Optional parts: / Shower hose 1.25 m / Shower hose 1.60 m / Shower hose 2.00 m	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	11626000 11626XXX 28622000 28622XXX 28626000 28626XXX 28624000 28624XXX

Thermostatic mixers/ valves/ diverters -

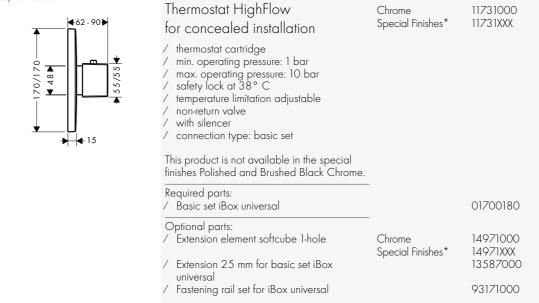




170/170	
	-67 - 95→

Thermostat for concealed installation with shut-off valve	Chrome Special Finishes*	11732000 11732XXX
 / 1 function / thermostat cartridge, ceramic valves 90° / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / non-return valve / with silencer / connection type: basic set 		
This product is not available in the special finishes Polished and Brushed Black Chrome.		
Required parts: / Basic set iBox universal		01700180
Optional parts: / Extension 25 mm for basic set iBox universal		13587000
/ Extension element softcube 2-hole arrow	Chrome Special Finishes*	14974000 14974XXX
/ Fastening rail set for iBox universal		93171000

14973000 14973XXX

13587000

93171000



- 15

- 67 - 95-

55/55

	finish	code no.
Thermostat for concealed installation with shut-off/ diverter valve	Chrome Special Finishes*	11733000 11733XXX
 2 functions thermostat cartridge, shut-off valve min. operating pressure: 1 bar max. operating pressure: 10 bar safety lock at 40° C temperature limitation adjustable non-return valve with silencer connection type: basic set 		
This product is not available in the special finishes Polished and Brushed Black Chrome.		
Required parts: / Basic set iBox universal		01700180
Optional parts: / Extension element softcube 2-hole 0-1-2	Chrome	14973000

Chrome Special Finishes*

		Basic set iBox universal		01700180
	151 114 0 0 0 0 0 0 106 106 106 106 106 106 106 10	 / suitable for all shower, bath tub and thermostat finish sets for concealed installation / connection thread / Rp ³/₄ / rotationally-symmetric installation / sound-decoupled installation / connection dimension: DN20 		
		Optional parts: / Extension 25 mm for basic set iBox	_	13587000
		universal / Fastening rail set for iBox universal		93171000
_		Shut-off valve for concealed installation	Chrome Special Finishes*	11960000 11960XXX
	-414-10	/ connection type: DN15/DN20		

/ Extension 25 mm for basic set iBox

Fastening rail set for iBox universal

universal



			finish	code no.
1	Rp 1/2→ 4 58→ 28 ←	Basic set 52 l/min for shut-off valve for concealed installation spindle		16973180
80	Rp 1/2→	 / connection type: DN15 / suitable for all shut-off valves finish sets / flow rate: 52 l/min / connection dimension: DN15 		
	4 −60 →	 Alternative products: / Basic set 40 l/min for concealed installation for shut-off valve ceramic / Basic set 130 l/min for shut-off valve for concealed installation spindle 		16974180 16970180
		Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000
	• 1 • •	Shut-off/ diverter valve Trio/ Quattro for concealed installation / connection dimension: DN20	Chrome Special Finishes*	11925000 11925XXX
	0.700	This product is not available in the special finishes Polished and Brushed Black Chrome.		
	•10	Required parts: / Basic set for Quattro four-way diverter		16930180
		valve for concealed installation / Basic set for shut-off/ diverter valve Trio for concealed installation		16982180
		Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000
		Basic set for shut-off/ diverter valve Trio for concealed installation / 2 functions / simultaneous utilization by 2 outlets		16982180
		 flow rate: 65 l/min connection dimension: DN20 Optional parts: Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro 		92990000
-		Basic set for Quattro four-way diverter valve for concealed installation		16930180
-Co	Rp 3/4 + + + + + + + + + + + + + + + + + + +	 / requires volume control / 3 functions / simultaneous utilization by 2 outlets / suitable for all Quattro finish sets / flow rate: 65 l/min / connection dimension: DN20 		
				92990000






For matching AXOR Urquiola Accessories, refer to the AXOR Accessories chapter.



AXOR MASSAUD

Basin	216
Wash bowls and wash basin	216
Bath	217

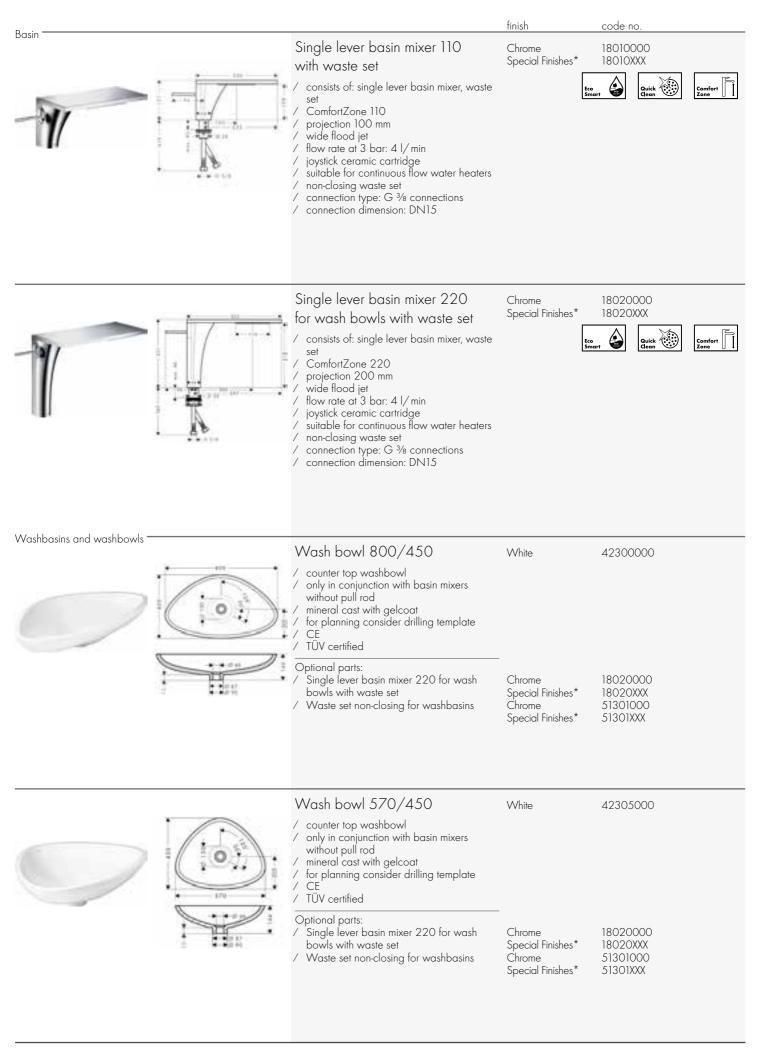

Rath		finish	code no.
Bath	Single lever bath mixer floor-standing / consists of: single lever bath mixer f standing, baton hand shower, show hose, shower holder / projection 248 mm / connection type: basic set / spray type mixer: wide flood jet / spray type hand shower: Rain, Mon / flow rate at 3 bar: 17 l/min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / diverter with automatic resetting / non-return valve / connection dimension: DN15 Consisting of: / Metal effect shower hose 1.25 m	Chrome Special Finishes* loor ver	18450000 18450XXX Quick Clean
932 Φ1/24/1124	(# 28282000) / Baton hand shower 2jet (# 28532 Required parts: / Basic set for mixers floor-standing Optional parts: / Extension 60 mm for pipe / Sealing foil for basic set bath mixer floor-standing		10452180 97686000 96441000
	Basic set for mixers floor-stan 4 5 5 5 5 5 5 5 5 5 5 5 5 5	pout	10452180 96441000
Thermostatic mixers			

Showers -




For matching thermostatic mixers, refer to the AXOR Showers chapter.

For matching shower products, refer to the AXOR Showers chapter.

Accessories -





For matching AXOR Accessories, refer to the AXOR Accessories chapter.

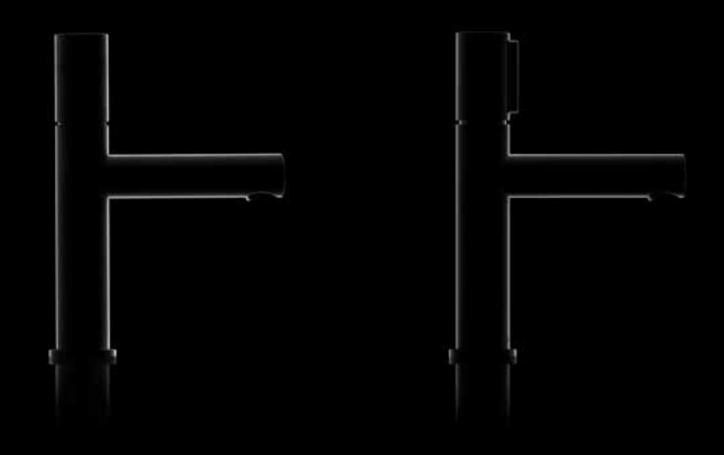

AXOR UNO


Basin	222
Bidet	232
Bath	233
Shower	239
Thermostatic mixers / valves / diverters	241

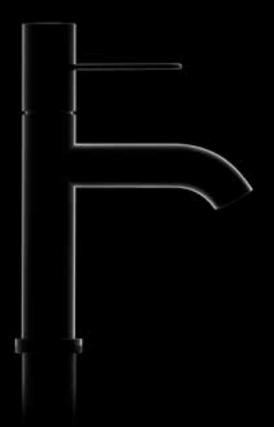


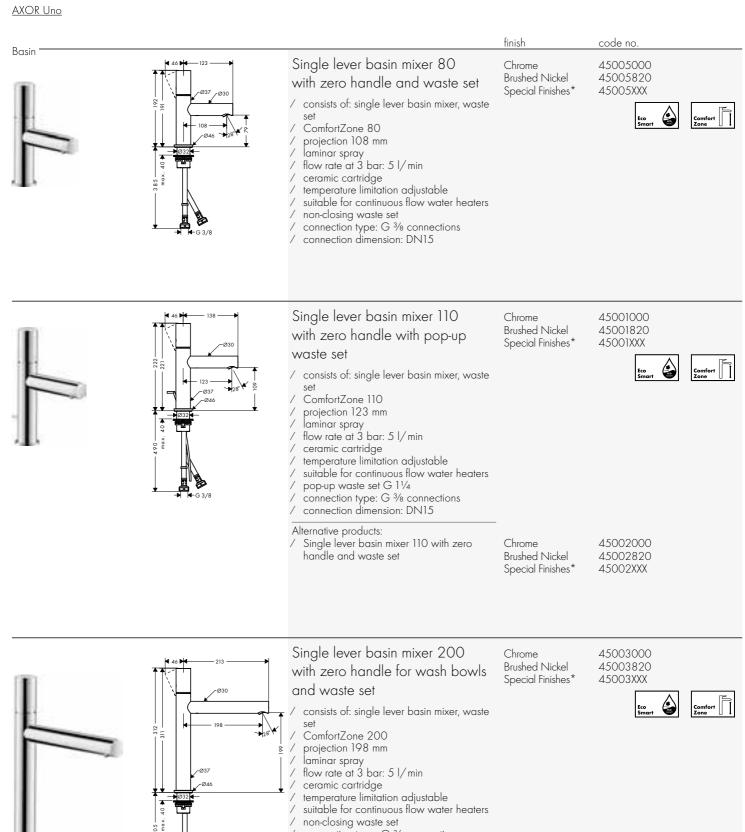


connection type: G ¾ connections
 connection dimension: DN15


Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.

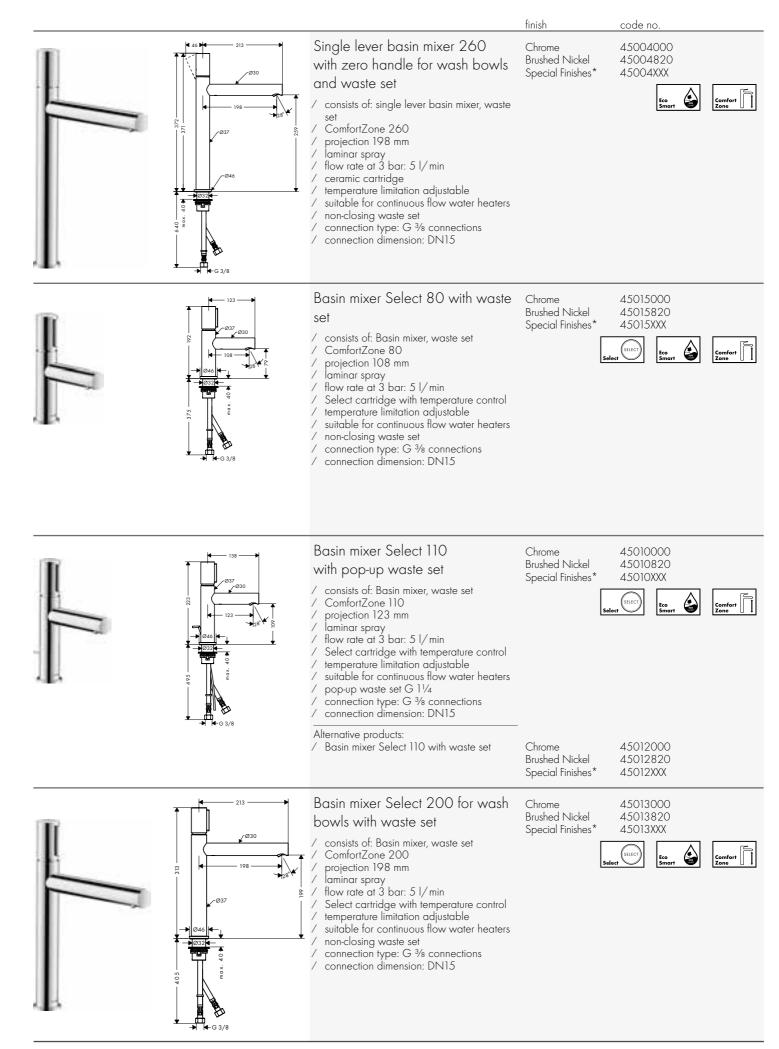

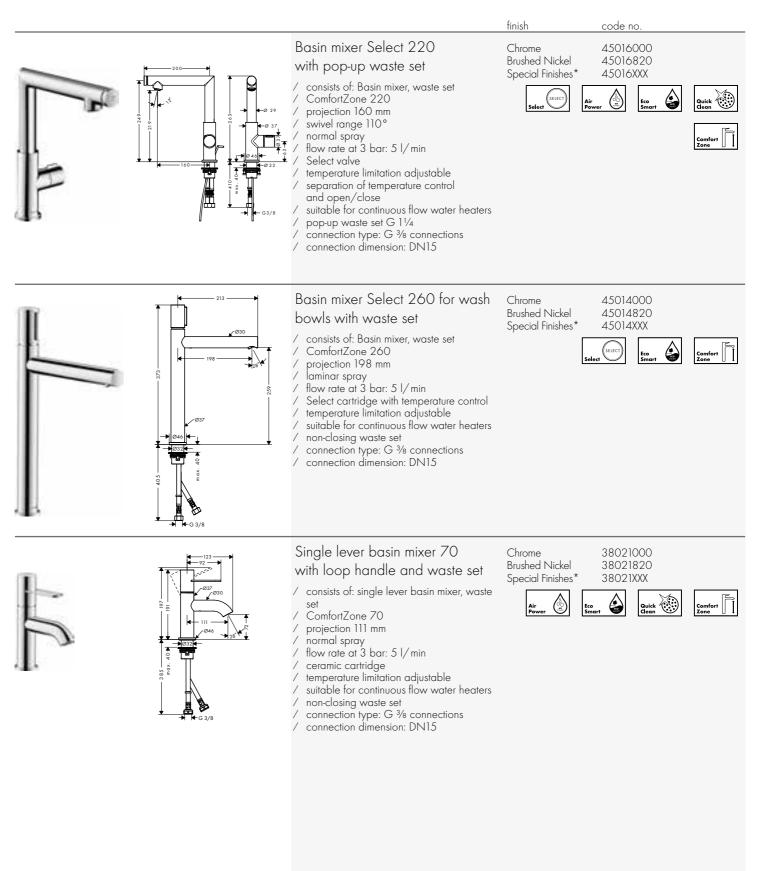

Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.

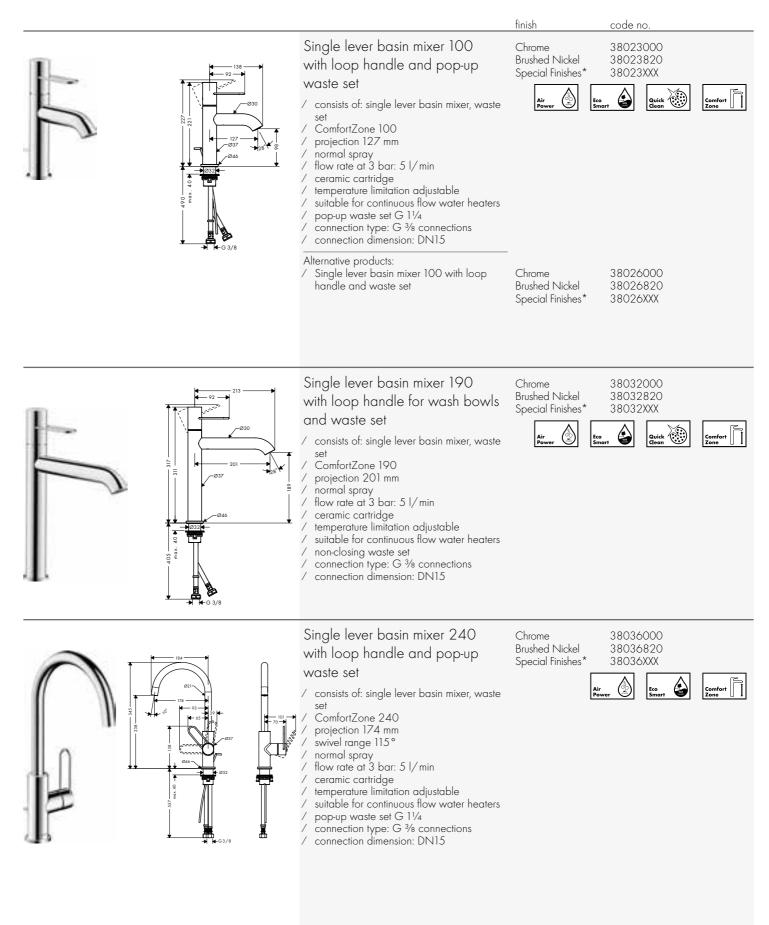

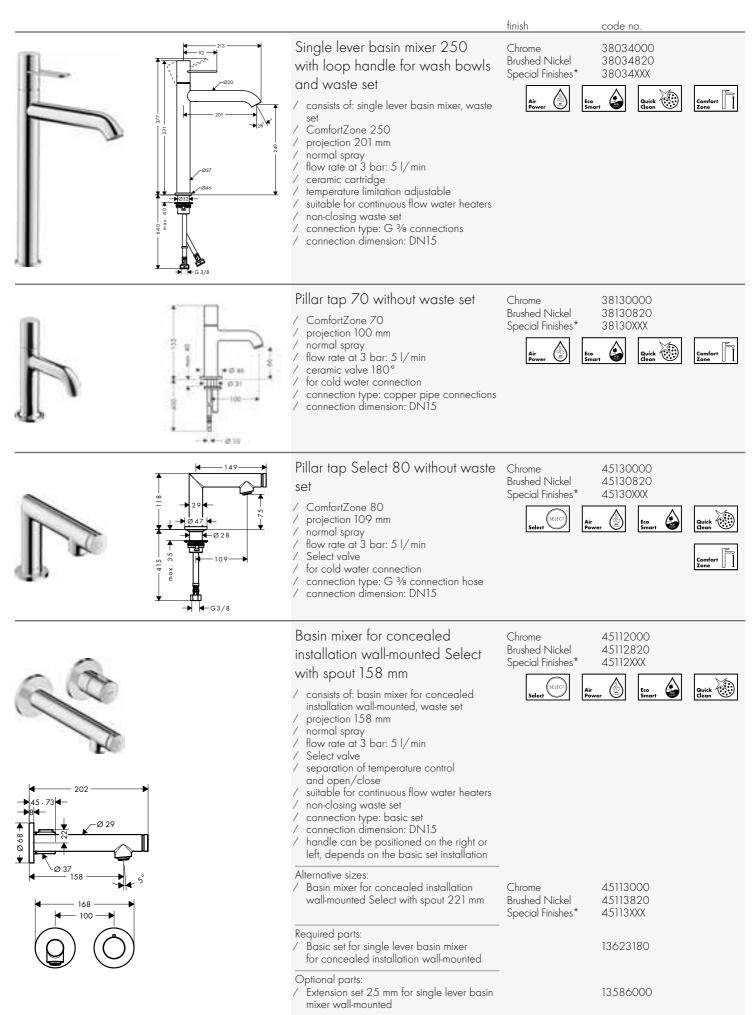


		finish	code no.
	Single lever basin mixer for concealed installation wall-mounted with loop handle and spout 165 mm	Chrome Brushed Nickel Special Finishes*	38121000 38121820 38121XXX wer
	 consists of: single lever basin mixer for concealed installation wall-mounted, waste set projection 165 mm normal spray flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters non-closing waste set connection type: basic set connection dimension: DN15 handle can be positioned on the right or left, depends on the basic set installation 	Pov	ver 🔾 Smart 🖤 Clean 🕑
→	Alternative sizes: / Single lever basin mixer for concealed installation wall-mounted with loop handle and spout 225 mm	Chrome Brushed Nickel Special Finishes*	38122000 38122820 38122XXX
	Required parts: / Basic set for single lever basin mixer for concealed installation wall-mounted		13623180
′5 ▶	Optional parts: / Extension set 25 mm for single lever basin mixer wall-mounted		13586000
* 1 1	Single lever basin mixer for concealed installation wall-mounted with spout 165 mm and plate / consists of: single lever basin mixer for concealed installation wall-mounted, waste set / projection 165 mm / normal spray / flow rate at 3 bar: 5 l/min / joystick ceramic cartridge / suitable for continuous flow water heaters / non-closing waste set / connection type: basic set / connection dimension: DN15 / handle can be positioned on the right or left, depends on the basic set installation	Chrome Brushed Nickel Special Finishes*	38112000 38112820 38112XXX <u>Air Evor</u> Eto
101 - 11 1 - 11	Alternative sizes: / Single lever basin mixer for concealed installation wall-mounted with spout 225 mm and plate	Chrome Brushed Nickel Special Finishes*	38115000 38115820 38115XXX
6	 Alternative products: / Single lever basin mixer for concealed installation wall-mounted with spout 165 mm and escutcheons / Single lever basin mixer for concealed installation wall-mounted with spout 225 mm and escutcheons 	Chrome Brushed Nickel Special Finishes* Chrome Brushed Nickel Special Finishes*	38113000 38113820 38113XXX 38116000 38116820 38116XXX
	Required parts: / Basic set for single lever basin mixer for concealed installation wall-mounted		13623180
	Optional parts: / Extension set 25 mm for single lever basin mixer wall-mounted		13586000


★ 8 9 Ø **★**

101-125

×.

		finish	code no.
	Single lever basin mixer for concealed installation wall-mounted with spout 165 mm and escutcheons / consists of: single lever basin mixer	Chrome Brushed Nickel Special Finishes*	38113000 38113820 38113XXX Air Ever Eco Smort
	 for concealed installation wall-mounted, waste set projection 165 mm normal spray flow rate at 3 bar: 5 l/min joystick ceramic cartridge suitable for continuous flow water heaters non-closing waste set connection type: basic set connection dimension: DN15 handle can be positioned on the right or left, depends on the basic set installation 		
	Alternative sizes: / Single lever basin mixer for concealed installation wall-mounted with spout 225 mm and escutcheons	Chrome Brushed Nickel Special Finishes*	38116000 38116820 38116XXX
	 Alternative products: / Single lever basin mixer for concealed installation wall-mounted with spout 225 mm and plate / Single lever basin mixer for concealed installation wall-mounted with spout 165 mm and plate 	Chrome Brushed Nickel Special Finishes* Chrome Brushed Nickel Special Finishes*	38115000 38115820 38115XXX 38112000 38112820 38112XXX
	Required parts: / Basic set for single lever basin mixer for concealed installation wall-mounted	-	13623180
	Optional parts: / Extension set 25 mm for single lever basin mixer wall-mounted		13586000
Rp 1/2 Rp 1/2 C C C C C C C C C C C C C C C	Basic set for single lever basin mixer for concealed installation wall-mounted / variable positioning of the mixer system, can be left or right of the spout / connection dimension: DN15		13623180
	Optional parts: / Extension set 25 mm for single lever basin mixer wall-mounted	-	13586000
	Extension set 25 mm for single lever basin mixer wall-mounted / extension length: 25 mm		13586000
8 🗆 🖞 🛄			

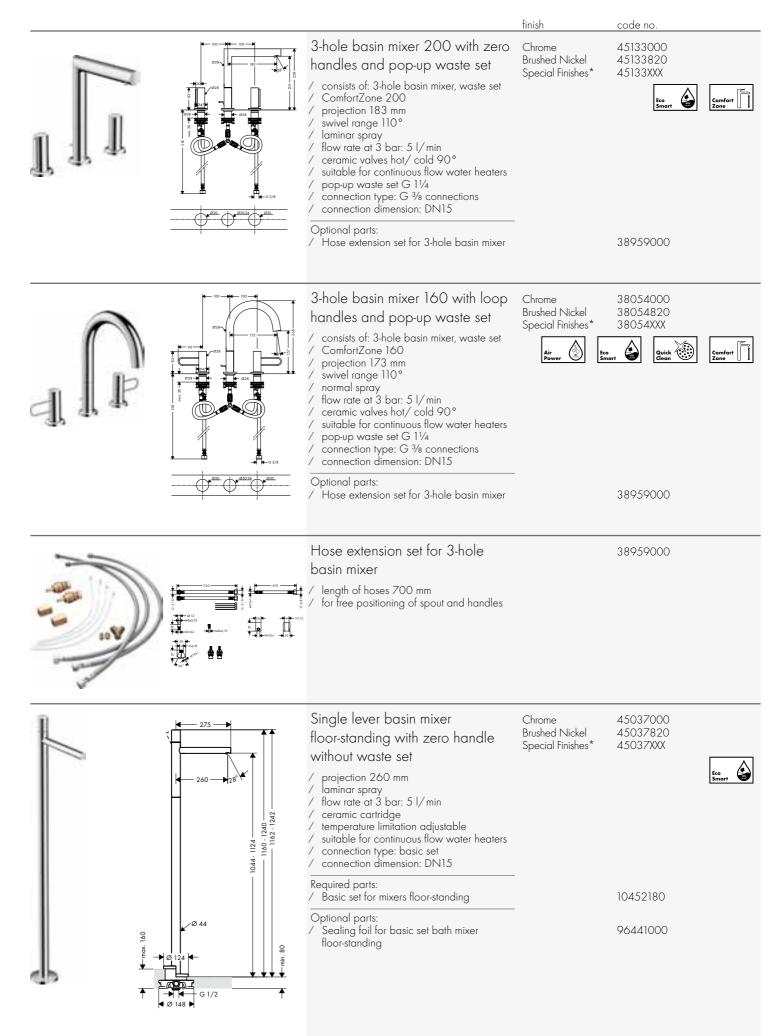

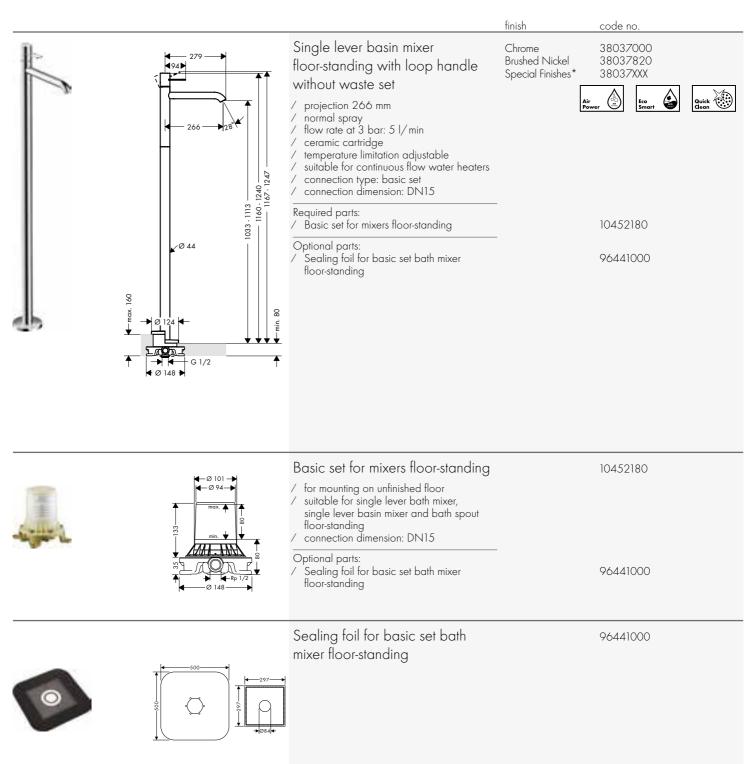

Electronic basin mixers —		finish	code no.
	Electronic basin mixer for concealed installation wall-mounted with spout 161 mm / projection 161 mm / normal spray / flow rate at 3 bar: 5 1/min / theft-proof aerator / temperature adjustable via iBox / infrared sensor technology / automatic environmental adjustment of infrared sensor / adjustable optical range of infrared sensor (5 settings) / 230 V 50 Hz mains connection / manual water stop for washbasin cleaning / for ideal function please note a minimum distance of 140 mm from the aerators center to the back rim of the wash basin / TÜV certified / dirt filters in the connection hoses	Chrome Special Finishes*	45110000 Asiroxxx For Smart
	Alternative sizes: / Electronic basin mixer for concealed installation wall-mounted with spout 221 mm	Chrome Special Finishes*	45111000 45111XXX
	Required parts: / Basic set for electronic basin mixer for concealed installation wall-mounted		16180180
	Optional parts: / Extension 25 mm for basic set for electronic basin mixer wall-mounted		13594000

	Basic set for electronic basin mixer for concealed installation wall-mounted / TÜV certified / suitable for infrared wall spout / connection dimension: DN20	16180180
	Optional parts: / Extension 25 mm for basic set for electronic basin mixer wall-mounted	13594000
	Extension 25 mm for basic	13594000




-	
	 _*125 *
ш.,	 in a
_	
	 8

set for electronic basin mixer wall-mounted

- / extension for basic set
 / suitable for all wall-mounted electronic mixers
- / extension length: 25 mm

		finish	code no.
	Electronic basin mixer with temperature pre-adjustment with mains connection 230 V / ComfortZone 100 / projection 148 mm / normal spray / flow rate at 3 bar: 3.5 l/min / theft-proof aerator / temperature adjustable via iBox / suitable for continous flow water heaters / infrared sensor technology / automatic environmental adjustment of infrared sensor / adjustable optical range of infrared sensor (2 settings) / 230 V / 50 Hz mains connection / hygiene rinse activatable (automatic water flow for 10 seconds every 24 hours following the last operation) / permanent rinse activatable (single water flow for 180 seconds, suitable for thermal disinfection) / manual water stop for washbasin cleaning / performance may be impaired if the sensor is obscured by the design of the wash basin, or when the wash basin is oversized and the distance between sensor and the wash basin edge is larger than 75 mm / functional restriction due to too large distance / connection dimension: DN15 / dirt filters in the connection hoses This product is not available in the special finishes Red Gold and Black Chrome. Required parts: / Basic set for electronic basin mixer		
	Basic set for electronic basin mixer / connection dimension: DN20 Required parts: / Electronic basin mixer with temperature pre-adjustment with mains connection 230 V This product is not available in the special finishes Red Gold and Black Chrome.	Chrome Special Finishes*	16182180 38010000 38010XXX




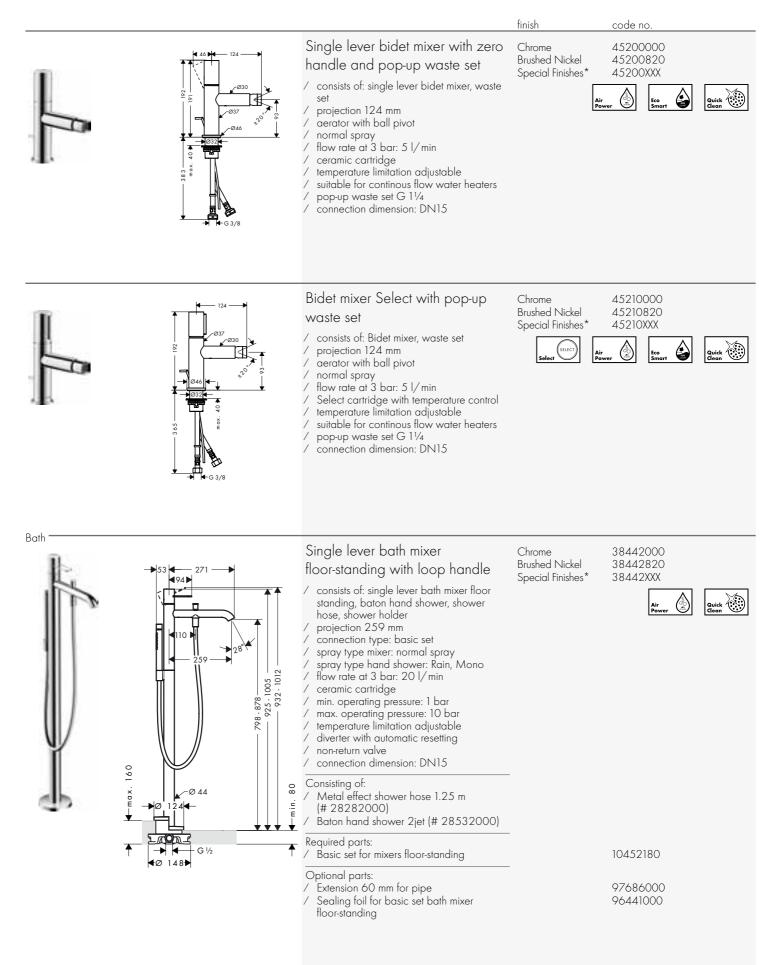

Single lever both mixer Charter State 1 Charter State 1				finish	code no.
Image: State of the mixes floor standing 10452180 Image: State of the mixes floor standing 20441000 Image: State of the mixes floor state of the mixes floor standing 2042100 Image: State of the mixes floor state of the mixes floor state of the mixes floor standing 3842		0 12 4 0	floor-standing with zero handle / consists of: single lever bath mixer floor standing, baton hand shower, shower hose, shower holder / projection 264 mm / connection type: basic set / spray type mixer: normal spray / spray type hand shower: Rain, Mono / flow rate at 3 bar: 20 l/min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / diverter with automatic resetting / non-return valve / connection dimension: DN15 Consisting of: / Metal effect shower hose 1.25 m (# 28282000) / Baton hand shower 2jet (# 28532000) Required parts: / Basic set for mixers floor-standing Optional parts: / Extension 60 mm for pipe / Sealing foil for basic set bath mixer	Brushed Nickel	45416820 45416XXX
 mixer floor-standing mixer floor-standing mixer floor-standing mixer floor-standing mixer floor-standing Single lever bath mixer for exposed installation with loop handle projection 203 mm connection type: schoped connections centre distance: ISO ± 16 mm spray type mixer: normal spray correcting pressure: 10 bar flow rate or 13 bar: 221/min correcting pressure: 10 bar temperature limitation adjustable diverter with automatic resetting non-return valve witable for continuous flow water heaters 	A STATE OF		 for mounting on unfinished floor suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing connection dimension: DN15 Optional parts: Sealing foil for basic set bath mixer 	_	
for exposed installation with loop handle // projection 203 mm // connection type: s-shaped connections // centre distance: 150 ± 16 mm // spray type mixer: normal spray // flow rate at 3 bar: 22 1/min // ceramic cartridge // min. operating pressure: 10 bar // temperature limitation adjustable // diverter with automatic resetting // non-return valve // with silencer // suitable for continous flow water heaters					96441000
			for exposed installation with loop handle / projection 203 mm / connection type: s-shaped connections / centre distance: 150 ± 16 mm / spray type mixer: normal spray / flow rate at 3 bar: 22 l/min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / diverter with automatic resetting / non-return valve / with silencer / suitable for continous flow water heaters	Brushed Nickel	38421820 38421XXX

Technical specifications and units of measure are subject to change.

Product Book 2020/2021

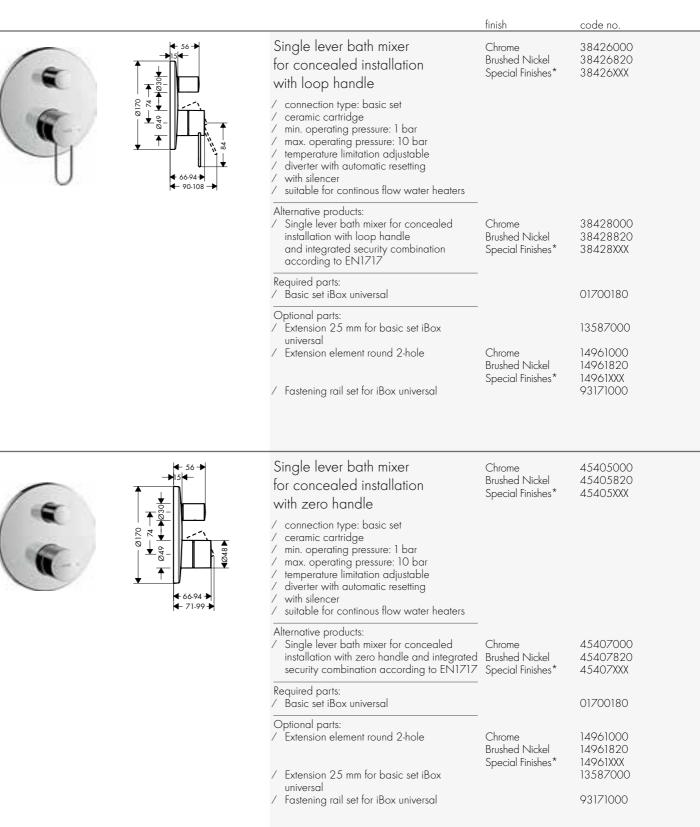

		finish	code no.
	 Basic set iBox universal suitable for all shower, bath tub and thermostat finish sets for concealed installation connection thread Rp ³/₄ rotationally-symmetric installation sound-decoupled installation connection dimension: DN20 Optional parts: Extension 25 mm for basic set iBox universal Fastening rail set for iBox universal 		01700180 13587000 93171000
R	2-hole rim mounted thermostatic bath mixer / 2 functions / safety lock at 40° C / temperature limitation adjustable / suitable for remote spout / connection type: basic set / connection dimension: DN15 Required parts:	Chrome Brushed Nickel Special Finishes*	38480000 38480820 38480XXX
	A gained parts: A gasic set for 2-hole rim mounted thermostatic bath mixer Optional parts: A Flexible connection tube 800 mm Connection tube set for 2-hole rim mounted thermostatic bath mixer		15486180 58308000 13089000
the second secon	Basic set for 2-hole rim mounted thermostatic bath mixer / suitable for remote spout / connection thread: G 1/2 / connection dimension: DN15 Optional parts: / Rim mounted bath set with hand shower / Finish set square / Finish set oval / Rim and tile mounted bath basic set	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	15486180 19418000 19418XXX 28012000 28012XXX 28022000 28022XXX 15490180
B	Rim mounted bath set with hand shower / consists of: hand shower, shower holder, shower hose, Secubox, Secuflex hose brake, hose insert / suitable for for installation on bath rim or tile surround (no mounting plate available) / drilling diameter on bath tub: Ø 50 mm / connection dimension: DN15 / maximum pull-out length of hand shower 1.10 m Consisting of: / Hand shower 120 3jet (# 26050000) Optional parts: / Secuflex insert extension	Chrome Special Finishes*	19418000 19418XXX 98806000
			7000000

	finish	code no.
 3-hole rim mounted bath mixer with loop handle consists of: 3-hole rim mounted single lever bath mixer, hand shower, shower holder projection 175 mm connection type: basic set spray type mixer: normal spray spray type mixer: normal spray spray type hand shower: Rain, RainAir, WhirlAir maximum pull-out length of hand shower: 1.10 m flow rate at 3 bar: 22 l/min ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable connection dimension: DN15 Consisting of: Hand shower 120 3jet (# 26050000) Required parts: Basic set for 3-hole rim mounted single lever bath mixer 	Chrome Brushed Nickel Special Finishes*	38436000 38436820 38436XXX
Basic set for 3-hole rim mounted single lever bath mixer / maximum pull-out length of hand shower: 1.10 m / connection dimension: DN15		15485180
 4-hole rim mounted bath mixer with zero handles / consists of: 4-hole rim mounted bath mixer, baton hand shower, Secuflex hose set, shower holder / projection 152 mm / connection type: basic set / spray type mixer: normal spray / spray type mixer: normal spray / spray type hand shower: Rain, Mono / maximum pull-out length of hand shower: 1.10 m / flow rate at 3 bar: 22 l/min / ceramic valves hot/ cold 90° / min. operating pressure: 1 bar / max. operating pressure: 10 bar / connection dimension: DN15 Consisting of: / Baton hand shower 2jet (# 28532000) Required parts: / Basic set for 4-hole rim mounted bath mixer Optional parts: / Secuflex insert extension 	Chrome Brushed Nickel Special Finishes*	45444000 45444820 45444XXX

	finish	code no.
 4-hole rim mounted bath mixer with loop handles consists of: 4-hole rim mounted bath mixer, hand shower, Secuflex hose set, shower holder connection type: basic set spray type mixer: normal spray spray type hand shower: Rain, RainAir, WhirlAir maximum pull-out length of hand shower: 1.10 m flow rate at 3 bar: 22 l/min ceramic valves hot/ cold 90° min. operating pressure: 1 bar max. operating pressure: 10 bar connection dimension: DN15 Consisting of: Hand shower 120 3jet (# 26050000) 	Chrome Brushed Nickel Special Finishes*	38445000 38445820 38445XXX Air Power
 / Basic set for 4-hole rim mounted bath mixer Optional parts: / Secuflex insert extension 		15480180 98806000
Basic set for 4-hole rim mounted bath mixer / maximum pull-out length of hand shower: 1.10 m / connection dimension: DN15 Optional parts:		15480180
/ Secuflex insert extension		98806000
Bath spout curved floor-standing / connection type: basic set / projection 226 mm / free-standing installation / flow rate: 20 l/min / spray type: normal spray Required parts:	Chrome Brushed Nickel Special Finishes*	38412000 38412820 38412XXX Air Power
 / Basic set for mixers floor-standing Optional parts: / Sealing foil for basic set bath mixer floor-standing 		10452180 96441000
Bath spout straight floor-standing / connection type: basic set / projection 226 mm / tree-standing installation / flow rate: 20 I/min / spray type: normal spray Required parts: / Basic set for mixers floor-standing Optional parts: / Sealing foil for basic set bath mixer floor-standing	Chrome Brushed Nickel Special Finishes*	45412000 45412820 45412XXX Arr Control Outle Merrir Control Outle Control Outle Contro
		ts within scale drawings are in mr

Product Book 2020/2021

Measurements within scale drawings are in mm.


		finish	code no.
	 Basic set for mixers floor-standing for mounting on unfinished floor suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing connection dimension: DN15 Optional parts: Sealing foil for basic set bath mixer floor-standing 		10452180 96441000
	Sealing foil for basic set bath mixer floor-standing		96441000
	Bath spout curved / with escutcheon / projection 178 mm / wall-mounted / flow rate: 20 I/min / connection dimension: DN20 / spray type: normal spray	Chrome Brushed Nickel Special Finishes*	38411000 38411820 38411XXX Air Couck Clean
	Bath spout straight / with escutcheon / projection 175 mm / wall-mounted / flow rate: 20 I/min / connection dimension: DN20 / spray type: normal spray	Chrome Brushed Nickel Special Finishes*	45410000 45410820 45410XXX Air Couck Couch Power
Shower	Single lever shower mixer for exposed installation with loop handle / 1 function / connection type: s-shaped connections / centre distance: 150 ± 16 mm / flow rate at 3 bar: 22 l/min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / non-return valve / with silencer / suitable for continous flow water heaters / hose connection DN15 / connection dimension: DN15	Chrome Brushed Nickel Special Finishes*	38621000 38621820 38621XXX

<u>AXOR Uno</u>			
		finish	code no.
	Single lever shower mixer for exposed installation with zero handle / 1 function / connection type: s-shaped connections / centre distance: 150 ± 16 mm / flow rate at 3 bar: 22 l/min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / max. operating pressure: 10 bar / temperature limitation adjustable / non-return valve / with silencer / suitable for continous flow water heaters / hose connection DN15 / connection dimension: DN15	Chrome Brushed Nickel Special Finishes*	45600000 45600820 45600XXX
	Single lever shower mixer for concealed installation with loop handle / 1 function / connection type: basic set / flow rate at 3 bar: 29.3 l/min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / with silencer / suitable for continous flow water heaters	Chrome Brushed Nickel Special Finishes*	38626000 38626820 38626XXX
	Required parts: / Basic set iBox universal		01700180
	Optional parts: / Extension element round 1-hole / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	Chrome Brushed Nickel Special Finishes*	14960000 14960820 14960XXX 13587000 93171000
	Single lever shower mixer for concealed installation with zero handle / 1 function / connection type: basic set / flow rate at 3 bar: 29.3 l/min / ceramic cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / temperature limitation adjustable / with silencer / suitable for continous flow water heaters	Chrome Brushed Nickel Special Finishes*	45605000 45605820 45605XXX
	Required parts: / Basic set iBox universal	-	01700180
	 Optional parts: / Extension element round 1-hole / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal 	Chrome Brushed Nickel Special Finishes*	14960000 14960820 14960XXX 13587000 93171000

		finish	code no.
	Basic set iBox universal / suitable for all shower, bath tub and thermostat finish sets for concealed installation / connection thread / Rp ¾ / rotationally-symmetric installation / sound-decoupled installation / connection dimension: DN20 Optional parts: / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	_	01700180 13587000 93171000
Thermostatic mixers/ valves/ diverters	Bath thermostat for exposed installation / projection 180 mm / 2 functions / centre distance: 150 ± 12 mm / spray type mixer: normal spray / flow rate: 20 I/min / thermostat cartridge, shut-off/ diverter valve / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / non-return valve / with silencer / connection type: s-shaped connections / connection dimension: DN15	Chrome Special Finishes*	34435000 34435XXX <u>Air Power</u> Ouick Com
	Shower thermostat for exposed installation / 1 function / centre distance: 150 ± 12 mm / thermostat cartridge, ceramic valve 180° / min. operating pressure: 10 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / non-return valve / with silencer / connection type: s-shaped connections / connection dimension: DN15	Chrome Special Finishes*	34635000 34635XXX

		finish	code no.
-	Thermostat HighFlow for concealed installation	Chrome Special Finishes*	38715000 38715XXX
	 / maximum flow rate at 3 bar: 59 l/min / thermostat cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / with silencer / connection type: basic set 		
	Alternative products: / Thermostat for concealed installation	— Chrome Special Finishes*	38375000 38375XXX
	This product is not available in the special finishes Polished and Brushed Bronze.	opecial minimo	000/0000
	Required parts: / Basic set iBox universal	_	01700180
	Optional parts: / Extension element round 1-hole	— Chrome Brushed Nickel Special Finishes*	14960000 14960820 14960XXX
	 / Extension 25 mm for basic set iBox universal 		13587000
	/ Fastening rail set for iBox universal		93171000





Thermostat for concealed installation with shut-off valve	Chrome Special Finishes*	38700000 38700XXX
 1 function maximum flow rate at 3 bar: 26 l/min thermostat cartridge, ceramic valves 90° min. operating pressure: 1 bar max. operating pressure: 10 bar safety lock at 40° C temperature limitation adjustable non-return valve with silencer connection type: basic set This product is available in the special finishes Polished and Brushed Bronze only via AXOR Signature inquiry.		
Required parts: / Basic set iBox universal		01700180
Optional parts: / Extension element round 2-hole arrow	Chrome Brushed Nickel Special Finishes*	14963000 14963820 14963XXX
 / Extension 25 mm for basic set iBox universal 		13587000
/ Fastening rail set for iBox universal		93171000

	finish	code no.
Thermostat for concealed installation with shut-off/ diverter valve / 2 functions / maximum flow rate at 3 bar: 26 l/min / thermostat cartridge, shut-off valve / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 40 ° C / temperature limitation adjustable / non-return valve / with silencer / connection type: basic set This product is available in the special finishes Polished and Brushed Bronze only via AXOR Signature inquiry.	Chrome Special Finishes*	38720000 38720XXX
Required parts: / Basic set iBox universal		01700180
Optional parts: / Extension 25 mm for basic set iBox universal / Extension element round 2-hole 0-1-2	Chrome Brushed Nickel	13587000 14962000 14962820
/ Fastening rail set for iBox universal	Special Finishes*	14962XXX 93171000
Basic set iBox universal / suitable for all shower, bath tub and thermostat finish sets for concealed installation / connection thread / Rp ³ / ₄ / rotationally-symmetric installation		01700180

	 	Rp 3 rotat sour conr
 ← 108 →	-C / /	ption Exte unive Faste

000

installation connection thread Rp ¾ rotationally-symmetric installation sound-decoupled installation connection dimension: DN20	
Optional parts: Extension 25 mm for basic set iBox	- 13587000
universal Fastening rail set for iBox universal	93171000



1		
-	- :	2
벁	1	ŧ

Shut-off valve for concealed installation	Chrome Special Finishes*	38976000 38976XXX
/ connection type: DN15/DN20		
This product is available in the special finishes Polished and Brushed Bronze only via AXOR Signature inquiry.		
Required parts: / Basic set 52 l/min for shut-off valve for concealed installation spindle		16973180
/ Basic set 40 I/ min for concealed installation for shut-off valve ceramic		16974180
 / Basic set 130 l/min for shut-off valve for concealed installation spindle 		16970180
Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000


			finish	code no.
6	Rp 1/2→ → → → → → → → → → → → → → → → → → →	Basic set 52 l/min for shut-off valve for concealed installation spindle / connection type: DN15 / suitable for all shut-off valves finish sets / flow rate: 52 l/min / connection dimension: DN15		16973180
	Rp 1/2→	Alternative products: / Basic set 40 / min for concealed installation for shut-off valve ceramic / Basic set 130 / min for shut-off valve for concealed installation spindle		16974180 16970180
		Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000
Gra		Shut-off/ diverter valve Trio/ Quattro for concealed installation This product is not available in the special finishes Polished and Brushed Bronze.	Chrome Special Finishes*	38933000 38933XXX
Car		Required parts: / Basic set for Quattro four-way diverter valve for concealed installation / Basic set for shut-off/ diverter valve Trio		16930180 16982180
		for concealed installation Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000
	Rp3/4	Basic set for shut-off/ diverter valve Trio for concealed installation / 2 functions / simultaneous utilization by 2 outlets / suitable for all Trio finish sets / flow rate: 65 l/min / connection dimension: DN20		16982180
		Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000
	Rp 3/4	Basic set for Quattro four-way diverter valve for concealed installation / requires volume control / 3 functions / simultaneous utilization by 2 outlets / suitable for all Quattro finish sets / flow rate: 65 I/min / connection dimension: DN20		16930180
		Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000


				AXOR Uno
		finish	code no.	
	Wall outlet stop with shut-off valve / hose connection DN15 / with non-return valve		38882000 38882XXX	
	This product is not available in the special finishes Polished and Brushed Bronze.			
Thermostatic mixers	For matching thermostatic mixers, re	efer to the AXC)R Showers chapt	ler.
Showers	For matching shower products, refe	er to the AXOR	Showers chapter	
Accessories	For matching AXOR Uno Accessor chapter.	ries, refer to the	AXOR Accessori	es



AXOR MONTREUX


Basin	248
Bidet	252
Bath	253
Shower	257
Thermostatic mixers / valves / diverters	258
Overhead showers	263
Hand showers	264
Shower sets	264
Shower systems	264

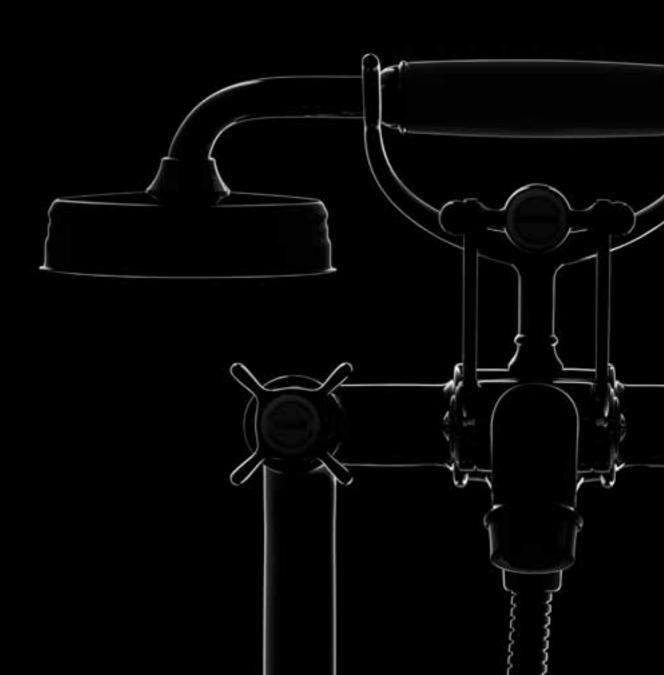


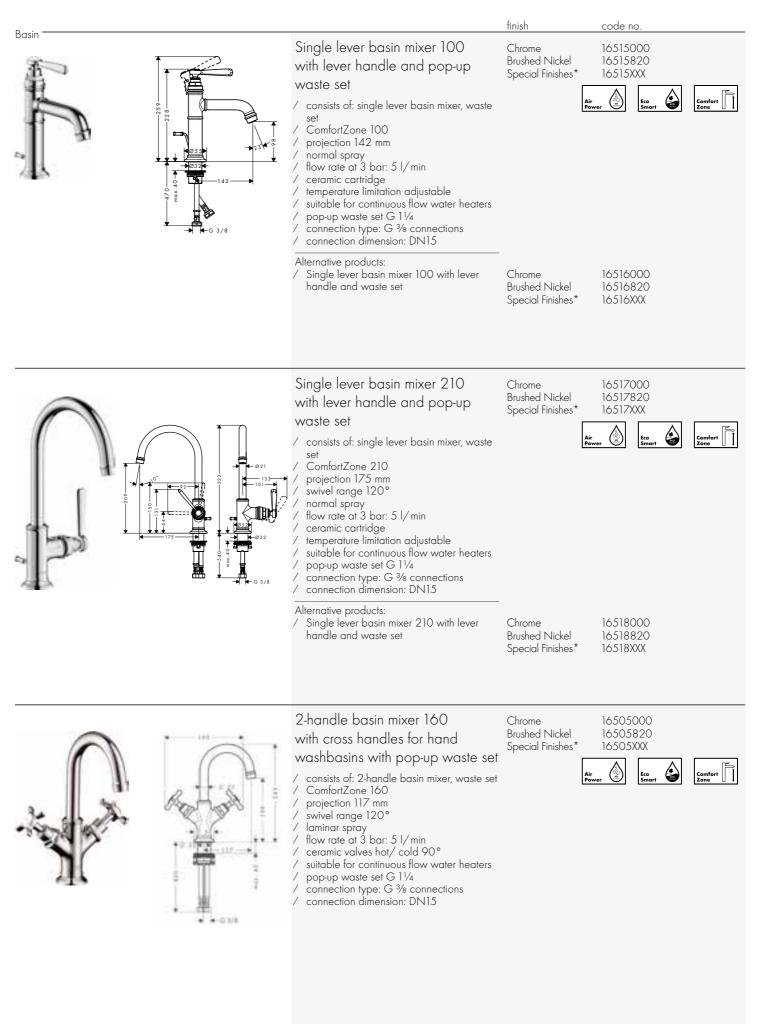

Product Book 2020/2021


Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.

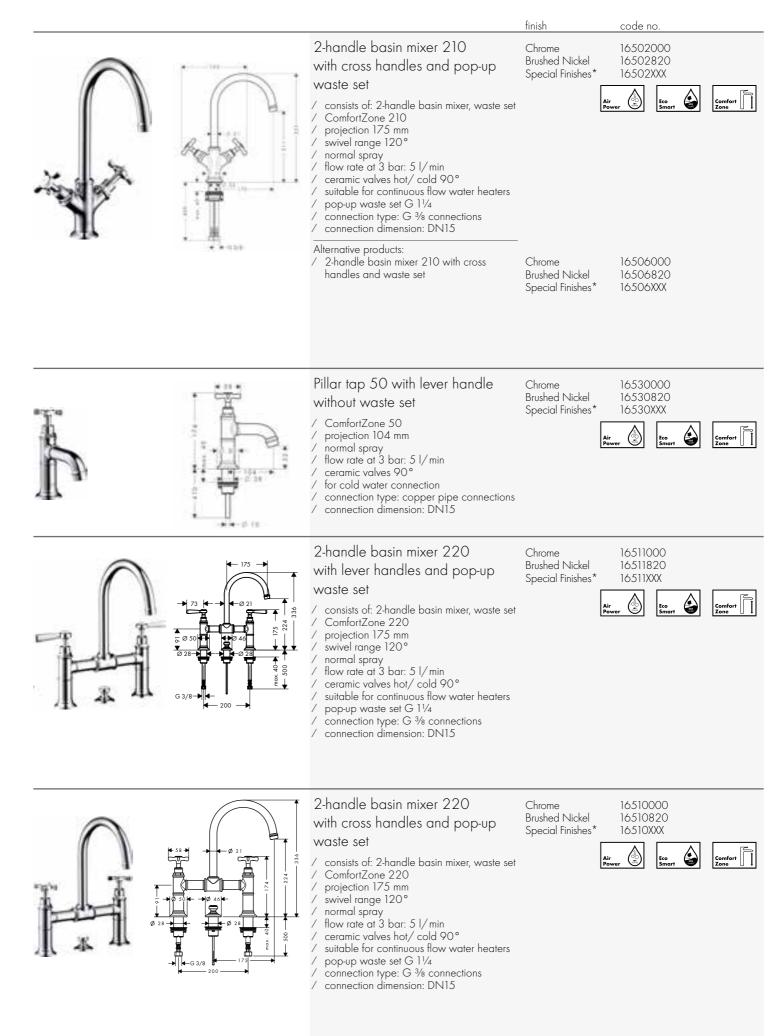

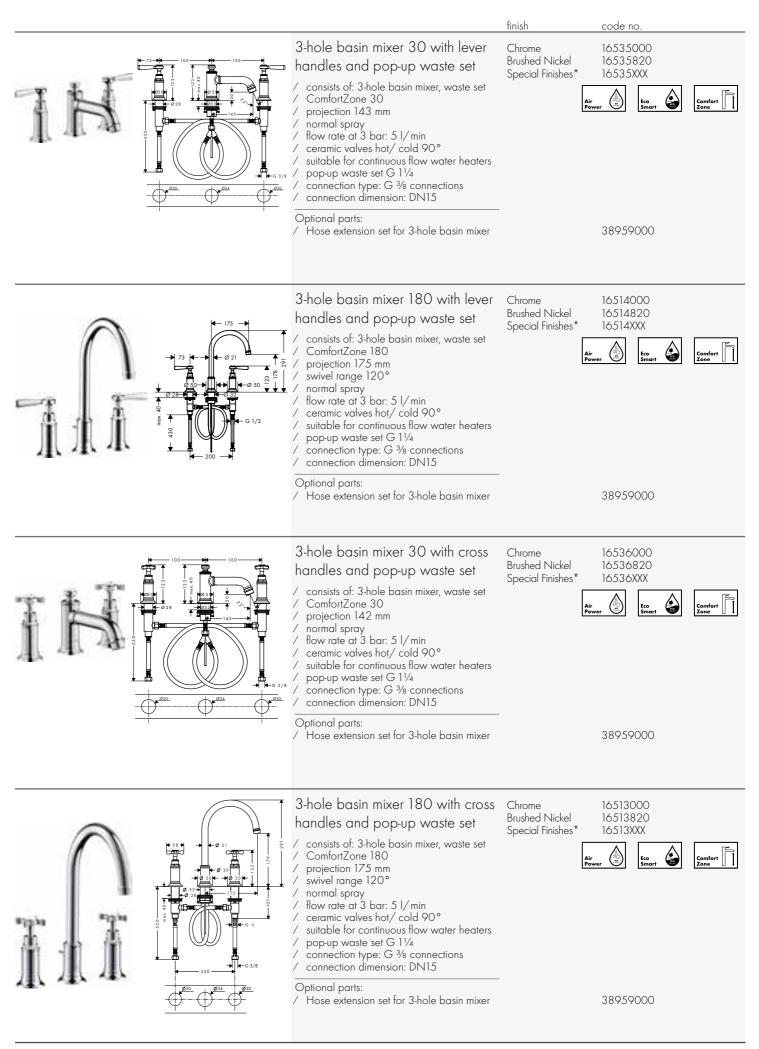

		finish	code no.
	Hose extension set for 3-hole basin mixer / length of hoses 700 mm / for free positioning of spout and handles		38959000
	 3-hole basin mixer for concealed installation wall-mounted with spout 165 - 225 mm and lever handles / consists of: 3-hole basin mixer for concealed installation wall-mounted, waste set / projection 165 - 225 mm / normal spray / flow rate at 3 bar: 5 l/min / ceramic valves hot/ cold 90° / suitable for continuous flow water heaters / non-closing waste set / connection type: basic set / connection dimension: DN15 	Chrome Brushed Nickel Special Finishes*	16534000 16534820 16534XXX Air reference for the second se
	Required parts: / Basic set for 3-hole basin mixer for concealed installation wall-mounted Optional parts: / Seal / Extension set 25 mm for basic set		10303180 96383000 96259000
	 3-hole basin mixer for concealed installation wall-mounted 3-hole basin mixer for concealed installation wall-mounted with spout 165 - 225 mm and cross handles / consists of: 3-hole basin mixer for concealed installation wall-mounted, waste set / projection 165 - 225 mm / normal spray / flow rate at 3 bar: 5 l/min / ceramic valves hot/ cold 90° / suitable for continuous flow water heaters / non-closing waste set / connection type: basic set / connection dimension: DN15 	Chrome Brushed Nickel Special Finishes*	16532000 16532820 16532XXX <u>Air Contectors</u>
	Required parts: / Basic set for 3-hole basin mixer for concealed installation wall-mounted Optional parts: / Seal / Extension set 25 mm for basic set for 3-hole basin mixer wall-mounted		10303180 96383000 96259000

		finish	code no.
6	Basic set for 3-hole basin mixer for concealed installation wall-mounted / suitable for all 3-hole wash basin mixers for wall mounting / connection from above or below / connection dimension: DN15/DN20 Optional parts: / Seal / Extension set 25 mm for basic set for 3-hole basin mixer wall-mounted		10303180 96383000 962 <i>5</i> 9000
No.	Extension set 25 mm for basic set for 3-hole basin mixer wall-mounted / connection dimension: DN15 / extension length: 25 mm		96259000
	Seal		96383000
Bidet	Single lever bidet mixer with lever handle and pop-up waste set / consists of: single lever bidet mixer, waste set / projection 110 mm / aerator with ball pivot / laminar spray / flow rate at 3 bar: 5 l/min / ceramic cartridge / suitable for continous flow water heaters / pop-up waste set G 11/4	Chrome Brushed Nickel Special Finishes*	16526000 16526820 16526XXX
	2-handle bidet mixer with cross handles and pop-up waste set / consists of: 2-handle bidet mixer, waste set / projection 104 mm / aerator with ball pivot / laminar spray / flow rate at 3 bar: 7.2 l/min / ceramic valves hot/ cold 180° / suitable for continous flow water heaters / pop-up waste set G 11/4	Chrome Brushed Nickel Special Finishes*	16520000 16520820 16520XXX

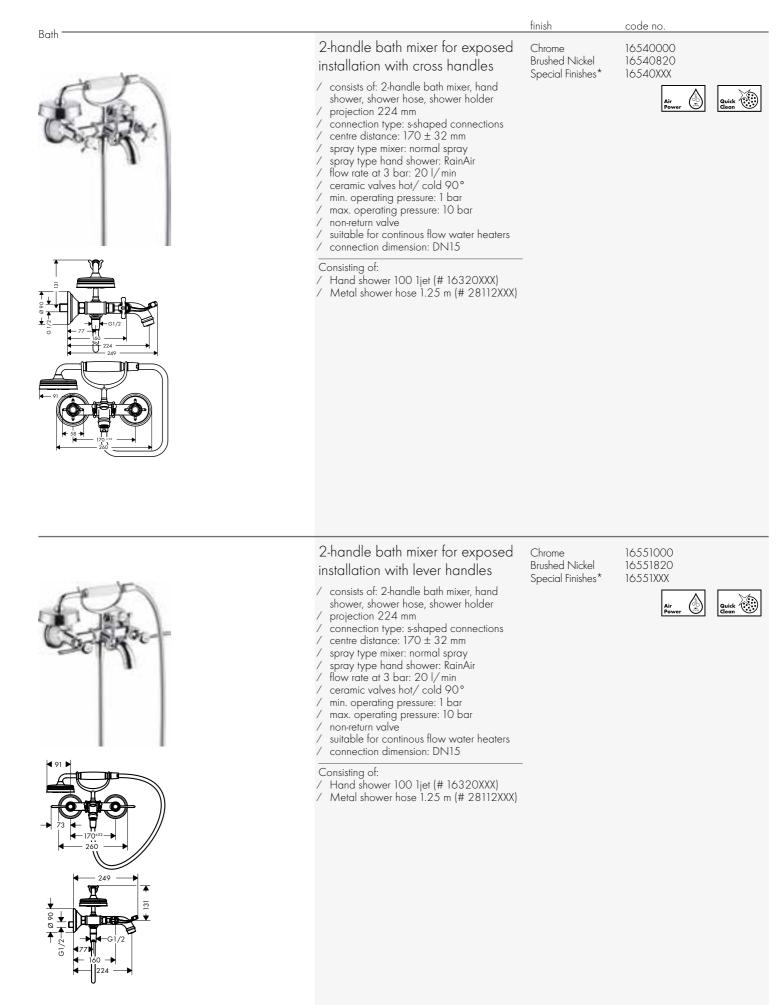

*For additional information please refer to the "special finish" overview.

	finish	code no.
2-handle bath mixer floor-standing with cross handles / consists of: 2-handle bath mixer floor standing, hand shower, shower hose, shower holder / projection 234 mm / connection type: basic set / spray type mixer: normal spray / spray type mixer: normal spray / spray type hand shower: RainAir / flow rate at 3 bar: 17 I/min / ceramic valves hot/ cold 90° / min. operating pressure: 1 bar / max. operating pressure: 10 bar / max. operating pressure: 10 bar / non-return valve / suitable for continous flow water heaters / connection dimension: DN15 / Sealing foil 96441000 is needed twice Consisting of: / Metal shower hose 1.25 m (# 28112XXX) / Hand shower 100 1jet (# 16320XXX) Required parts: / Basic set for 2-handle bath mixer floor-standing Optional parts: / Sealing foil for basic set bath mixer floor-standing	Chrome Brushed Nickel Special Finishes*	16547000 16547820 16547XXX Isree Course Course Course Course Course Course Course Course Course Cour
2-handle bath mixer floor-standing with lever handles / consists of: 2-handle bath mixer floor standing, hand shower, shower hose, shower holder / projection 234 mm / connection type: basic set / spray type mixer: normal spray / spray type hand shower: RainAir / flow rate at 3 bar: 22 l/min / ceramic valves hot/ cold 90° / min. operating pressure: 1 bar / max. operating pressure: 10 bar / max. operating pressure: 10 bar / max. operating pressure: 10 bar / non-return valve / suitable for continous flow water heaters / connection dimension: DN15 / Sealing foil 96441000 is needed twice Consisting of: / Hand shower 100 1jet (# 16320XXX) / Metal shower hose 1.25 m (# 28112XXX) Required parts: / Basic set for 2-handle bath mixer floor-standing Optional parts: / Sealing foil for basic set bath mixer floor-standing	Chrome Brushed Nickel Special Finishes*	16553000 16553820 16553XX Image: Constraint of the second sec
Basic set for 2-handle bath mixer floor-standing / two seals necessary / for mounting on unfinished floor / connection dimension: DN15 Optional parts: / Sealing foil for basic set bath mixer floor-standing		16549180 96441000

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

 	finish	code no.
Bath spout / connection type: G ¹ / ₂ / projection 166 - 220 mm / flow rate: 20 l/min / spray type: normal spray	Chrome Brushed Nickel Special Finishes*	16541000 16541820 16541XXX Air Power
 4-hole rim mounted bath mixer with cross handles / consists of: 4-hole rim mounted bath mixer, hand shower, shower hose, shower holder / projection 196 mm / connection type: basic set / spray type mixer: normal spray / spray type mixer: normal spray / spray type hand shower: RainAir / maximum pull-out length of hand shower: 1.10 m / flow rate at 3 bar: 22 l/min / ceramic valves hot/ cold 180° / min. operating pressure: 1 bar / mox. operating pressure: 10 bar / non-return valve / connection dimension: DN15 	Chrome Brushed Nickel Special Finishes*	16546000 16546820 16546XXX <u>Air Power</u> <u>Ourick Clean</u>
 / Hand shower 100 1jet (# 16320XXX) Required parts: / Basic set for 4-hole rim mounted bath mixer Optional parts: / Secuflex insert extension 		15480180 98806000
 4-hole rim mounted bath mixer with lever handles / consists of: 4-hole rim mounted bath mixer, hand shower, shower hose, shower holder / projection 196 mm / connection type: basic set / spray type mixer: normal spray / spray type hand shower: RainAir / maximum pull-out length of hand shower: 1.10 m / flow rate at 3 bar: 22 l/min / ceramic valves hot/ cold 90° / min. operating pressure: 1 bar / max. operating pressure: 10 bar / non-return valve / connection dimension: DN15 Consisting of: / Hand shower 100 1jet (# 16320XXX) Required parts: / Basic set for 4-hole rim mounted bath mixer 	Chrome Brushed Nickel Special Finishes*	16550000 16550XXX Air er Could Clean
Optional parts: / Secuflex insert extension		98806000
Basic set for 4-hole rim mounted bath mixer / maximum pull-out length of hand shower: 1.10 m / connection dimension: DN15 Optional parts: / Secuflex insert extension		15480180 98806000

*For additional information please refer to the "special finish" overview.

		finish	code no.
\cap	4-hole tile mounted bath mixer with cross handles	Chrome Brushed Nickel Special Finishes*	16544000 16544820 16544XXX
	 consists of: 4-hole tile mounted bath mixer, hand shower, shower hose, shower holder projection 196 mm connection type: basic set spray type mixer: normal spray spray type hand shower: RainAir maximum pull-out length of hand shower: 1.10 m flow rate at 3 bar: 22 l/min ceramic valves hot/ cold 180° min. operating pressure: 1 bar max. operating pressure: 10 bar non-return valve connection dimension: DN15 		Air Power
	Consisting of: / Hand shower 100 1jet (# 16320XXX)		
4 110 - 4 110 - 4 110 -	Required parts: / Basic set for 4-hole tile mounted bath mixer		15481180
	Optional parts: / Secuflex insert extension		98806000
	 4-hole tile mounted bath mixer with lever handles / consists of: 4-hole tile mounted bath mixer, hand shower, shower hose, shower holder / projection 196 mm / connection type: basic set / spray type mixer: normal spray / spray type mixer: normal spray / spray type hand shower: RainAir / maximum pull-out length of hand shower: 1.10 m / flow rate at 3 bar: 22 l/min / ceramic valves hot/ cold 90° / min. operating pressure: 1 bar / max. operating pressure: 10 bar / non-return valve / connection dimension: DN15 Consisting of: / Hand shower 100 1jet (# 16320XXX) Required parts: / Basic set for 4-hole tile mounted bath mixer Optional parts: / Secuflex insert extension 	Chrome Brushed Nickel Special Finishes*	16554000 16554820 16554XXX Air Control Outlier Control Power Control Outlier Control Control Control
	Basic set for 4-hole tile mounted bath mixer / maximum pull-out length of hand shower: 1.10 m / connection dimension: DN15 Optional parts: / Secuflex insert extension		15481180 98806000

ci		finish	code no.
Shower	2-handle shower mixer for exposed installation with cross handles / 1 function / connection type: s-shaped connections / centre distance: 170 ± 32 mm / flow rate at 3 bar: 11 l/min / ceramic valves hot/ cold 180° / min. operating pressure: 1 bar / max. operating pressure: 10 bar / non-return valve / suitable for continous flow water heaters / hose connection DN15 / connection dimension: DN15	Chrome Brushed Nickel Special Finishes*	16560000 16560820 16560XXX
8-	Shower holder / fixed holding position / for hoses with conical nut	Chrome Brushed Nickel Special Finishes*	16325000 16325820 16325XXX
	Optional parts: / Metal shower hose 1.25 m / Metal shower hose 1.60 m / Metal shower hose 2.00 m	Chrome Brushed Nickel Special Finishes* Chrome Brushed Nickel Special Finishes* Chrome Brushed Nickel Special Finishes*	28112000 28112820 28112XXX 28116000 28116820 28116XXX 28120000 28120820 28120XXX
Ŷ	Wall outlet with non-return valve / non-return valve	Chrome Brushed Nickel Special Finishes*	16884000 16884820 16884XXX
Tec	Wall outlet stop with non return valve, shut-off valve and cross handle / connection type: DN15 / hose connection DN15 / with non-return valve	Chrome Brushed Nickel Special Finishes*	16882000 16882820 16882XXX
Ter	Wall outlet stop with non return valve, shut-off valve and lever handle / connection type: DN15 / hose connection DN15 / with non-return valve	Chrome Brushed Nickel Special Finishes*	16883000 16883820 16883XXX

-

4-G¾

		finish	code no.
Thermostatic mixers/ valves/ diverters	Shower thermostat for exposed installation with cross handle / 1 function / centre distance: 150 ± 12 mm / flow rate at 3 bar: 16 1/min / thermostat cartridge, ceramic valve 180° / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / non-return valve / with silencer / connection type: s-shaped connections / connection dimension: DN15	Chrome Brushed Nickel Special Finishes*	16261000 16261820 16261XXX




1.1	Ш	~		
48 4	11	m	A	
0.5	łŀ		U	Ŷ
1.1	Ш			

Thermostat HighFlow for concealed installation with cross handle	Chrome Brushed Nickel Special Finishes*	16815000 16815820 16815XXX
 / maximum flow rate at 3 bar: 59 l/min / flow rate at 3 bar: 59 l/min / thermostat cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / non-return valve / with silencer / connection type: basic set 		
Alternative products: / Thermostat for concealed installation with cross handle	Chrome Brushed Nickel Special Finishes*	16810000 16810820 16810XXX
Required parts: / Basic set iBox universal		01700180
Optional parts: / Extension element round 1-hole / Extension 25 mm for basic set iBox	Chrome Brushed Nickel Special Finishes*	14960000 14960820 14960XXX 13587000
universal / Fastening rail set for iBox universal		93171000

		finish	code no.
	Thermostat HighFlow for concealed installation with lever handle	Chrome Brushed Nickel Special Finishes*	16824000 16824820 16824XXX
	 / maximum flow rate at 3 bar: 59 l/min / thermostat cartridge / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / non-return valve / with silencer / connection type: basic set 		
	Alternative products: / Thermostat for concealed installation with lever handle	– Chrome Brushed Nickel Special Finishes*	16823000 16823820 16823XXX
	Required parts: / Basic set iBox universal	_	01700180
	Optional parts: / Extension element round 1-hole	– Chrome Brushed Nickel Special Finishes*	14960000 14960820 14960XXX
	/ Extension 25 mm for basic set iBox universal		13587000
	/ Fastening rail set for iBox universal		93171000
0	Thermostat for concealed installation with cross handle	Chrome Brushed Nickel Special Finishes*	16800000 16800820 16800XXX





Thermostat for concealed				
installation with cross handle				
and shut-off valve				

1 function				
flow rate at 3	bar:	26	l/ min	

 / 1 function / flow rate at 3 bar: 26 l/min / thermostat cartridge, ceramic valves 90° / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / non-return valve / with silencer / connection type: basic set 		
Required parts: / Basic set iBox universal	-	01700180
Optional parts: / Extension element round 2-hole arrow	- Chrome Brushed Nickel Special Finishes*	14963000 14963820 14963XXX
 / Extension 25 mm for basic set iBox universal 		13587000
 Fastening rail set for iBox universal 		93171000

Special Finishes*

16800XXX

		finish	code no.
	Thermostat for concealed installation with lever handle and shut-off valve / 1 function / flow rate at 3 bar: 26 l/min / thermostat cartridge, ceramic valves 90° / min. operating pressure: 10 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / non-return valve / with silencer / connection type: basic set	Chrome Brushed Nickel Special Finishes*	16801000 16801820 16801XXX
	Required parts: / Basic set iBox universal		01700180
	Optional parts: / Extension element round 2-hole arrow / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	Chrome Brushed Nickel Special Finishes*	14963000 14963820 14963XXX 13587000 93171000
	Thermostat for concealed installation with cross handle and shut-off/ diverter valve / 2 functions / maximum flow rate at 3 bar: 29 l/min / flow rate at 3 bar: 29 l/min / flow rate at 3 bar: 29 l/min / thermostat cartridge, shut-off valve / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / non-return valve / with silencer / connection type: basic set	Chrome Brushed Nickel Special Finishes*	16820000 16820820 16820XXX
	Required parts: / Basic set iBox universal	-	01700180
	Optional parts: / Extension 25 mm for basic set iBox universal / Extension element round 2-hole 0-1-2 / Fastening rail set for iBox universal	Chrome Brushed Nickel Special Finishes*	13587000 14962000 14962820 14962XXX 93171000

			finish	code no.
Ce Ce		Thermostat for concealed installation with lever landle and shut-off/ diverter valve / 2 functions / flow rate at 3 bar: 29 l/min / thermostat cartridge, shut-off valve / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / non-return valve / with silencer / connection type: basic set	Chrome Brushed Nickel Special Finishes*	16821000 16821820 16821XXX
		Required parts: / Basic set iBox universal		01700180
		Optional parts: / Extension element round 2-hole 0-1-2	– Chrome Brushed Nickel Special Finishes*	14962000 14962820 14962XXX
		/ Extension 25 mm for basic set iBox universal/ Fastening rail set for iBox universal		13587000 93171000
		Basic set iBox universal		01700100
		 / suitable for all shower, bath tub and thermostat finish sets for concealed installation / connection thread / Rp ³/₄ / rotationally-symmetric installation / sound-decoupled installation / connection dimension: DN20 		01700180
	K Ø 122 → K 108 →	Optional parts: / Extension 25 mm for basic set iBox	_	13587000
		universal / Fastening rail set for iBox universal		93171000
		Shut-off valve for concealed installation with cross handle	Chrome Brushed Nickel Special Finishes*	16871000 16871820 16871XXX
	τh. σ.+	/ connection type: DN15/DN20	Special Finishes"	
U GO		Required parts: / Basic set 52 l/min for shut-off valve for concealed installation spindle	_	16973180
		 / Basic set 40 l/min for concealed installation for shut-off valve ceramic 		16974180

/

installation for shut-off valve ceramic Basic set 130 l/min for shut-off valve for concealed installation spindle Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro 92990000

			IIIISII	code no.
- Sar		Shut-off valve for concealed installation with lever handle / connection type: DN15/DN20 Required parts:	Chrome Brushed Nickel Special Finishes*	16872000 16872820 16872XXX
		/ Basic set 52 l/min for shut-off valve for concealed installation spindle		16973180
	Û↓	/ Basic set 40 l/min for concealed installation for shut-off valve ceramic		16974180
		/ Basic set 130 l/min for shut-off valve for concealed installation spindle		16970180
		Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000
		Basic set 52 I/ min for shut-off		16973180
4 10	⋖ -58 -> 28 ⋖ -	valve for concealed installation spindle		
50		/ connection type: DN15 / suitable for all shut-off valves finish sets		
	₽ 1/2 ► 1/2	Alternative products: / Basic set 40 l/min for concealed		16974180
	← 60 →	 installation for shut-off valve ceramic / Basic set 130 l/min for shut-off valve for concealed installation spindle 		16970180
		Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000
	x − <i>i</i> 2− x	Shut-off/ diverter valve Trio/ Quattro for concealed installation with cross handle	Chrome Brushed Nickel Special Finishes*	16830000 16830820 16830XXX
1 Star		Required parts: / Basic set for Quattro four-way diverter		16930180
C		 / Basic set for Quality for concealed installation / Basic set for shut-off/ diverter valve Trio for concealed installation 		16982180
	4 4 17	Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000
		Basic set for shut-off/ diverter valve Trio for concealed installation		16982180
SO	$\begin{array}{c} 4.4 \\ \hline \\ 4.4 \\ \hline \\ 6.6 \\ \hline \\ 7.6 \\ \hline \\ 6.7 \\ \hline \\ 6.7 \\ \hline \\ 6.7 \\ \hline \\ 7.6 \\ \hline \\ 6.7 \\ \hline \\ 7.6 \\ \hline \hline \\ 7.6 \\ \hline \\ 7.6 \\ \hline \hline \hline 7.6 \\ \hline$	 2 functions simultaneous utilization by 2 outlets suitable for all Trio finish sets flow rate: 65 l/min connection dimension: DN20 		
		Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000

finish


code no.

Product Book 2020/2021

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

			finish	code no.
	Rp 3/4	Basic set for Quattro four-way diverter valve for concealed installation / requires volume control / 3 functions / simultaneous utilization by 2 outlets / suitable for all Quattro finish sets / flow rate: 65 l/min / connection dimension: DN20 Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000
Overhead showers	4	Overhead shower 180 1jet Classic / spray type: RainAir / shower head size: 180 mm / ball-joint: overhead shower angle adjustable / flow rate Rain spray (at 3 bar): 18 I/min / material spray disc: metal / installation: ceiling or wall / connection thread G 1/2 / connection dimension: DN15 Optional parts:	Chrome Special Finishes*	28487000 28487XXX Air Power
Ø 188 Ø 26° 0 26°		 / Shower arm 389 mm / Ceiling connector 100 mm / Ceiling connector 300 mm 	Chrome Special Finishes* Chrome Brushed Nickel Special Finishes* Chrome Brushed Nickel Special Finishes*	27348000 27348XXX 26432000 26432820 26432XXX 26433000 26433820 26433XXX
	▲ %	Overhead shower 240 1jet Classic / spray type: RainAir / shower head size: 240 mm / ball-joint: overhead shower angle adjustable / maximum flow rate at 3 bar: 17 l/min / flow rate RainAir spray (at 3 bar): 17 l/min / material spray disc: metal / installation: ceiling or wall / connection thread G 1/2 / connection dimension: DN15	Chrome Special Finishes*	28474000 28474XXX Air Power Outline Power Outline Clean
✓ Ø 245 ✓ 26° → 26° →	<u> </u>	Optional parts: / Shower arm 389 mm / Ceiling connector 100 mm / Ceiling connector 300 mm	Chrome Special Finishes* Chrome Brushed Nickel Special Finishes* Chrome Brushed Nickel Special Finishes*	27348000 27348XXX 26432000 26432820 26432XXX 26433000 26433820 26433XXX

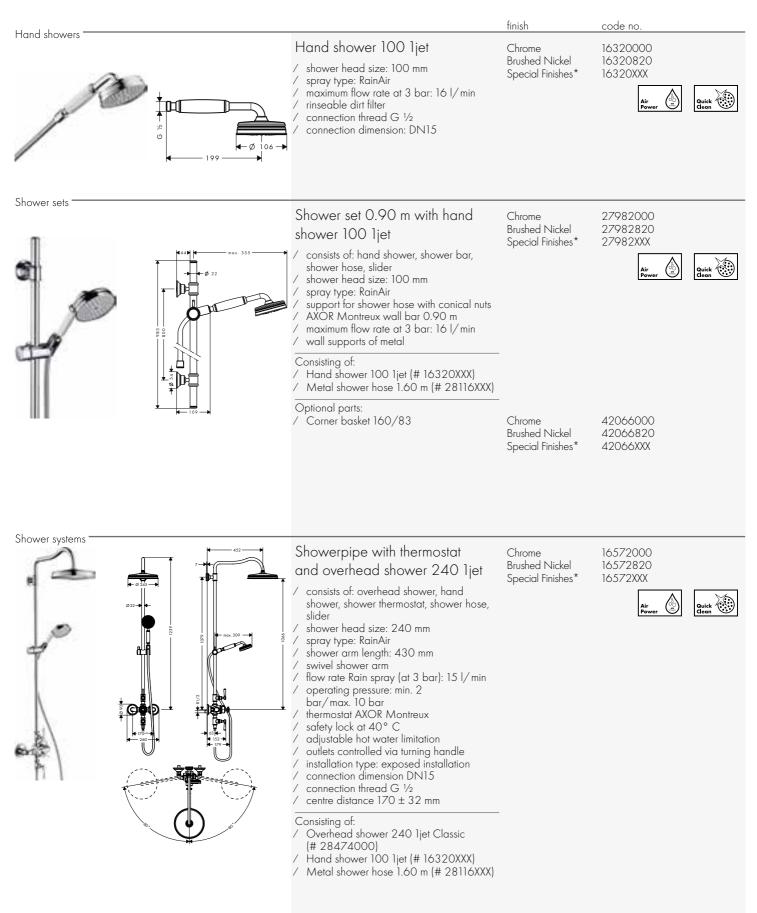

Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.



Accessories



For matching shower products, refer to the AXOR Showers chapter.


For matching AXOR Montreux Accessories, refer to the AXOR Accessories chapter.

PROGRAMS

AXOR Showers / Flow diagrams	268
AXOR Accessories	354
AXOR Electronic mixers	390
AXOR Wash basins, bath tubs	398
AXOR Kitchen mixers	402
AXOR Basic sets, wastes and overflows	414





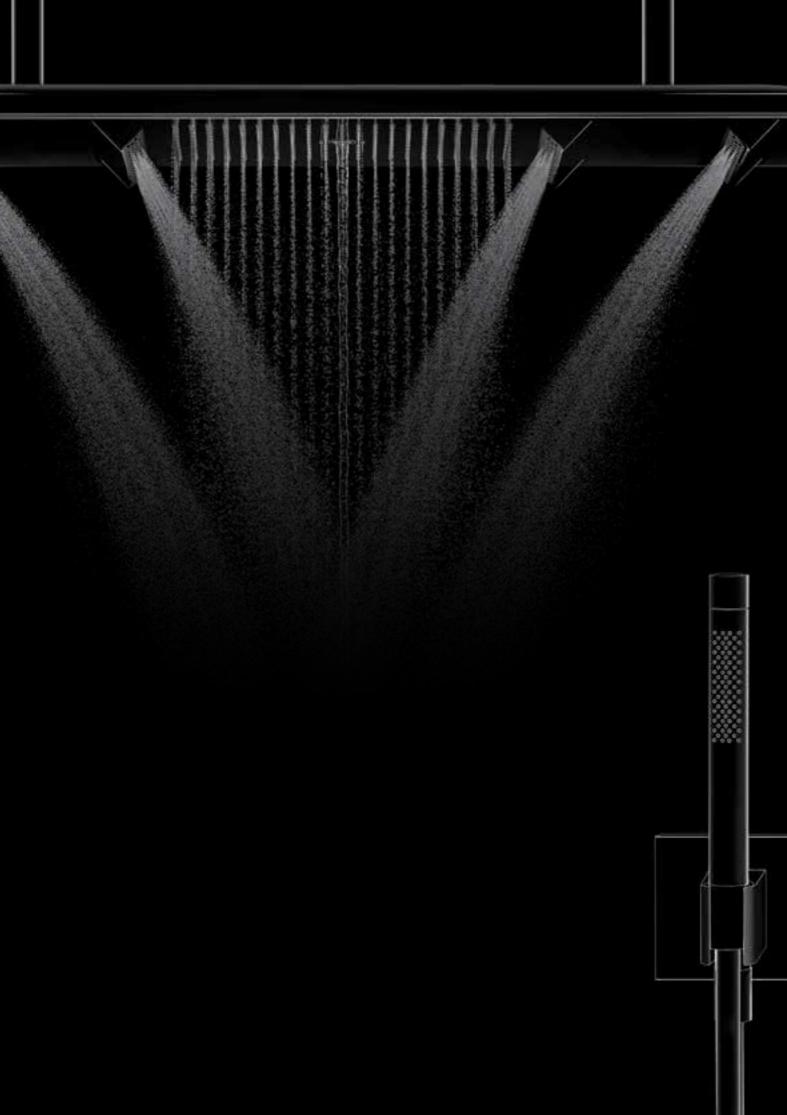

AXOR SHOWERS / FLOW DIAGRAMS

Overhead showers	274
Wall plates	303
Body shower / Shower module	303
Hand showers	305
Shower sets	307
Shower holders	311
FixFit wall outlets	312
Porter	312
Shower hoses	315
Shower systems	316
Thermostatic bath mixers for exposed installation	322
Thermostatic shower mixers	
for exposed / concealed installation	323
Thermostatic module Select	324
ShowerCollection	327
ShowerCollection Accessories	332
ShowerSelect	333
One	342
Flow diagrams	345



AXOR SHOWERHEAVEN 1200/300 4JET

Luxury taken to a new level. AXOR ShowerHeaven is a new archetype in the shower. With maximum appeal, and scope. Where water takes the stage. And assumes a variety of forms: from revitalising jets to soothing shower rain. Including the gentle PowderRain - the latest AXOR innovation in water design. Precisely distributed drops. Gently enveloping. A cocoon of pure water. An elegant ballet. Borne of precise technology. Adapted optimally to the user. In perfection.

Mechanical wings:

- / Movable flaps that open under water pressure
- Body jet adjustable to angle the height and preferences of different users
- / When not in use, the flaps close to form an even surface that is ideal for cleaning





Body jet with PowderRain:

- / Can be controlled separately
- / Wets the body from both sides
- / Head remains dry
- / With QuickClean function
- / Envelops the body with water without spraying
- / Flow rate: approx. 15 Vmin

Optional lighting:

- / energysaving and indirect
 LED lighting
- / Colour temperatures
- warm white (2700 K) or neutral white (3700)
- For atmospheric lighting in the shower

Suspended version:

in design

- / Free-floating appearance
- / Creates great lightness

1

Mono-jet:

..........

......

.....

......

- / Concentrated laminar jet
- / Creates a relaxing spa feeling

Resource-friendly use of water:

/ Water supply through DN15

standard connection

when all spray moments are active

/ Flow rate: max. 30 l/min

simultaneously

- and massages the neck area / (
- / Flow rate: 15 l/min

Rain jet:

......

......


- / Large shower field, 460 mm in width
- / Abundant all-body jet
- / Geometric jet management, perfectly aligned to the user's body
- / With QuickClean function
- / Flow rate: 16 Vmin

POWDERRAIN.

GENTLY ENVELOPED. IN PERFECTION.

A soft rain in the shower. Gently enveloping like a protective coat. Soothing the soul. Quiet and soft, yet powerful. PowderRain is the fruit of intensive research. A result that was unthinkable

before, with finest silicone nozzles lending water elegance in small drops. Precisely distributed – a unique feeling. Like a cocoon of water. In perfection.

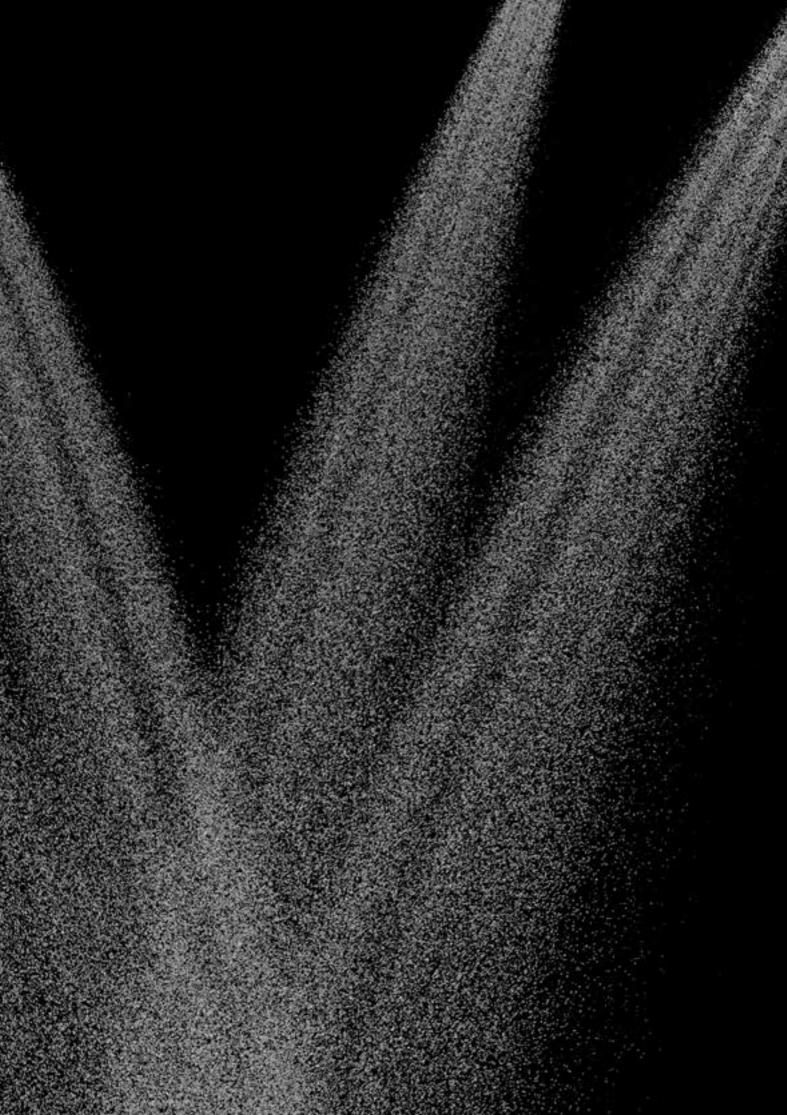

Overhead showers		finish	code no.
Cremera momers	ShowerHeaven 1200/300 4jet with lighting 2700 K	Chrome Special Finishes*	10628000 10628XXX
	 / spray type: Rain, Mono, PowderRain / shower head size: 1200 x 300 mm / maximum flow rate at 3 bar: 30 l/min / flow rate Rain spray (at 3 bar): 16 l/min / flow rate PowderRain spray outer (at 0,3 MPa): 12 l/min / flow rate PowderRain spray outer (at 0,3 MPa): 12 l/min / flow rate PowderRain spray outer (at 0,3 MPa): 12 l/min / flow rate PowderRain spray inner (at 0,3 MPa): 12 l/min / can be activated individually or in combination / Select button on thermostat / material spray disc: metal / overhead shower removable for cleaning / extendable flaps can be opened manually / brass ceilling connector / ceiling connection length: 100 mm / installation: ceiling, extendable claps can be pre-set to the user size / connection dimension: DN15 / with integrated lighting / illuminant: LED / power supply: 24 V / transformer power supply, 24 V, 60 W, EuP II / input voltage: 100 - 240 V AC / 50 / 60 Hz / output voltage: 24 V - DC / colour temperature: 2700 K / not suitable for continuous flow water heaters 		Quick Com
	This product is not available in the special finishes Polished and Brushed Black Chrome.		
	Alternative products: / ShowerHeaven 1200/300 4jet without lighting	Chrome Special Finishes*	10637000 10637XXX
	This product is not available in the special finishes Polished and Brushed Black Chrome. / ShowerHeaven 1200/300 4jet with lighting 3500 K	Chrome Special Finishes*	10629000 10629XXX
	This product is not available in the special finishes Polished and Brushed Black Chrome.		
	Required parts: / Basic set for ShowerHeaven 1200/300 4jet		10922180
	Optional parts: / Extension set 230 mm for ceiling connector ShowerHeaven 1200/300 4jet	Chrome Special Finishes*	13603000 13603XXX
	 Thermostatic module Select 670/90 for concealed installation for 5 functions 	Chrome Special Finishes*	18358000 18358XXX

	finish	code no.
 ShowerHeaven 1200/300 4jet with lighting 3500 K	Chrome Special Finishes*	10629000 10629XXX
 spray type: Rain, Mono, PowderRain shower head size: 1200 x 300 mm maximum flow rate at 3 bar: 30 l/min flow rate Rain spray (at 3 bar): 16 l/min flow rate Nono spray (at 3 bar): 15 l/min flow rate PowderRain spray outer (at 0,3 MPa): 12 l/min flow rate PowderRain spray outer (at 0.3 MPa): 12 l/min can be activated individually or in combination Select button on thermostat material spray disc: metal overhead shower removable for cleaning extendable flaps can be opened manually brass ceilling connector ceiling connection length: 100 mm installation: ceiling, extendable claps can be pre-set to the user size connection dimension: DN15 with integrated lighting illuminant: IED power supply: 24 V transformer power supply, 24 V, 60 W, EuP II input voltage: 100 - 240 V AC / 50 / 60 Hz output voltage: 24 V - DC colour temperature: 3500 K not suitable for continuous flow water heaters 		Guick
finishes Polished and Brushed Black Chrome. Alternative products: / ShowerHeaven 1200/300 4jet without lighting	Chrome Special Finishes*	10637000 10637XXX
This product is not available in the special finishes Polished and Brushed Black Chrome. / ShowerHeaven 1200/300 4jet with lighting 2700 K	Chrome Special Finishes*	10628000 10628XXX
This product is not available in the special finishes Polished and Brushed Black Chrome.		
Required parts: / Basic set for ShowerHeaven 1200/300 4jet		10922180
Optional parts: / Thermostatic module Select 670/90 for concealed installation for 5 functions / Extension set 230 mm for ceiling connector ShowerHeaven 1200/300 4jet	Chrome Special Finishes* Chrome Special Finishes*	18358000 18358XXX 13603000 13603XXX

Basic set for ShowerHeaven


10922180




′ sound-decoupled installation ′ connection dimension: Rp ½

T







	finish	code no.
Extension set 230 mm for ceiling connector ShowerHeaven 1200/300 4jet	Chrome Special Finishes*	13603000 13603XXX
/ dimension: 230 mm		
Optional parts: / ShowerHeaven 1200/300 4jet with lighting 2700 K	Chrome Special Finishes*	10628000 10628XXX
This product is not available in the special finishes Polished and Brushed Black Chrome. / ShowerHeaven 1200/300 4jet with lighting 3500 K	Chrome Special Finishes*	10629000 10629XXX
This product is not available in the special finishes Polished and Brushed Black Chrome. / ShowerHeaven 1200/300 4jet without lighting	Chrome Special Finishes*	10637000 10637XXX
 This product is not available in the special finishes Polished and Brushed Black Chrome. / Overhead shower 300 1 jet with ceiling connection / Overhead shower 300/300 1 jet with ceiling connection / Overhead shower 300/300 2 jet with ceiling connection / Overhead shower 250 1 jet with ceiling connection / Overhead shower 250 2 jet with ceiling connection / Overhead shower 250/250 1 jet with ceiling connection / Overhead shower 250/250 2 jet with ceiling connection 	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	35301000 35301XXX 35304000 35304XXX 35316000 35316XXX 35320000 35320XXX 35286000 35286XXX 35297000 35297XXX 35308000 35308XXX 35312000 35312XXX



	finish	code no.	
ShowerHeaven 970/970 3 jet with lighting / spray type: RainAir, normal spray, laminar spray / shower head size: 970 x 970 mm / maximum flow rate at 3 bar: 33.3 l/min / flow rate RainAir spray (at 3 bar): 20.6 l/min / flow rate normal spray (at 3 bar): 33.3 l/min / flow rate laminar spray: 15.6 l/min / can be activated individually or in combination, the 3 spray zones must be controlled via 3 valves or a diverter valve with 3 outlets / spray zones: Bodyzone - outer overhead shower zone, Rainzone - inner overhead shower zone, Rainzone - inner overhead shower zone with AirPower function, laminar spray at Ø 17 mm / spray disc surface: polished stainless steel / frame: brushed stainless steel / installation: ceiling / connection dimension: DN20 / with integrated lighting / illuminant: IED / power supply: 12 V / transformer power supply for concealed installation 12 V, 18 W / input voltage: 100 - 240 V AC / 50 / 60 Hz / output voltage: 12 V - DC / colour temperature: 2700 K / energy efficiency label: C / not suitable for continuous flow water heaters / TÜV certified	finish Stainless Steel Optic	10623800	Buick -
Alternative products: / ShowerHeaven 970/970 3jet without lighting	Stainless Steel Optic	10621800	
Optional parts: / Thermostatic module 360/120 for concealed installation square for 3 functions	Chrome Special Finishes*	10751000 10751XXX	





- Ø 300 -

ShowerHeaven 720/720 3jet with lighting	Stainless Steel Optic		
 spray type: RainAir, normal spray, laminar spray shower head size: 720 x 720 mm maximum flow rate at 3 bar: 36.8 l/min flow rate RainAir spray (at 3 bar): 20.5 l/min flow rate normal spray (at 3 bar): 36.8 l/min flow rate normal spray (at 3 bar): 36.8 l/min flow rate laminar spray: 15.9 l/min flow rate laminar spray: 15.9 l/min the 3 spray zones must be controlled via 3 valves or a diverter valve with 3 outlets, can be activated individually or in combination spray zones: Bodyzone - outer overhead shower zone, Rainzone - inner overhead shower zone, Rainzone - inner overhead shower zone with AirPower function, laminar spray at Ø 17 mm spray disc surface: polished stainless steel frame: brushed stainless steel installation: ceiling connection dimension: DN20 with integrated lighting illuminant: LED power supply: 12 V transformer power supply for concealed installation 12 V, 18 W input voltage: 100 - 240 V AC / 50 / 60 Hz output voltage: 12 V - DC colour temperature: 2700 K energy efficiency label: C not suitable for continuous flow water heaters TÜV certified 		Air Power	Quick Coon
Alternative products: / ShowerHeaven 720/720 3jet without lighting	Stainless Steel Optic	10625800	
Optional parts: / Thermostatic module 360/120 for concealed installation square for 3 functions	Chrome Special Finishes*	10751000 10751XXX	
Overhead shower 300 2jet with shower arm / consists of: overhead shower, shower arm / spray type: PowderRain, Intense PowderRain / shower head size: 300 mm / shower arm length: 450 mm / maximum flow rate at 3 bar: 19 I/min / flow rate Intense PowderRain (at 3bar): 16 I/min / flow rate PowderRain spray (at 0.3 bar): 19 I/min / Select button on thermostat / dynamic spray nozzles move out while using / material spray disc: metal / overhead shower removable for cleaning / ServiceCard with sieve can be removed without tools for cleaning porpose / installation: wall / connection thread G ½ / connection dimension: DN15 Required parts: / Basic set for overhead shower 2iet	Chrome Special Finishes*	35303000 35303XXX 35361180	Quick Geon
/ Basic set for overhead shower 2jet with shower arm		35361180	

finish

code no.

Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.

		finish	code no.	
	Overhead shower 300 2jet with ceiling connection	Chrome Special Finishes*	35304000 35304XXX	
↓ ↓ ↓ ↓	 consists of: overhead shower, ceiling connector spray type: PowderRain, Intense PowderRain shower head size: 300 mm maximum flow rate at 3 bar: 18 l/min flow rate Intense PowderRain (at 3bar): 17 l/min flow rate PowderRain spray (at 0.3 bar): 18 l/min Select button on thermostat dynamic spray nozzles move out while using material spray disc: metal overhead shower removable for cleaning ServiceCard with sieve can be removed without tools for cleaning porpose brass ceilling connector ceiling connection length: 100 mm installation: ceiling connection dimension: DN15 			Ourick Clean
	Required parts: / Basic set for overhead shower with ceiling connector		26434180	
	Optional parts: / Extension 230 mm for ceiling connector overhead shower	- Chrome Special Finishes*	35288000 35288XXX	
	Overhead shower 300 2jet ceiling / spray type: PowderRain, Intense PowderRain / shower head size: 300 mm / maximum flow rate at 3 bar: 17 l/min / flow rate Intense PowderRain (at 3bar): 15 l/min / flow rate PowderRain spray (at 0.3 bar): 17 l/min / Select button on thermostat / dynamic spray nozzles move out while using / material spray disc: metal / overhead shower removable for cleaning / installation: flush with the ceiling / connection dimension: DN15	Chrome Special Finishes*	35305000 35305XXX	Quick Con
	Required parts: / Basic set for overhead shower ceiling	_	35363180	

G1/2

G1/2

	finish	code no.
Overhead shower 300 1jet with shower arm	Chrome Special Finishes*	35300000 35300XXX
 consists of: overhead shower, shower arm spray type: PowderRain shower head size: 300 mm shower arm length: 450 mm maximum flow rate at 3 bar: 17 l/min flow rate PowderRain spray (at 0.3 bar): 17 l/min dynamic spray nozzles move out while using material spray disc: metal overhead shower removable for cleaning ServiceCard with sieve can be removed without tools for cleaning porpose installation: wall connection thread G 1/2 connection dimension: DN15 		Quick

	Overhead shower 300 1jet with ceiling connection	Chrome Special Finishes*	35301000 35301XXX
	 consists of: overhead shower, ceiling connector spray type: PowderRain shower head size: 300 mm maximum flow rate at 3 bar: 19 l/min flow rate PowderRain spray (at 0.3 bar): 19 l/min dynamic spray nozzles move out while using material spray disc: metal overhead shower removable for cleaning ServiceCard with sieve can be removed without tools for cleaning porpose brass ceilling connector ceiling connection length: 100 mm installation: ceiling connection dimension: DN15 		
✓ Ø 300 →	Required parts: / Basic set for overhead shower with ceiling connector		26434180
	Optional parts: / Extension 230 mm for ceiling connector overhead shower	Chrome Special Finishes*	35288000 35288XXX



Measurements within scale drawings are in mm.


Quick Clean


Technical specifications and units of measure are subject to change.

		finish	code no.	
	Overhead shower 300/300 2jet with shower arm / consists of: overhead shower, shower arm	Chrome Special Finishes*	35318000 35318XXX	
450 450 450 450 600 9 9 9 9 9 9 9 9 9 9 9 9 9	 spray type: PowderRain, Intense PowderRain shower head size: 300 x 300 mm shower arm length: 450 mm maximum flow rate at 3 bar: 19 l/min flow rate Intense PowderRain (at 3bar): 16 l/min flow rate PowderRain spray (at 0.3 bar): 19 l/min Select button on thermostat dynamic spray nozzles move out while using material spray disc: metal overhead shower removable for cleaning ServiceCard with sieve can be removed without tools for cleaning porpose installation: wall connection dimension: DN15 			Geon
	Required parts: / Basic set for overhead shower 2jet with shower arm		35361180	
	Overhead shower 300/300 2jet with ceiling connection	Chrome Special Finishes*	35320000 35320XXX	
	 consists of: overhead shower, ceiling connector spray type: PowderRain, Intense PowderRain shower head size: 300 x 300 mm maximum flow rate at 3 bar: 18 l/min flow rate Intense PowderRain (at 3bar): 17 l/min flow rate PowderRain spray (at 0.3 bar): 18 l/min Select button on thermostat dynamic spray nozzles move out while using material spray disc: metal overhead shower removable for cleaning ServiceCard with sieve can be removed without tools for cleaning porpose brass ceilling connector ceiling connection length: 100 mm installation: ceiling connection dimension: DN15 			Guick Con
	Required parts: / Basic set for overhead shower with ceiling connector		26434180	
	Optional parts: / Extension 230 mm for ceiling connector overhead shower	Chrome Special Finishes*	35288000 35288XXX	




→ 131/131 →










	finish	code no.	
Overhead shower 300/300 2jet ceiling / spray type: PowderRain, Intense PowderRain / shower head size: 300 x 300 mm / maximum flow rate at 3 bar: 17 l/min / flow rate Intense PowderRain (at 3bar): 15 l/min / flow rate PowderRain spray (at 0.3 bar): 17 l/min / Select button on thermostat / dynamic spray nozzles move out while using / material spray disc: metal / overhead shower removable for cleaning / installation: flush with the ceiling / connection dimension: DN15 Required parts:	Chrome Special Finishes*	35321000 35321XXX	Quick Geon
/ Basic set for overhead shower ceiling		35363180	
Overhead shower 300/300 1jet with shower arm / consists of: overhead shower, shower arm / spray type: PowderRain / shower head size: 300 x 300 mm / shower arm length: 450 mm / maximum flow rate at 3 bar: 18 1/ min / flow rate PowderRain spray (at 0.3 bar): 18 1/ min / dynamic spray nozzles move out while using / material spray disc: metal / overhead shower removable for cleaning / ServiceCard with sieve can be removed without tools for cleaning porpose / installation: wall / connection thread G 1/2 / connection dimension: DN15	Chrome Special Finishes*	35314000 35314XXX	Quick Clean

code no.

	4		-	
	-	r		
/		_00	115	





Overhead shower 300/300 1jet with ceiling connection	Chrome Special Finishes*	35316000 35316XXX	
 consists of: overhead shower, ceiling connector spray type: PowderRain shower head size: 300 x 300 mm maximum flow rate at 3 bar: 19 l/min flow rate PowderRain spray (at 0.3 bar): 19 l/min dynamic spray nozzles move out while using material spray disc: metal overhead shower removable for cleaning ServiceCard with sieve can be removed without tools for cleaning porpose brass ceilling connector ceiling connection length: 100 mm installation: ceiling connection thread G 1/2 connection dimension: DN15 			Quick
Required parts: / Basic set for overhead shower with ceiling connector		26434180	
Optional parts: / Extension 230 mm for ceiling connector overhead shower	Chrome Special Finishes*	35288000 35288XXX	

finish

Overhead shower 300/300 1jet ceiling	Chrome Special Finishes*	35317000 35317XXX	
 / spray type: PowderRain / shower head size: 300 x 300 mm / maximum flow rate at 3 bar: 18 l/min / flow rate PowderRain spray (at 0.3 bar): 18 l/min / dynamic spray nozzles move out while using / material spray disc: metal / overhead shower removable for cleaning / installation: flush with the ceiling / connection thread G ½ / connection dimension: DN15 			Quick deen
Required parts: / Basic set for overhead shower ceiling		35363180	








	finish	code no.	
Overhead shower 250 2jet with shower arm	Chrome Special Finishes*	35296000 35296XXX	
 consists of: overhead shower, shower arm spray type: PowderRain, Intense PowderRain shower head size: 250 mm shower arm length: 450 mm maximum flow rate at 3 bar: 19 l/min flow rate Intense PowderRain (at 3bar): 15 l/min flow rate PowderRain spray (at 0.3 bar): 19 l/min Select button on thermostat dynamic spray nozzles move out while using material spray disc: metal overhead shower removable for cleaning ServiceCard with sieve can be removed without tools for cleaning porpose installation: wall connection dimension: DN15 			Quick Clean
Required parts: / Basic set for overhead shower 2jet with shower arm		35361180	






Overhead shower 250 2jet with ceiling connection / consists of: overhead shower, ceiling connector / spray type: PowderRain, Intense PowderRain / shower head size: 250 mm / maximum flow rate at 3 bar: 18 I/min flow rate Intense PowderRain (at 3bar): 16 I/min / flow rate PowderRain spray (at 0.3 bar): 18 I/min / Select button on thermostat / dynamic spray nozzles move out while using / material spray disc: metal / overhead shower removable for cleaning / ServiceCard with sieve can be removed without tools for cleaning porpose / brass ceilling connector / ceiling connector length: 100 mm / installation: ceiling	Chrome Special Finishes*	35297000 35297XXX Quick 4 Clean
 connection dimension: DN15 Required parts: / Basic set for overhead shower with ceiling connector Optional parts: / Extension 230 mm for ceiling connector overhead shower 	Chrome Special Finishes*	26434180 35288000 35288XXX


Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.

X


 	finish	code no.	
Overhead shower 250 2jet ceiling / spray type: PowderRain, Intense PowderRain / shower head size: 250 mm / maximum flow rate at 3 bar: 18 I/min / flow rate Intense PowderRain (at 3bar): 17 I/min / flow rate PowderRain spray (at 0.3 bar): 18 I/min / Select button on thermostat / dynamic spray nozzles move out while using / material spray disc: metal / overhead shower removable for cleaning / installation: flush with the ceiling / connection dimension: DN15	Chrome Special Finishes*	35298000 35298XXX	Quick Geon
Required parts: / Basic set for overhead shower ceiling		35363180	
Overhead shower 250 1jet with shower arm / consists of: overhead shower, shower arm / spray type: PowderRain / shower head size: 250 mm / shower arm length: 450 mm / maximum flow rate at 3 bar: 19 I/min / flow rate PowderRain spray (at 0.3 bar): 19 I/min / dynamic spray nozzles move out while using / material spray disc: metal / overhead shower removable for cleaning / ServiceCard with sieve can be removed without tools for cleaning porpose / installation: wall / connection thread G 1/2 / connection dimension: DN15	Chrome Special Finishes*	35284000 35284XXX	Quick Control of Contr






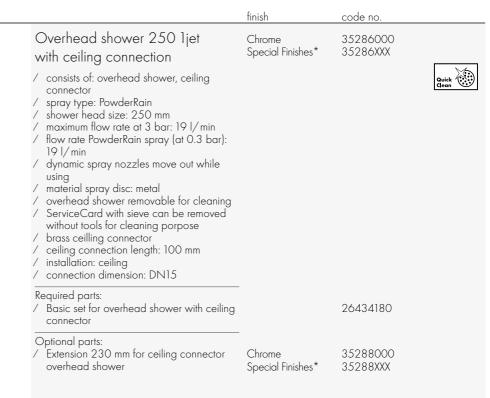







Overhead shower 250 1jet ceiling	Chrome Special Finishes*	35287000 35287XXX	
 / spray type: PowderRain / shower head size: 250 mm / maximum flow rate at 3 bar: 18 l/min / flow rate PowderRain spray (at 0.3 bar): 18 l/min / dynamic spray nozzles move out while using / material spray disc: metal / overhead shower removable for cleaning / installation: flush with the ceiling / connection thread G 1/2 / connection dimension: DN15 			Quick Constraints
Required parts: / Basic set for overhead shower ceiling		35363180	

Quick Clean

Quick Clean

code no.


finish

		1111511	code no.
	Overhead shower 250/250 2jet with shower arm / consists of: overhead shower, shower arm / spray type: PowderRain, Intense PowderRain / shower head size: 250 x 250 mm / shower arm length: 450 mm / maximum flow rate at 3 bar: 19 I/min / flow rate Intense PowderRain (at 3bar): 15 I/min / flow rate PowderRain spray (at 0.3 bar): 19 I/min / Select button on thermostat / dynamic spray nozzles move out while using / material spray disc: metal / overhead shower removable for cleaning / ServiceCard with sieve can be removed without tools for cleaning porpose / installation: wall / connection dimension: DN15 Required parts: / Basic set for overhead shower 2jet with shower arm	Chrome Special Finishes*	35310000 35310XXX 35361180
$\begin{array}{c} \hline \\ \hline $	Overhead shower 250/250 2jet with ceiling connection / consists of: overhead shower, ceiling connector / spray type: PowderRain, Intense PowderRain / shower head size: 250 x 250 mm / maximum flow rate at 3 bar: 18 l/min flow rate Intense PowderRain (at 3bar): 16 l/min / flow rate PowderRain spray (at 0.3 bar): 18 l/min / Select button on thermostat / dynamic spray nozzles move out while using / material spray disc: metal / overhead shower removable for cleaning / ServiceCard with sieve can be removed without tools for cleaning porpose / brass ceilling connector / ceiling connector length: 100 mm / installation: ceiling / connection dimension: DN15 Required parts: / Basic set for overhead shower with ceiling connector Optional parts: / Extension 230 mm for ceiling connector overhead shower	Chrome Special Finishes*	35312000 35312XXX 26434180 35288000 35288XXX

 	finish	code no.	
Overhead shower 250/250 2jet ceiling / spray type: PowderRain, Intense PowderRain / shower head size: 250 x 250 mm / maximum flow rate at 3 bar: 17 I/min / flow rate Intense PowderRain (at 3bar): 15 I/min / flow rate PowderRain spray (at 0.3 bar): 17 I/min / Select button on thermostat / dynamic spray nozzles move out while using / material spray disc: metal / overhead shower removable for cleaning / installation: flush with the ceiling / connection dimension: DN15	Chrome Special Finishes*	35313000 35313XXX	Quick Clean
Required parts: / Basic set for overhead shower ceiling		35363180	
Overhead shower 250/250 1jet with shower arm / consists of: overhead shower, shower arm / spray type: PowderRain / shower head size: 250 x 250 mm / shower arm length: 450 mm / maximum flow rate at 3 bar: 17 1/min / flow rate PowderRain spray (at 0.3 bar): 17 1/min / dynamic spray nozzles move out while using / material spray disc: metal / overhead shower removable for cleaning / ServiceCard with sieve can be removed	Chrome Special Finishes*	35306000 35306XXX	Quick Clean
without tools for cleaning porpose / installation: wall / connection thread G ½ / connection dimension: DN15			

Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.

				ANOK Showers
		finish	code no.	
	Overhead shower 250/250 1jet with ceiling connection	Chrome Special Finishes*	35308000 35308XXX	
	 consists of: overhead shower, ceiling connector spray type: PowderRain shower head size: 250 x 250 mm maximum flow rate at 3 bar: 19 l/min flow rate PowderRain spray (at 0.3 bar): 19 l/min dynamic spray nozzles move out while using material spray disc: metal overhead shower removable for cleaning ServiceCard with sieve can be removed without tools for cleaning porpose brass ceilling connector ceiling connection length: 100 mm installation: ceiling connection thread G 1/2 connection dimension: DN15 			Quick Clean
	Required parts: / Basic set for overhead shower with ceiling connector		26434180	
	Optional parts: / Extension 230 mm for ceiling connector overhead shower	Chrome Special Finishes*	35288000 35288XXX	
	Overhead shower 250/250 1jet ceiling / spray type: PowderRain / shower head size: 250 x 250 mm / maximum flow rate at 3 bar: 19 l/min / flow rate PowderRain spray (at 0.3 bar): 19 l/min / dynamic spray nozzles move out while using / material spray disc: metal	Chrome Special Finishes*	35309000 35309XXX	Guick
	 / overhead shower removable for cleaning / installation: flush with the ceiling / connection dimension: DN15 Required parts: / Basic set for overhead shower ceiling 		35363180	
$G_{1/2}$				
	Basic set for overhead shower 2 jet with shower arm		35361180	



/ sound-decoupled installation
 / connection dimension: Rp ¹/₂

°

with ceiling connector		20434160
/ ceiling installation		
 Optional parts: / Overhead shower 460/300 1jet with ceiling connection / Overhead shower 460/300 2jet with ceiling connection / Overhead shower 460/300 3jet with ceiling connection / Overhead shower 300 1jet with ceiling connection / Overhead shower 300 2jet with ceiling connection / Overhead shower 300/300 1jet with ceiling connection / Overhead shower 300/300 2jet with ceiling connection / Overhead shower 250 1jet with ceiling connection / Overhead shower 250 2jet with ceiling connection / Overhead shower 250/250 1jet with ceiling connection / Overhead shower 250/250 2jet with ceiling connection 	Chrome Special Finishes* Chrome Special Finishes*	35277000 35277XXX 35279000 35279XXX 35281000 35281XXX 35301000 35301XXX 35304000 35304XXX 35316000 35316XXX 35320000 35320XXX 35286000 35286XXX 35297000 352977XXX 35308000 35308XXX 35312000 35312XXX


Basic set for overhead shower

finish


code no.

26434180

35363180







Basic set for overhead shower	
ceiling	

- ServiceCard with sieve and flow restrictor can be removed without tools for cleaning porpose
- Optional parts: Overhead shower 300 1jet ceiling Chrome 35302000 Special Finishes* 35302XXX Overhead shower 300 2jet ceiling Chrome 35305000 Special Finishes* Chrome 35305XXX 35317000 Overhead shower 300/300 1jet ceiling Special Finishes* 35317XXX Overhead shower 300/300 2jet ceiling 35321000 Chrome Special Finishes* 35321XXX 35287000 Overhead shower 250 1jet ceiling Chrome Special Finishes* 35287XXX Overhead shower 250 2jet ceiling Chrome 35298000 Special Finishes* 35298XXX Overhead shower 250/250 1jet ceiling Chrome 35309000 Special Finishes* 35309XXX Overhead shower 250/250 2jet ceiling 35313000 Chrome

Overhead shower 250/580 3jet Chrome Special Finishes*

consists of: overhead shower, wall

spray type: Rain, RainFlow, Mono shower head size: 580 x 260 mm maximum flow rate at 3 bar: 20 I/min flow rate Rain spray (at 3 bar): 17 I/min flow rate Mono spray (at 3 bar): 20 I/min flow rate RainFlow spray (at 3 bar):

connector

35283000 nes* 35283XXX

35313XXX




17 I/min / material spray disc: metal / spray disc removable for cleaning / installation: wall-mounted - for installation on iBox / connection dimension: DN15 Required parts: / Basic set iBox universal 01700180

Special Finishes*


Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

290

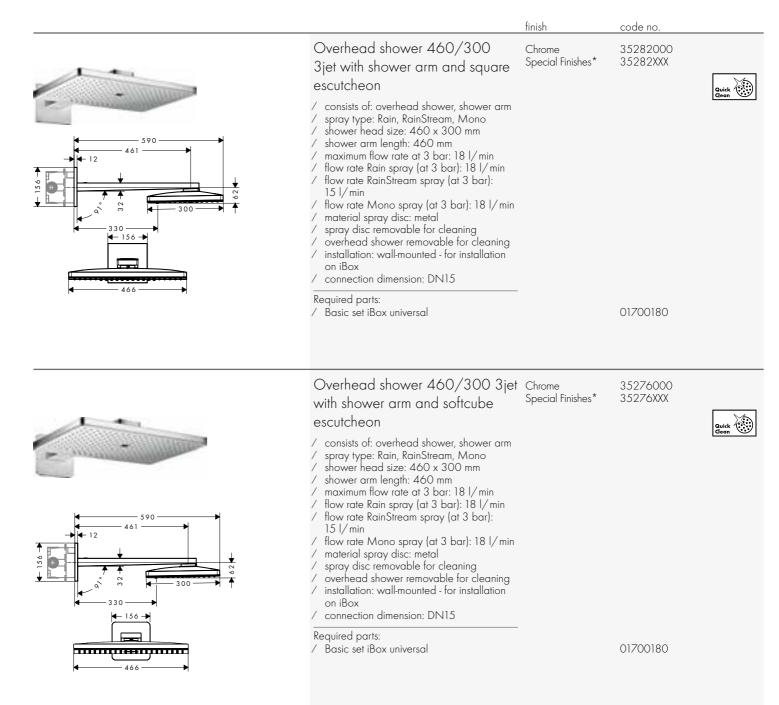






	finish	code no.	
Overhead shower 460/300 3jet with ceiling connection	Chrome Special Finishes*	35281000 35281XXX	
 consists of: overhead shower, ceiling connector spray type: Rain, RainStream, Mono shower head size: 460 x 300 mm maximum flow rate at 3 bar: 23 l/min flow rate RainStream spray (at 3 bar): 17 l/min flow rate RainStream spray (at 3 bar): 22 l/min flow rate Mono spray (at 3 bar): 23 l/min material spray disc: metal spray disc removable for cleaning overhead shower removable for cleaning brass ceilling connector ceiling connection length: 100 mm installation: ceiling connection dimension: DN15 			Quick Construction
Required parts: / Basic set for overhead shower with ceiling connector		26434180	
Optional parts: / Extension 230 mm for ceiling connector overhead shower	Chrome Special Finishes*	35288000 35288XXX	





Overhead shower 460/300 2jet with shower arm and square escutcheon	Chrome Special Finishes*	35280000 35280XXX	Quick 🔅
 consists of: overhead shower, shower arm spray type: Rain, RainStream shower head size: 460 x 300 mm shower arm length: 460 mm maximum flow rate at 3 bar: 18 l/min flow rate Rain Spray (at 3 bar): 18 l/min flow rate RainStream spray (at 3 bar): 15 l/min material spray disc: metal spray disc removable for cleaning overhead shower removable for cleaning installation: wall-mounted - for installation on iBox connection dimension: DN15 			(deen
Required parts:			

Required parts: / Basic set iBox universal

01700180


		finish	code no.	
	Overhead shower 460/300 2jet with shower arm and softcube escutcheon / consists of: overhead shower, shower arm / spray type: Rain, RainStream / shower head size: 460 x 300 mm / shower arm length: 460 mm / maximum flow rate at 3 bar: 18 l/min / flow rate Rain spray (at 3 bar): 18 l/min / flow rate RainStream spray (at 3 bar): 15 l/min / material spray disc: metal / spray disc removable for cleaning / overhead shower removable for cleaning / installation: wall-mounted - for installation on iBox / connection dimension: DN15 Required parts: / Basic set iBox universal	Chrome Special Finishes*	35275000 35275XXX 01700180	Quick Clean
◄ 466 →				
	Overhead shower 460/300 2jet with ceiling connection / consists of: overhead shower, ceiling connector / spray type: Rain, RainStream / shower head size: 460 x 300 mm / flow rate Rain spray (at 3 bar): 21 l/min / flow rate RainStream spray (at 3 bar): 18 l/min / material spray disc: metal / spray disc removable for cleaning / overhead shower removable for cleaning / brass ceilling connector / ceiling connection length: 100 mm / installation: ceiling / connection dimension: DN15 Required parts: / Basic set for overhead shower with ceiling connector	Chrome Special Finishes*	35279000 35279XXX 26434180	Quick Clean
	 Extension 230 mm for ceiling connector overhead shower 	Chrome Special Finishes*	35288000 35288XXX	
	Overhead shower 460/300 ljet with shower arm and square escutcheon / consists of: overhead shower, shower arm spray type: Rain / shower head size: 460 x 270 mm / shower head size: 460 x 270 mm / shower arm length: 460 mm / maximum flow rate at 3 bar: 19 l/min / flow rate Rain spray (at 3 bar): 19 l/min / material spray disc: metal / spray disc removable for cleaning / overhead shower removable for cleaning / installation: wall / connection thread G 1/2 / connection dimension: DN15	Chrome Special Finishes*	35278000 35278XXX	Quick Clean

- 466


	finish	code no.
Overhead shower 460/300 1jet with shower arm and softcube escutcheon / consists of: overhead shower, shower arm / spray type: Rain / shower head size: 460 x 270 mm / shower arm length: 460 mm / maximum flow rate at 3 bar: 19 1/min / flow rate Rain spray (at 3 bar): 19 1/min / material spray disc: metal / spray disc removable for cleaning / overhead shower removable for cleaning / installation: wall / connection thread G 1/2 / connection dimension: DN15	Chrome Special Finishes*	35274000 35274XXX
Overhead shower 460/300 1jet with ceiling connection / consists of: overhead shower, ceiling connector / spray type: Rain / shower head size: 460 x 270 mm / maximum flow rate at 3 bar: 211/min / flow rate Rain spray (at 3 bar): 211/min / material spray disc: metal / spray disc removable for cleaning / overhead shower removable for cleaning / overhead shower removable for cleaning / brass ceilling connector / ceiling connection length: 100 mm / installation: ceiling / connection dimension: DN15	Chrome Special Finishes*	35277000 35277XXX
Required parts: / Basic set for overhead shower with ceiling connector Optional parts: / Extension 230 mm for ceiling connector overhead shower	Chrome Special Finishes*	26434180 35288000 35288XXX
 Basic set for overhead shower with ceiling connector / ceiling installation Optional parts: / Overhead shower 460/300 1jet with ceiling connection / Overhead shower 460/300 2jet with ceiling connection / Overhead shower 460/300 3jet with ceiling connection / Overhead shower 300 1jet with ceiling connection / Overhead shower 300 2jet with ceiling connection / Overhead shower 300/300 1jet with ceiling connection / Overhead shower 300/300 2jet with ceiling connection / Overhead shower 250/250 1jet with ceiling connection / Overhead shower 250/250 1jet with ceiling connection / Overhead shower 250/250 2jet with ceiling connection 	Chrome Special Finishes* Chrome Special Finishes*	26434180 35277000 35277XXX 35279000 35279XXX 35281000 35281XXX 35301000 35301XXX 35304000 35304XXX 35316000 35316XXX 35320000 35320XXX 35286000 35286XXX 35297000 35297XXX 35308000 35308XXX 35312000 35312XXX

	finish	code no.	
Extension 230 mm for ceiling connector overhead shower / dimension: 230 mm	Chrome Special Finishes*	35288000 35288XXX	
 Optional parts: / Overhead shower 460/300 1jet with ceiling connection / Overhead shower 460/300 2jet with ceiling connection / Overhead shower 460/300 3jet with ceiling connection / Overhead shower 300 1jet with ceiling connection / Overhead shower 300/2jet with ceiling connection / Overhead shower 300/300 1jet with ceiling connection / Overhead shower 300/300 2jet with ceiling connection / Overhead shower 250 1jet with ceiling connection / Overhead shower 250 2jet with ceiling connection / Overhead shower 250/250 1jet with ceiling connection / Overhead shower 250/250 2jet with ceiling connection 	Chrome Special Finishes* Chrome Special Finishes*	35277000 35277XXX 35279000 35279XXX 35281000 35281XXX 35301000 35301XXX 35304000 35304XXX 35316000 35316XXX 35316000 35316XXX 35286000 35286XXX 35286000 35286XXX 35297XXX 35308000 35308XXX 35312000 35312XXX	
Optional parts:	_	01700180	
 Extension 25 mm for basic set iBox universal Fastening rail set for iBox universal 		13587000 93171000	
Overhead shower 350 1jet with shower arm / consists of: overhead shower, shower arm / spray type: PowderRain / shower head size: 350 mm / shower arm length: 390 mm / ball-joint: overhead shower angle adjustable / maximum flow rate at 3 bar: 26 l/min / flow rate PowderRain spray (at 0.3 bar): 26 l/min	Chrome Brushed Nickel Special Finishes*	26034000 26034820 26034XXX	
/ material spray disc: metal / overhead shower removable for cleaning / installation: wall / connection thread G 1/2 / connection dimension: DN15			

*For additional information please refer to the "special finish" overview.

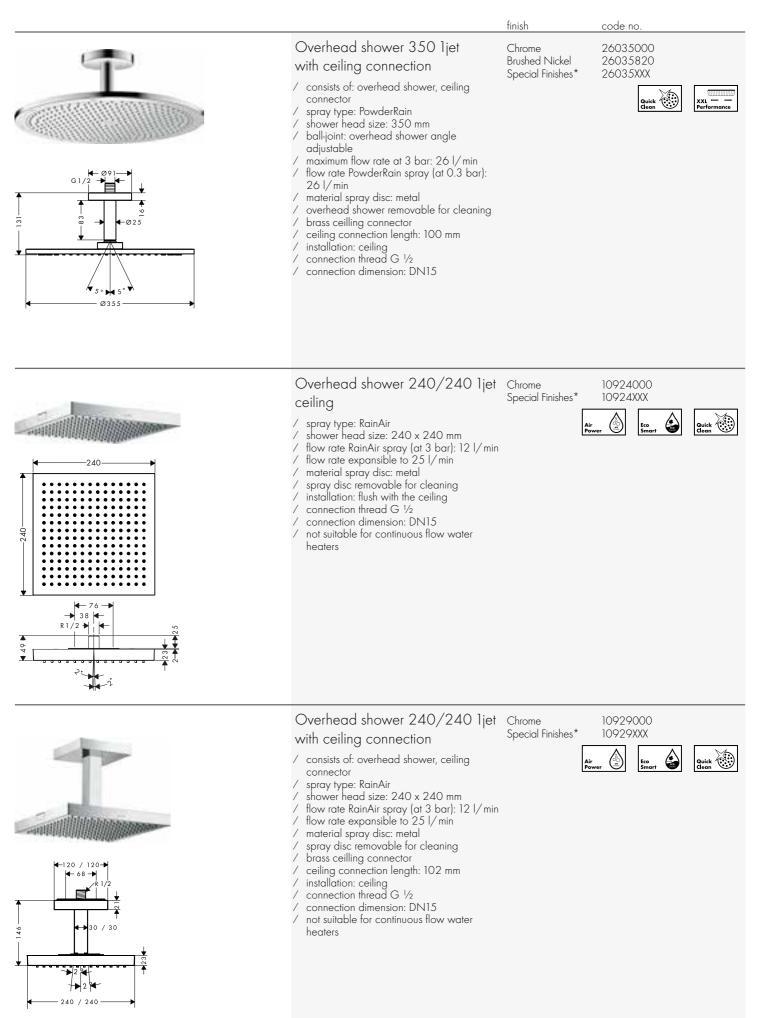


Measurements within scale drawings are in mm.

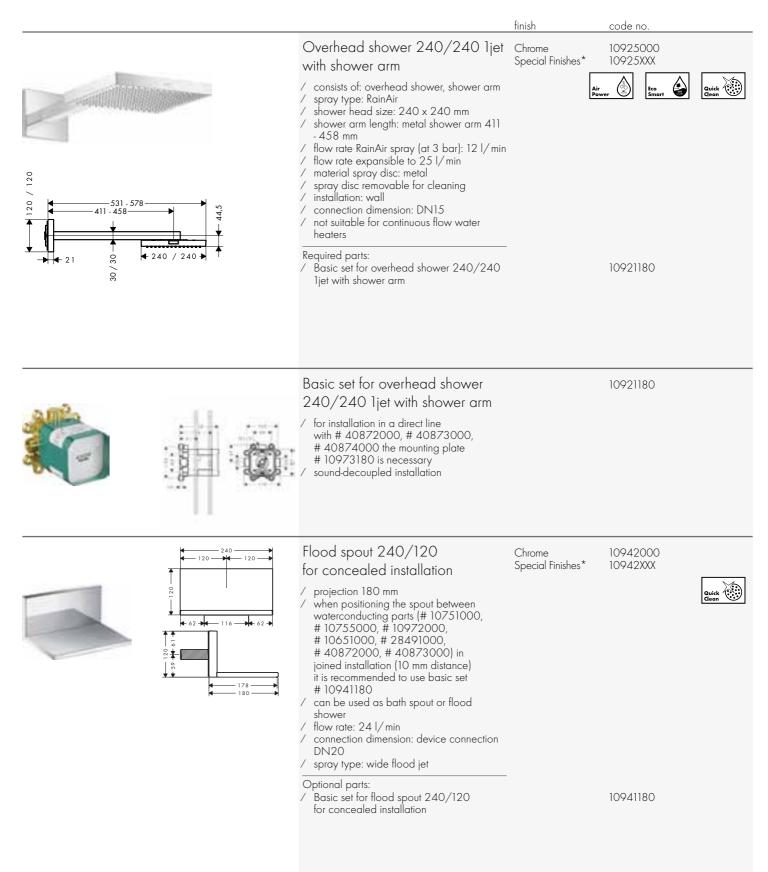

		finish	code no.
	Basic set for flood spout 240/120 for concealed installation / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning / connection dimension: DN20 Required parts: / Flood spout 240/120 for concealed	- Chrome	10941180
2 H K K	installation	Special Finishes*	10942XXX






	LampShower 275 1jet with ceiling connector	Chrome Special Finishes*
	 consists of: overhead shower, ceiling connector spray type: Rain shower head size: 275 mm ball-joint: overhead shower angle adjustable flow rate Rain spray (at 3 bar): 18 l/min spray zones: special spray image from placed inside spray nozzles on the inner diameter material spray disc: metal spray disc removable for cleaning brass ceiling connector ceiling connection length: 265 mm installation: ceiling connection thread G 1/2 connection dimension: DN15 with integrated lighting illuminant: LED power supply: 12 V transformer power supply for concealed installation 12 V, 18 W input voltage: 10 - 240 V AC / 50 / 60 Hz output voltage: 12 V - DC colour temperature: 2700 K 	
,	/ energy efficiency label: A+ / TÜV certified	

26032000 26032XXX

Quick Clean

AXOR Showers

		finish	code no.
<image/>	LampShower 275 1 jet with shower arm / consists of: overhead shower, shower arm / spray type: Rain / shower head size: 275 mm / shower arm length: 380 mm / shower arm swivels by 150° / ball-joint: overhead shower angle adjustable / maximum flow rate at 3 bar: 13 I/min / flow rate Rain spray (at 3 bar): 13 I/min / flow rate Rain spray (at 3 bar): 13 I/min / spray zones: special spray image from placed inside spray nozzles on the inner diameter / material spray disc: metal / spray disc removable for cleaning / installation: wall / connection dimension: DN15 / with integrated lighting / illuminant: LED / power supply: 12 V / transformer power supply for concealed installation 12 V, 18 W / input voltage: 100 - 240 V AC / 50 / 60 Hz / output voltage: 12 V - DC / colour temperature: 2700 K / energy efficiency label: A+ / TÜV certified Required parts: / Basic set for LampShower 275 1jet	finish Chrome Special Finishes*	26909180
$ \begin{array}{c} $	with shower arm and overhead shower 240 2 jet with shower arm Basic set for LampShower 275 1 jet with shower arm and overhead shower 240 2 jet with shower arm / TÜV certified		26909180

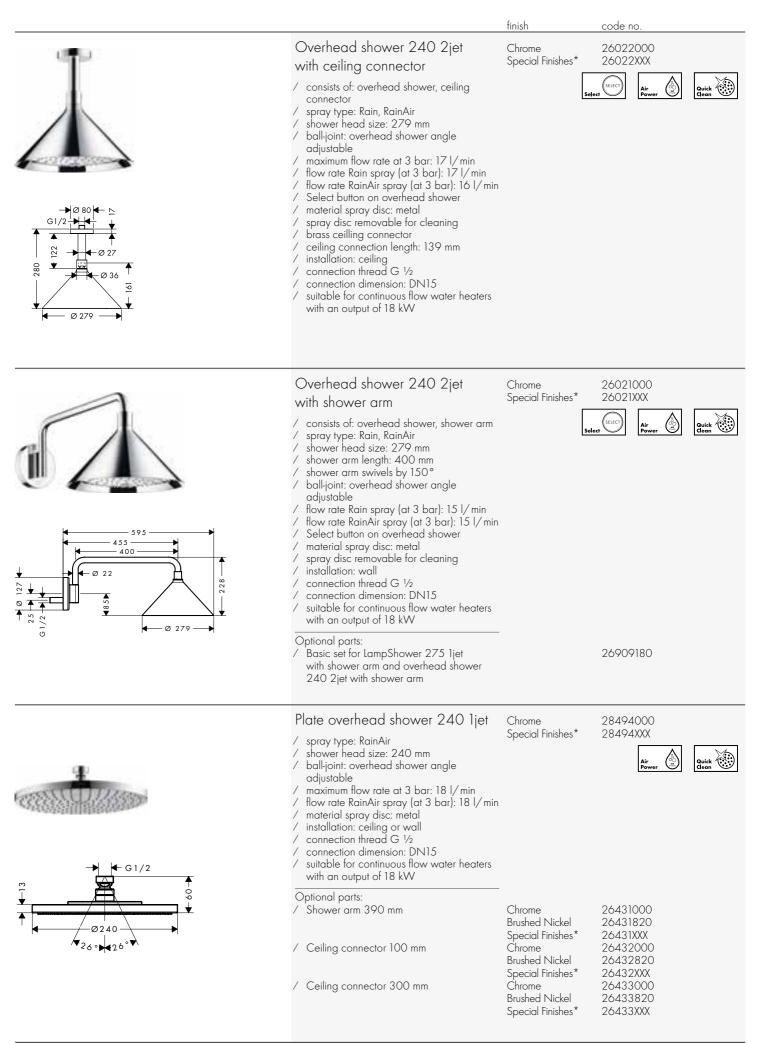


Measurements within scale drawings are in mm.


	finish	code no.
Overhead shower 180 1jet / spray type: RainAir / shower head size: 180 mm / ball-joint: overhead shower angle adjustable / maximum flow rate at 3 bar: 24 l/min / flow rate RainAir spray (at 3 bar): 24 l/min / material spray disc: metal / installation: ceiling or wall / connection thread G 1/2 / connection dimension: DN15	Chrome Special Finishes*	28489000 28489XXX Quick Ceen
Optional parts: / Shower arm 390 mm / Ceiling connector 100 mm / Ceiling connector 300 mm	Chrome Brushed Nickel Special Finishes* Chrome Brushed Nickel Special Finishes* Chrome Brushed Nickel Special Finishes*	26431000 26431820 26431XXX 26432000 26432820 26432XXX 26433000 26433820 26433XXX
Overhead shower 180 1jet Classic / spray type: RainAir / shower head size: 180 mm / ball-joint: overhead shower angle adjustable / flow rate Rain spray (at 3 bar): 18 l/min / material spray disc: metal / installation: ceiling or wall / connection thread G 1/2 / connection dimension: DN15	Chrome Special Finishes*	28487000 28487XXX <u>Air Power</u> Quick Clean
Optional parts: / Shower arm 389 mm / Ceiling connector 100 mm / Ceiling connector 300 mm	Chrome Special Finishes* Chrome Brushed Nickel Special Finishes* Chrome Brushed Nickel Special Finishes*	27348000 27348XXX 26432000 26432820 26432XXX 26433000 26433820 26433XXX
Overhead shower 240 1jet Classic / spray type: RainAir / shower head size: 240 mm / ball-joint: overhead shower angle adjustable / maximum flow rate at 3 bar: 17 l/min / flow rate RainAir spray (at 3 bar): 17 l/min / material spray disc: metal / installation: ceiling or wall / connection thread G 1/2 / connection dimension: DN15	Chrome Special Finishes*	28474000 28474XXX Airwer Ouick Clean
Optional parts: / Shower arm 389 mm / Ceiling connector 100 mm / Ceiling connector 300 mm	Chrome Special Finishes* Chrome Brushed Nickel Special Finishes* Chrome Brushed Nickel Special Finishes*	27348000 27348XXX 26432000 26432820 26432XXX 26433000 26433820 26433XXX

*For additional information please refer to the "special finish" overview.

			finish	code no.
0	G1/2→ ←	Ceiling connector 100 mm / length: 100 mm / connection thread G ½ / connection dimension DN15	Chrome Brushed Nickel Special Finishes*	26432000 26432820 26432XXX
		Optional parts: / Plate overhead shower 240 1jet	— Chrome Special Finishes*	28494000 28494XXX
		/ Overhead shower 180 1jet	Chrome	28489000
	G1/2→ ←	/ Overhead shower 180 1jet Classic	Special Finishes* Chrome Special Finishes*	28489XXX 28487000 28487XXX
		/ Overhead shower 240 1jet Classic	Chrome Special Finishes*	28474000 28474XXX

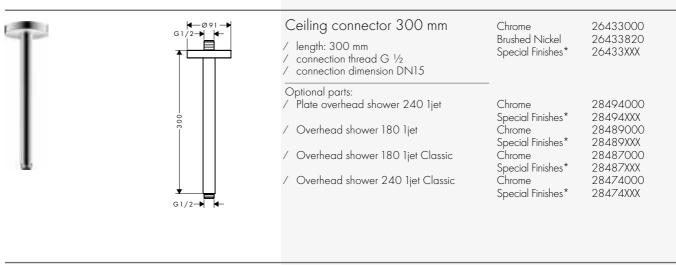





Shower arm 389 mm	Chrome	27348000
/ wall-mounted / version: 90° angle / connection thread G ½	Special Finishes*	27348XXX
Optional parts:		
/ Overhead shower 180 1jet Classic	Chrome	28487000
	Special Finishes*	28487XXX
 Overhead shower 240 1jet Classic 	Chrome	28474000
/ Wall plate 120/120 Softcube	Special Finishes* Chrome Special Finishes*	28474XXX 36725000 36725XXX

6





Image: Second Finisher 36725000 Image: Second Finisher 27348000 Image: Second Finisher 27348000 Image: Second Finisher 27419000 Image: Second Finisher 28401000 Image: Second Finisher 28401000	Wall plates		finish	code no.
 Shower can 389 mm Chrome 27348000 Special Hindust Z7348000 Z7348000 Z7348000 Z7348000 Z7348000 Z7348000 Z7419000 Mail plate square motival meal wall or calling mounting Chrome Special Hindust Z7419000 Z7419000 Z7419000 Z7419000 Z7419000 Z7419000 Z7419000 Z7419000 Shower module 120/120 Chrome Special Hindust Z8491000 Z4491000 Z4491000 Shower module 120/120 million square Shower hand size: 120 mm Shower hand size: 120 mm Shower hand size: 120 mm Shower normal spray Shower use and spray (13 bag): 53 U min Shower hand size: 120 mm Shower use and spray (13 bag): 53 U min Shower and G 16 Shower hand size: 123 Junin Shower and G 16 Shower modules, the use or special spray (13 bag): 53 U min Shower and G 16 Correction dimension: DN15 maximal: meal Diptiene Institution: DN15 maximal: meal Diptiene Institution: DN15 Transitiat: meal Diptiene Institution: DN15 Tabalistic method in 20/120 Z3480180 		/ material: metal		
 / material: metal / wall or ceiling mounting Body showers / shower modules Shower module 120/120 for conceeded installation square / shower module stallation square / shower modules Shower module 120/120 for conceeded installation square / shower head size: 120 mm / spray hype: normal spray / spray hype: normal spray / spray hype: normal spray (at 3 bar): 5.3 l / min / filev rate normal spray (at 3 bar): 5.3 l / min / filev rate normal spray (at 3 bar): 5.3 l / min / filev rate normal spray (at 3 bar): 5.3 l / min / filev rate normal spray (at 3 bar): 5.3 l / min / filev rate normal spray (at 3 bar): 5.3 l / min / filev rate normal spray (at 3 bar): 5.3 l / min / filev rate normal spray (at 3 bar): 5.3 l / min / filev rate normal spray (at 3 bar): 5.3 l / min / filev rate normal spray (at 3 bar): 5.3 l / min / in a fineley arranged installation (10 mm distance) / the use of basis set # 28.486180 is recommended / in a tailation and # 28.470180 b is recommended / in a tailation and # 28.470180 b is recommended / material: medal Optional parts: / Basis est for shower module 120/120 2846180 		Optional parts: / Shower arm 389 mm		
Shower module 120/120 for concealed installation square / shower head size: 120 mm / spray type: normal spray spray angle adjustable in five steps / field of application: functions as overhead, shoulder or side shower / maximum flow rate at 3 bar: 5.3 l/min / flow rate normal spray (at 3 bar): 5.3 l/min / connection thread: G ½ / in a joined installation, connection via a G ½ connection thread is possible / if installed as an overhead shower with several joint modules, the use of installetion aid # 28470180 is recommended / connection dimension: DN15 / material: metal Optional parts: / Basic set for shower module 120/120 28486180		/ material: metal		
 shower head size: 120 mm spray type: normal spray spray agle adjustable in five steps field of application: functions as overhead, shoulder or side shower maximum flow rate at 3 bar: 5.3 l/min flow rate normal spray (at 3 bar): 5.3 l/min connection thread: G ½ in a joined installation (10 mm distance) the use of basic set # 28486180 is recommended in a freely arranged installation, connection via a G ½ connecting thread is possible finstalled as an overhead shower with several joint modules, the use of installation aid # 28470180 is recommended connection dimension: DN15 material: metai Optional parts: Basic set for shower module 120/120 28486180 	Body showers / shower modules			
the use of basic set # 28486180 is recommended / in a freely arranged installation, connection via a G 1/2 connecting thread is possible / if installed as an overhead shower with several joint modules, the use of installation aid # 28470180 is recommended / connection dimension: DN15 / material: metal Optional parts: / Basic set for shower module 120/120 28486180		 / shower head size: 120 mm / spray type: normal spray / spray angle adjustable in five steps / field of application: functions as overhead, shoulder or side shower / maximum flow rate at 3 bar: 5.3 l/min / flow rate normal spray (at 3 bar): 5.3 l/min / connection thread: G 1/2 		Quick Keen
/ Basic set for shower module 120/120 28486180		 the use of basic set # 28486180 is recommended / in a freely arranged installation, connection via a G ½ connecting thread is possible / if installed as an overhead shower with several joint modules, the use of installation aid # 28470180 is recommended / connection dimension: DN15 		
		Optional parts: / Basic set for shower module 120/120 for concealed installation	-	28486180
/ Installation part 28470180				28470180

 		finish	code no.	
	Shower module 120/120 for concealed installation softcube / shower head size: 120 mm / spray type: normal spray / spray angle adjustable in five steps / field of application: functions as overhead, shoulder or side shower / maximum flow rate at 3 bar: 5.3 l/min / flow rate normal spray (at 3 bar): 5.3 l/min / connection thread: G ½ / in a joined installation (10 mm distance) the use of basic set # 28486180 is recommended / in a freely arranged installation, connection via a G ½ connecting thread is possible / if installed as an overhead shower with several joint modules, the use of installation aid # 28470180 is recommended / connection dimension: DN15 / material: metal Optional parts: / Basic set for shower module 120/120 for concealed installation / Installation part	Chrome Special Finishes*	36822000 36822XXX 28486180 28470180	Quick Clean
Rp3/4	Basic set for shower module 120/120 for concealed installation / in a joined installation it serves as a waterconducting unit, allows dimensionally accurate positioning, connection right or left / sound-decoupled installation Required parts: / Shower module 120/120 for concealed installation square / Shower module 120/120 for concealed installation softcube	Chrome Special Finishes* Chrome Special Finishes*	28486180 28491000 28491XXX 36822000 36822XXX	
	Body shower round 1jet / shower head size: 65 mm / spray type: normal spray / ball-joint: side shower angle adjustable / rosette: circular / flow rate normal spray (at 3 bar): 5 1/min / grey spray disc / connection thread: G V_2 / suitable for continous flow water heaters / connection dimension: DN15 / material: metal	Chrome Special Finishes*	28464000 28464XXX	Quick Com
	Body shower square 1jet / shower head size: 65 mm / spray type: normal spray / ball-joint: side shower angle adjustable / rosette: angular / flow rate normal spray (at 3 bar): 5 l/min / grey spray disc / connection thread: G 1/2 / suitable for continous flow water heaters / connection dimension: DN15	Chrome Special Finishes*	28469000 28469XXX	Quick Com

Measurements within scale drawings are in mm.


Hand showers			finish	code no.
	FCI → GI → GI /2→	Hand shower 2jet / spray type: normal spray, flood spray / convenient diversion via Select button / maximum flow rate at 3 bar: 12 l/min / with internal water conduction / rinseable dirt filter / connection thread G 1/2 / connection dimension: DN15 / not recommended for rim-/ tile-mounted mixers	Chrome Special Finishes*	45720000 45720XXX Select
		Optional parts: / Metal effect shower hose 1.25 m / Metal effect shower hose 1.60 m / Metal effect shower hose 2.00 m	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	28282000 28282XXX 28286000 28286XXX 28284000 28284XXX
		Baton hand shower 2jet / spray type: Rain, Mono / spray type adjustment by turning spray disc / maximum flow rate at 3 bar: 13 l/min / rinseable dirt filter / connection thread G 1/2 / connection dimension: DN15 / suitable for continous flow water heaters / not recommended for rim-/ tile-mounted mixers	Chrome Special Finishes*	12680000 12680XXX Quick Com
	↑ → G 1/2	Optional parts: / Metal effect shower hose 1.25 m / Metal effect shower hose 1.60 m / Metal effect shower hose 2.00 m	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	28282000 28282XXX 28286000 28286XXX 28284000 28284XXX
		Baton hand shower 2jet / spray type: Rain, Mono / spray type adjustment by turning spray disc / maximum flow rate at 3 bar: 16 l/min / rinseable dirt filter / connection thread G 1/2 / connection dimension: DN15 / suitable for continous flow water heaters / not recommended for rim-/ tile-mounted mixers	Chrome Special Finishes*	28532000 28532XXX Quick Ceen
27	-► 4 G ½	Alternative products: / Baton hand shower 1jet	Chrome Special Finishes*	10531000 10531XXX
		Optional parts: / Metal effect shower hose 1.25 m / Metal effect shower hose 1.60 m / Metal effect shower hose 2.00 m	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	28282000 28282XXX 28286000 28286XXX 28284000 28284XXX

Baton hand showen Tjel - ency specifier		finish	code no.
✓ Merial effect shower hose 1.60 m Special Finishes* 25292000 25236000 25236000 25236000 25236000 25236000 25230000 25230000 25230000 25230000 25230000 25230000 25230000 252300 2523000 252300 2	 / spray type: Rain / maximum flow rate at 3 bar: 8 l/min / rinseable dirt filter / connection thread G 1/2 / connection dimension: DN15 / suitable for continous flow water heaters / not recommended for rim-/ tile-mounted mixers Alternative products: / Baton hand shower 2jet Optional parts: 	Special Finishes* Chrome Special Finishes*	10531XXX Quick Clean 28532000 28532XXX
 Shower head size: 85 mm Special Finishes* 20025/000 Special Finishes* 20025/000 Special Finishes* 20025/000 Special Finishes* 20050/000 Special Finishes* 20051/000 20051/00	/ Metal effect shower hose 1.60 m	Special Finishes* Chrome Special Finishes* Chrome	28282XXX 28286000 28286XXX 28284000
Special Finishes* 2605000X shower head size: 125 mm spray type: Rain, RainAir, WhirlAir convenient diversion via Select button maximum flow rate at 3 bar: 15 1/ min with Internal water conduction inseable diri filter connection dimension: DN15 Water saving EcoSmart version: Hand shower 120 3jet EcoSmart 9 1/ min Chrome Special Finishes* 26051000 Special Finishes* 26051000 Special Finishes* 26051000 Hand shower 100 1jet shower head size: 100 mm spray type: RainAir maximum flow rate at 3 bar: 16 1/ min inseable diri filter connection thread G ½ connection thread G ½ concetion dimension: DN15	 / shower head size: 85 mm / spray type: Rain / maximum flow rate at 3 bar: 9.5 l/min / with internal water conduction / rinseable dirt filter / connection thread G 1/2 / connection dimension: DN15 		26025XXX
 Hand shower 120 3jet EcoSmart 9 l/min Chrome 26051000 Special Finishes* 26051000 Special Finishes* 26051XXX Hand shower 100 1jet shower head size: 100 mm spray type: RainAir maximum flow rate at 3 bar: 16 l/min rinseable dirt filter connection thread G 1/2 connection dimension: DN15 	 shower head size: 125 mm spray type: Rain, RainAir, WhirlAir convenient diversion via Select button maximum flow rate at 3 bar: 15 l/min with internal water conduction rinseable dirt filter connection thread G 1/2 connection dimension: DN15 suitable for continous flow water heaters 	Special Finishes*	26050XXX
/ shower head size: 100 mm / spray type: RainAir / maximum flow rate at 3 bar: 16 l/min / rinseable dirt filter / connection thread G 1/2 / connection dimension: DN15	/ Hand shower 120 3jet EcoSmart 9 I/min		
	/ shower head size: 100 mm / spray type: RainAir / maximum flow rate at 3 bar: 16 l/min / rinseable dirt filter / connection thread G ½	Brushed Nickel	16320820 16320XXX

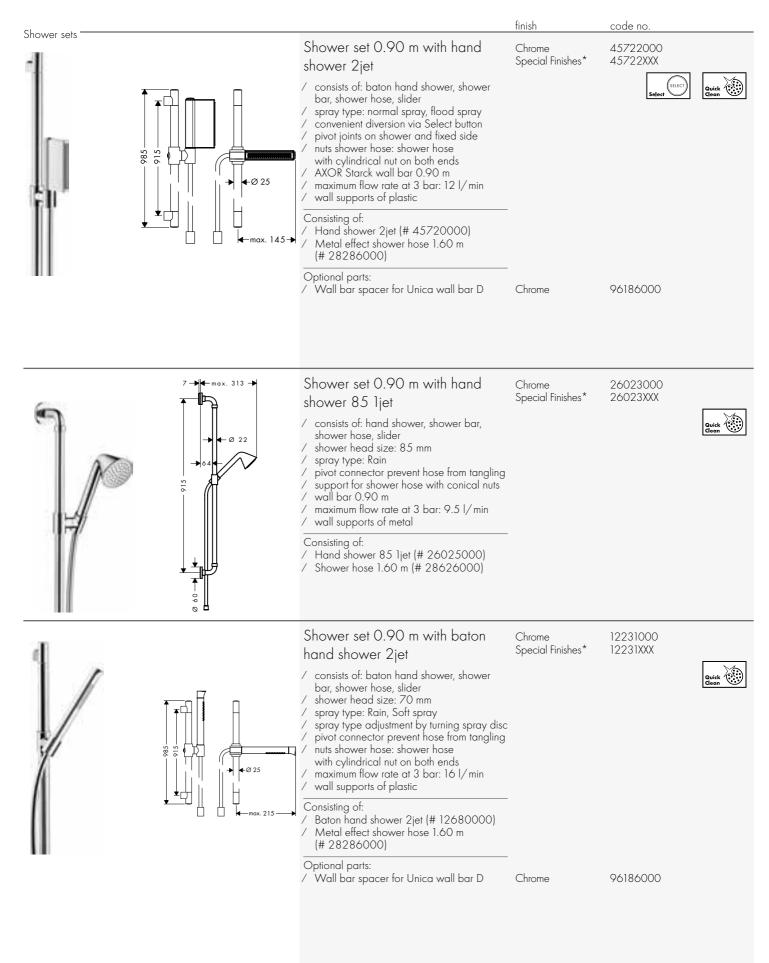

			finish	code no.
đ		Shower set 0.90 m with baton hand shower 2jet	Chrome Special Finishes*	27980000 27980XXX
		 consists of: baton hand shower, shower bar, shower hose, slider shower head size: 70 mm spray type: Rain, Mono spray type adjustment by turning spray disc pivot connector prevent hose from tangling nuts shower hose: shower hose with cylindrical nut on both ends maximum flow rate at 3 bar: 16 l/min wall supports of plastic 		Quick Clean
1	♥ U ↓ ↓ mox. 210→	Consisting of: / Baton hand shower 2jet (# 28532000) / Metal effect shower hose 1.60 m (# 28286000)		
	٨	Alternative products: / Shower set 0.90 m with baton hand shower 1jet	Chrome Special Finishes*	27983000 27983XXX
		Optional parts: / Wall bar spacer for Unica wall bar D	Chrome	96186000
4		Shower set 0.90 m with baton hand shower 1jet	Chrome Special Finishes*	27983000 27983XXX
		 consists of: baton hand shower, shower bar, shower hose, slider shower head size: 70 mm spray type: Rain pivot connector prevent hose from tangling nuts shower hose: shower hose with cylindrical nut on both ends maximum flow rate at 3 bar: 8 I/min wall supports of plastic 		Eco Smart
1	↓	Consisting of: / Baton hand shower 1jet (# 10531000) / Metal effect shower hose 1.60 m (# 28286000)		
II		Optional parts: / Wall bar spacer for Unica wall bar D	Chrome	96186000

	Shower bar 0.90 m / consists of: shower bar, shower hose, slider / bar width: brass pipe with a bar calibre of 25 mm / metal shower slide / slide inclination angle steplessly adjustable	Chrome Special Finishes*	27830000 27830XXX
18 s @	Consisting of: / Metal effect shower hose 1.60 m (# 28286000)		
	Optional parts: / Wall bar spacer for Unica wall bar D	Chrome	96186000

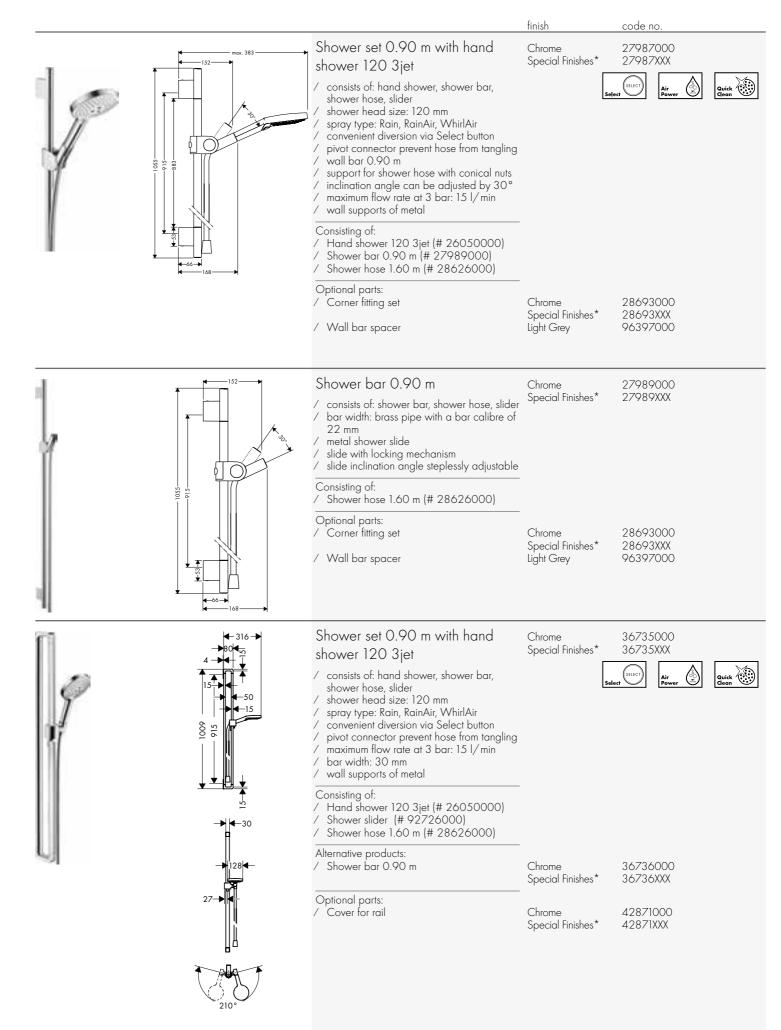

*For additional information please refer to the "special finish" overview.

		finish	code no.
	Shower bar 0.90 m / consists of: shower bar, shower hose, slider / pivot connector prevent hose from tangling / support for shower hose with conical nuts / slider moves sideways,up/down and pivots / bar width: 30 mm / metal shower slide / slide inclination angle steplessly adjustable / silent inclination angle adjustment / wall supports of metal Consisting of: / Shower hose 1.60 m (# 28626000) Optional parts: / Cover for rail	Chrome Special Finishes* Chrome Special Finishes*	36736000 36736XXX 42871000 42871XXX
	Cover for rail Required parts: / Rail grab bar 300 mm / Rail bath towel holder 600 mm / Rail bath towel holder 800 mm / Shower set 0.90 m with hand shower 120 3 jet / Shower bar 0.90 m	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	42871000 42871XXX 42830000 42830XXX 42832000 42832XXX 42833000 42833XXX 36735000 36735XXX 36736000 36736XXX
	Shower set 0.90 m with hand shower 120 3 jet / consists of: hand shower, shower bar, shower hose, slider / shower head size: 120 mm / spray type: Rain, RainAir, WhirlAir / convenient diversion via Select button / pivot connector prevent hose from tangling / wall bar 0.90 m / support for shower hose with conical nuts / inclination angle can be adjusted by 30° / maximum flow rate at 3 bar: 16 I/min / wall supports of metal Consisting of: / Hand shower 120 3 jet (# 26050000) / Shower hose 1.60 m (# 28626000)	Chrome Special Finishes*	27991000 27991XXX Iet Street Power C Quick Clean
	Shower bar 0.90 m / consists of: shower bar, shower hose, slider / pivot connector prevent hose from tangling / metal shower slide / slide with locking mechanism / wall supports of metal Consisting of: / Shower hose 1.60 m (# 28626000)	Chrome Special Finishes*	27831000 27831XXX

Product Book 2020/2021

Measurements within scale drawings are in mm.

			finish	code no.
		Shower set 0.90 m with hand shower 100 1jet / consists of: hand shower, shower bar, shower hose, slider / shower head size: 100 mm / spray type: RainAir / support for shower hose with conical nuts / AXOR Montreux wall bar 0.90 m / maximum flow rate at 3 bar: 16 1/min / wall supports of metal Consisting of: / Hand shower 100 1jet (# 16320XXX) / Metal shower hose 1.60 m (# 28116XXX) Optional parts: / Corner basket 160/83	Chrome Brushed Nickel Special Finishes* Chrome Brushed Nickel Special Finishes*	27982000 27982820 27982XXX Internet for the second
Shower holders	₩ 27 ₩ 34 ₩	Shower holder / fixed holding position / for hoses with cylindrical nuts Optional parts: / Metal effect shower hose 1.25 m / Metal effect shower hose 1.60 m / Metal effect shower hose 2.00 m	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	27515000 27515XXX 28282000 28282XXX 28286000 28286XXX 28286XXX 28284000 28284XXX
	4 -65-►	Shower holder round / fixed holding position / for hoses with conical nut Optional parts: / Shower hose 1.25 m / Shower hose 1.60 m / Shower hose 2.00 m	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	39525000 39525XXX 28622000 28622XXX 28626000 28626XXX 28624000 28624XXX
		Shower holder / fixed holding position / for hoses with conical nut Optional parts: / Metal shower hose 1.25 m / Metal shower hose 1.60 m / Metal shower hose 2.00 m	Chrome Brushed Nickel Special Finishes* Chrome Brushed Nickel Special Finishes* Chrome Brushed Nickel Special Finishes* Chrome Brushed Nickel Special Finishes*	16325000 16325820 16325XXX 28112000 28112820 28112XXX 28116000 28116820 28116XXX 28120000 28120820 28120XXX

		finish	code no.
	Shower holder / fixed holding position / for hoses with cylindrical nuts	Chrome Special Finishes*	45721000 45721XXX
n	Optional parts: / Metal effect shower hose 1.25 m / Metal effect shower hose 1.60 m / Metal effect shower hose 2.00 m	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	28282000 28282XXX 28286000 28286XXX 28284000 28284XXX
Fixfit wall outlets	Wall outlet softcube / non-return valve / installation: wall	Chrome Special Finishes*	36731000 36731XXX
T	Wall outlet square / non-return valve / installation: wall	Chrome Special Finishes*	36732000 36732XXX
9	Wall outlet round / non-return valve / installation: wall	Chrome Special Finishes*	27451000 27451XXX
Ŷ	Wall outlet with non-return valve / non-return valve	Chrome Brushed Nickel Special Finishes*	16884000 16884820 16884XXX
Porter units	Porter unit round / integrated support function / non-return valve / installation: wall / hose nut: for shower hoses with conical nut on both sides / metal housing with internal water supply made of plastic	Chrome	36733000


Measurements within scale drawings are in mm.


		finish	code no.
Ş	Porter unit square / integrated support function / non-return valve / installation: wall / hose nut: for shower hoses with conical nut on both sides / metal housing with internal water supply made of plastic	Chrome	36734000
	Porter unit 120/120 softcube / integrated support function / non-return valve / installation: wall / in a joined installation (10 mm distance) we recommend for perfect handling only the horizontal installation / in a joined installation (10 mm distance), the basic set # 28486180 must be used / in a freely-arranged installation (distance greater than 10 mm), no basic set is required / hose nut: for shower hoses with conical nut on both sides Optional parts: / Basic set for shower module 120/120 for concealed installation / Shower hose 1.25 m	Chrome Special Finishes*	36724000 36724XXX 28486180 28622000
	/ Shower hose 1.60 m/ Shower hose 2.00 m	Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	28622XXX 28626000 28626XXX 28624000 28624XXX
	Porter unit / integrated support function / non-return valve / hose nut: for shower hoses with conical nut on both sides	Chrome Special Finishes*	11626000 11626XXX
	Optional parts: / Shower hose 1.25 m / Shower hose 1.60 m / Shower hose 2.00 m	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	28622000 28622XXX 28626000 28626XXX 28624000 28624XXX


			finish	code no.
		Porter unit 120/120 with baton hand shower 2jet and shower hose / consists of: baton hand shower, porter unit, shower holder, shower hose / integrated support function / non-return valve / in a joined installation (10 mm distance) we recommend for perfect handling only the horizontal installation / in a joined installation (10 mm distance), the basic set # 28486180 must be used / in a freely-arranged installation (distance greater than 10 mm), no basic set is required Consisting of: / Metal effect shower hose 1.25 m (# 28282000)	Chrome Special Finishes*	12232000 12232XXX
		Optional parts: / Basic set for shower module 120/120 for concealed installation		28486180
		Porter unit 120/120 with baton hand shower 2jet and shower hose / consists of: porter unit, baton hand shower, shower holder, shower hose / integrated support function / non-return valve / in a joined installation (10 mm distance) we recommend for perfect handling only the horizontal installation / in a joined installation (10 mm distance), the basic set # 28486180 must be used / in a freely-arranged installation (distance greater than 10 mm), no basic set is required Consisting of: / Metal effect shower hose 1.25 m (# 28282000) Optional parts: / Basic set for shower module 120/120 for concealed installation	Chrome Special Finishes*	12626000 12626XXX 28486180
1		Porter unit / for hoses with cylindrical nuts / integrated support function / non-return valve / installation: wall Optional parts: / Metal effect shower hose 1.25 m	Chrome Special Finishes* Chrome Special Finishes*	45723000 45723XXX 28282000 28282XXX
	42 ►	/ Metal effect shower hose 1.60 m/ Metal effect shower hose 2.00 m	Chrome Special Finishes* Chrome Special Finishes*	28286000 28286XXX 28284000 28284XXX

			finish	code no.
Shower hoses	G 1/2	Shower hose 1.25 m / high-quality shower hose with metal effect / with plastic coating, easy to clean / shower hose length: 1.25 m / pivot connector prevent hose from tangling / kink-protected / nuts shower hose: conical nut on both ends Alternative sizes: / Shower hose 1.60 m / Shower hose 2.00 m	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	28622000 28622XXX 28626000 28626XXX 28624000 28624XXX
	G 1/2	Shower hose 1.25 m with volume control / high-quality shower hose with metal effect / with plastic coating, easy to clean / shower hose length: 1.25 m / pivot connector prevent hose from tangling / kink-protected	Chrome Special Finishes*	28127000 28127XXX
	G ½ → ←	 / adjustable flow rate between 6 l/min and 16 l/min / nuts shower hose: cylindrical nut on both ends Alternative sizes: / Shower hose 1.60 m with volume control 	Chrome Brushed Nickel Special Finishes* Chrome	28128000 28128820 28128XXX 28282000
		 / high-quality shower hose / with plastic coating, easy to clean / shower hose length: 1.25 m / pivot connector prevent hose from tangling / kink-protected / nuts shower hose: cylindrical nut on both ends Alternative sizes: / Metal effect shower hose 1.60 m / Metal effect shower hose 2.00 m 	Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	28282XXX 28286000 28286XXX 28284000 28284XXX
	••••••	Metal shower hose 1.25 m / metal shower hose / without plastic coating / shower hose length: 1.25 m / pivot joints on both sides / kink-protected Alternative sizes:	Chrome Brushed Nickel Special Finishes*	28112000 28112820 28112XXX
	U	/ Metal shower hose 1.60 m/ Metal shower hose 2.00 m	Chrome Brushed Nickel Special Finishes* Chrome Brushed Nickel Special Finishes*	28116000 28116820 28116XXX 28120000 28120820 28120XXX

*For additional information please refer to the "special finish" overview.

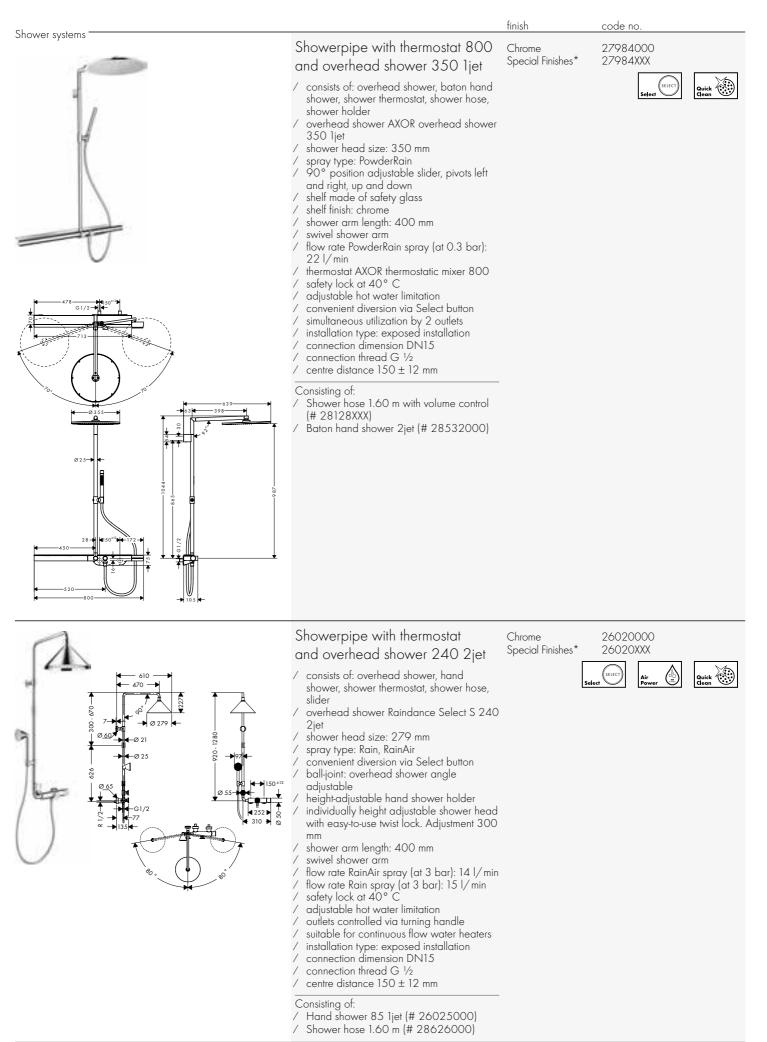

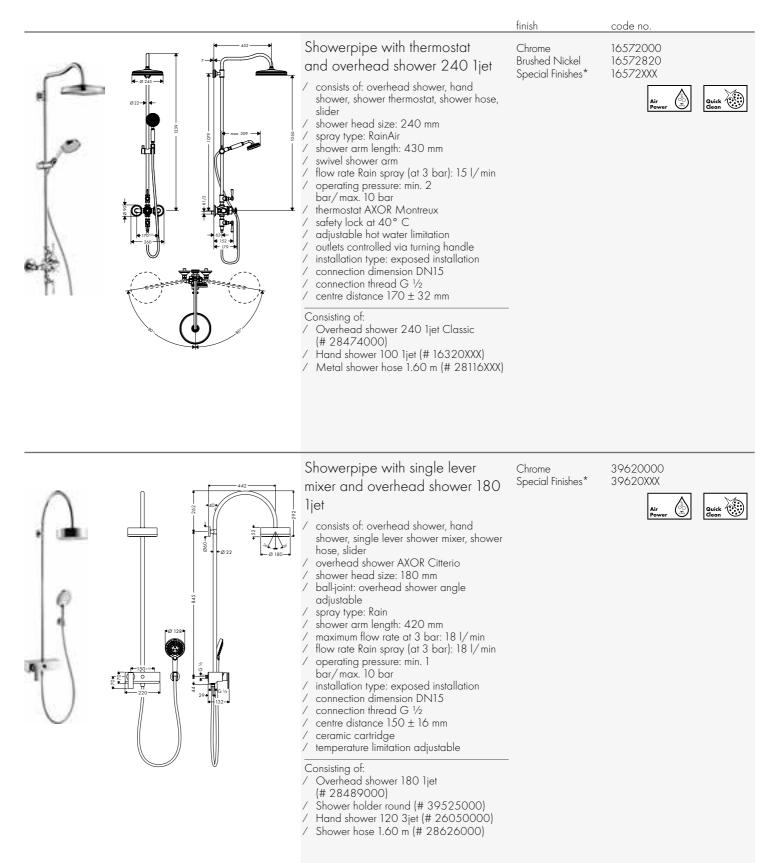

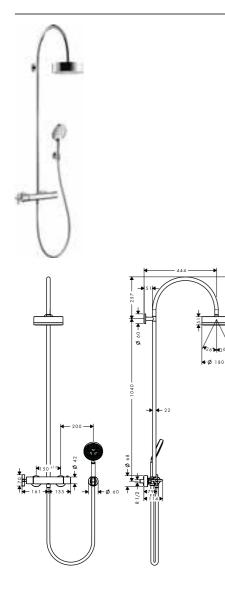

	finish	code no.
Showerpipe with thermostat and overhead shower 180 1jet / consists of: overhead shower, hand shower, shower thermostat, shower hose, shower holder / overhead shower AXOR Citterio / shower head size: 180 mm / spray type: Rain / ball-joint: overhead shower angle adjustable / hand shower wall support / shower arm length: 444 mm	finish Chrome Special Finishes*	code no. 39670000 39670XXX Air Power
<pre>/ maximum flow rate at 3 bar: 17 /min / flow rate Rain spray (at 3 bar): 17 l/min / operating pressure: min. 0.15 MPa/max. 0.6 MPa / thermostat AXOR Citterio / safety lock at 38 ° C / adjustable hot water limitation / outlets controlled via turning handle / installation type: exposed installation / connection dimension DN15 / connection thread G ½ / centre distance 150 ± 12 mm Consisting of: / Overhead shower 180 1jet (# 28489000)</pre>		

Quick Clean

Air Power

- Hand shower 120 3jet (# 26050000) Shower holder round (# 39525000) Shower hose 1.60 m (# 28626000)
- 111

AXOR THERMOSTATIC MODULES WITH SELECT TECHNOLOGY

AESTHETICS AND FUNCTION. IN PERFECTION.

Exclusive aesthetics. Impressive functionality. AXOR thermostatic modules create perfect moments in the shower. Comfortable to use. With Select technology. At the touch of a button. With precise regulation for constant temperature control. Escutcheons made of high-grade metal. In a variety of designs. In perfection.

AXOR SHOWERSELECT THERMOSTATIC MIXERS

Modular. Combinable. Intuitive. AXOR ShowerSelect individual thermometer mixers. Easy to operate thanks to Select technology. Allow several outlets to be controlled – either individually or at the same time. Easy to install with the iBox Universal.





Available in three different escutcheon forms. As a square with precise corners. As a soft cube. Circular.




AXOR ONE

Flat. Soft. Planar. The monolithic control element and the hand shower of the AXOR One shower set. Interaction design par excellence. All thanks to the innovative ShowerSelect technology. With the control element, two large paddles manage the shower jets. Can be combined with one, two or three outlets. Concealed installation.


AXOR SELECT THERMOSTATIC MODULE

The technical counterpart to the element of water. The AXOR Select thermostatic module. Clear in appearance, impressive in performance. Timeless and elegant. Perfect integration in the room. Intuitive to use thanks to its large Select buttons. For three to five outlets or spray modes depending on the version. Precise switching at the touch of a button. Purely mechanical. With integrated thermostat and porter unit.

Design: Phoenix Design

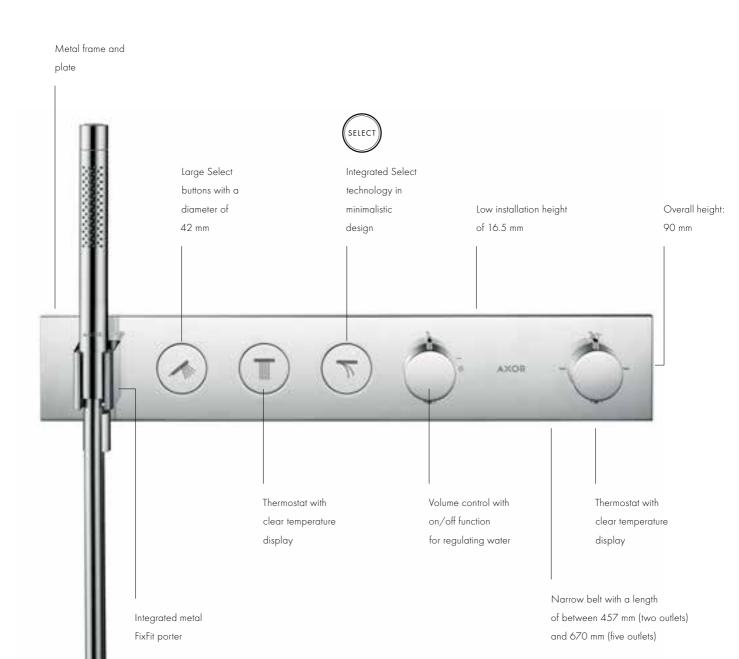

The second for the later	
Thermostatic mixers for exposed installation bath	Bath thermostat 1200 for exposed installation / 2 functions / simultaneous utilization by 2 outlets / centre distance: 150 ± 12 mm / flow rate for bath spout at 3 bar: 20 l/m / flow rate of hand shower at 3 bar: 16 l/min / Select valve, thermostat cartridge / safety lock at 40° C / temperature limitation adjustable / non-return valve / with silencer / material handles: metal / shelf made of safety glass / shelf finish: mirror glass / connection type: G ½ / connection dimension: DN15 / dirt filter included Alternative sizes: / Bath thermostat 800 for exposed installation Optional parts: / Shower hose 1.25 m with volume control
	Bath thermostat 800 for exposed installation / 2 functions / simultaneous utilization by 2 outlets / centre distance: 150 ± 12 mm / flow rate for bath spout at 3 bar: 20 l/m



	finish	code no.	
Bath thermostat 1200 for exposed installation / 2 functions / simultaneous utilization by 2 outlets / centre distance: 150 ± 12 mm / flow rate for bath spout at 3 bar: 20 l/min / flow rate of hand shower at 3 bar: 16 l/min / Select valve, thermostat cartridge / safety lock at 40° C / temperature limitation adjustable / non-return valve / with silencer / material handles: metal / shelf made of safety glass / shelf finish: mirror glass / connection type: G 1/2 / connection dimension: DN15 / dirt filter included Alternative sizes:	Chrome Special Finishes*	45421000 45421XXX Select	Quick
 Anthermostat 800 for exposed installation Optional parts: Shower hose 1.25 m with volume control Shower hose 1.60 m with volume control 	Chrome Special Finishes* Chrome Brushed Nickel Special Finishes*	45420000 45420XXX 28127000 28127XXX 28128000 28128820 28128XXX	
Bath thermostat 800 for exposed installation / 2 functions / simultaneous utilization by 2 outlets / centre distance: 150 ± 12 mm / flow rate for bath spout at 3 bar: 20 l/min / flow rate of hand shower at 3 bar: 16 l/min / thermostat cartridge, Select valve / safety lock at 40° C / temperature limitation adjustable / non-return valve / with silencer / shelf made of safety glass	Chrome Special Finishes*	45420000 45420XXX Select	Quick Contraction

shelf finish: mirror glass connection type: G ½ connection dimension: DN15 dirt filter included / /

- 1
- /


Chrome Special Finishes*	45421000 45421XXX
Chrome	28127000
Special Finishes*	28127XXX
Chrome	28128000
Brushed Nickel	28128820
Special Finishes*	28128XXX
	Special Finishes* Chrome Special Finishes* Chrome Brushed Nickel

AXOR Showers

		finish	code no.
ermostatic mixer for exposed/concealed installation show	Thermostat 800 for exposed/ concealed installation	Chrome Special Finishes*	45440000 45440XXX
	 2 functions simultaneous use of several outlets Select push-button on/off control for 2 outlets flow rate hand shower connection at 3 bar: 15 I/min flow rate upper outlet: 22 I/min Select valve, thermostat cartridge safety lock at 40° C temperature limitation adjustable non-return valve with silencer material handles: metal shelf made of safety glass shelf finish: mirror glass control of an external shower or bath tub filler via concealed connection G V₂ possible connection type: basic set connection dimension: DN15 dirt filter included 		Select
	Required parts: / Basic set for thermostat for exposed/ concealed installation for 2 functions	-	45442180
	Optional parts: / Shower hose 1.25 m with volume control / Shower hose 1.60 m with volume control	Chrome Special Finishes* Chrome Brushed Nickel Special Finishes*	28127000 28127XXX 28128000 28128820 28128XXX



Ther




- 91

Basic set for thermostat for exposed/ concealed installation for 2 functions

/ sound-decoupled installation
 / connection dimension: Rp ¹/₂

45442180


		finish	code no.	
Thermostatic module Select	Thermostatic module Select 460/90 for concealed installation for 2 functions / consists of: Thermostatic module, shower holder / depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function / 2 functions / simultaneous use of several outlets / Select push-button on/off control for 2 outlets / maximum flow rate at 3 bar: 26 l/min / thermostat cartridge, Select valve / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / hose nut: for shower hoses with conical or cylindrical nut on both sides / connection type: basic set / Thermostat is delivered with buttons Waterfall, Rain large, Mono, hand shower Required parts: / Basic set for thermostatic module Select for 2 functions	Chrome Special Finishes*	18355000 18355XXX 18310180	Select
	Basic set for thermostatic module Select for 2 functions / 2 functions / connection thread / Rp ³ / ₄ / installation depth: 87 - 122 mm / horizontal installation / sound-decoupled installation / connection dimension: DN15/DN20		18310180	
	Thermostatic module Select 530/90 for concealed installation for 3 functions / consists of: Thermostatic module, shower holder / depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function / 3 functions / simultaneous use of several outlets / Select push-button on/off control for 3 outlets / maximum flow rate at 3 bar: 26 l/min / thermostat cartridge, Select valve / min. operating pressure: 1 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / hose nut: for shower hoses with conical or cylindrical nut on both sides / connection type: basic set / Thermostat is delivered with buttons Rain large, Waterfall, hand shower	Chrome Special Finishes*	18356000 18356XXX	Select
	Required parts: / Basic set for thermostatic module Select for 3 functions		18311180	

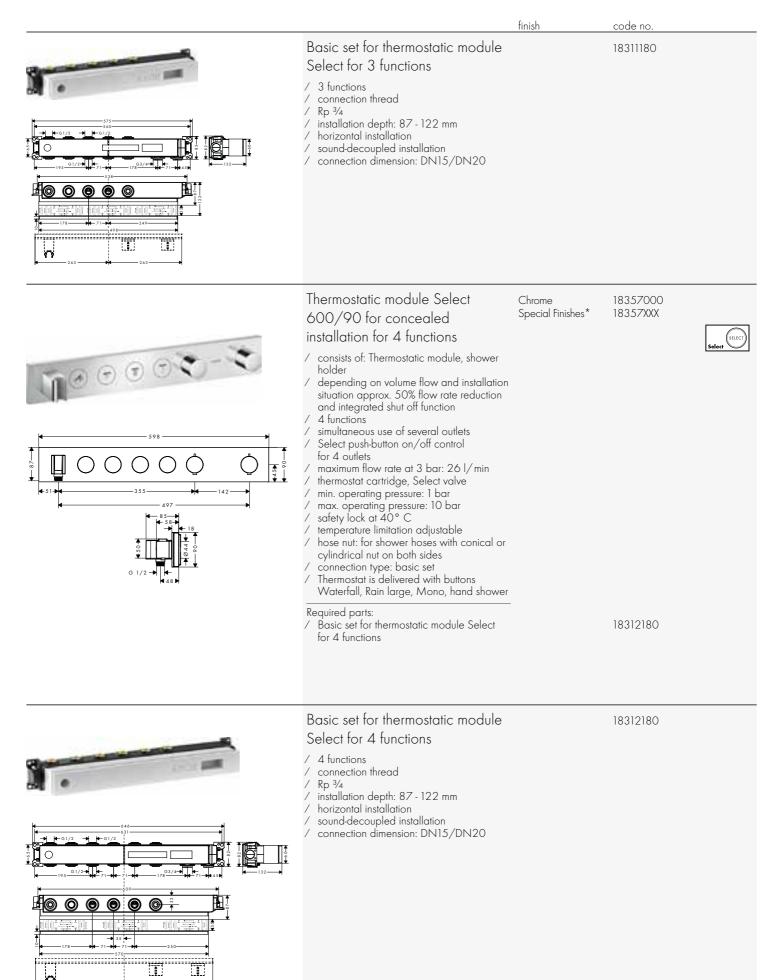

	finish	code no.
Thermostatic module Select 670/90 for concealed installation for 5 functions	Chrome Special Finishes*	18358000 18358XXX
 consists of: Thermostatic module, shower holder depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function 5 functions simultaneous use of several outlets Select push-button on/off control for 5 outlets maximum flow rate at 3 bar: 26 l/min thermostat cartridge, Select valve min. operating pressure: 1 bar max. operating pressure: 10 bar safety lock at 40° C temperature limitation adjustable hose nut: for shower hoses with conical or cylindrical nut on both sides connection type: basic set Required parts: Basic set for thermostatic module Select for 5 functions 		(selee r)

Basic set for thermostatic module Select for 5 functions

- 5 functions connection thread
- Rp 3⁄4 /
- /




- 1
- /
- installation depth: 87 122 mm horizontal installation sound-decoupled installation connection dimension: DN15/DN20

Optional parts - buttons - please order separately		finish	code no.
	Symbol handshower thermostatic module Select	Chrome	93307000
	Symbol overhead shower thermostatic module Select	Chrome	93308000
O	Symbol overhead shower Rain small thernistatic module Select	Chrome	93663000
B	Symbol RainFlow thermostatic module Select	Chrome	93309000
$\overline{\mathbb{C}}$	Symbol Mono thermostatic module Select	Chrome	93310000
Ø	Symbol PowderRain inside thermostatic module Select	Chrome	93311000
O	Symbol PowderRain outside thermostatic module Select	Chrome	93312000
ShowerCollection	Thermostatic module 360/120 for concealed installation square for 3 functions / 3 functions / simultaneous use of several outlets / thermostat cartridge / min. operating pressure: 1,5 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / non-return valve / connection type: basic set / connection dimension: DN20	Chrome Special Finishes*	10751000 10751XXX
	Required parts: / Basic set for thermostatic module 360/120 for concealed installation Optional parts: / Extension set 25 mm for thermostatic module	- Chrome Special Finishes*	10750180 10790000 10790XXX
	/ Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro	Special ministries	92990000

	finish	code no.
Basic set for thermostatic module 360/120 for concealed installation / connection from left or right / 3 outlets can be used simultaneously / flow rate at free through-flow: 59 l/min / spindle valves / horizontal or vertical installation / sound-decoupled installation / in a joined installation / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning / connection dimension: DN20		10750180
/ Thermostatic module 360/120 for concealed installation square	Chrome Special Finishes*	10751000 10751XXX
for 3 functions / Thermostatic module 360/120 for concealed installation	Chrome Special Finishes*	12717000 12717XXX
Thermostatic module 120/120 for concealed installation square / maximum flow rate at 3 bar: 59 l/min / thermostat cartridge / min. operating pressure: 1,5 bar / max. operating pressure: 10 bar / safety lock at 40° C / temperature limitation adjustable / non-return valve / connection type: basic set / connection dimension: DN20	Chrome Special Finishes*	10755000 10755XXX
Required parts: / Basic set for thermostatic module 120/120 for concealed installation		10754180
Optional parts: / Extension set 25 mm for thermostatic module	Chrome Special Finishes*	10790000 10790XXX
Basic set for thermostatic module 120/120 for concealed installation / flow rate at free through-flow: 59 l/min / horizontal or vertical installation / sound-decoupled installation / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning / connection dimension: DN20 Optional parts: / Thermostat HighFlow 120/120 for concealed installation / Thermostatic module 120/120 for concealed installation square / Thermostat 120/120 for concealed installation	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	10754180 12712000 12712XXX 10755000 10755XXX 36702000 36702XXX
	 360/120 for concealed installation connection from left or right 3 outlets can be used simultaneously flow rate at free through-flow: 59 l/min spindle valves horizontal or vertical installation sound-decoupled installation in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning connection dimension: DN20 Required parts: Thermostatic module 360/120 for concealed installation square for 3 functions Thermostatic module 360/120 for concealed installation square for 3 functions Thermostatic module 360/120 for concealed installation square for a functions Thermostatic module 360/120 for concealed installation square for a functions Thermostatic module 360/120 for concealed installation square for a functions Thermostatic module 120/120 for concealed installation square for a function gressure: 1,5 bar max. operating pressure: 10 bar safety lock at 40° C temperature limitation adjustable connection type: basic set connection dimension: DN20 Required parts: Basic set for thermostatic module 120/120 for concealed installation Optional parts: Extension set 25 mm for thermostatic module Dional parts: f Basic set for thermostatic module 120/120 for concealed installation f ow rate at free through-flow: 59 l/min h obscience and the set of thermostatic module Optional parts: f Thermostat HighFlow 120/120 for concealed installation f on poince installation f on poince installation f ocunection dimension: DN20 Optional parts: f Thermostati HighFlow 120/120 for concealed installation f or concealed install	Basic set for thermostatic module 360/120 for concealed installation Connection from left or right 3 outlets can be used simultaneously flow rate at free throughflow: 591/min spindle valves A sourdecoupled installation in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning Connection dimension: DN20 Required parts: Thermostatic module 360/120 for concealed installation square for 3 functions Chrome Special Finishes* Thermostatic module 120/120 for concealed installation square Chrome Special Finishes* Maximum flow rate at 3 bar: 59 l/min Chrome Special Finishes* Maximum flow rate at 3 bar: 59 l/min Chrome Special Finishes* Maximum flow rate at 3 bar: 59 l/min Chrome Special Finishes* Maximum flow rate at 3 bar: 59 l/min / thermostat cartridge / max. operating pressure: 15 bar / max. operating pressure: 10 bar / safety lock at 40° C Chrome Special Finishes* Basic set for thermostatic module 120/120 for conceeled installation Chrome Special Finishes* Optional parts: / basic set for thermostatic module Chrome Special Finishes* Basic set for thermostatic module Thermostat HighFlow 120/120 for conceeled installation / in a joined installation / in a oined installation / barizontal or vertical installation / sound-decoupled installation / hermostat 120/120 for conceeled

			finish	code no.
		Extension set 25 mm for thermostatic module / connection dimension: DN20 / extension for basic set / extension length: 25 mm	Chrome Special Finishes*	10790000 10790XXX
	4 55 ♦ 4 50 ♦	Shut-off valve 120/120 for concealed installation square	Chrome Special Finishes*	10972000 10972XXX
-		 / connection type: DN15/DN20 / in a joined installation (10 mm distance) with # 10755000, # 10751000, # 10651000, # 28491000, # 40872000, # 40873000 or # 40874000 the use of basic set # 10971180 is recommended / in a freely arranged installation, basic sets # 15973180, # 15974180 or # 15970180 can also be used 		
		 Required parts: / Basic set for shut-off valve 120/120 for concealed installation / Basic set 52 l/min for shut-off valve for concealed installation spindle / Basic set 40 l/min for concealed installation for shut-off valve ceramic / Basic set 130 l/min for shut-off valve for concealed installation spindle 	-	10971180 16973180 16974180 16970180
		Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro	_	92990000





Basic set for shut-off valve 120/120 for concealed installation

- suitable for all shut-off valves finish sets connection from left or right flow rate at free through-flow: 55 l/min sound-decoupled installation in a joined installation it serves as /

- a waterconducting unit and allows dimensionally accurate positioning connection dimension: DN15

Optional parts:

Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro /

10971180

			finish	code no.
	Rp 1/2→ 4 58 → 28 4	Basic set 52 I/ min for shut-off valve for concealed installation spindle		16973180
80		 / connection type: DN15 / suitable for all shut-off valves finish sets / flow rate: 52 l/min / connection dimension: DN15 		
	┫-60-▶	Alternative products: / Basic set 40 l/min for concealed	-	16974180
		installation for shut-off valve ceramic / Basic set 130 l/min for shut-off valve for concealed installation spindle		16970180
		Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro	-	92990000
		Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation	Chrome Special Finishes*	10932000 10932XXX
	 3 consumers: in a freely-arranged installation (distance greater than 10 mm), the basic set # 15930180 must be used 2 consumers: in a joined installation (10 mm distance) with # 36702000, the basic set # 36770180 must be used 2 consumers: in a freely-arranged installation (distance greater than 10 mm), the basic set # 15981180 must be used simultaneous utilization by 2 outlets 			
		Required parts: / Basic set for shut-off/ diverter valve Trio	_	36770180
		120/120 for concealed installation / Basic set for Quattro four-way diverter valve for concealed installation		16930180
		 / Basic set for shut-off/ diverter valve Trio for concealed installation 		16982180
inf)		Basic set for shut-off/ diverter valve Trio 120/120 for concealed installation		36770180
CTC .		/ 2 functions / 1 inlet/ 2 outlets		

diverter valve Trio T20/T20 for concealed installation / 2 functions / 1 inlet/ 2 outlets / 2 outlets can be used simultaneously / connection thread / Rp ³ / ₄ / horizontal or vertical installation / sound-decoupled installation / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning / connection dimension: DN20		
Required parts: / Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation / Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation / Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio/ Quattro	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	36772000 36772XXX 10932000 10932XXX 12731000 12731XXX 92990000

Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.

			finish	code no.
	Rp3/4 0 0 0 0 0 0 0 0 0 0 0 0 0	Basic set for shut-off/ diverter valve Trio for concealed installation / 2 functions / simultaneous utilization by 2 outlets / suitable for all Trio finish sets / flow rate: 65 l/min / connection dimension: DN20 Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000
-	Rp 3/4	Basic set for Quattro four-way diverter valve for concealed installation / requires volume control / 3 functions / simultaneous utilization by 2 outlets / suitable for all Quattro finish sets / flow rate: 65 l/min / connection dimension: DN20 Optional parts: / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000
		Hand shower module 120/120 for concealed installation square / consists of: shut-off valve, hand shower module, baton hand shower, shower hose / hose nut: for shower hoses with cylindrical nut on both sides / connection type: DN15 / with non-return valve Consisting of: / Metal effect shower hose 1.25 m (# 28282000) Required parts: / Basic set for hand shower module 120/120 for concealed installation Optional parts: / Extension set for hand shower module	Chrome Special Finishes*	10651000 10651XXX 10650180 10658000

		finish	code no.
	Basic set for hand shower module 120/120 for concealed installation / flow rate at free through-flow: 30 l/min / ceramic valve 180° / horizontal or vertical installation / sound-decoupled installation / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning / connection dimension: DN15 Required parts: / Hand shower module 120/120 for concealed installation square	Chrome Special Finishes*	10650180 10651000 10651XXX
ShowerCollection Accessories	 Shelf 120/120 / when positioning the shelf between waterconducting parts (# 10755000, # 10751000, # 10942000, # 10972000, # 10972000, # 10651000, # 28491000) in joined installation (10 mm distance), it is recommended to use basic set # 40877180 / suitable for installation with or without basic set # 40877180 / for use with either vertical or horizontal installation of the basic set Optional parts: / Basic set/ waterconducting unit for shelf 120/120 for concealed installation 	Chrome Special Finishes*	40872000 40872XXX 40877180
	Basic set/ waterconducting unit for shelf 120/120 for concealed installation / in a joined installation it serves as a waterconducting unit, allows dimensionally accurate positioning. In combination with: # 40872000		40877180
	 Shelf 240/120 for use with either vertical or horizontal installation of the basic set when positioning the shelf between waterconducting parts (# 10755000, # 10751000, # 10942000, # 10972000, # 10972000, # 10972000, # 10972000, # 28491000) in joined installation (10 mm distance), it is recommended to use basic set # 40878180 suitable for installation with or without basic set # 40878180 Optional parts: Basic set/ waterconducting unit for shelf 240/120 for concealed installation 	Chrome Special Finishes*	40873000 40873XXX 40878180

Measurements within scale drawings are in mm.

		finish	code no.
0	Basic set/ waterconducting unit for shelf 240/120 for concealed installation / in a joined installation it serves as a waterconducting unit, allows dimensionally accurate positioning. In combination with: # 40873000		40878180
	Installation plate		10973180
ShowerSelect Soft	 / installation and distance template for easy installation of basic set for lighting and speaker module / installation plate can be extended by a second plate 		
	Thermostat HighFlow for concealed installation softcube / maximum flow rate at 3 bar: 59 l/min / thermostat cartridge / safety lock at 40° C / temperature limitation adjustable / connection type: basic set Required parts: / Basic set iBox universal Optional parts: / Valve for concealed installation softcube for 3 functions / Extension element / Extension 25 mm for basic set iBox	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	36711000 36711XXX 01700180 36773000 36773XXX 98860000 98860XXX 13587000
	 / Extension 25 min for basic series x universal / Fastening rail set for iBox universal 		93171000

		finish	code no.
	Thermostat HighFlow for concealed installation softcube for 1 function and additional outlet / 1 function and 1 additional outlet / Select push-button on/off control for 1 outlet / flow rate hand shower connection at 3 bar: 34 I/ min / flow rate upper outlet: 59 I/ min / thermostat cartridge / safety lock at 40° C / temperature limitation adjustable / connection type: basic set / Thermostat is delivered with button hand shower	Chrome Special Finishes*	36706000 36706XXX Select
	Required parts: / Basic set iBox universal		01700180
	 Optional parts: Valve for concealed installation softcube for 3 functions Extension element Fastening rail set for iBox universal Extension 25 mm for basic set iBox universal 	Chrome Special Finishes* Chrome Special Finishes*	36773000 36773XXX 98860000 98860XXX 93171000 13587000
000	Valve for concealed installation softcube for 3 functions / 3 functions / simultaneous use of several outlets / maximum flow rate at 3 bar: 30 l/min / Select valve / connection type: basic set / Thermostat is delivered with buttons Rain large, Waterfall, hand shower	Chrome Special Finishes*	36773000 36773XXX
	Required parts: / Basic set iBox universal	-	01700180
	 Optional parts: / Extension element / Thermostat HighFlow for concealed installation softcube / Thermostat HighFlow for concealed installation softcube for 1 function and additional outlet / Fastening rail set for iBox universal / Extension 25 mm for basic set iBox universal 	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	98860000 98860XXX 36711000 36711XXX 36706000 36706XXX 93171000 13587000

		finish	code no.
	Thermostat for concealed installation softcube for 1 function / 1 function / Select push-button on/off control for 1 outlet / maximum flow rate at 3 bar: 26 l/min / thermostat cartridge / safety lock at 40° C / temperature limitation adjustable / connection type: basic set / Thermostat is delivered with button On/Off Required parts: / Basic set iBox universal Optional parts: / Extension element / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	Chrome Special Finishes* Chrome Special Finishes*	36705000 36705XXX 01700180 98860000 98860XXX 13587000 93171000
	Thermostat for concealed installation softcube for 2 functions / 2 functions / 2 functions / simultaneous use of several outlets / Select push-button on/off control for 2 outlets / flow rate upper outlet: 25 l/min / flow rate lower outlet: 23 l/min / thermostat cartridge / safety lock at 40° C / temperature limitation adjustable / connection type: basic set / Thermostat is delivered with buttons hand shower and Rain large Required parts: / Basic set iBox universal Optional parts: / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal / Extension element	Chrome Special Finishes*	36707000 36707XXX Ister 01700180 13587000 93171000 98860XXX
$\begin{array}{c} 151 \\ 114 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 122 \end{array}$	 Basic set iBox universal / suitable for all shower, bath tub and thermostat finish sets for concealed installation / connection thread / Rp ³/₄ / rotationally-symmetric installation / sound-decoupled installation / connection dimension: DN20 		01700180

Optional parts: / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal

		finish	code no.
ShowerSelect Round	Thermostat HighFlow for concealed installation round / maximum flow rate at 3 bar: 59 l/min / thermostat cartridge / safety lock at 40° C / temperature limitation adjustable / connection type: basic set Required parts: / Basic set iBox universal	Chrome Brushed Nickel Special Finishes*	36721000 36721820 36721XXX 01700180
	 Optional parts: / Valve for concealed installation round for 3 functions / Fastening rail set for iBox universal / Extension 25 mm for basic set iBox universal 	Chrome Brushed Nickel Special Finishes*	36727000 36727820 36727XXX 93171000 13587000
	Thermostat HighFlow for concealed installation round for 1 function and additional outlet / 1 function and 1 additional outlet / Select push-button on/off control for 1 outlet / flow rate hand shower connection at 3 bar: 34 l/min / flow rate upper outlet: 59 l/min / thermostat cartridge / safety lock at 40° C / temperature limitation adjustable / connection type: basic set / Thermostat is delivered with button hand shower	Chrome Brushed Nickel Special Finishes*	36726000 36726820 36726XXX
	Required parts: / Basic set iBox universal Optional parts: / Fastening rail set for iBox universal / Valve for concealed installation round for 3 functions / Extension 25 mm for basic set iBox universal	Chrome Brushed Nickel Special Finishes*	01700180 93171000 36727000 36727820 36727XXX 13587000
000	Valve for concealed installation round for 3 functions / 3 functions / simultaneous use of several outlets / maximum flow rate at 3 bar: 30 l/min / connection type: basic set / Thermostat is delivered with buttons Rain large, Waterfall, hand shower Required parts: / Basic set iBox universal	Chrome Brushed Nickel Special Finishes*	36727000 36727820 36727XXX select
	 Optional parts: / Thermostat HighFlow for concealed installation round / Thermostat HighFlow for concealed installation round for 1 function and additional outlet / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal 	Chrome Brushed Nickel Special Finishes* Chrome Brushed Nickel Special Finishes*	36721000 36721820 36721XXX 36726000 36726820 36726820 36726XXX 13587000 93171000

Product Book 2020/2021

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

		finish	code no.	
	Thermostat for concealed installation round for 1 function / 1 function / Select push-button on/off control for 1 outlet / maximum flow rate at 3 bar: 26 l/min / thermostat cartridge / safety lock at 40° C / temperature limitation adjustable / connection type: basic set / Thermostat is delivered with button On/Off Required parts: / Basic set iBox universal Optional parts: / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	Chrome Brushed Nickel Special Finishes*	36722000 36722820 36722XXX 01700180 13587000 93171000	Select
	Thermostat for concealed installation round for 2 functions / 2 functions / simultaneous use of several outlets / Select push-button on/off control for 2 outlets / flow rate upper outlet: 25 l/min / flow rate lower outlet: 23 l/min / thermostat cartridge / safety lock at 40° C / temperature limitation adjustable / connection type: basic set / Thermostat is delivered with buttons Rain large and hand shower Required parts: / Basic set iBox universal Optional parts: / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	Chrome Brushed Nickel Special Finishes*	36723000 36723820 36723XXX 01700180 13587000 93171000	Select
	Basic set iBox universal / suitable for all shower, bath tub and thermostat finish sets for concealed installation / connection thread / Rp ¾ / rotationally-symmetric installation / sound-decoupled installation / connection dimension: DN20 Optional parts: / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal		01700180 13587000 93171000	



werSelect Square	Thermostat HighFlow for concealed installation square / maximum flow rate at 3 bar: 59 l/min / thermostat cartridge / safety lock at 40° C / temperature limitation adjustable / connection type: basic set	Chrome Special Finishes*	36718000 36718XXX	
	Required parts: / Basic set iBox universal Optional parts: / Extension 25 mm for basic set iBox universal / Valve for concealed installation square for 3 functions / Fastening rail set for iBox universal	Chrome Special Finishes*	01700180 13587000 36717000 36717XXX 93171000	
0	Thermostat HighFlow for concealed installation square for 1 function and additional outlet / 1 function and 1 additional outlet / Select push-button on/off control for 1 outlet / flow rate hand shower connection at 3 bar: 34 l/min / flow rate upper outlet: 59 l/min / thermostat cartridge / safety lock at 40° C / temperature limitation adjustable / connection type: basic set / Thermostat is delivered with button hand shower Required parts: / Basic set iBox universal Optional parts: / Valve for concealed installation square for 3 functions / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	Chrome Special Finishes* Chrome Special Finishes*	36716000 36716XXX 01700180 36717000 36717XXX 13587000 93171000	Select

finish

code no.



Valve for concealed installation square for 3 functions	Chrome Special Finishes*	36717000 36717XXX	
 / 3 functions / simultaneous use of several outlets / maximum flow rate at 3 bar: 30 l/min / connection type: basic set / Thermostat is delivered with buttons Rain large, Waterfall, hand shower 			Select
Required parts: / Basic set iBox universal	-	01700180	
Optional parts: / Thermostat HighFlow for concealed installation square / Thermostat HighFlow for concealed installation square for 1 function and additional outlet	Chrome Special Finishes* Chrome Special Finishes*	36718000 36718XXX 36716000 36716XXX	
 / Extension 25 mm for basic set iBox universal 		13587000	
/ Fastening rail set for iBox universal		93171000	

Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.

Product Book 2020/2021

- 170 -

000

٠


170

36715000 36715XXX

01700180

13587000





▶22

454-82**▶** 170

O(

-54-170/170 -

		finish	code no.	
	Thermostat for concealed installation square for 1 function	Chrome Special Finishes*	36714000 36714XXX	
, , , , , ,	 1 function Select push-button on/off control for 1 outlet maximum flow rate at 3 bar: 26 l/min thermostat cartridge safety lock at 40° C temperature limitation adjustable connection type: basic set Thermostat is delivered with button On/Off 		5	elect
,	Required parts: / Basic set iBox universal		01700180	
,	Optional parts: / Extension 25 mm for basic set iBox universal		13587000	
,	 Fastening rail set for iBox universal 		93171000	



	Thermostat for concealed installation square for 2 functions	Chrome Special Finishes*
120	 2 functions simultaneous use of several outlets Select push-button on/off control for 2 outlets flow rate upper outlet: 25 l/min flow rate lower outlet: 23 l/min thermostat cartridge safety lock at 40° C temperature limitation adjustable connection type: basic set Thermostat is delivered with buttons Rain large and hand shower 	
] ↓	Required parts: / Basic set iBox universal	
	Optional parts: / Extension 25 mm for basic set iBox	

universal / Fastening rail set for iBox universal 93171000

*For additional information please refer to the "special finish" overview.


00	

	finish	code no.
Thermostat for concealed installation square for 2 functions with wall outlet and shower holder	Chrome Special Finishes*	36712000 36712XXX Select
 consists of: Thermostat, shower holder 2 functions simultaneous use of several outlets Select push-button on/off control for 2 outlets maximum flow rate at 3 bar: 26 l/min thermostat cartridge, Select valve safety lock at 40° C temperature limitation adjustable hose nut: for shower hoses with conical nut on both sides connection type: basic set Thermostat is delivered with buttons Rain large and hand shower 		
This product is not available in brushed special finishes.		
Required parts: / Basic set iBox universal		01700180
Optional parts: / Shower hose 1.25 m / Extension element ShowerSelect FixFit Porter / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	Chrome Special Finishes* Chrome	28622000 28622XXX 13601000 13587000 93171000

	Basic set iBox universal	01700180
	 suitable for all shower, bath tub and thermostat finish sets for concealed installation connection thread Rp ³/₄ rotationally-symmetric installation sound-decoupled installation connection dimension: DN20 	
	Optional parts: / Extension 25 mm for basic set iBox universal	13587000
	 Fastening rail set for iBox universal 	93171000

		finish	code no.
Optional parts - buttons - please order separately	Symbol ON/OFF	Black	93579610
	Symbol hand shower	Black	93573610
	Symbol overhead shower Rain large	Black	93571610
	Symbol overhead shower Rain small	Black	93572610
B	Symbol Rain Flow	Black	93574610
	Symbol Whirl	Black	93575610
	Symbol Mono	Black	93576610
	Symbol tub	Black	93577610
	Symbol body spray	Black	93578610

One



	finish	code no.	
Thermostatic module for concealed installation for 1 function / Eco-Function: flow rate regulation via lever handle / depending on volume flow and installation situation approx. 50% flow rate reduction / 1 function and 1 additional outlet / comfortable turning on / off of consumers with large Select-paddle / maximum flow rate at 3 bar: 24 I/min / flow rate per outlet: 24 I/min / flow rate per outlet: 24 I/min / thermostat cartridge, Select valve, ceramic valves 90° / min. operating pressure: 1 bar / safety lock at 40° C / temperature limitation adjustable / the thermostat offers the possibility for thermal disinfection / non-return valve / connection type: basic set / Thermostat is delivered with button hand shower	Chrome Special Finishes*	45711000 45711XXX	Select
Required parts: / Basic set for thermostatic module for concealed installation		45710180	
Thermostatic module for concealed installation for 2 functions / Eco-Function: flow rate regulation via lever handle / depending on volume flow and installation situation approx. 50% flow rate reduction / 2 functions and 1 additional outlet / simultaneous use of several outlets / comfortable turning on / off of consumers with large Selectoaddle	Chrome Special Finishes*	45712000 45712XXX	Select


- comfortable turning on / c with large Select-paddle

 - flow rate by simultaneous use of all outlets: 30 |/ min /
 - thermostat cartridge, Select valve, ceramic valves 90°

 - min. operating pressure: 1 bar safety lock at 40° C temperature limitation adjustable
 - the thermostat offers the possibility for thermal disinfection /

 - non-return valve
 - connection type: basic set
 - Required parts:

Basic set for thermostatic module / for concealed installation



		finish	code no.
<image/>	Thermostatic module for concealed installation for 3 functions / Eco-Function: flow rate regulation via lever handle / depending on volume flow and installation situation approx. 50% flow rate reduction / 3 functions and 1 additional outlet / simultaneous use of several outlets / comfortable turning on / off of consumers with large Select-paddle / flow rate per outlet: 24 l/min / flow rate per outlet: 24 l/min / flow rate by simultaneous use of all outlets: 30 l/min / thermostat cartridge, Select valve, ceramic valves 90° / min. operating pressure: 1 bar / safety lock at 40° C / temperature limitation adjustable / the thermostat offers the possibility for thermal disinfection / non-return valve / connection type: basic set Required parts: / Basic set for thermostatic module for concealed installation	Chrome Special Finishes*	45713000 45713XXX
<image/>	Basic set for thermostatic module for concealed installation / 2 inlets / 4 outlets / all outlets can be used simultaneously / connection thread / Rp ¹ / ₂ / installation depth: from 80 to 108 mm / sound-decoupled installation Required parts: / Thermostatic module for concealed installation for 1 function / Thermostatic module for concealed installation for 2 functions / Thermostatic module for concealed installation for 3 functions	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	45710180 45711000 45711XXX 45712000 45712XXX 45713000 45713XXX
and the second sec	Extension set 25 mm for basic set thermostatic module / extension for basic set / extension length: 25 mm Optional parts: / Basic set for thermostatic module for concealed installation		45790000 45710180

			finish	code no.
-		Shut-off valve for concealed installation / comfortable turning on / off of consumers with large Select-paddle	Chrome Special Finishes*	45771000 45771XXX
Ĺ		/ connection type: basic set / 1 function / connection dimension: DN15 / material: metal		
		Required parts: / Basic set for shut-off valve for concealed installation	Chrome	45770180
	 4 → 134 → 134 → 108 → 108 	Basic set for shut-off valve for concealed installation	Chrome	45770180
		 connection from left or right flow rate at free through-flow: 30 l/min sound-decoupled installation in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning connection dimension: DN15 		


G1/2

Required parts: / Shut-off valve for concealed installation 45771000 45771XXX Chrome Special Finishes*

The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.


Overhead showers '

- ShowerHeaven 1200/300 4jet with lighting 2700 K
- # 10628000



4. PowderRain outside


ShowerHeaven 970/970 3jet with lighting # 10623800



2. RainAir

3. Laminar spray

Overhead shower 460/300 3jet with shower arm and square escutcheon # 35282000




3. RainStream


- ShowerHeaven 1200/300 4jet with lighting / 3500 K # 10629000
- 0,60 6,0 0.55 5,5 0,50 5,0 0,45 4,5 0,40 4,0 1+2 0,35 3,5 MPa 3,0 ឆ្នី 0,30 0,25 2,5 0,20 2,0 0,15 1,5 0,10 1,0 0,05 0,5 0.00 0.0 Q = I/min 0 3 6 9 12 15 18 21 24 27 30 Q = I/sec 00,1 0,2 0.3 0.4 0.5
- 1. Rain 2. Mono

3. PowderRain inside 4. PowderRain outside

- / ShowerHeaven 720/720 3jet with lighting
 - # 10627800




/ Overhead shower 460/300 3jet with shower arm and softcube escutcheon # 35276000



- 1. Mono
- 2. Rain


3. RainStream






- 2. Mono
- 3. PowderRain inside
- 4. PowderRain outside


[/] Overhead shower 250/580 3jet # 35283000



/ Overhead shower 460/300 3jet with ceiling connection # 35281000




 Overhead shower 460/300 2jet with shower arm and square escutcheon # 35280000




2. RainStream


 Overhead shower 460/300 2jet with shower arm and softcube escutcheon # 35275000




- The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.
 - / Overhead shower 460/300 2jet with ceiling connection
 - # 35279000




Overhead shower 460/300 1jet with shower arm and square escutcheon # 35278000




 / Overhead shower 460/300 1jet with shower arm and softcube escutcheon # 35274000









 Overhead shower 350 1jet with shower arm # 26034000, 26034820



 / Overhead shower 350 1jet with ceiling connection # 26035000, 26035820



 Overhead shower 300 2jet with shower arm # 35303000




^{2.} Intense PowderRain

The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.

AXOR Flow diagrams


- Overhead shower 300 2jet with ceiling connection
- # 35304000




1. PowderRain

2. Intense PowderRain


/ Overhead shower 300 2jet ceiling # 35305000




Overhead shower 300 1jet with shower arm # 35300000




Overhead shower 300 1jet with ceiling connection# 35301000



/ Overhead shower 300 1jet ceiling # 35302000








2. Intense PowderRain


/ Overhead shower 300/300 2jet with ceiling connection # 35320000




1. PowderRain

2. Intense PowderRain

/ Overhead shower 300/300 2jet ceiling # 35321000



/ Overhead shower 300/300 1jet with shower
arm
35314000



Product Book 2020/2021


Q = I/min 0 3

Q = I/sec 0

6 9

0,1

Overhead shower 300/300 1jet with ceiling connection # 35316000




0,2

12 15 18 21 24 27 30

0.4 0.5

0.3




/

/

35317000

0.60



Overhead shower 300/300 1jet ceiling

6.0


5,5

5,0


4,5

4.0

3,5




Overhead shower 250 2jet with shower arm # 35296000




2. PowderRain


Overhead shower 250 2jet with ceiling connection # 35297000




- 1. PowderRain
- 2. Intense PowderRain

Overhead shower 250 2jet ceiling # 35298000









/ Overhead shower 250 1jet with ceiling connection






/ Overhead shower 250 1jet ceiling # 35287000



Overhead shower 250/250 2jet with shower arm # 35310000



1. Intense PowderRain 2. PowderRain


The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.

- Overhead shower 250/250 2jet with ceiling connection # 35312000
- 0.60 6.0 0,55 5,5 0,50 5,0 0,45 4,5 0.40 4.0 0.35 3.5 MPa 3,0 .5 0,30 1+2 0,25 2,5 0,20 2,0 0,15 1,5 1,0 0,10 0,05 0,5 0,00 🖌 0.0 Q = I/min 03 6 9 12 15 18 21 24 27 30 Q = I/sec 00.1 0.2 0.3 0.4 0.5

1. PowderRain


2. Intense PowderRain

Overhead shower 250/250 2jet ceiling / # 35313000




Overhead shower 250/250 1jet with shower / arm


^{# 35306000}




Overhead shower 250/250 1jet with ceiling connection # 35308000




/ Overhead shower 250/250 1jet ceiling # 35309000








Overhead shower 240/240 1jet with ceiling connection # 10929000



/ Overhead shower 240/240 1jet with shower arm # 10925000






2. With flow limiter


(25 l/min)

/ Flood spout 240/120 for concealed installation #10942000




1. Hand shower 2. Bath spout

 LampShower 275 1jet with ceiling connector # 26032000




/ LampShower 275 1jet with shower arm # 26031000




- The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.
 - Overhead shower 240 2jet with ceiling connector
 # 26022000





Overhead shower 240 2jet with shower arm # 26021000



- 1. Rain 2. RainAir


0,50 5,0 0,45 4,5 0,40 4.0 0,35 3,5 0,30 3,0 dy 0,25 -2,5 b 0,20 2,0 0.15 -1.5 -1,0 0,10 0,05 -0,5 0,00 0.0 Q = 1/min 0 3 6 9 12 15 18 21 24 27 30 0,2 Q = I/sec 00,1 0,3 0,5 0,4

Plate overhead shower 240 1jet


/

28494000







Overhead shower 180 1jet Classic
 # 28487000




/ Overhead shower 240 1jet Classic # 28474000









The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.

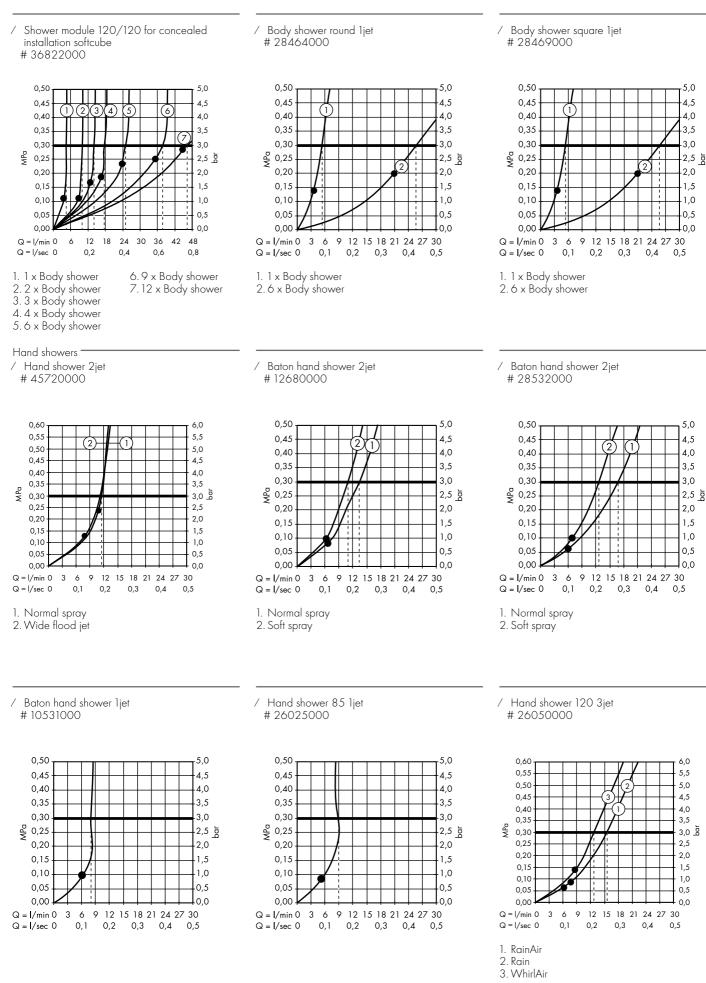

Hand shower 120 3jet EcoSmart 9 I/min # 26051000




- Showerpipe with thermostat and overhead shower 240 2jet # 26020000



2. Hand shower


Hand shower 100 1jet # 16320000, 16320820

/




- The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.
 - Showerpipes and shower panels -Showerpipe with thermostat 800 /
 - and overhead shower 350 ljet

27984000




2. Hand shower

Showerpipe with thermostat and overhead / shower 240 ljet # 16572000, 16572820




1. Overhead shower

2. Hand shower

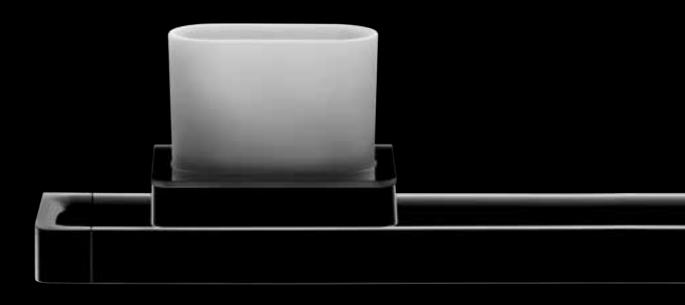

AXOR ACCESSORIES

AXOR Universal	356
AXOR ShowerCollection	366
AXOR Starck	368
AXOR Starck Organic	371
AXOR Citterio / Citterio M	374
AXOR Urquiola	378
AXOR Uno	381
AXOR Montreux	385





AXOR UNIVERSAL ACCESSORIES

AXOR UNIVERSAL ACCESSORIES

MODULARITY. IN PERFECTION.

A new way of looking. At unique aspects of everyday life. With AXOR Universal Accessories, all possibilities are open. Twelve elements that are more than just appendages – a unique system of individual masterpieces. Combined by an intelligent construction. Resolutely linear.

Design: Antonio Citterio



AXOR UNIVERSAL ACCESSORIES

1

Products required:

b. Rail

a. # 42838000 + 1 x # 42870000 adapter set

Removable glass cover for convenient filling and cleaning The scratch-proof white glass Thanks to their timeless design, AXOR is dishwasher-friendly and is Spacious Universal Accessories dovetail elegantly therefore exceptionally hygienic shelf area with any style of bathroom Metal frame 180 ml volume for liquid soap or washing-up liquid Metal frame It is possible to install AXOR Universal Liquid soap dispenser Accessories as an individual solution or for single-hand # 42819000 as a system on a rail - with adapter set operation # 42870000 Adapter set # 42870000 is also required. 2 3 a prostation in the local division of the loca b h Asymmetrical placement of 300 mm shelf on the Elegant combination of rail with 300 mm shelf rail. 1 adapter set required.

(installed asymmetrically), roll holder. 2 adapter sets required.

Products required:


a. # 42838000 + 1 x # 42870000 adapter set b. # 42836000 + 1 x # 42870000 adapter set c. Rail



Spacious shelf areas through 300 mm shelf and liquid soap dispenser on the rail. 3 adapter sets required.

Products required:

a. # 42838000 + 2 x # 42870000 adapter set b. # 42819000 + 1 x # 42870000 adapter set c. Rail





Products required:

a. # 42838000 + 2 x # 42870000 adapter set b. # 42836000 + 1 x # 42870000 adapter set c. # 42803000 + 1 x # 42870000 adapter set d. Rail

b



b

Products required:

a. # 42838000 + 2 x # 42870000 adapter set b. # 42836000

7



Roll holder with soap dish/shelf 150 mm – the space-saving combination for guest bathrooms. 1 adapter set required.


Products required:

a. # 42803000 + 1 x # 42870000 adapter set b. # 42836000

a

			finish	code no.
AXOK Universal Accessories	designed by Antonio Citterio —	Toothbrush tumbler / drilling distance 108 mm / wall-mounted / adapter set # 42870XXX must be used when installing on a rail Optional parts:	Chrome Special Finishes* _	42834000 42834XXX
		Adapter set	Chrome	42870000
		/ Rail grab bar 300 mm	Special Finishes* Chrome Special Finishes*	42870XXX 42830000 42830XXX
	- 105 - 93 - 93 - 75 .	/ Rail bath towel holder 600 mm	Chrome Special Finishes*	42832000 42832XXX
		/ Rail bath towel holder 800 mm	Chrome Special Finishes*	42833000 42833XXX






Ο

58

47-

Soap dish/ shelf / drilling distance 108 mm / material: glass, metal / wall-mounted / adapter set # 42870XXX must be used when installing on a rail / combinable with roll holder # 42836XXX (adapter # 42870XXX necessary)	Chrome Special Finishes*	42803000 42803XXX
Optional parts:		
/ Adapter set	Chrome Special Finishes*	42870000 42870XXX
/ Rail grab bar 300 mm	Chrome	42830000
-	Special Finishes*	42830XXX
/ Rail bath towel holder 600 mm	Chrome	42832000
/ Rail bath towel holder 800 mm	Special Finishes* Chrome	42832XXX 42833000
	Special Finishes*	42833XXX
/ Roll holder with cover	Chrome	42836000
	Special Finishes*	42836XXX



Liquid soap dispenser with shelf	Chrome	42819000
 / drilling distance 108 mm / wall-mounted / adapter set # 42870XXX must be used when installing on a rail / can be used additional as a shelf / filling capacity 180 ml / dosage 0.5 ml / suitable for shower 	Special Finishes*	42819XXX
Optional parts:		
/ Adapter set	Chrome Special Finishes*	42870000 42870XXX
/ Rail grab bar 300 mm	Chrome Special Finishes*	42830000 42830XXX
/ Rail bath towel holder 600 mm	Chrome Special Finishes*	42832000 42832XXX
/ Rail bath towel holder 800 mm	Chrome Special Finishes*	42833000 42833XXX

Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.


		finish	code no.
	 Shelf 300 / drilling distance 258 mm / wall-mounted / two adapter sets # 42870XXX must be used when installing on a rail (for asymmetric installation only one adapter set) / combinable with roll holder # 42836XXX (adapter # 42870XXX necessary) / length 300 mm / suitable for shower Optional parts: / Adapter set / Rail grab bar 300 mm / Rail bath towel holder 600 mm / Rail bath towel holder 800 mm / Roll holder with cover 	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	42838000 42838XXX 42830000 42870XXX 42830000 42830XXX 42830000 42830XXX 42832000 42832XXX 42833000 42833XXX 42836000 42833XXX
	Shelf 150 / drilling distance 108 mm / wall-mounted / adapter set # 42870XXX must be used when installing on a rail / combinable with roll holder # 42836XXX (adapter # 42870XXX necessary) / length 150 mm / suitable for shower Optional parts: / Adapter set / Rail grab bar 300 mm / Rail bath towel holder 600 mm / Rail bath towel holder 800 mm / Roll holder with cover	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	42840000 42840XXX 42870000 42870XXX 42830000 42830XXX 42832000 42832XXX 42833000 42833XXX 42833000 42833XXX 42836000 42836XXX



		finish	code no.
	Rail grab bar 300 mm / drilling distance 280 x 170 mm / wall-mounted / across or upright mountable / length 374 mm / use as a rail for accessoiries and grab bar	Chrome Special Finishes*	42830000 42830XXX
	Optional parts: / Mounting kit for two-sided glass installation / Cover for rail / Shower slider	Chrome Chrome Special Finishes* Chrome Special Finishes*	42841000 42871000 42871XXX 92726000 92726XXX
	Rail bath towel holder 600 mm / use as a rail for accessories and bath towel holder / drilling distance 600 mm / wall-mounted / length 694 mm	Chrome Special Finishes*	42832000 42832XXX

~		/ drilling distance 600 mm / wall-mounted / length 694 mm		
	, , , ,	Optional parts: / Mounting kit for two-sided glass installation / Cover for rail / Shower slider	Chrome Chrome Special Finishes* Chrome Special Finishes*	42841000 42871000 42871XXX 92726000 92726XXX

Rail bath towel holder 800 mm / use as a rail for accessories and bath towel holder / drilling distance 800 mm / wall-mounted / length 894 mm	Chrome Special Finishes*	42833000 42833XXX
Optional parts: / Mounting kit for two-sided glass installation / Cover for rail / Shower slider	Chrome Chrome Special Finishes* Chrome Special Finishes*	42841000 42871000 42871XXX 92726000 92726XXX

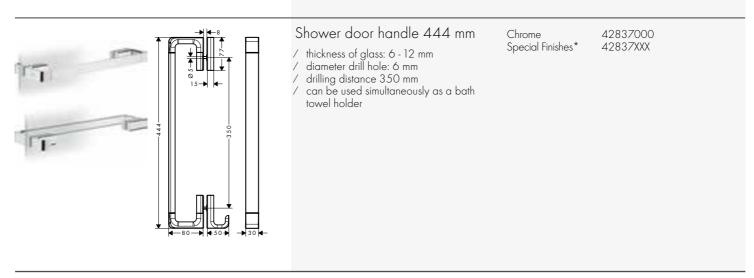

Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.

		finish	code no.
	Bath towel shelf / thickness of glass: 6 mm / diameter drill hole: 6 mm / for hanging bathrobes / wall-mounted / length 600 mm	Chrome Special Finishes*	42842000 42842XXX
	Towel holder twin-handle / drilling distance 80 mm / wall-mounted / length 409 mm / arms swivel independently	Chrome Special Finishes*	42821000 42821XXX
	Single hook / drilling distance 35 mm / material: metal / wall-mounted	Chrome Special Finishes*	42801000 42801XXX
-	Roll holder with cover / drilling distance 35 mm / wall-mounted / mirror-inverted installation possible / combinable with soap dish / shelf # 42803XXX and shelf 300 mm # 42838XXX (adapter set # 42870XXX necessary) Optional parts: / Soap dish/ shelf / Shelf 300 / Adapter set	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	42836000 42836XXX 42803000 42803XXX 42838000 42838XXX 42870000 42870XXX
	Roll holder without cover / drilling distance 35 mm / wall-mounted	Chrome Special Finishes*	42846000 42846XXX

 	finish	code no.
Toilet brush holder wall-mounted / drilling distance 108 mm / material: glass, metal / wall-mounted Optional parts: / Replacement toilet brush without stick	Chrome Special Finishes* White	42835000 42835XXX 40088000
Adapter set / for assembling AXOR Universal Accessories on a rail / for combination of soap dish/ shelf # 42803XXX or shelf 300 mm # 42838XXX with roll holder # 42836XXX Optional parts: / Rail grab bar 300 mm / Rail bath towel holder 600 mm / Rail bath towel holder 800 mm	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	42870000 42870XXX 42830000 42830XXX 42832000 42832XXX 42833000 42833XXX
Cover for rail Required parts: / Rail grab bar 300 mm / Rail bath towel holder 600 mm / Rail bath towel holder 800 mm / Shower set 0.90 m with hand shower 120 3 jet / Shower bar 0.90 m	Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	42871000 42871XXX 42830000 42830XXX 42832000 42832XXX 42833000 42833XXX 36735000 36735XXX 36736000 36736XXX
Mounting kit for two-sided glass installation / thickness of glass: 6 - 12 mm / diameter drill hole: 6 mm Required parts: / Rail grab bar 300 mm / Rail bath towel holder 600 mm / Rail bath towel holder 800 mm	Chrome Chrome Special Finishes* Chrome Special Finishes* Chrome Special Finishes*	42841000 42830000 42830XXX 42832000 42832XXX 42833000 42833XXX

		finish	code no.
	 Cover 150 mm suitable for AXOR Universal Accessories with a length of 150 mm gluing for covering the mounting holes of an accessory (only necessary in combination with two rails, when installed on glass) 	Chrome Special Finishes*	42890000 42890XXX
300	 Cover 300 mm suitable for AXOR Universal Accessories with a length of 300 mm gluing for covering the mounting holes of an accessory (only necessary in combination with two rails, when installed on glass) 	Chrome Special Finishes*	42891000 42891XXX

AXOR SHOWERCOLLECTION ACCESSORIES



		finish	code no.
AXOR ShowerCollection Accessories designed by Philippe S	 Shelf 120/120 / when positioning the shelf between waterconducting parts (# 10755000, # 10751000, # 10942000, # 10972000, # 10651000, # 28491000) in joined installation (10 mm distance), it is recommended to use basic set # 40877180 / suitable for installation with or without basic set # 40877180 / for use with either vertical or horizontal installation of the basic set Optional parts: / Basic set/ waterconducting unit for shelf 120/120 for concealed installation 	Chrome Special Finishes*	40872000 40872XXX 40877180
	Basic set/ waterconducting unit for shelf 120/120 for concealed installation / in a joined installation it serves as a waterconducting unit, allows dimensionally accurate positioning. In combination with: # 40872000		40877180
	 Shelf 240/120 for use with either vertical or horizontal installation of the basic set when positioning the shelf between waterconducting parts (# 10755000, # 10751000, # 10942000, # 10972000, # 10651000, # 28491000) in joined installation (10 mm distance), it is recommended to use basic set # 40878180 suitable for installation with or without basic set # 40878180 Optional parts: Basic set/waterconducting unit for shelf 240/120 for concealed installation 	Chrome Special Finishes*	40873000 40873XXX 40878180
	Basic set/ waterconducting unit for shelf 240/120 for concealed installation / in a joined installation it serves as a waterconducting unit, allows dimensionally accurate positioning. In combination with: # 40873000		40878180
	Installation plate / installation and distance template for easy installation of basic set for lighting and speaker module / installation plate can be extended by a second plate		10973180



AXOR STARCK ACCESSORIES

AXOR Starck Accessories —			finish	code no.
AXOR SIGICK Accessories		Toothbrush tumbler / wall-mounted	Chrome	40834000
The second se		Soap dish / material: metal / wall-mounted	Chrome	40833000
ſ	900 ml 4 - 20 76 - 4	Liquid soap dispenser / wall-mounted / filling capacity 500 ml	Chrome Special Finishes*	40819000 40819XXX
6 6		Grab bar / drilling distance 300mm / wall-mounted / length 430mm / TÜV certified	Chrome Special Finishes*	40830000 40830XXX
8 8		Bath towel rail 600 mm / wall-mounted / length 730 mm Alternative sizes: / Bath towel rail 800 mm	Chrome Special Finishes* Chrome Special Finishes*	40806000 40806XXX 40808000 40808XXX
		Towel holder twin-handle / drilling distance 102 mm / wall-mounted / length 420 mm / swivelling	Chrome Brushed Nickel Special Finishes*	40820000 40820820 40820XXX

			finish	code no.
Ő	0.25	Towel ring / wall-mounted	Chrome	40821000
Ø	\$50 •	Single hook / material: metal / wall-mounted	Chrome Special Finishes*	40837000 40837XXX
60	274 0 53	Roll holder / wall-mounted / for 2 paper rolls	Chrome Special Finishes*	40836000 40836XXX
		Toilet brush holder floor-standing / material: metal / deck mounted installation Optional parts: / Replacement toilet brush without stick	Chrome - Black	40840000 40068000
		Toilet brush holder wall-mounted / material: metal / wall-mounted Optional parts: / Replacement toilet brush without stick	Chrome - Black	40835000 40068000





AXOR STARCK ORGANIC ACCESSORIES

	finish	code no.
Toothbrush tumbler / wall-mounted	Chrome	42734000
Soap dish / material: metal / wall-mounted	Chrome	42733000
Grab bar / drilling distance 280 x 170 mm / wall-mounted / length 410 mm / TÜV certified	Chrome Special Finishes*	42730000 42730XXX
Bath towel rail 600 mm / drilling distance 600 mm / wall-mounted / length 732 mm Alternative sizes: / Bath towel rail 800 mm	Chrome Special Finishes* Chrome Special Finishes*	42706000 42706XXX 42708000 42708XXX
Towel holder / wall-mounted / length 420 mm	Chrome Special Finishes*	42720000 42720XXX
Single hook / material: metal / wall-mounted	Chrome Special Finishes*	42737000 42737XXX
	Toothbrush tumbler / wall-mounted Scap dish / material: metal / wall-mounted / wa	Chrome Chrome Image: Society of the second secon

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

			finish	code no.
		Roll holder / wall-mounted / for 2 paper rolls	Chrome Special Finishes*	42736000 42736XXX
E		Toilet brush holder wall-mounted	Chrome	42735000
	193. HV1.	/ material: metal / wall-mounted		
		Optional parts: / Replacement toilet brush without stick	- Black	40068000

嘲



AXOR CITTERIO / CITTERIO M ACCESSORIES

			finish	code no.
AXOR Citterio / Citterio M Ad		Toothbrush tumbler / wall-mounted / material holder: metal	Chrome Special Finishes*	41734000 41734XXX
		Soap dish / material: crystal glass / wall-mounted / material holder: metal	Chrome Special Finishes*	41733000 41733XXX
C.		Liquid soap dispenser / wall-mounted / filling capacity 240 ml / dosage 1.5 ml / material holder: metal	Chrome Special Finishes*	41719000 41719XXX
* *		Glass shelf / wall-mounted / material holder: metal	Chrome Brushed Nickel Special Finishes*	41550000 41550820 41550XXX
M. M.	010 010 010 010	Grab bar / wall-mounted / length 334 mm / TÜV certified	Chrome Special Finishes*	41730000 41730XXX
RA		Bath towel rail 600 mm / drilling distance 600 mm / wall-mounted / length 654 mm	Chrome Special Finishes*	41760000 41760XXX
	0 22 J	Alternative sizes: / Bath towel rail 800 mm	— Chrome Special Finishes*	41780000 41780XXX

		finish	code no.
	Towel holder twin-handle / drilling distance 102 mm / wall-mounted / length 420 mm / swivelling	Chrome Brushed Nickel Special Finishes*	40820000 40820820 40820XXX
Ó	Towel ring / wall-mounted	Chrome Special Finishes*	41721000 41721XXX
	Single hook / material: metal / wall-mounted	Chrome Brushed Nickel Special Finishes*	41537000 41537820 41537XXX
C	Roll holder / wall-mounted	Chrome Special Finishes*	41738000 41738XXX
	Roll holder without cover / length 126 mm / wall-mounted / for spare rolls This product is available in the special finishes Polished and Brushed Bronze only via AXOR Signature inquiry.	Chrome Brushed Nickel Special Finishes*	41528000 41528820 41528XXX
	Toilet brush holder floor-standing / material holder: metal / material: crystal glass / free-standing Optional parts: / Replacement toilet brush without stick	Chrome Brushed Nickel Special Finishes* White	41536000 41536820 41536XXX 40088000

Product Book 2020/2021

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.



6.2

46772

	finish	code no.
Toilet brush holder wall-mounted / material holder: metal / material: crystal glass / wall-mounted	Chrome Special Finishes*	41735000 41735XXX
Optional parts: / Replacement toilet brush without stick	White	40088000



AXOR URQUIOLA ACCESSORIES

AVOR Uraviala Accessorias -		finish	code no.
AXOR Urquiola Accessories –	Toothbrush tumbler / wall-mounted	Chrome Special Finishes*	42434000 42434XXX
	Soap dish / material: brass, opal glass / wall-mounted	Chrome Special Finishes*	42433000 42433XXX
	Grab bar / drilling distance 280 x 170 mm / wall-mounted / length 320 mm / TÜV certified	Chrome Special Finishes*	42430000 42430XXX
	Bath towel rail 600 mm / drilling distance 600 mm / wall-mounted / length 640 mm Alternative sizes: / Bath towel rail 800 mm	Chrome Special Finishes* - Chrome Special Finishes*	42460000 42460XXX 42480000 42480XXX
5	Single hook / material: brass / wall-mounted	Chrome Special Finishes*	42401000 42401XXX
	Roll holder / wall-mounted	Chrome Special Finishes*	42436000 42436XXX

- 94





AXOR UNO ACCESSORIES

AVON Accessones			
AXOR Uno Accessories		finish	code no.
	Toothbrush tumbler / wall-mounted / material holder: metal This product is available in the special finishes Polished and Brushed Bronze only via AXOR Signature inquiry.	Chrome Brushed Nickel Special Finishes*	41534000 41534820 41534XXX
	Soap dish / material: crystal glass / wall-mounted / material holder: metal This product is available in the special finishes Polished and Brushed Bronze only via AXOR Signature inquiry.	Chrome Brushed Nickel Special Finishes*	41533000 41533820 41533XXX
R	Liquid soap dispenser / wall-mounted / filling capacity 250 ml / material holder: metal This product is available in the special finishes Polished and Brushed Bronze only via AXOR Signature inquiry.	Chrome Brushed Nickel Special Finishes*	41519000 41519820 41519XXX
* *	Glass shelf / wall-mounted / material holder: metal	Chrome Brushed Nickel Special Finishes*	41550000 41550820 41550XXX
	Grab bar / drilling distance 280 x 170 mm / wall-mounted / length 418 mm / TÜV certified This product is available in the special finishes Polished and Brushed Bronze only via AXOR Signature inquiry.	Chrome Brushed Nickel Special Finishes*	41530000 41530820 41530XXX

Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.

			finish	code no.
		Bath towel rail 600 mm / drilling distance 600 mm / wall-mounted / length 738 mm This product is available in the special finishes Polished and Brushed Bronze only via AXOR Signature inquiry. Alternative sizes: / Bath towel rail 800 mm This product is available in the special finishes Polished and Brushed Bronze only via AXOR Signature inquiry.	Chrome Brushed Nickel Special Finishes* Chrome Brushed Nickel Special Finishes*	41560000 41560820 41560XXX 41580000 41580820 41580XXX
	426	Towel holder / wall-mounted / length 426 mm This product is available in the special finishes Polished and Brushed Bronze only via AXOR Signature inquiry.	Chrome Brushed Nickel Special Finishes*	41520000 41520820 41520XXX
	420	Towel holder twin-handle / drilling distance 102 mm / wall-mounted / length 420 mm / swivelling	Chrome Brushed Nickel Special Finishes*	40820000 40820820 40820XXX
Ó		Towel ring / wall-mounted This product is available in the special finishes Polished and Brushed Bronze only via AXOR Signature inquiry.	Chrome Brushed Nickel Special Finishes*	41521000 41521820 41521XXX
		Single hook / material: metal / wall-mounted	Chrome Brushed Nickel Special Finishes*	41537000 41537820 41537XXX

		finish	code no.
Ċ	Roll holder with cover / wall-mounted This product is available in the special finishes Polished and Brushed Bronze only via AXOR Signature inquiry.	Chrome Brushed Nickel Special Finishes*	41538000 41538820 41538XXX
	Roll holder without cover / length 126 mm / wall-mounted / for spare rolls This product is available in the special finishes Polished and Brushed Bronze only via AXOR Signature inquiry.	Chrome Brushed Nickel Special Finishes*	41528000 41528820 41528XXX
	Toilet brush holder floor-standing / material holder: metal / material: crystal glass / free-standing Optional parts: / Replacement toilet brush without stick	Chrome Brushed Nickel Special Finishes* White	41536000 41536820 41536XXX 40088000
	Toilet brush holder wall-mounted / material holder: metal / material: crystal glass / wall-mounted This product is available in the special finishes Polished and Brushed Bronze only via AXOR Signature inquiry. Optional parts: / Replacement toilet brush without stick	Chrome Brushed Nickel Special Finishes* White	41535000 41535820 41535XXX 40088000



AXOR MONTREUX ACCESSORIES

		finish	code no.
AXOR Montreux Accessories	Toothbrush tumbler / wall-mounted	Chrome Brushed Nickel Special Finishes*	42134000 42134820 42134XXX
6 F	Liquid soap dispenser / wall-mounted / filling capacity 300 ml	Chrome Brushed Nickel Special Finishes*	42019000 42019820 42019XXX
	Soap dish / material: support made of metal, porcelain / wall-mounted	Chrome Brushed Nickel Special Finishes*	42033000 42033820 42033XXX
	Corner basket 160/101 / material: metal / wall-mounted	Chrome Brushed Nickel Special Finishes*	42065000 42065820 42065XXX
	Corner basket 160/83 / material: metal / suitable for mounting on Unica wall bar Ø 22 mm	Chrome Brushed Nickel Special Finishes*	42066000 42066820 42066XXX
An an	Grab bar / drilling distance 280 x 170 mm / wall-mounted / length 463 mm / TÜV certified	Chrome Brushed Nickel Special Finishes*	42030000 42030820 42030XXX

Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.

			finish	code no.
A	4	Bath towel rail 600mm / drilling distance 600mm / wall-mounted / length 783mm	Chrome Brushed Nickel Special Finishes*	42060000 42060820 42060XXX
A	710	Alternative sizes: / Bath towel rail 800 mm	Chrome Brushed Nickel Special Finishes*	42080000 42080820 42080XXX
		Towel holder / wall-mounted / length 433 mm	Chrome Brushed Nickel Special Finishes*	42020000 42020820 42020XXX
O		Towel ring / wall-mounted	Chrome Brushed Nickel Special Finishes*	42021000 42021820 42021XXX
		Single hook / material: metal / wall-mounted	Chrome Brushed Nickel Special Finishes*	42137000 42137820 42137XXX
		Roll holder with cover / wall-mounted	Chrome Brushed Nickel Special Finishes*	42036000 42036820 42036XXX
	* * * *	Roll holder without cover / length 159 mm / wall-mounted / for spare rolls	Chrome Brushed Nickel Special Finishes*	42028000 42028820 42028XXX

		finish	code no.
	Toilet brush holder wall-mounted / material: metal, porcelain / wall-mounted	Chrome Brushed Nickel Special Finishes*	42035000 42035820 42035XXX
· · · · · · · · · · · · · · · · · · ·	Optional parts: / Replacement toilet brush without stick	- White	40088000
	Shaving mirror / inclinable / material: metal / wall-mounted / enlargement: 1.7 times / swivelling	Chrome Brushed Nickel Special Finishes*	42090000 42090820 42090XXX

AXOR ELECTRONIC MIXERS

AXOR Starck	392
AXOR Starck Organic	393
AXOR Citterio	394
AXOR Uno	394




AXOR Starck -



	finish	code no.	
Electronic basin mixer with temperature control battery- operated	Chrome Special Finishes*	10101000 10101XXX Esco Smart	Comfort
 ComfortZone 90 projection 103 mm normal spray flow rate at 3 bar: 5 l/min temperature adjustable via mixer lever on the side suitable for continous flow water heaters infrared sensor technology automatic environmental adjustment of infrared sensor adjustable optical range of infrared sensor (2 settings) battery operation 6 V (Lithium battery, lifetime approx. 2 years, battery included in scope of delivery) hygiene rinse activatable (automatic water flow for 10 seconds every 24 hours following the last operation) permanent rinse activatable (single water flow for 180 seconds, suitable for thermal disinfection) manual water stop for washbasin cleaning performance may be impaired if the sensor is obscured by the design of the wash basin, or when the wash basin is oversized and the distance between sensor and the wash basin edge is larger than 75 mm functional restriction due to too large distance connection dimension: DN15 TÜV certified ditr filters in the connection hoses 			
 / Electronic basin mixer with temperature control with mains connection 230 V This product is available in the special finish Polished Nickel only via AXOR Signature 	Chrome Special Finishes*	10140000 10140XXX	
 inquiry. / Electronic basin mixer with temperature pre-adjustment battery-operated / Electronic basin mixer with temperature pre-adjustment with mains connection 230 V 	Chrome Special Finishes* Chrome Special Finishes*	10106000 10106XXX 10145000 10145XXX	






finish code no.	
Electronic basin mixer with temperature control battery- operated	
 ComfortZone 90 shower spray flow rate at 3 bar: 3.5 l/min temperature adjustable via mixer lever on the side with isolated water conduction not suitable for continuous flow water heaters infrared sensor technology automatic environmental adjustment of infrared sensor adjustable optical range of infrared sensor (2 settings) battery operation 6 V (Lithium battery, lifetime approx. 2 years, battery included in scope of delivery) hygiene rinse activatable (automatic water flow for 10 seconds every 24 hours following the last operation) permanent rinse activatable (single water flow for 180 seconds, suitable for thermal disinfection) manual water stop for washbasin cleaning 	

- / manual water stop for washbasin cleaning
 / performance may be impaired if the sensor is obscured by the design of the wash basin, or when the wash basin is oversized and the distance between sensor and the wash basin edge is larger than 75 mm
- / functional restriction due to too large
- distance connection dimension: DN15
- / / dirt filters in the connection hoses


Alternative products:		
/ Electronic basin mixer with temperature	Chrome	12172000
pre-adjustment battery-operated	Special Finishes*	12172XXX
/ Electronic basin mixer with temperature	Chrome	12173000
control with mains connection 230 V	Special Finishes*	12173XXX
/ Electronic basin mixer with temperature	Chrome	12174000
pre-adjustment with mains connection 230	Special Finishes*	12174XXX
V		

AXOR Citterio -

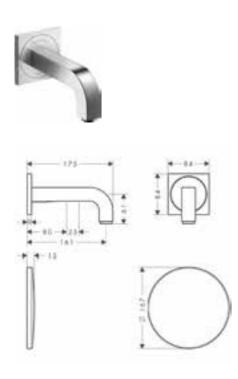

	finish	code no.
Electronic basin mixer for concealed installation wall-mounted with spout 161 mm	Chrome Special Finishes*	39117000 39117XXX Air Power
 / projection 161 mm / normal spray / flow rate at 3 bar: 5 l/min / theft-proof aerator / temperature adjustable via iBox / infrared sensor technology / automatic environmental adjustment of infrared sensor / adjustable optical range of infrared sensor (5 settings) / 230 V / 50 Hz mains connection / manual water stop for washbasin cleaning / for ideal function please note a minimum distance of 140 mm from the aerators center to the back rim of the wash basin / TÜV certified / dirt filters in the connection hoses 		
Alternative sizes: / Electronic basin mixer for concealed installation wall-mounted with spout 221 mm	Chrome Special Finishes*	39118000 39118XXX
Required parts: / Basic set for electronic basin mixer for concealed installation wall-mounted		16180180
Optional parts: / Extension 25 mm for basic set for electronic basin mixer wall-mounted		13594000

AXOR Uno -

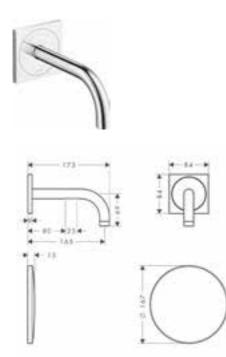

Electronic basin mixer for concealed installation wall-mounted with spout 165 mm / projection 165 mm / normal spray / flow rate at 3 bar: 5 l/min / theft-proof aerator / temperature adjustable via iBox / infrared sensor technology	Chrome Special Finishes*	38119000 38119XXX Air Control
 automatic environmental adjustment of infrared sensor adjustable optical range of infrared sensor (5 settings) 230 V / 50 Hz mains connection manual water stop for washbasin cleaning for ideal function please note a minimum distance of 140 mm from the aerators center to the back rim of the wash basin TÜV certified dirt filters in the connection hoses 		
Alternative sizes: / Electronic basin mixer for concealed installation wall-mounted with spout 225 mm	Chrome Special Finishes*	38120000 38120XXX
Required parts: / Basic set for electronic basin mixer for concealed installation wall-mounted		16180180
Optional parts: / Extension 25 mm for basic set for electronic basin mixer wall-mounted		13594000

Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.


Product Book 2020/2021

		finish	code no.
	Electronic basin mixer for concealed installation wall-mounted with spout 161 mm / projection 161 mm / normal spray / flow rate at 3 bar: 5 l/min / theft-proof aerator / temperature adjustable via iBox / infrared sensor technology / automatic environmental adjustment of infrared sensor / adjustable optical range of infrared sensor [5 settings] / 230 V / 50 Hz mains connection / manual water stop for washbasin cleaning for ideal function please note a minimum distance of 140 mm from the aerators center to the back rim of the wash basin / TÜV certified / dirt filters in the connection hoses	Chrome Special Finishes*	45110000 time for the second
	Alternative sizes: / Electronic basin mixer for concealed installation wall-mounted with spout 221 mm	Chrome Special Finishes*	45111000 45111XXX
→ 15 4 -	Required parts: / Basic set for electronic basin mixer for concealed installation wall-mounted		16180180
	Optional parts: / Extension 25 mm for basic set for electronic basin mixer wall-mounted		13594000

0	\bigcirc	Î	B m w
٢			////0
1			/
		2	

	Basic set for electronic basin mixer for concealed installation wall-mounted	16180180
]:	/ TÜV certified/ suitable for infrared wall spout/ connection dimension: DN20	
	Optional parts: / Extension 25 mm for basic set for electronic basin mixer wall-mounted	13594000





Extension 25 mm for basic set for electronic basin mixer wall-mounted

- / extension for basic set
 / suitable for all wall-mounted electronic mixers
- / extension length: 25 mm

 	finish	code no.
Electronic basin mixer with temperature pre-adjustment with mains connection 230 V / ComfortZone 100 / projection 148 mm / normal spray / flow rate at 3 bar: 3.5 l/min / theft-proof aerator / temperature adjustable via iBox / suitable for continous flow water heaters / infrared sensor technology / automatic environmental adjustment of infrared sensor / adjustable optical range of infrared sensor (2 settings) / 230 V / 50 Hz mains connection / hygiene rinse activatable (automatic water flow for 10 seconds every 24 hours following the last operation) / permanent rinse activatable (single water flow for 180 seconds, suitable for thermal disinfection) / manual water stop for washbasin cleaning / performance may be impaired if the sensor is obscured by the design of the wash basin, or when the wash basin is oversized and the distance between sensor and the wash basin edge is larger than 75 mm / functional restriction due to too large distance / connection dimension: DN15 / dirt filters in the connection hoses This product is not available in the special finishes Red Gold and Black Chrome.	Chrome Special Finishes*	solution 38010000 38010XXX <u>if over</u> <u>if over</u>
Required parts: / Basic set for electronic basin mixer		16182180
Basic set for electronic basin mixer / connection dimension: DN20 Required parts: / Electronic basin mixer with temperature pre-adjustment with mains connection 230 V This product is not available in the special finishes Red Gold and Black Chrome.	Chrome Special Finishes*	16182180 38010000 38010XXX



AXOR WASH BASINS, BATH TUBS

Wash basins / bath tubs	400
Bath tubs	401

		finish	code no.
AXOR Urquiola Wash bowls and Wash basin [—]	Wash bowl 624/408	White	11300000
	 / counter top washbowl / only in conjunction with basin mixers without pull rod / mineral cast with gelcoat / CE / TÜV certified 		
	Optional parts: / Waste set non-closing for washbasins	Chrome Special Finishes*	51301000 51301XXX

Wash bowl 511 / counter top washbowl / only in conjunction with basin mixers without pull rod / mineral cast with gelcoat / CE / TÜV certified Optional parts: / Waste set non-closing for washbasins	White Chrome Special Finishes*	11301000 51301000 51301XXX
Wash basin 624/399 wall-mounted / wall mounted / only in conjunction with basin mixers without pull rod / mineral cast with gelcoat / CE / TÜV certified Optional parts: / Waste set non-closing for washbasins	White — Chrome Special Finishes*	11302000 51301000 51301XXX

AXOR Massaud Wash basin and Wash bowls -

AV()P Massaud Mash basis and Mash bouls			
AXOR Massaud Wash basin and Wash bowls	Wash bowl 800/450	White	42300000
	 counter top washbowl only in conjunction with basin mixers without pull rod mineral cast with gelcoat for planning consider drilling template CE TÜV certified 		
	Optional parts: / Single lever basin mixer 220 for wash bowls with waste set / Waste set non-closing for washbasins	Chrome Special Finishes* Chrome Special Finishes*	18020000 18020XXX 51301000 51301XXX

Measurements within scale drawings are in mm.


AXOR wash basins, bath tubs

11440000

		finish	code no.
	Wash bowl 570/450	White	42305000
	 counter top washbowl only in conjunction with basin mixers without pull rod mineral cast with gelcoat for planning consider drilling template CE TÜV certified 		
	Optional parts: / Single lever basin mixer 220 for wash bowls with waste set / Waste set non-closing for washbasins	— Chrome Special Finishes* Chrome Special Finishes*	18020000 18020XXX 51301000 51301XXX

AXOR Urquiola Bath tub -






Bath tub 1,800/600

- / free-standing bath tub
 / filling level: approx. 340 mm
 / filling capacity: approx. 180 | (1 person 70 kg)
 / weigth with water (1 person 70 kg): approx. 440 kg
 / weight without water: 187 kg
 / material: mineral cast with gelcoat
 / CE
 / TÜV certified

White

- / TÜV certified



AXOR KITCHEN MIXERS

AXOR Starck	406
AXOR Citterio	407
AXOR Citterio M	410
AXOR Uno	410
AXOR Montreux	411
AXOR Accessories for kitchen mixers	412





SINGLE LEVER KITCHEN MIXER SELECT 230 2JET WITH PULL-OUT SPRAY

Pulls out up to 76 cm from the mixer for freedom of movement and fluidity of operation

The hose is protected from damage and runs silently

Four separately-adjustable fixings for flexible sBox positioning



Flat housing profile (less than 30 mm) for installation in tight spaces

Designed to fit all standard base cabinets while leaving space for any waste-disposal system

Hose weight for secure and easy hose retraction

Switch water on and off with the Select button for convenience and water conservation

> • At the touch of a button, switch between spray types while the water is on


Robust laminar spray for efficient filling of the kitchen sink or pots


Soft shower spray for intensive cleaning of crockery and pots, or for watering plants. Optimized for reduced splashing. QuickClean function at the shower aerator


MagFit magnetic bracket ensures effortless retraction of the spray head into the mixer body

EXPERT HOSE GUIDANCE FOR EASE AND COMFORT.

The sBox contains an innovative hose guidance system, available with the AXOR Citterio Select kitchen mixer with multifunction pull-out spray. Housed in the base cabinet, the sBox ensures the smooth, quiet extraction and retraction of the hose. Inside the sBox, the hose weight safely guards and guides the hose from any obstacles and hindrances. It cannot be caught or damaged. The 52cm box fits conveniently in any standard base cabinet.

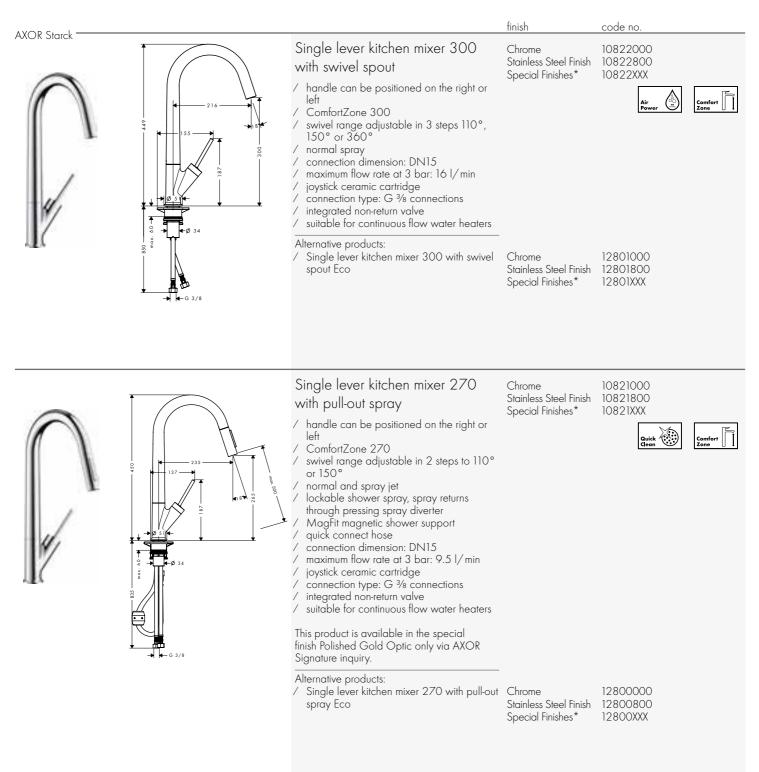

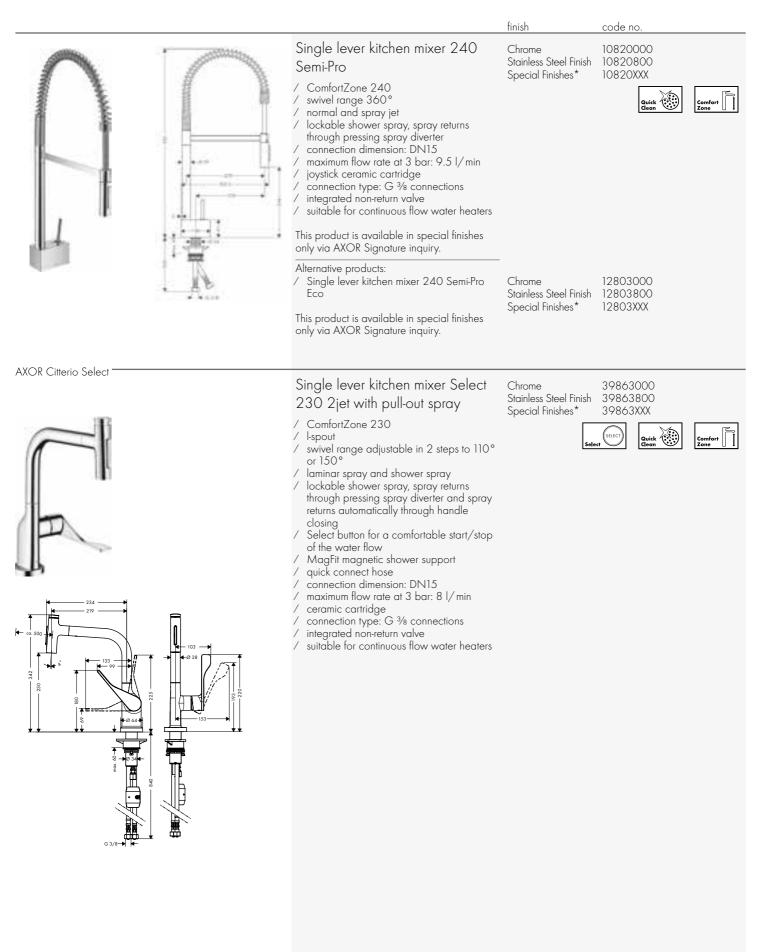

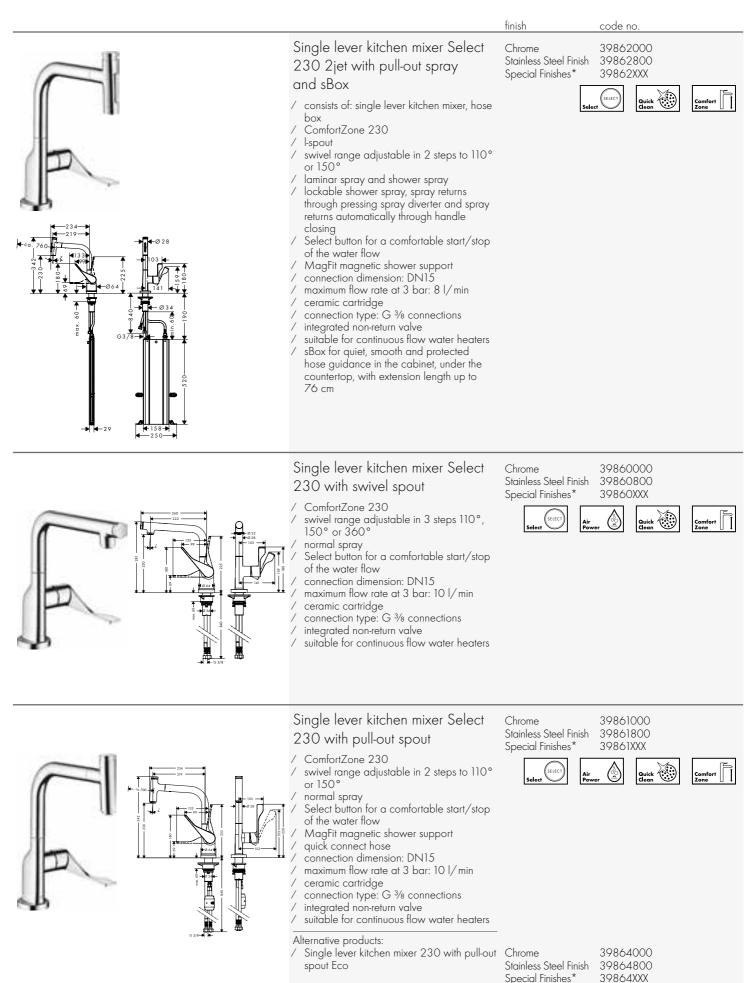



*For additional information please refer to the "special finish" overview.

AXOR Citterio M		finish	code no.
	2-hole single lever kitchen mixer 240 with swivel spout	Chrome Stainless Steel Finish Special Finishes*	34820000 34820800 34820XXX
	 / ComfortZone 240 / swivel range adjustable in 3 steps 110°, 150° or 360° / normal spray / quick connect hose / connection dimension: DN15 / maximum flow rate at 3 bar: 13 l/min / ceramic cartridge / connection type: G ¾ connections / integrated non-return valve / suitable for continuous flow water heaters Alternative products: / 2-hole single lever kitchen mixer 240 with swivel spout Eco 	Air Pow Chrome Stainless Steel Finish Special Finishes*	
	 2-hole single lever kitchen mixer 220 with pull-out spray / ComfortZone 220 / swivel range adjustable in 2 steps to 110° or 150° / normal and spray jet / lockable shower spray, spray returns through pressing spray diverter / MagFit magnetic shower support / quick connect hose / connection dimension: DN15 / maximum flow rate at 3 bar: 9.5 l/min / ceramic cartridge / connection type: G 3/8 connections / integrated non-return valve / suitable for continuous flow water heaters 	Chrome Stainless Steel Finish Special Finishes*	34822000 34822800 34822XXX Quick Comfort Comfort Comfort
<mark>-≱ a</mark> − 0 3/8	 2-hole single lever kitchen mixer 220 with pull-out spray Eco Optional parts: 	Chrome Stainless Steel Finish Special Finishes*	34824000 34824800 34824XXX
	 Angle valve with microfilter outlet G 3/8 	Chrome	51308000
AXOR Uno	Single lever kitchen mixer for concealed installation wall-mounted / handle can be positioned on the right or left, depends on the basic set installation / swivel range adjustable in 2 steps to 110° or 150°	Chrome Stainless Steel Finish Special Finishes*	38815000 38815800 38815XXX
	 / with telescopic function (330 - 500 mm) / normal spray / maximum flow rate at 3 bar: 9 l/min / joystick ceramic cartridge / connection type: basic set or base unit required / integrated non-return valve / suitable for continuous flow water heaters 		
	Required parts: / Basic set for single lever basin mixer for concealed installation wall-mounted		13623180
	Optional parts: / Extension set 25 mm for single lever basin mixer wall-mounted		13586000

Measurements within scale drawings are in mm.

		finish	code no.
	Basic set for single lever basin mixer for concealed installation wall-mounted / variable positioning of the mixer system, can be left or right of the spout / connection dimension: DN15 Optional parts:		13623180
	/ Extension set 25 mm for single lever basin mixer wall-mounted		13586000
AXOR Montreux	Single lever kitchen mixer 260 with swivel spout / ComfortZone 260 / swivel range adjustable in 3 steps 110°, 150° or 360° / laminar spray / connection dimension: DN15 / maximum flow rate at 3 bar: 12 l/min / ceramic cartridge / connection type: G 3/8 connections / suitable for continuous flow water heaters	Chrome Stainless Steel Finish Special Finishes*	16580000 16580800 16580XXX
		Chrome Polished Black Chrome Brushed Black Chrome Stainless Steel Finish	42018000 42018330 42018340 42018800
		Chrome Stainless Steel Finish Special Finishes* Chrome Polished Black Chrome Brushed Black Chrome Stainless Steel Finish	16581000 16581800 16581XXX Quick Confor [] Confor [] Con

				finish	code no.	
		Single lever kitchen mixer 21 Semi-Pro / ComfortZone 210 / swivel range 360° / normal and spray jet / lockable shower spray, spray return: through pressing spray diverter / connection dimension: DN15 / maximum flow rate at 3 bar: 9.5 I/ / ceramic cartridge / connection type: G ¾ connections / integrated non-return valve / suitable for continuous flow water he This product is available in special finis only via AXOR Signature inquiry.	s min eaters	Chrome Stainless Steel Finish Special Finishes*	16582000 16582800 16582XXX	Comfort
JII.		Alternative products: / Single lever kitchen mixer 210 Semi Eco This product is available in special finis only via AXOR Signature inquiry.		Chrome Stainless Steel Finish Special Finishes*	16585000 16585800 16585XXX	
		Optional parts: / Liquid soap dispenser/ washing-up liquid dispenser		Chrome Polished Black Chrome Brushed Black Chrome Stainless Steel Finish	42018000 42018330 42018340 42018800	
Accessories	47 m ax. 55	Liquid soap dispenser/ washing-up liquid dispenser / suitable for matched design to selected kichen mixers / projection 91 mm / material: durable metal construction / non-corroding outlet pipe / filling capacity 500 ml / dosage 2 ml / easy to fill up from the top / for installation in worktops up to 55 / easy and save installation without to needed / mounting hole with 28 - 35 mm dia needed	MEW pols	Chrome Polished Black Chrome Brushed Black Chrome Stainless Steel Finish	42018000 42018330 42018340 42018800	
	28	Liquid soap dispenser/ washing-up liquid dispenser / suitable for matched design to selected kichen mixers / projection 91 mm / material: durable metal construction / non-corroding outlet pipe / filling capacity 500 ml / dosage 2 ml / easy to fill up from the top / for installation in worktops up to 55 / easy and save installation without to needed / mounting hole with 28 - 35 mm dia needed	MEW pols	Chrome Polished Black Chrome Brushed Black Chrome Stainless Steel Finish	42818000 42818330 42818340 42818800	

Measurements within scale drawings are in mm.

	n				
	Н	ł	1	Ŀ	
. *	님	l	Ľ	۴	
	1	I	E		
	1	t	L		
3	s	k	E	s	
-			ų	L.	L



/ for counter surfaces up to 47 mm thick / shaft Ø 27 mm

- / non-return valve
 / connection dimension DN15
 / device connection DN20

This product is available in the special finish Polished Gold Optic only via AXOR Signature inquiry.

finish	code no.
Chrome Stainless Steel Finish	10823000 10823800
Special Finishes*	10823XXX

413

${\sf AXOR}$ Basic sets, wastes and overflows

iBox universal	421
Bath filler with wastes and overflow for bath tubs	425
Wastes and overflow for bath tubs	429
Wastes for basin / bidet	430
Traps	431

AXOR BASIC SETS AND ACCESSORIES

TECHNOLOGY IN PERFECTION.

AXOR's perfection continues in the wall and beneath the bath tub or wash basin. Where mixers and showers are installed. With AXOR basic sets, siphons and waste sets. Based on AXOR's many years of know-how. Produced to the highest quality standards.

Basic sets



Basic set for basin mixers for concealed installation



Basic set for floor-standing basin and bath tub mixers



Basic sets for rim-mounted and tile-mounted bath tub mixers



Basic set for rim 'and tile mounted sBox bath set



Basic sets for AXOR ShowerCollection thermostatic modules



iBox universal basic sets for mixers 'and thermostatic mixers for concealed installation



Basic sets for overhead showers



Basic sets for thermostatic modules

In addition, AXOR offers accessories for different bathroom applications.

Waste and overflow sets



Inflow, waste and overflow sets for bath tubs



Waste and overflow sets for bath tubs



Waste sets for wash basins/bidets



Siphons



IBOX UNIVERSAL

The design. The function. The technology in the wall. For AXOR, perfection extends to all dimensions. A prime example of this is the iBox® universal. One basic set. For a variety of concealed-installation solutions. Uncompromisingly reliable. Consistently easy to install. Technology. In perfection.

- A basic set for over 15 different concealed-installation shower, bath tub and thermostat sets
- / Suitable for all AXOR mixers
- / This means that it is still possible to choose an AXOR product after installation

	AXOR ShowerSelect So thermostatic mixer for 1 outlet	AXOR Showe thermostatic n for 2 outlets	nixer t	XVOR ShowerSelect Soft hermostatic mixer righflow for 1 outlet	AXOR ShowerSelect S thermostatic mixer highfle for 1 outlet and 1 additional outlet		
	2			۲)	2	000	
	no.36705000	no.36707000) n	o.36711000	no.36706000	no.36773000	
	AXOR ShowerSelect Rc thermostatic mixer for 1 outlet	ound AXOR Showe thermostatic n for 2 outlets	nixer t	XOR ShowerSelect Round hermostatic mixer ighflow for 1 outlet	AXOR ShowerSelect R thermostatic mixer highfle for 1 outlet and 1 additional outlet		
)	۲		000	
	no.36722000	no.36723000	D n	o.36721000	no.36726000	no.36727000	
	AXOR ShowerSelect So thermostatic mixer for 1 outlet	quare AXOR Showe thermostatic n for 2 outlets	nixer t	WOR ShowerSelect Square hermostatic mixer righflow for 1 outlet	AXOR ShowerSelect S thermostatic mixer highfle for 1 outlet and 1 additional outlet		AXOR ShowerSelect Square thermostatic mixer for 2 outlets with FixFit and porter unit
		••		۲			
	no.36714000	no.36715000) n	0.36718000	no.36716000	no.36717000	no.36712000
	AXOR Edge bath mixer	AXOR Edge shower mixer	AXOR Edge thermostatic mixer highflow	AXOR Edge thermostatic mixer with shut-off valve	AXOR Edge thermostatic mixer with shut-off/ diverter valve		
	175	17	0	0.0	20		
	no.46450000 no.46451000 no.46420000 no.46421000	no.46650000 no.46651000	no.46740000 no.46741000	no.46750000 no.46751000	no.46760000 no.46761000		
	AXOR Starck bath mixer	AXOR Starck shower mixer	AXOR Starck thermostatic mixer	AXOR Starck thermostatic mixer highflow	AXOR Starck thermostatic mixer with shut-off valve	AXOR Starck thermostatic mixer with shut-off/ diverter valve	
			Æ	æ	*	*	
	no.10416000 no.10418000 no.10414000, no.1042	no.10616000 no.10614000* 17000*	no.10710000	no.10715000	no.10700000	no.10720000	
*le	ver handles with						
	AXOR Starck Organic bath mixer	0	AXOR Starck Orgo thermostatic mixer highflow	anic AXOR Starck Organic thermostatic mixer with shut-off valve	AXOR Starck Organic thermostatic mixer with shut-off/ diverter valve		
	AA	15	10	44	A.A.		
	12415000	no 12605000	no 12711000	no 12715000	no 12716000		

no.12415000 no.12416000

no.12605000

and the second no.12711000

no.12715000

no.12716000

AXOR Citterio bath mixer

no.39455000 no.39457000

AXOR Citterio E bath mixer

AXOR Citterio E shower mixer



no.36655000

shower mixer

no.34625000

AXOR Urquiola

shower mixer

no.11625000

AXOR Uno

bath mixer

AXOR Citterio

shower mixer

no.39655000

no.36455000 no.36457000

AXOR Citterio M



bath mixer

no.34425000 no.34427000

AXOR Urquiola bath mixer



no.11425000

AXOR Uno bath mixer



no.38426000, -820 no.38428000. -820

AXOR Montreux

thermostatic mixer

no.16810000, -820

no.16823000, -820*

no 45405000 -820

no.45407000, -820

no.38626000, -820

AXOR Montreux thermostatic mixer highflow



no.16815000, -820 no.16800000, -820 no.16824000, -820* no.16801000, -820*

AXOR Citterio AXOR Citterio thermostatic mixer thermostatic mixer with shut-off valve

highflow

no.39716000

no.39711000*



no.39705000 no.39700000*

AXOR Citterio thermostatic mixer with



no.39720000*



no.39725000



no.34715000

AXOR Urquiola

highflow

no.11731000

AXOR Uno

shower mixer

AXOR Montreux

thermostatic mixer

with shut-off valve

thermostatic mixer

AXOR Citterio M thermostatic mixer highflow



no.34716000

AXOR Urquiola

thermostatic mixer

with shut-off valve

no.34705000

AXOR Citterio M

thermostatic mixer

with shut-off valve



AXOR Citterio M

thermostatic mixer with

shut-off/ diverter valve

AXOR Urquiola thermostatic mixer with shut-off/ diverter valve



no.11733000



no.11732000



AXOR Montreux

no.16820000, -820

no.16821000, -820

thermostatic mixer with

shut-off/ diverter valve

no 45605000 -820

no.38715000

AXOR Montreux thermostatic mixer highflow



no.16823000, -820 no.16824000, -820



no.16801000, -820









no.16821000, -820

AXOR Uno thermostatic mixer

highflow

AXOR Uno



no.38700000



AXOR Uno

thermostatic mixer with

shut-off/ diverter valve

AXOR Montreux thermostatic mixer with shut-off / diverter valve







thermostatic mixer



no.38375000

AXOR Montreux

thermostatic mixer

iBox universal			finish	code no.
IDOX UNVERSAL		 Basic set iBox universal suitable for all shower, bath tub and thermostat finish sets for concealed installation connection thread Rp ³/₄ rotationally-symmetric installation sound-decoupled installation connection dimension: DN20 Optional parts: Extension 25 mm for basic set iBox universal Fastening rail set for iBox universal 		01700180 13587000 93171000
		Basic set iBox universal with shut-off unit / suitable for all shower, bath tub and thermostat finish sets for concealed installation / connection thread / Rp ¾ / sound-decoupled installation / connection dimension: DN20 Optional parts: / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal		01750180 13587000 93171000
	*25 * 8 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	Extension 25 mm for basic set iBox universal / extension for basic set / extension length: 25 mm		13587000
O.		Extension element / for installation between tiles and finish set / suitable for all square finish sets for concealed installation with round edges / dimension: 172 x 172 mm / extension length: 22 mm	Chrome Special Finishes*	98860000 98860XXX
6		Extension element round 1-hole / for situations of limited depth for concealed installation / diameter: 170 mm / dimension: 18 mm higher than the default escutcheon / extension length: 33 mm / material: metal escutcheon	Chrome Brushed Nickel Special Finishes*	14960000 14960820 14960XXX

		finish	code no.
0	 Extension element round 2-hole for situations of limited depth for concealed installation diameter: 170 mm dimension: 18 mm higher than the default escutcheon extension length: 33 mm material: metal escutcheon 	Chrome Brushed Nickel Special Finishes*	14961000 14961820 14961XXX
0	Extension element round 2-hole O-1-2 / for situations of limited depth for concealed installation / diameter: 170 mm / dimension: 18 mm higher than the default escutcheon / extension length: 33 mm / material: metal escutcheon	Chrome Brushed Nickel Special Finishes*	14962000 14962820 14962XXX
00	Extension element round 2-hole arrow / for situations of limited depth for concealed installation / diameter: 170 mm / dimension: 18 mm higher than the default escutcheon / extension length: 33 mm / material: metal escutcheon	Chrome Brushed Nickel Special Finishes*	14963000 14963820 14963XXX
)	Extension element square 1-hole / for situations of limited depth for concealed installation / diameter: 170 mm / dimension: 18 mm higher than the default escutcheon / extension length: 33 mm / material: metal escutcheon	Chrome Special Finishes*	14964000 14964XXX
)	Extension element square 1-hole red blue / for situations of limited depth for concealed installation / diameter: 170 mm / dimension: 18 mm higher than the default escutcheon / extension length: 33 mm / material: metal escutcheon	Chrome Special Finishes*	14965000 14965XXX
5	Extension element square 1-hole arrow / for situations of limited depth for concealed installation / diameter: 170 mm / dimension: 18 mm higher than the default escutcheon / extension length: 33 mm / material: metal escutcheon	Chrome Special Finishes*	14966000 14966XXX

Measurements within scale drawings are in mm.

		finish	code no.
1	 Extension element square 2-hole for situations of limited depth for concealed installation diameter: 170 mm dimension: 18 mm higher than the default escutcheon extension length: 33 mm material: metal escutcheon 	Chrome Special Finishes*	14967000 14967XXX
	Extension element square 2-hole red blue / for situations of limited depth for concealed installation / diameter: 170 mm / dimension: 18 mm higher than the default escutcheon / extension length: 33 mm / material: metal escutcheon	Chrome Special Finishes*	14968000 14968XXX
5	Extension element square 2-hole O-1-2 / for situations of limited depth for concealed installation / diameter: 170 mm / dimension: 18 mm higher than the default escutcheon / extension length: 33 mm / material: metal escutcheon	Chrome Special Finishes*	14969000 14969XXX
10	Extension element square 2-hole arrow / for situations of limited depth for concealed installation / diameter: 170 mm / dimension: 18 mm higher than the default escutcheon / extension length: 33 mm / material: metal escutcheon	Chrome Special Finishes*	14970000 14970XXX
	Extension element softcube 1-hole / for situations of limited depth for concealed installation / diameter: 170 mm / dimension: 18 mm higher than the default escutcheon / extension length: 33 mm / material: metal escutcheon	Chrome Special Finishes*	14971000 14971XXX
	Extension element softcube 2-hole / for situations of limited depth for concealed installation / diameter: 170 mm / dimension: 18 mm higher than the default escutcheon / extension length: 33 mm / material: metal escutcheon	Chrome Special Finishes*	14972000 14972XXX

*For additional information please refer to the "special finish" overview.

		finish	code no.
C	Extension element softcube 2-hole 0-1-2 / for situations of limited depth for concealed installation / diameter: 170 mm / dimension: 18 mm higher than the default escutcheon / extension length: 33 mm / material: metal escutcheon	Special Finishes*	14973000 14973XXX
	Extension element softcube 2-hole arrow / for situations of limited depth for concealed installation / diameter: 170 mm / dimension: 18 mm higher than the default escutcheon / extension length: 33 mm / material: metal escutcheon	Special Finishes*	14974000 14974XXX

Fastening rail set for iBox universal


93171000



Bath filler with wastes and overflow for bath tubs		finish	code no.
	Finish set bath filler, waste and overflow set / consists of: cover, security plug / TÜV certified / suitable for standard and special bath tubs / triple aerator / jet former can be adjusted by 20° / flow rate 38 l/min Optional parts:	Chrome Special Finishes*	58300000 58300XXX
	 / Basic set bath filler, waste and overflow set for standard bath tubs / Basic set bath filler, waste and overflow set for special bath tubs 		58301180 58302180
	Basic set bath filler, waste and overflow set for standard bath tubs / consists of: basic set, bath tub trap / suitable for standard bath tubs / bowden cable length 520 mm / supply hose water connection left and right DN20 Required parts:		58301180
	Optional parts: / Finish set bath filler, waste and overflow set Optional parts: / Flexible connection tube 800 mm	Chrome Special Finishes*	58300000 58300XXX 58308000
	Basic set bath filler, waste and overflow set for special bath tubs / consists of: basic set, bath tub trap / suitable for special bath tubs, with bellows for bath tubs with slanted bath rim / bowden cable length 780 mm / supply hose water connection left and right DN20		58302180
	Required parts: / Finish set bath filler, waste and overflow set Optional parts: / Flexible connection tube 800 mm	Chrome Special Finishes*	58300000 58300XXX 58308000
	Complete set bath filler, waste and overflow set for standard bath tubs / consists of: bath tub trap, basic set, finish set / TÜV certified / suitable for standard bath tubs / bowden cable length 520 mm / supply hose water connection left and right DN20 Consisting of: / Basic set bath filler, waste and overflow set for standard bath tubs (# 58301180) / Finish set bath filler, waste and overflow set (# 58300000)	Chrome Special Finishes*	58303000 58303XXX

*For additional information please refer to the "special finish" overview.

		finish	code no.	
OÊ	Finish set bath filler, waste and overflow set / consists of: cover, security plug / TÜV certified / suitable for standard and special bath tubs / wide flood jet / jet former can be adjusted by 30° / flow rate 30 l/min Required parts: / Basic set bath filler, waste and overflow set for standard bath tubs / Basic set bath filler, waste and overflow set for special bath tubs		58304000 58304820 58304XXX 58305180 58306180	Quick Clean

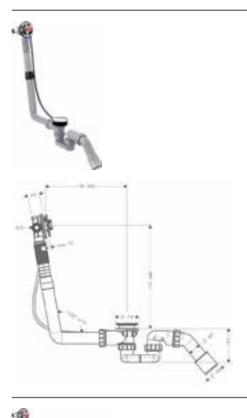

Basic set bath filler, waste and overflow set for standard bath tubs		58305180
 consists of: basic set, bath tub trap suitable for standard bath tubs, with bellows for bath tubs with slanted bath rim bowden cable length 520 mm supply hose water connection left DN20 		
Alternative products: / Basic set bath filler, waste and overflow set for special bath tubs		58306180
Required parts: / Finish set bath filler, waste and overflow set	Chrome Brushed Nickel Special Finishes*	58304000 58304820 58304XXX

	J	2	
Ĩ.	Sile.		
	A	1	

Basic set bath filler, waste and overflow set for special bath tubs		58306180
 consists of: basic set, bath tub trap suitable for special bath tubs, with bellows for bath tubs with slanted bath rim bowden cable length 780 mm supply hose water connection left DN20 		
Alternative products: / Basic set bath filler, waste and overflow set for standard bath tubs		58305180
Required parts: / Finish set bath filler, waste and overflow set	Chrome Brushed Nickel Special Finishes*	58304000 58304820 58304XXX

Product Book 2020/2021


426

		finish	code no.
The second secon	Complete set bath filler, waste and overflow set for standard bath tubs / consists of: bath tub trap, basic set, finish set / TÜV certified / suitable for standard bath tubs, with bellows for bath tubs with slanted bath rim / bowden cable length 520 mm / supply hose water connection left DN20 Consisting of: / Finish set bath filler, waste and overflow set (# 58304XXX) / Basic set bath filler, waste and overflow set for standard bath tubs (# 58305180)	Chrome Special Finishes*	58307000 58307XXX
¹ 4	Flexible connection tube 800 mm / length 800 mm / version: 90° angle		58308000
	 SBOX Finish set square consists of: hose box, shower hose, escutcheon suitable for rim or tile mounted installation 1 function sBox for quiet, smooth and protected hose guidance flow rate at 3 bar: 9.5 l/min no additional maintenance opening required bath rim width at least 100 mm clamping range: 0 - 30 mm connection dimension: DN15 maximum pull-out length of hand shower 1.45 m removable for service at any time protected against backflow for domestic use (according to DIN EN1717) 	Chrome Special Finishes*	28012000 28012XXX
	Alternative products: / SBOX Finish set oval Required parts:	Chrome Special Finishes*	28022000 28022XXX
	/ SBOX Rim and tile mounted bath basic set Optional parts:		15490180
	/ SBOX Installation plate for tile mounted installation		28014000
	 SBOX Mounting angle set for installation plate for tile mounted installation Rim mounted adapter 25° 	Chrome	28011000 28071000

 	finish	code no.
SBOX Finish set oval / consists of: hose box, shower hose, escutcheon / suitable for rim or tile mounted installation / 1 function / sBox for quiet, smooth and protected hose guidance / flow rate at 3 bar: 9.5 l/ min / no additional maintenance opening required / bath rim width at least 100 mm / clamping range: 0 - 30 mm / connection dimension: DN15 / maximum pull-out length of hand shower 1.45 m / removable for service at any time / protected against backflow for domestic use (according to DIN EN1717) Alternative products: / SBOX Finish set square Required parts:	Chrome Special Finishes* Chrome Special Finishes*	28022000 28022XXX 28012000 28012XXX
/ SBOX Rim and tile mounted bath basic set Optional parts:		15490180
/ SBOX Installation plate for tile mounted installation		28014000
/ SBOX Mounting angle set for installation plate for tile mounted installation		28011000
 / Rim mounted adapter 25°	Chrome	28071000
SBOX Rim and tile mounted bath basic set / suitable for rim or tile mounted installation / 1 function / connection thread / R 1/2 / connection hose length: 600 mm / bath rim width at least 100 mm / drilling diameter on bath tub: two drilled holes Ø 50/51 mm and connection by sawing out required / clamping range: 0 - 30 mm / connection dimension: DN15 Optional parts: / SBOX Installation plate for tile mounted installation / SBOX Mounting angle set for installation plate for tile mounted installation		15490180 28014000 28011000

SBOX Installation plate for tile mounted installation

28014000



dimension: 350 x 120 mm

		finish	code no.
	SBOX Mounting angle set for installation plate for tile mounted installation / minimum mounting height: 400 mm / maximum mounting height: 750 mm / packaging unit: 2 pieces		28011000
Wastes and overflow for bath tubs	Finish set waste and overflow set / consists of: turning handle, security plug / suitable for standard and special bath tubs / TÜV certified Required parts: / Basic set waste and overflow set for standard bath tubs / Basic set waste and overflow set	Chrome Special Finishes*	58311000 58311XXX 58313180 58314180
	for special bath tubs Finish set waste and overflow set consists of: turning handle, security plug suitable for standard and special bath tubs Required parts: Basic set waste and overflow set for standard bath tubs Basic set waste and overflow set for special bath tubs	Chrome Brushed Nickel Special Finishes*	58312000 58312820 58312XXX 58313180 58314180
	Basic set waste and overflow set for standard bath tubs / suitable for standard bath tubs / PE screw connection G 11/2 x 40/ 50 mm / flexible overflow hose / bowden cable length 520 mm Required parts: / Finish set waste and overflow set / Finish set waste and overflow set	Chrome Special Finishes* Chrome Brushed Nickel Special Finishes*	58313180 58311000 58311XXX 58312000 58312820 58312XXX

		finish	code no.
	Basic set waste and overflow set for special bath tubs / suitable for special bath tubs / PE screw connection G 1½ x 40/ 50 mm / flexible overflow hose / bowden cable length 780 mm Required parts: / Finish set waste and overflow set / Finish set waste and overflow set	Chrome Special Finishes* Chrome Brushed Nickel Special Finishes*	58314180 58311000 58311XXX 58312000 58312820 58312XXX
	Complete set waste and overflow set for standard bath tubs / consists of: basic set, finish set / TÜV certified / suitable for standard bath tubs / PE screw connection G 1½ x 40/ 50 mm / flexible overflow hose / bowden cable length 520 mm Consisting of: / Finish set waste and overflow set (# 58311000) / Basic set waste and overflow set for standard bath tubs (# 58313180)	Chrome Special Finishes*	58315000 58315XXX
	Complete set waste and overflow set for standard bath tubs / consists of: basic set, finish set / TÜV certified / suitable for standard bath tubs / PE screw connection G 11/2 x 40/ 50 mm / flexible overflow hose / bowden cable length 520 mm Consisting of: / Finish set waste and overflow set (# 58312XXX) / Basic set waste and overflow set for standard bath tubs (# 58313180)	Chrome Brushed Nickel Special Finishes*	58316000 58316820 58316XXX
Wastes for basin/ bidet	Waste set pop-up for basin and bidet mixers / operation via pull-rod / for basins with overflow hole / brass / drain plug material brass / connection dimension G 11/4	Chrome Special Finishes*	51302000 51302XXX

		finish	code no.
Ť	Waste set push-open for basin and bidet mixers / operation with pressure plug / for basins with overflow hole / brass / drain plug material brass / connection dimension G 11/4	Chrome Brushed Nickel Special Finishes*	51300000 51300820 51300XXX
	Waste set non-closing for washbasins	Chrome Special Finishes*	51301000 51301XXX
Traps	Design trap Flowstar / adjustment distance 65 - 165 mm / distance to wall 330 mm / connection dimension entry: G 11/4	Chrome Brushed Nickel Special Finishes*	51303000 51303820 51303XXX
	Design trap set Flowstar / consists of: design trap, angle valve, cover / adjustment distance 65 - 165 mm / distance to wall 330 mm / connection dimension entry: G 11/4 Consisting of: / Design trap Flowstar (# 51303XXX) / Angle valve with cover outlet G 3/8 (# 51307XXX)	Chrome Brushed Nickel Special Finishes*	51304000 51304820 51304XXX
	Design trap Flowstar S / adjustment distance 60 - 165 mm / distance to wall 330 mm / connection dimension entry: G 11/4	Chrome Brushed Nickel Special Finishes*	51305000 51305820 51305XXX
È	Cover / for angle valve / packaging unit: 1 piece	Chrome Special Finishes*	51306000 51306XXX

		finish	code no.
A State	Angle valve with cover outlet G 3/8 / consists of: angle valve, cover / self-sealing connection thread / connection dimension entry: G ¹ / ₂ / connection dimension outlet G ³ / ₈ / packaging unit: 1 piece Consisting of:	Chrome Brushed Nickel Special Finishes*	51307000 51307820 51307XXX
	/ Cover (# 51306000) Angle valve with microfilter outlet	Chrome	51200000
(H	 G 3/8 / for protection of mixers against dirt inlet, e.g. for electronic basin mixers / filter element can be removed and cleaned / connection dimension entry: G ¹/₂ / connection dimension outlet G ³/₈ / packaging unit: 1 piece 	Chrome	51308000
	Angle valve E outlet G 3/8 / connection dimension entry: G ½ / connection dimension outlet G ¾ / main material: brass / material handle and escutcheon: plastic / packaging unit: 1 piece	Chrome	51312000
all	Angle valve E outlet G 1/2 / connection dimension entry: G 1/2 / connection dimension outlet G 1/2 / main material: brass / material handle and escutcheon: plastic / packaging unit: 1 piece	Chrome	51309000
	Angle valve S outlet G 3/8 / self-sealing connection thread / connection dimension entry: G ½ / connection dimension outlet G ¾ / main material: brass / material handle and escutcheon: plastic / packaging unit: 1 piece	Chrome	51310000
F	Pipe trap standard model / adjustment distance 35 - 85 mm / distance to wall 250 mm / connection dimension entry: G 11/4	Chrome	51320000

Measurements within scale drawings are in mm.

 	finish	code no.
Pipe trap easy to install	Chrome	51321000
 / adjustment distance 30 - 120 mm / distance to wall 300 mm / connection dimension entry: G 11/4 		
Pipe trap standard model for bidet	Chrome	51315000
 / adjustment distance 30 - 55 mm / distance to wall 275 mm / connection dimension entry: G 11/4 		

General Terms and Conditions

- Scope

 Scope
 These general terms and conditions (AGB) of Hansgrohe SE (Hansgrohe) apply, unless otherwise stated, to all purchase and work and materials contracts as well as other orders (Order) between Hansgrohe and customers who are not consumers in accordance with Section 13 of the German Civil Code (BGB) (Buyer). Differing general terms and conditions of the buyer are not recognised even if they are not expressly contradicted.

 The general terms and conditions also apply for future business relations with the same buyer even if they are not expressly agreed again. Unless otherwise stipulated, the general terms and conditions are valid as amended at the time the buyer places the order or also in the version published most recently in text form
- form.

- Contract closing
 The offers of Hansgrohe are subject to change unless they are expressly identified as binding in the offer text. The order placed by the buyer is considered a binding contractual offer that remains valid for at least 8 days in the absence of a deviating provision. The contract only comes into effect if Hausgrohe provides the buyer with written (including text form) confirmation in relation to the order.
 Hansgrohe only assumes a guarantee to end consumers in accordance with a separate guarantee declaration that is designated as such.
 The documents such as figures and drawings provided by Hansgrohe as part of the contract negotiation stage as well as the technical information and specifications made by Hansgrohe are binding. Technical, constructional or other changes to the order or work are permitted if and to the extent that they are reasonable for the buyer.
 Individual agreements including trade terms have priority over the general terms and conditions. A written contract or the written confirmation of Hansgrohe is essential for the content of these agreements.

- III. Scope and place of delivery, transport and transfer of risk
 1. A delivery ex works or a delivery to another shipping location of Hansgrohe disclosed to the buyer is generally agreed and this location is the place of performance of the delivery and any supplementary performance. The risk is transferred to the buyer at the latest upon the product being dispatched. If the delivery is delayed due to the behaviour of the buyer or as a result of a circumstance beyond Hansgrohe's control, the risk is transferred to the buyer upon receiving notification that the products are ready for shipment.
 2. Unless otherwise stipulated, the buyer must take out travel insurance at his/her own expense and cost based on standard transport insurance conditions that covers the risk of transporting the product that is part of the order from the shipping location to the agreed destination. The buyer bears the transport costs in accordance with Point V.5.
 3. In the event that an agreement is reached on trade terms, the latest version of locatorms shall apply.

- In the event that an agreement is reached on trade terms, the latest version of Incoterms shall apply. Hansgrohe is entitled to partial deliveries and invoices at an acceptable level prior to the expiry of the delivery period. If the delivery or shipment of the delivered item is delayed at the request of the buyer or as a result of circumstances that the buyer bears the risk and respon-sibility for, the buyer must refund Hansgrohe the costs incurred as a result of storing the item and the accrued interest on the capital deployed for the delivered item. In the case of storage by Hansgrohe, the entitlement amounts to at least 0.5% of the still outstanding invoice amount for each outstanding month, starting with the month after notice has been given that the products are ready for shipment. The customer still retains the right to prove that no damage or substantial ly less damage has occurred. However, after having set a commensurate subsequent delivery term and after the unsuccessful expiry of this term, Hansgrohe is entitled to use the delivered item for another purpose and to deliver a replacement item to the buyer subject to a reasonably extended deadline or to withdraw from the agreement.
- is enlined to use the derivered new for anomal purpose and to deriver a topresonant with the laws and regulations of the country / countries designated by Hansgrohe will procure that the products shipped by Hansgrohe to the buyer comply with the laws and regulations of the country / countries designated by the buyer. In case the buyer after receipt of the products exports the products to third countries it is the obligation of the buyer to make sure that the products comply with the applicable local laws and regulations of such countries with regard to the products. If, however, the buyer chooses to export products to third countries, the buyer is solely responsible for any and all liability resulting from any non-compliance of the products.

- IV. Delivery term and operational disruptions
 Delivery terms start to apply at the earliest once all documentation which is required for determining the content of the order has been received if the buyer has to obtain this documentation according to the agreement and upon receipt of the down-payment. A delivery term is complied with if the shipment is dispatched within the deadline and the buyer has been notified that the products are ready for shipment.
 Delivery terms are extended in the event of circumstances occurring which Hansgrohe or its suppliers are not responsible for and which do not have a substantial influence on the production or delivery of the product (e.g. labour disputes, force majeure and other operational breakdowns that are beyond a party's control) for the duration of the operational disruption. Hansgrohe is obligated to inform the buyer of the anticipated duration of the operational disruption and to state a new delivery date. If the product can also not be delivered within the new delivery period, both parties are entitled to withdraw from the agreement in whole or in part; any payment already made by the buyer is immediately refunded. Rights to demand compensation in lieu of performance in accordance with Point X. and the statutory rights of Hansgrohe, especially if a party is no longer obligated to perform its obligations (e.g. due to impossibility), remain unaffected.
 The conditions for the delay in delivery are based on the statutory provisions irrespective of the existing regulations. Deviating from this however, a written warning is required from the buyer in all cases.

- V. Prices and subsidiary expenses
 1. Deliveries are made at current prices when the contract is concluded in accordance with the order confirmation from Hansgrohe. All prices apply ex works / dispatch location. All prices are quoted in euros unless otherwise stated and other additional expenses (e.g. installation and instruction costs), statutory value added tax and other statutory fees (e.g. duties, fees) are disclosed at the currently prevailing rate.
 2. Hansgrohe reserves the right to increase fixed prices for a period of more than 4 months if cost increases, especially those owing to collective wage agreements, marketable cost prices or material price increases occur after the conclusion of the agreement. These prices are demonstrated to the customer on request.
 3. Hansgrohe calculates a minimum quantity surpharae of EUR 10 for an order value of below EUR 50. Purchase quantities that are smaller than the
- 3. Hansgrohe calculates a minimum quantity surcharge of EUR 10 for an order value of below EUR 50. Purchase quantities that are smaller than the stipulated packaging units are processed at a surcharge of 10% on the net product value.
 4. If the delivery is made to a third party, a surcharge of 10% on the net product value is calculated.
 5. Orders with a net product value exceeding EUR 750 are dispatched carriage paid, while the freight costs for a net product value below EUR 750 are charged to the customer in the invoice. Express costs and fees for posted goods shipments are always charged to the customer.

- VI. Payment and default
 1. As stipulated in the invoice, payments must be made without any deduction immediately after receiving said invoice and delivering the product to Hansgrohe. Hansgrohe is however authorised to carry out the delivery in question in whole or in part at any time against prepayment. A proviso to this effect is asserted at the latest at the time the order is confirmed. Hansgrohe expressly reserves the right to accept cheques. Cheques are only accepted on account of payment and only apply as a payment when honoured. All payments shall be made free of charge. The buyer bears the discount, collection and other bank charges for cheques without express agreement. Payments are initially set off against costs, then against interest and then used to settle the oldest principal debt.
 2. In the event of a default, default interest at the statutory rate, at least 9% per year, is calculated; it remains possible to provide proof of less damage at the level of the statutory interest rate.
 3. The buyer shall only be entitled to offset claims or retention rights in relation to the claims of Hansgrohe if the counterclaim is uncontested or a final decision has been reached. This does not apply if the counterclaim relates directly to the main obligation of Hansgrohe from the same agreement.
 4. The assignment of claims is subject to approval from Hansgrohe.

General Terms and Conditions

5. If it becomes evident after concluding the agreement or delivering the product that the buyer is not or is no longer creditworthy, e.g. enforcement measures are being initiated against him/her, due invoices are not being paid despite receiving a reminder or any other capital deterioration occurs, Hansgrohe can immediately assert claims which are not yet due or such claims for which a cheque has been provided. In these instances, Hansgrohe can request an advance payment, a collateral security or a delivery that will only be carried out based on cash on delivery for the product that has yet to be delivered. If the buyer fails to comply with the request within the statutory deadline that it has been set, Hansgrohe is entitled to withdraw from the agreement. The statutory rights of Hansgrohe (especially in accordance with Section 321 BGB) remain unaffected.

- VII. The retention
 1. Hanggrohe retains ownership of the delivered product until all claims resulting from the business relationship with the buyer at the time the agreement is concluded are settled including all claims from follow-up contracts, repeat orders or spore parts orders occurring at this time. If the value of all security rights to which Hansgrohe is entitled exceeds the value of all secured claims by more than 10%, Hansgrohe shall release a corresponding proportion of the security rights to which Hansgrohe is entitled exceeds the value of all secured claims by more than 10%, Hansgrohe is entitled to take back the reserved product. In the event that Hansgrohe takes back or spizes the reserved product, it is not possible to note it separately from other products, explored product. The event that Hansgrohe takes back or spizes the reserved product, this core and to store it separately from other products, it is also abligated to handle the reserved product. In the event take, Any security, claims that arise in the event of a loss are to be assigned to Hansgrohe. If maintenance and inspection work is required, the buyer may return predege the reserved product. In this work on time and at its own expense against damage resulting from fire, water, storm, robbery and the buyer may neither pledge the reserved product. In this work on time and at its own expense, against damager is ownership. If a third party is unable to refund thansgrohe immediately in writing and provide thansgrohe with all information and documentation which are required for presenting the individual costs of third party proceedings, the buyer is liable to Hansgrohe and explore the plate to the caser too of turber claims star to be assigned to Hansgrohe and explore the tools incurred subject to the caser tool of turber claims star with a the specer vertice of the loss incurred subject to the caser tool of the party is unable to refund thansgrohe is an evende and the reserved product in the case and there is no of turber

- VIII. Claims for defects period of limitation
 1. The statutory regulations shall apply for the rights of the buyer in the event of material defects and defects of title unless otherwise determined below. The special statutory regulations in Point X shall apply for compensating damages in the event of supplier recourse in accordance with Sections 478, 479 BCBI; however the regulations in Point X shall apply for compensating damages in the event of supplier recourse.
 3. If a defivery item is defective, the buyer has the following rights:
 a) Hansgrohe is obligated to rectify the fault and will do this at its own discretion and complaint obligations.
 b) If the rectification of defects is unsuccessful, the buyer is entitled to withdraw from the agreement or reduce the purchase price. A rescission shall be ruled out if the breach of duty on the part of Hansgrohe is solely in accordance with the provided to incorporate a new or repaired product.
 c) Ractifying the fault involves neutred in vain in the event of elects solely in accordance with the provided under the ender of the endero

IX. Returns

- Products delivered by Hansgrohe are not taken back as a rule unless the buyer is entitled to compensation (e.g. due to rescission in the event of a failed subsequent delivery).
 If Hansgrohe is prepared to make an exception and take the product back, an appropriate fee (usually 25% of the net product value) is charged for this as part of an appropriate agreement. The transport risk and transportation costs are borne by the buyer.

- X. Liability for compensation
 1. Hansgrohe is liable for compensation in accordance with the statutory provisions unless otherwise stated below. In the event of breaches of duty regardless of the legal reason Hansgrohe shall be responsible for intent and gross negligence. Hansgrohe is only liable in the event of simple
- regardless of the legal reason Hansgrohe shall be responsible for intent and gross negligence. Hansgrohe is only liable in the event of simple negligence:

 a) for damages resulting from loss of life, physical injury or damage to health and
 b) for damages resulting from the substantial infringement of important contractual obligations (obligations which must be fulfilled before the contract is executed properly and which the contractual partner may, as a matter of routine, trust that they shall be met); the liability in this case is however restricted to compensation for the typically foreseeable damage.

 2. The above limitations of liability also apply in favour of the employers, employees, representatives and assistants of Hansgrohe. Only the statutory regulations apply for claims in accordance with the German Product Liability Act.
 3. Exclusions or limitations of liability do not apply in so far as Hansgrohe has failed to disclose a fault with fraudulent intent or has provided a guarantee for the condition of an item.

- XI. Rescission of the purchase agreement
 If the purchase agreement is rescinded (e.g. due to one of the contractual parties withdrawing), the buyer is obligated to return the delivery item to Hansgrohe in advance regardless of any other development in accordance with the following clauses. Hansgrohe is entitled to collect the delivery
- 2
- item from the buyer's premises. Hansgrohe may also request a reasonable payment from the buyer for the deterioration or destruction of the delivered item or for the delivered item, which is the risk and responsibility of the buyer, not being returned. Hansgrohe may also request payment for the use of the delivered item if the value of the delivered item has reduced between the completion of its installation and its direct repossession in full by Hansgrohe. This decrease in value is calculated from the difference between the total price specified in the order and the present value as calculated from the sales proceeds or if a sale is not possible from the estimate of a sworn authorised expert.

XII. Assignment

The assignment of rights and / or the transfer of the buyer's obligations stated in the agreement are not permitted without the written approval of Hansgrohe. Section 354a of the Commercial Code (HGB) shall remain unaffected.

- XIII. Export control regulations
 1. The delivery items may be subject to the export control regulations of the Federal Republic of Germany, the European Union, the United States of America or other states.
 2. If the delivered item is exported abroad at a later date, the buyer is responsible for complying with the statutory provisions.

- XIV.Competent court and applicable law
 1. The law of the Federal Republic of Germany shall apply to these general terms and conditions and the contractual relationship between the parties excluding international common law, especially UN Purchasing Law. The choice of law also applies to non-contractual obligations that are closely linked to this agreement. The scope and scale also determine the choice of law in accordance with statutory provisions.
 2. Stuttgart (Germany) is agreed as the exclusive competent court for agreements with buyers who have their head office in a member state in the European Union. All disputes that cannot be mutually agreed upon arising from or relating to agreements with buyers who have their head office outside the European Union shall be settled finally in accordance with the arbitration regulations of the Deutsches Institution für Schiedsgerichtsbarkeit e.V. Bonn (DIS) with the exclusion of the normal legal process. The place of arbitration is Stuttgart, Germany. The procedural law of this place shall apply if the arbitration regulations do not contain any corresponding provisions. The arbitration proceedings are conducted in German. The court of arbitration may also decide on the validity of this arbitration agreement.

General Terms and Conditions of Hansgrohe SE Version: 01 April 2019

AXOR

AXOR / Hansgrohe SE P.O. Box 1145 77757 Schiltach Germany

info@axor-design.com axor-design.com





AXOR Poduct Book 2020/2021 EX en-EN · Subject to change in the interest of technical advancement Form No. 84121077 · 09/20/2.7 · Printed in Germany