



2020

CATALOGUE 2020



EVOLUTION
AND DEVELOPMENT
NEVER ENDS

CATALOGUE 2020



Sede /Headquarter

Progress Profiles SpA
Via Le Marze 7
31011 ASOLO (TV) Italy
Tel. +39 0423 950398
Fax +39 0423 950979
Azienda certificata
UNI EN ISO 9001:2015
www.progressprofiles.com
info@progressprofiles.com

Filiale /Branch Office & Warehouse


Progress Profiles America Inc.
4 Middlebury Boulevard (Unit 14)
Randolph, New Jersey 07869
U.S.A.
Tel. 001 973 584 2650
Fax 001 973 584 2657

usa@progressprofiles.com


Filiale /Branch Office & Warehouse

Progress Profiles Middle East LLC
AL QUOZ INDUSTRIAL FOURTH
26th Street, Showroom No. 1
Dubai, U.A.E.
Tel. 00971-04 325 1499
Fax 00971-04 325 1466
P.O. BOX: 29101


uae@progressprofiles.com

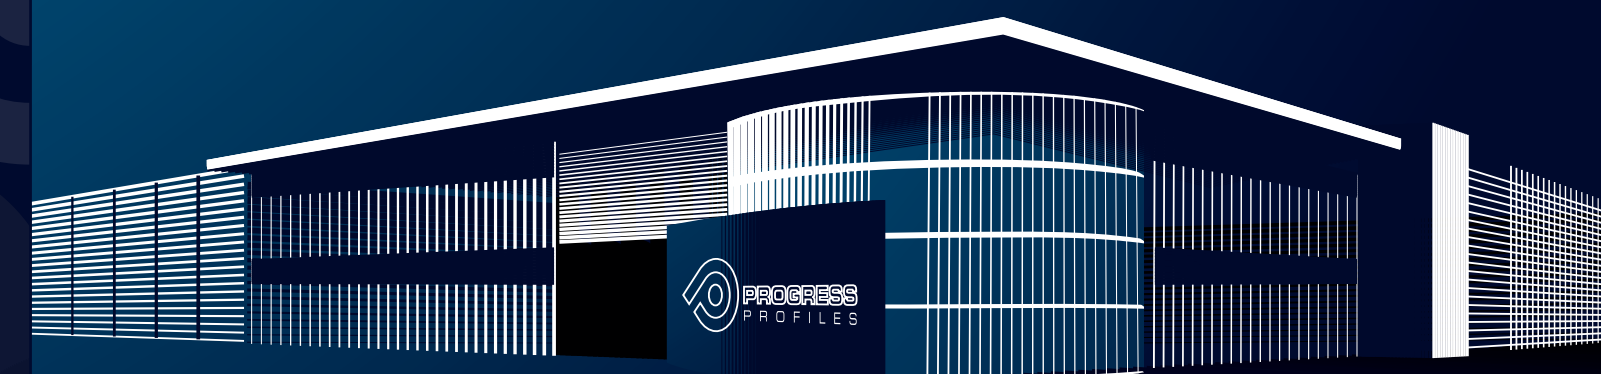

All previous price lists lose their validity on the publication of this price list. Errors, changes, and printing mistakes as well as changes necessary in the interest of product innovation or shipping reserved. For reasons of printing, colours shown in this price list may differ from actual product colours.

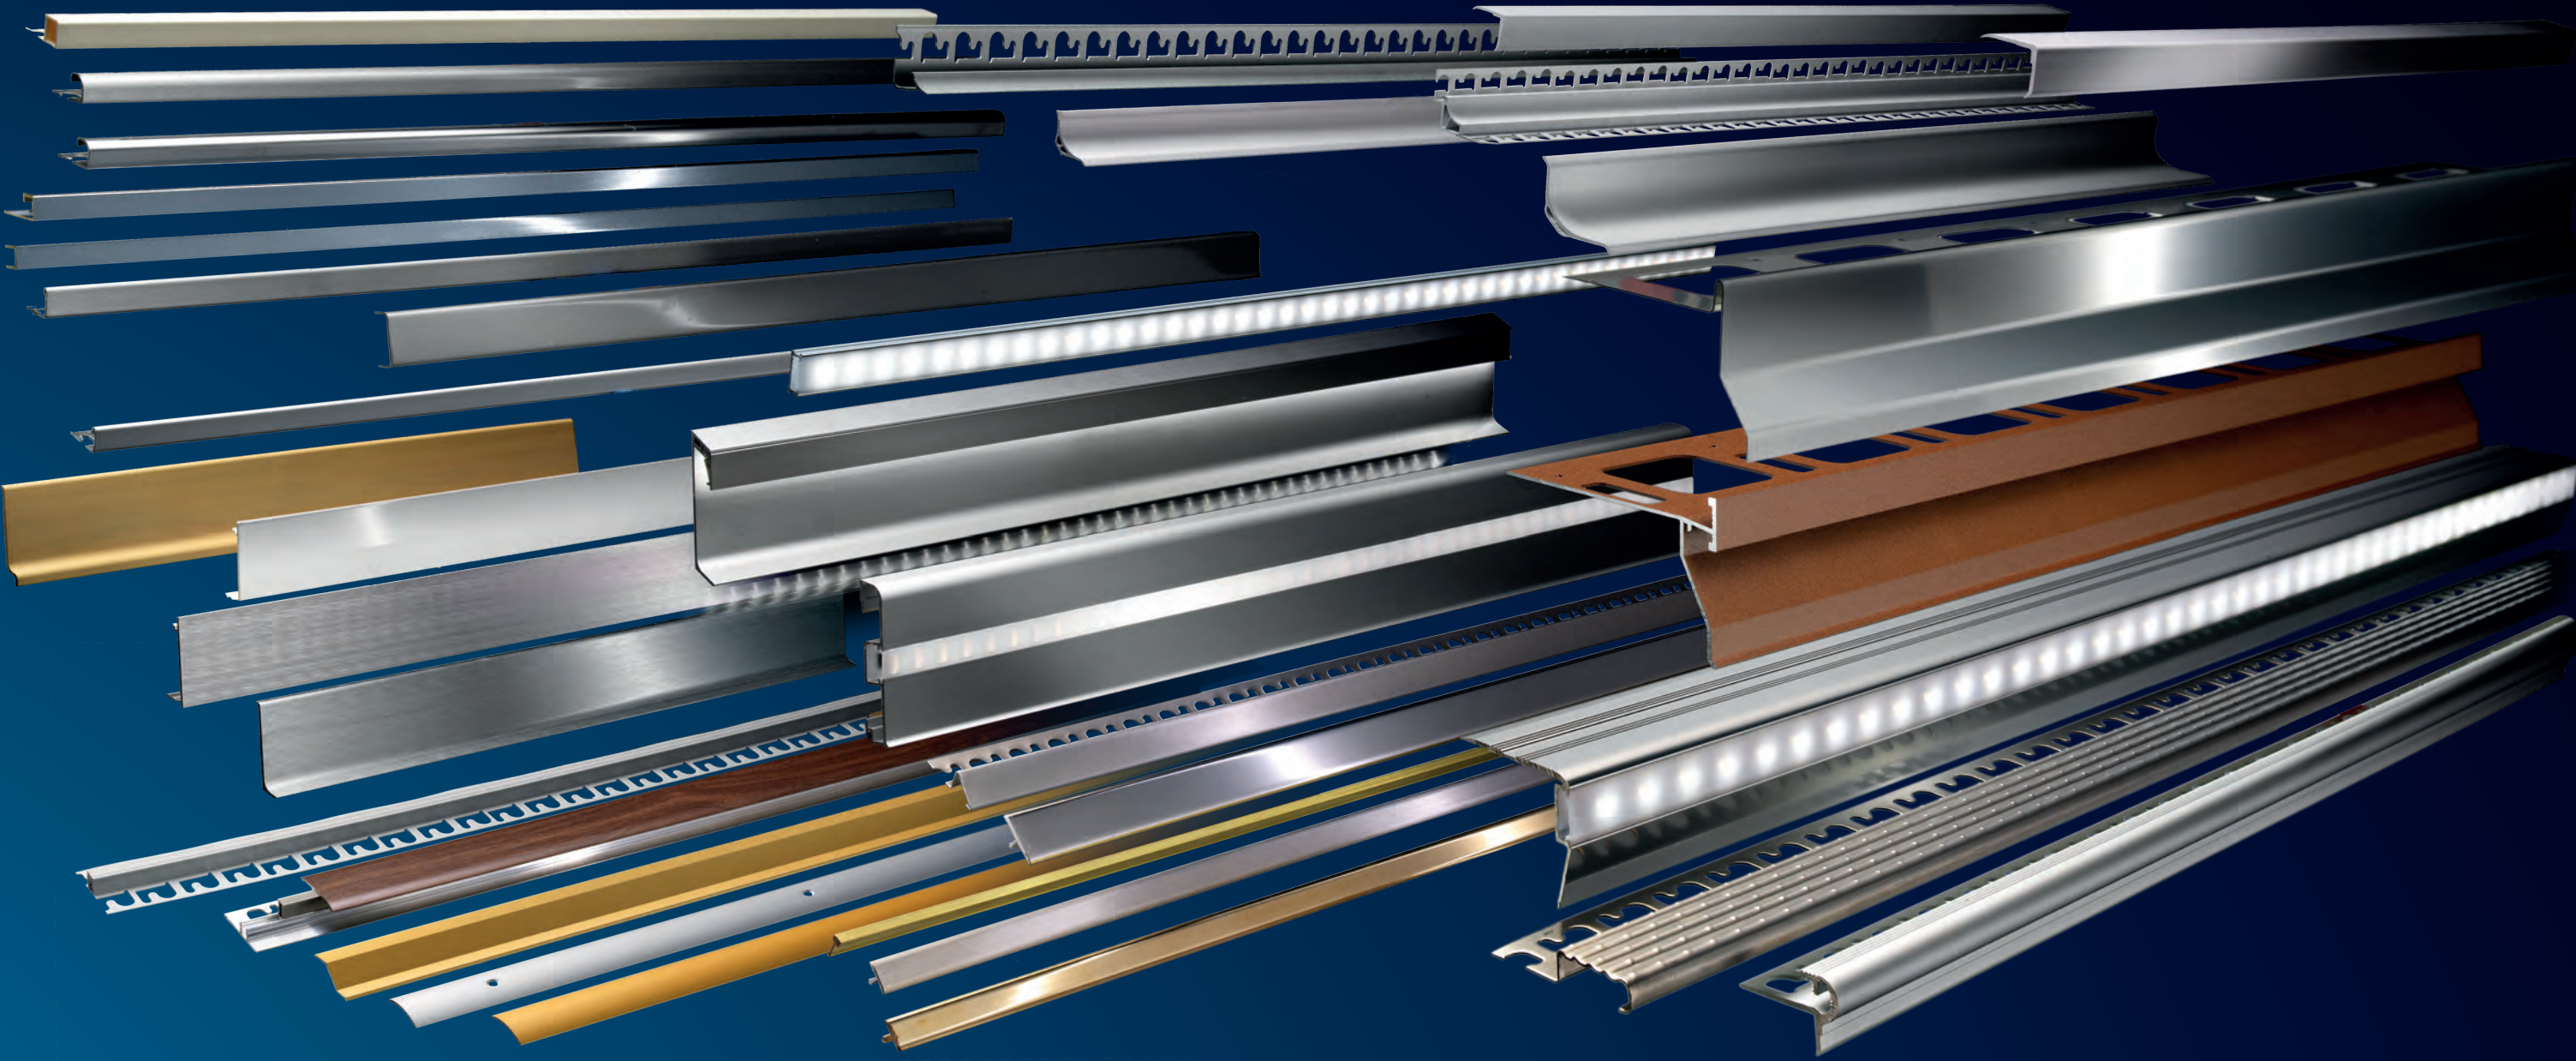

PROFILES & SYSTEMS

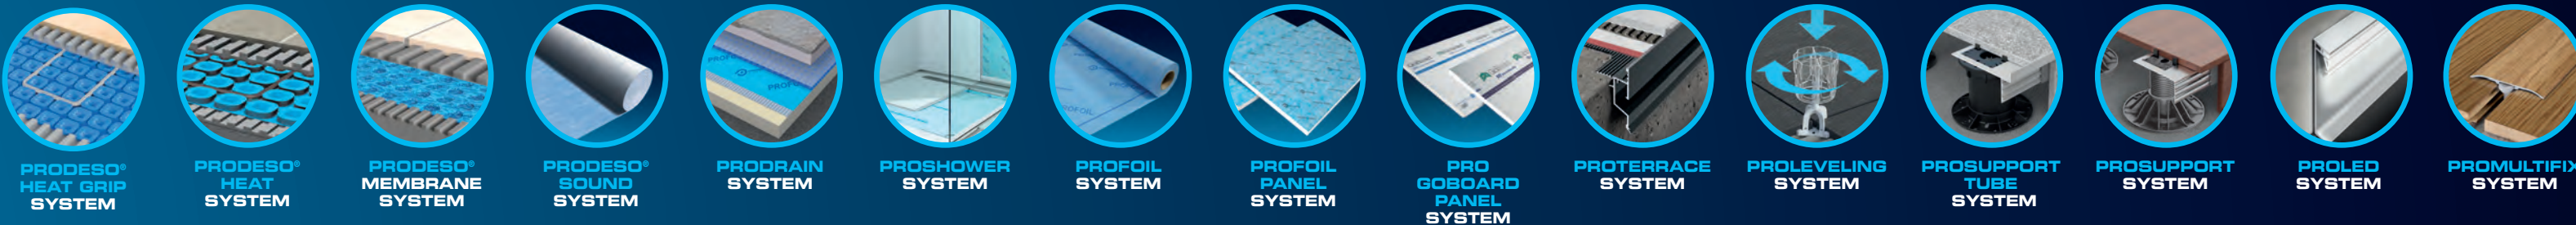

PRODESOS® HEAT GRIP SYSTEM
PRODESOS® HEAT SYSTEM
PRODESOS® MEMBRANE SYSTEM
PRODESOS® SOUND SYSTEM
PRODRAIN SYSTEM
PROSHOWER SYSTEM
PROFOIL SYSTEM
PROFOIL PANEL SYSTEM
PRO GOBOARD PANEL SYSTEM
PROTERRACE SYSTEM
PROLEVELING SYSTEM
PROSUPPORT TUBE SYSTEM
PROSUPPORT SYSTEM
PROLED SYSTEM
PROMULTIFIX SYSTEM


Article	Page	Article	Page	Article	Page	Article	Page	Article	Page
AG...	260-261	MSP...	281	PIF...	265	PPR	287	PTR...	114-124,159
AGF...	265	PAD...	293	PILE...	315	PPT...	286	PTS...	82,245
AL...	261	PBP...	121	PIN...	256	PPTC...	287	PTSP...	122
ALF...	265	PC...	166	PINS...	246,249,255	PPY...	293	PVJ...	302
BRSYS	311	PCG...	164	PINT...	110	PQ...	71	PWK...	132-134,245
BT...	214-225	PCJ...	165	PINT...	239	PRB...	180,182,194	R...	286
C 550...	301	PCL...	73	PINTP...	255	PRBBU	180	RETDB...	287
C...	146-147	PCM...	111	PINTPC...	238-244	PRBFX...	180	SAC...	294
CAT...	311	PCPF...	294	PINY...	255	PRBKL	180	SC...	131
CCOL...	312	PCR...	86-86,110	PINYC...	240	PRBKLAB	180	SO...	131
CLPS...	289	PCRA...	247	PINYL...	255	PRBPE...	179,182,194	SPCPDESHI	313
COFMI	313	PCT...	60	PINYLC...	241	PRC...	225	SPCPDESI	313
COL...	313	PD...	74-76,86,111	PINZ...	246,248,255	PRCLEAN...	282	T...	266
COP...	313	PDES...	178-179	PINZC...	236-244	PRD...	54	TCT...	131
CPGC...	303	PDESDR...	176-177	PISPC...	235-244	PRF..	70-71,108	TDA...	286
CT...	266	PDESEC...	175	PIT...	72	PRLISH...	282	TET...	131
CU...	262	PDESH...	172-174	PJ...	15-23,109	PRLW...	281	TF...	265
CUF...	265	PDESHG...	170-171	PJE...	24-25	PRS...	84	TGS...	131
CURAS...	308	PDRI...	182	PJP...	23	PRS...	272-273	TIGPC...	287
CW...	262	PDRP	181	PJQ...	10-14	PRT...	77-78	TP...	264
DMP...	291	PDSND...	181	PJQS...	2-9	PRTSP...	59	TPF...	265
DSVT...	293	PDSNDTP...	181	PJTR...	26-29	PS...	53	TQP...	265
DVO...	293	PDZ...	290	PK...	210-211	PSA...	55-57	TQPF...	265
ESHAPAN	306	PEBD...	45	PKCH...	201	PSAW...	226	TQV...	264
ESPB...	311	PED...	132-137	PKFL...	201	PSC	171-173	TQVF...	265
ESPBLSH	310	PEF	171-173,181	PKGLED...	209	PSD...	288	TR...	264
ESPD	310	PEL...	68,107	PKINS...	202	PSDWK...	123	TRAG...	308
ESPF...	319	PEM	319	PKISP...	203	PSDWK...	163	TRF...	265
ESPFDPP	312	PEN...	150	PKLED...	207	PSH...	50-52,157	TSHIRT...	315
ESPGLED	312	PENF...	149	PKLI...	202	PSH...DK	181	TUBLAM	312
ESPGSM...	308	PEP	318	PKLL...	59,156	PSHPAN...	186-193	TV...	263
ESPLED	312	PEPINS	318	PKLT...	204-205	PSHPANCEK...	193	TVF...	265
ESPPDH1595	313	PEPINSP	318	PKSH...	211	PSHPANEK...	186	UG...	265
ESPPDH1	313	PESP...	309	PL...	85	PSHW...	187-188	WB...	289
ESPPLS...	310	PET...	90-91	PLF...	291	PSHWPACS...	192	WP...	289
ESPPST	312	PETFXP...	153	PLG...	67	PSHWPFACS...	192		
ESPQC...	307	PFC...	45-48	PLS...	93-97	PSHWPGACS...	190		
ESPSHW 70	312	PFDP...	163	PLT...	40-43	PSHWPLACS...	191		
ESPSP	318	PFDP...P...	162	PLTCH...	35	PSHWWRD...	189		
FLY...	311	PFLO...	182,194	PLV...	79-81,99	PSL...	78		
FTPP...	282	PFLOPST...	182	PMPFX...	231	PSS...	54		
G...	146-148	PFLPAN...	183,195-197	PMQ...	100-101	PST..	274-2780		
GADGETS	314	PFLPANICH...	196	PNPLS	310	PST..	288		
GC...	143	PFLT...	44	PNPLSA3	310	PSW...	257		
GCT...	287	PFR...	83-85	PNPLWS	310	PSWC...	250-251		
GDA...	150-151	PFTT...	283	PNPSR	310	PSY...	114-129,159		
GILET...	315	PFX...	140-148	PNSP...	247,255	PT...	16,35-39,64-66,104-105		
GNS...	152	PG...	71	PNV...	82	PTEDP...	162		
GPL...	73	PGAW...	226	POLO...	315	PTEE...	165		
GRP...	288	PGOBOR...	196	PP..	292,294	PTER...	167		
KMD...	282	PI...	30-34,158	PPD...	287	PTG...	120,129		
M...	295-300	PI...	263	PPN...	294	PTP	127,129		



Look into our eyes and we will tell you who we are

A story a human character and perseverance.

Bold decisions. Ours is a story of accomplishments that started in Canada in 1965 and blossomed in Italy . The extensive know-how acquired over 40 years of prior experience in the field of plastic extrusion and metal profiles brought to the company's turning point occurred during the 90s. This was a period rich in investments in additional qualified personnel, state-of-the-art machinery, and cutting edge innovations that opened the doors to internationalization and the development of innovative solutions for ceramic tiles, marble, wood/parquet, laminate and vinyl flooring, fitted carpets, resin or concrete flooring, mosaic and low thicknesses flooring and innovative fixing/ Laying Heating and Uncoupling membrane systems. All this took PROGRESS PROFILES® in a new trajectory, as demonstrated by the quick growth of the company which became increasingly larger and articulate, recognized as a true reference point in the market. This great success is mainly due to the team play spirit within our company. Highly dedicated, trained and skilled professionals in every single department, technical, training, design, manufacturing, sales, logistic, marketing allow us to bring constantly innovative solution to the international marketplace. In particular investments in marketing and marketing support has been clearly visible in and a wide range of technical catalogues, leaflets and marketing material, which have led the company, already having a leading position in the international market and being the undisputed leader in the Italian market, to achieve the goal of over 10000 active and satisfied clients.

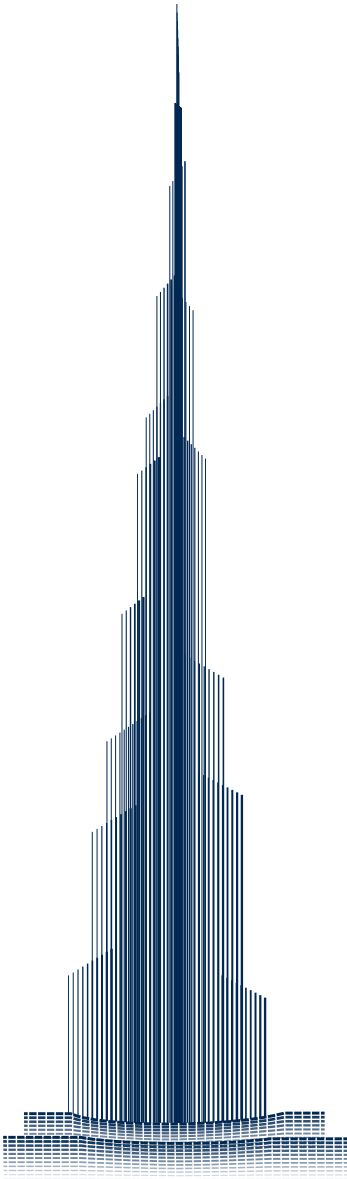




The eyes are the mirror of the soul and of the company



Explore new ideas to constantly improve, by testing and challenging existing practices.

An example of cutting-edge entrepreneurship with determined goals and a forward-looking action plan aiming at capturing the latest trends in the sector. All this is proved by over 35 years of success in the International market, a steadily increasing turnover, and a solid business context, which, as of today, boasts over 130 employees and a network of over 120 high-profile national and international agents, and three headquarters located abroad, in America, Dubai and Australia, to promote Italian high quality through a bold internationalization policy. A dynamic policy that is expressed in the participation in the most important International trade fairs, as well as in an cooperative International dialog with several

of the main characters in the design and architectural spaces of today trend development. This dialog is critical and challenging but the company faces it with great enthusiasm and desire to grow through idea exchanging and learning.

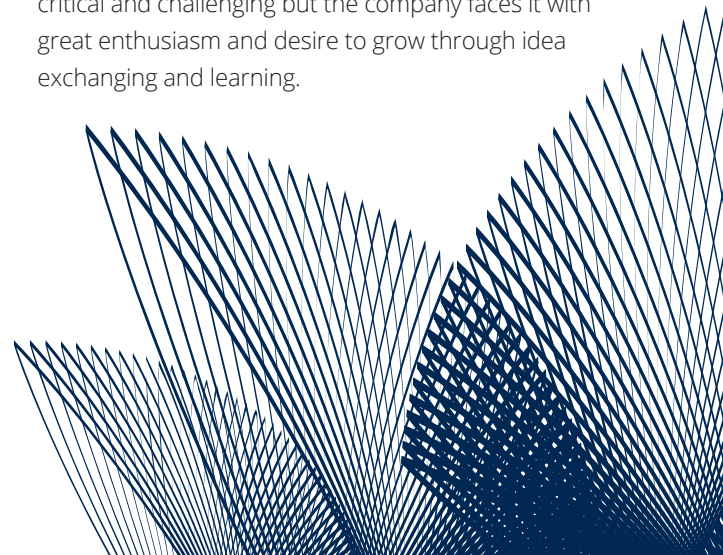




A glance at the future



Following the entire product life cycle from idea to project and finally to finished product

The wide range of PROGRESS PROFILES® products is the result of over 35 years of research and development applied to the most advanced technologies and materials available on the market to create exclusive, functional and state-of-the-art solutions for improving the quality of the finished project, while reducing the installers efforts. These objectives have guided the company policy of important investments in enhancing the Planning Office, acquiring state-of-the-art equipment and a team of professionals that are able to seize the soul of a product and develop its full potential and performances, according to all the customer requirements and trends of the sector. A policy that has led the company to invent, design, and deposit patents and trademarks aiming at promoting and overturning established application concepts.

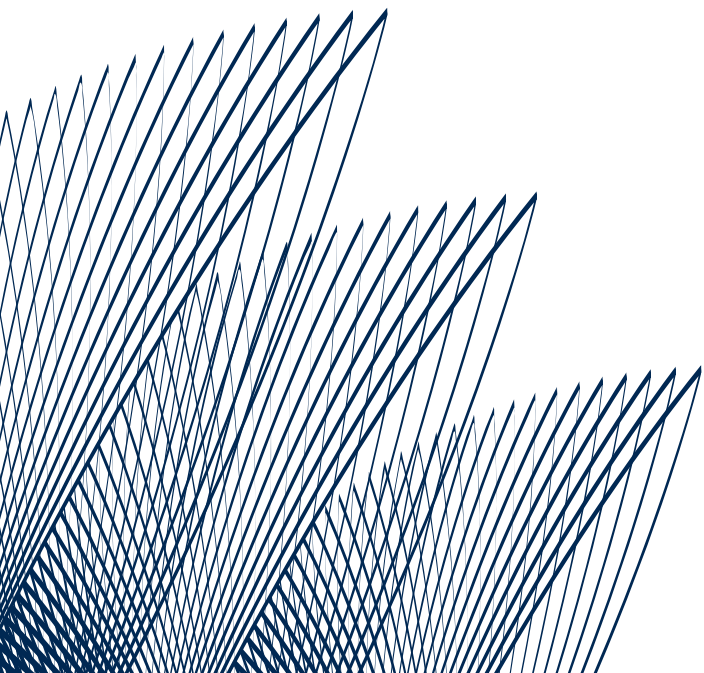



Eyes wide open on innovation




Learning and Technical Training is the most important investment for any enterprise.

PROGRESS PROFILES® feather in the cap is the depth of training offers reserved to employees and clients, in which the company has, since the beginning, invested a large amount of energy and resources. To confirm such focus in the recently inaugurated (2015) Headquarters in Asolo the company has set up a 200 sqm showroom and 300 sqm training facility both equipped with latest technologies to allow operators of the trade – Italian and foreign representatives, architects, engineers, planners, designers, building and laying/fixing companies to view and to acquire the technical knowledge needed to use the latest product in their trade. This is achieved through practical demonstrations, video tutorials on laying methods, technical seminars and workshops, all held by accomplished, seasoned and accredited professionals. All this transfer of knowledge and information to our internal and external partners is accompanied by certifications and standards documents that further strengthens and enrich the quality of their overall training, allowing them to be always up-to-date on the latest systems and products in their field.





A company that sees clearly

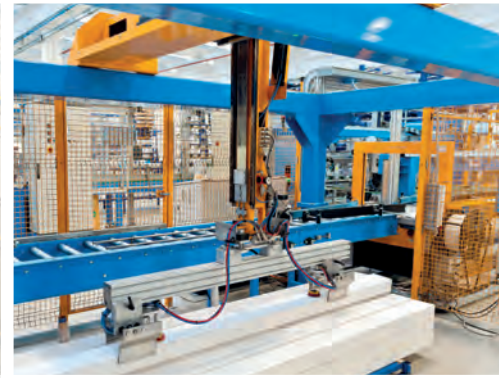

First of all, Made in Italy.

The new headquarters in Asolo, with an indoor area of over 16000 sqm and equipped with a photovoltaic roof system, generating 800 kWh, can boast state-of-the-art technology equipment: latest generation machinery for processing stainless steel, aluminium, brass, PVC and real wood, as well as packaging, labelling and assembling machines. The result of all this are the over 8 million linear metres of its profiles that are laid every year. High-quality and great aesthetic impact characterise the wide range of PROGRESS PROFILES® products, which includes over 13000 technical and design solutions, most of which patented, for

interior finishes, laying ceramic and wood, as well as for residential and commercial buildings. A wide range of products that has grown over the years through advanced technological processes that have led to the development of products, materials, and innovative modern finishes, such as anodized, polished and brushed titanium, copper, chrome and Gold, Tiltex, Black line, Tuscany line, Stone line and the latest heating and uncoupling membranes and shower systems. The entire production is strictly Italian made and ISO 9001:2015 certified. The excellence of the results is the proof.




We keep an eye on everything!



Everything at its place to guarantee efficiency and punctuality.

The logistics system devised by PROGRESS PROFILES® for the operative management of the complex warehouse is emergency proof. Studied in the slightest detail according to the most advanced methods and logics of the system, it ensures a systematic organization of the goods in a total space of 8000 sqm, which allows an efficient and punctual service and prompt delivery any time of the year. Moreover, a state of the art software management service is actively keeping direct and constant control over the entire order procedure, leaving nothing to chance and ensuring maximum reliability and accuracy.

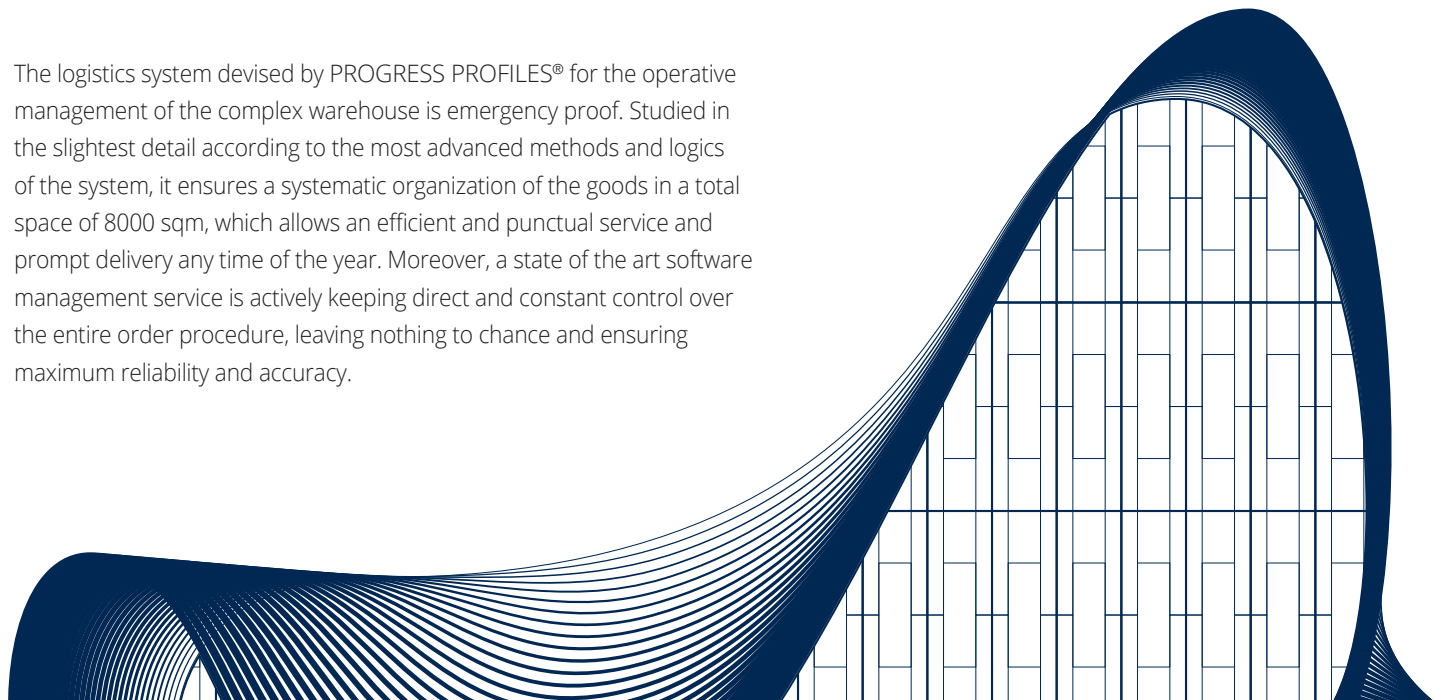



An eye for detail that make the difference



The quality can be seen, touched and is 100% guaranteed.

Every PROGRESS PROFILES® product is made and tested according to the strictest standards that allow us to guarantee their excellence from every point of view. At the forefront in the quality, the company operates with a management system certified according to UNI EN ISO 9001 since 1999, among the first in the world in its field, and it is today ISO 9001:2015 certified.

An absolute certainty of reliability that is ensured also by important company choices: 100% made in Italy, the exclusive use of non-toxic materials and top quality stainless steel, aluminium and brass alloys, conforming to Italian and International standards, the choice of high quality raw materials and their use in compliance with the REACH requirements, implementing the LEED products mapping system for gaining GREENTOP credits, and more in general, by the ability to offer a service designed in the slightest detail to meet all requirements and make a difference in the market.






A forward-looking company



A courageous international growth campaign.

PROGRESS PROFILES® sales network in Italy and abroad creates a capillary knowledge and support delivery system. Even though as today 65% our turnover is made within the Italian national territory, there are over 70 countries accounted for worldwide where the company exports and sells its products. Apart from the main markets such as France, Austria, Greece, Portugal, Germany, Switzerland, Scandinavia, England, Ireland, India, Australia, New Zealand – the company is also present in the countries of former Yugoslavia and Eastern Europe, in particular Russia, and in all the countries of the Middle East, North Africa, and South America.

As a demonstration of the importance of the internationalization process, the company takes part in all the most important trade fairs of the sector and has recently created headquarters in 2 major contemporary business capitals: **U.S.A.:** Progress Profiles America Inc., **U.A.E.:** Progress Profiles Middle East LLC.

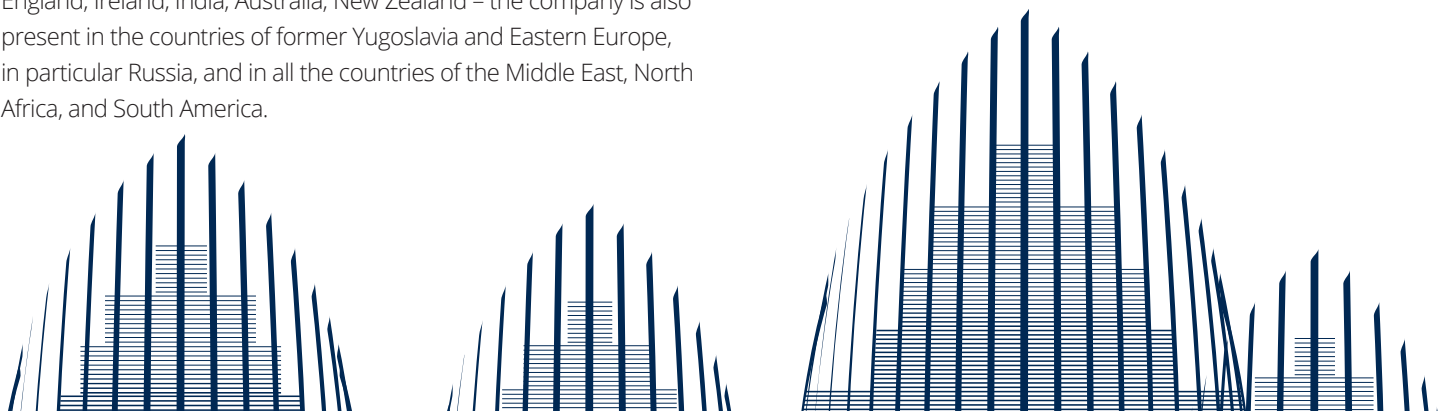





ADHESIVE LAID JOINTS pvc	146
ANGLE BAR pvc	223,254
CANAL "U" FORM alu.....	262
CANAL DOUBLE "U" FORM alu.....	262
🔍 CATALOGUES.....	311
COLOUR RANGE KEYRINGS.....	313
CORNER "L" FORM alu.....	261
CORNER "L" FORM pvc.....	261
CORNER EQUAL SIDES alu.....	260
CORNER EQUAL SIDES brass.....	260
CORNER EQUAL SIDES pvc.....	261
CORNER EQUAL SIDES steel.....	260
CORNERS and PIPE COLLAR PROFOIL	180,182,194
COUNTER DISPLAY FOR BROCHURES.....	311
🔍 COUNTER DISPLAY FOR FLYERS.....	311
CURTAINBALANCE alu.....	266
CURVE PROFILE alu.....	265
DIAMOND - SLITTING DISKS.....	303
DISPLAY ESPF.....	319
DISPLAY ESPF 2.....	319
DISPLAY ESPF 2 2015.....	319
DISPLAY ESPF 2015.....	319
DISPLAY ESPSP.....	318
DISPLAY PEM.....	319
DISPLAY PEP.....	318
DISPLAY PEPINS.....	318
DISPLAY PEPINSP.....	318
DOPPY.....	293
DOWELS, WASHERS, SCREWS.....	183,195
DRAIN REDUCTION.....	189
DRIP pvc.....	287
EMPTY RECTANGULAR TUBE alu.....	264
EMPTY ROUND TUBE alu.....	263
EMPTY SQUARE TUBE alu.....	264
END CAPS FOR DISTANCE TUBE.....	286
EXHIBITION BOARD.....	310
EXPOSURE DISPLAY / WALL UNIT.....	306
EXPOSURE PRODESO / PRODESO HEAT.....	313
EXPOSURE PRODESO HEAT /PRODESO/PROTERRACE	313
FINISHES CASES.....	313
FINNED DISTANCE TUBE.....	286
FIREPROOF CORD V.....	151
FISHBONE RIBBED JOINT pvc.....	288
FLAT alu.....	263
FLAT SPACER.....	294
🔍 FLYER.....	311
FULL ROUND TUBE alu.....	264
FULL SQUARE TUBE alu.....	265
🔍 GADGET.....	314-315
GAP-COVERING BALLOON SHEATH.....	301
GASKETS FOR PRECAST FORMS.....	296-300
GDA 25, GDA 35 alu.....	150
GDA 55 alu.....	151
GNS 20, GNS 50 alu.....	152
GNS 75 alu.....	152
HINGE SUPPORT.....	131
INTERCHANGEABLE INSERT.....	256
IRON.....	267
KIT MONTAGGIO MODULARE.....	189
LEVELLING WEDGES.....	281
MAGNET KIT.....	282
MEMBRANE CASES.....	313
🔍 MINI CATALOGUE.....	311
MODULAR DISPLAY SYSTEM.....	317
MORTAR LAID DOUBLE JOINTS pvc.....	147
MORTAR LAID FULL JOINTS pvc.....	148
MORTAR LAID JOINTS pvc.....	147
MORTAR LAID JOINTS steel-brass- alu.....	146
MULTIPIEDE.....	291
🔍 MULTISPACER.....	281
PAD.....	293
PAU.....	292
PAVIJOINT pvc.....	292
PAVIJOINT pvc.....	302
PRO GOBOARD PANEL.....	183,196
PROANGLE brass.....	71
PROANGLE WOOD pvc.....	226,253
PROBAND 150/250.....	179,182,194
PROBAND BU.....	180
PROBAND FIX.....	180,194,282
PROBAND KOLL.....	180
🔍 PROBAND KOLL AB.....	180
PROBAND NET.....	183,195
PROBATH FLEX pvc.....	57
PROBATH pvc.....	57
PROBORD steel.....	45
PROBRATESTP alu.....	121
PROCANAL brass-alu.....	73
PROCAP S/L.....	225
PROCARE CLEAN.....	282
PROCARPET ACC steel.....	77
PROCARPET ALL alu.....	78
PROCARPET OTT brass.....	77
PROCOVER 1045 ALL alu.....	86
PROCOVER 14PT alu.....	91
PROCOVER alu.....	89, 110
PROCOVER brass.....	88
PROCOVER steel.....	88
PROCOVER WOOD.....	89,110,247
PROCURVE MACHINE.....	113
🔍 PRODESO DRAIN.....	176
🔍 PRODESO ECO.....	175
🔍 PRODESO HEAT GRIP SYSTEM.....	170-171
🔍 PRODESO HEAT SYSTEM.....	172-174
PRODESO MEMBRANE.....	178
🔍 PRODESO SOUND.....	181
🔍 PRODESO SOUND TAPE.....	181
PRODILAT alu.....	143
PRODILAT steel.....	143
PRODISTANZ.....	290
PRODRAIN 10.....	182
PRODRIP.....	181
PROECOFON.....	181,282
PROEDGE AC steel.....	46
PROEDGE AL alu.....	48
PROEDGE FLEX pvc.....	45
PROEDGE OT brass.....	46
PROEDGE PVC pvc.....	48
PROEDGE R AC steel.....	47
PROEDGE R OT brass.....	47
PROELEGANT alu.....	68
PROELEGANT brass.....	68
PROELEGANT CURVE alu.....	107
PROELEGANT CURVE brass.....	107
PROEND 5050 alu.....	136
PROEND alu.....	132
PROEND GRIP 70 alu.....	136
PROEND GRIP alu.....	137
PROEND INS 75 alu.....	135
PROEND INS alu.....	135
PROEXPAN 115-130-190-210 alu.....	149
PROEXPAN H20-H40 alu.....	150
PROFILE "T" FORM alu.....	266
PROFILE WITH DOUBLE CHAMFER pvc.....	288
PROFILE WITH TRIANGULAR CHAMFER pvc.....	288
Profiles LVT SOL 30P.....	254
🔍 Profiles LVT SOL 30P BASE + TOP.....	244
Profiles LVT TERMINAL PIN.....	254
🔍 Profiles LVT TERMINAL PIN BASE + TOP.....	244
Profiles LVT ZERO CURVE.....	254
🔍 Profiles LVT ZERO CURVE BASE + TOP.....	244
PROFINAL alu.....	71
PROFINAL brass.....	70
PROFINAL CURVE alu.....	108
PROFINAL CURVE brass.....	108
PROFINAL steel.....	70
PROFINLIST 20 alu.....	44
PROFIXER LINE SYSTEM alu.....	248-249
PROFLAT steel-brass.....	73
PROFLEX 25 pvc.....	148
PROFLEX 5 PR pvc.....	145
PROFLEX 5 pvc.....	144
PROFLEX ACC PR steel.....	140
PROFLEX ACC steel.....	140
🔍 PROFLEX ACN steel.....	142
PROFLEX AL alu.....	141
PROFLEX ALN alu.....	142
PROFLEX OT brass.....	141
PROFLEX pvc.....	144
PROFLOOR 1216 steel-brass.....	84
PROFLOOR 24 steel.-brass.....	85
PROFLOOR 712 alu.....	83
PROFLOOR 712 brass.....	83
PROFLOOR 712 steel.....	83
PROFOIL.....	182,194
PROFOIL PANEL.....	183,195
PROFOIL PANEL NICHE.....	196
PROFOIL PASTE.....	182,194
PROGRIP.....	117-118,137
PROINSERT BASE 45 E 40.....	256
PROINSERT SYSTEM PROFILES SAMPLES.....	312
🔍 PRINTER AC steel.....	30-31
PRINTER AL alu.....	33
🔍 PRINTER KL ACC steel.....	30-31, 158
PRINTER KL ALL brass-alu.....	33, 158
PRINTER pvc.....	34
PROJOINT alu.....	72
PROJOINT brass.....	72
PROJOLLY alu.....	18-21
🔍 PROJOLLY ANGLE 135 steel.....	29
PROJOLLY brass.....	17
PROJOLLY CURVE alu.....	109
PROJOLLY CURVE brass.....	109
PROJOLLY ECO MARBLE pvc.....	25
PROJOLLY ECO pvc.....	24
PROJOLLY MARBLE pvc.....	23
PROJOLLY OPEN pvc.....	23
PROJOLLY pvc.....	22
PROJOLLY QUART alu.....	10
PROJOLLY QUART pvc.....	14
PROJOLLY QUART steel.....	10
PROJOLLY SQUARE alu.....	6-8
PROJOLLY SQUARE brass.....	5
PROJOLLY SQUARE pvc.....	9
PROJOLLY SQUARE steel.....	2-3
PROJOLLY steel.....	15-16
PROJOLLY TRIANGLE alu.....	28
🔍 PROJOLLY TRIANGLE brass.....	27
PROJOLLY TRIANGLE steel.....	26
PROKERLAM JOLLY alu.....	156
PROKERLAM LINE alu.....	59, 156
PROKERLAM SQUARE alu.....	156
PROLEVALL 25-35-38 alu.....	99
PROLEVALL 29 alu.....	79
PROLEVALL 305 steel-brass.....	80
PROLEVALL 32 alu.....	80
PROLEVALL 33 brass.....	79
PROLEVALL 358 brass.....	81
PROLEVALL 4413 brass-alu.....	81
🔍 PROLEVELING SYSTEM.....	270-273
PROLEVELING SYSTEM BOARD.....	310
🔍 PROLEVELING WEDGE SYSTEM BOARD.....	310
PROLEVELING SYSTEM DISPLAY 7.....	310
PROLEVELING SYSTEM DISPLAY 5.....	310
🔍 PROLEVELING WEDGE SYSTEM.....	281
PROLEVIGAL alu.....	67
PROLEVIGAL brass.....	67
PROLINOLEUM alu.....	85
PROLISTEL ACC steel.....	40-41
PROLISTEL ALL alu.....	43
PROLISTEL CHANNEL alu.....	35
PROLISTEL LED alu.....	43
PROLISTEL P ALL alu.....	42
🔍 PROLISTEL P OTT brass.....	41
PROLISTEL/SKIRTING DISPLAY.....	310

PROMOQUETTE alu.	100	PROSQUARE brass	71	SKIRTING 60 steel	216
PROMOQUETTE CLIP alu.	101	PROSTAIR 50 alu.	119	SKIRTING 60/120 pvc	224
PROMOQUETTE FIX alu.	100	PROSTAIR ACC steel	114	SKIRTING 62F pvc	224
PROMOQUETTE GIN alu.	101	PROSTAIR alu.	120	SKIRTING 7011 pvc	222,252
◊ PROMULTIFIX SYSTEM	231	PROSTAIR BOTTON / STRIP steel	121	SKIRTING 7016 pvc	222,252
PRONIVO alu.	82	PROSTAIR GRIP ACC steel	117	SKIRTING 80 alu.	219
PROPLATE 80 ALZ alu.	91	PROSTAIR KL 20 alu.	159	SKIRTING 80 steel	218
PROPLATE brass	90	PROSTAIR LED alu.	124	SKIRTING COVECAP pvc	225
PROPLATE FIX alu.	153	PROSTAIR WOOD	128	SKIRTING pvc	223,254
PROPLATE FIX pvc	153	PROSTAIR WOOD Z	128	SMALL EXPOSURE STAND	308
PROPLATE steel.	90	PROSTEP INS alu.	127,245	SNAP-ON STRAND SHEATH pvc	286
PROPOLISH	282	PROSTEP pvc	120	SNAP-ON STRAND TUBE pvc.....	286
PROPOSALS OF SHOWROOM EQUIPMENT.....	316	PROSTEP WOOD	129	SOL 30 alu.	255
PROPRESS 712 steel.-brass	84	PROSTYLE 2610 steel.....	114	SOL 30 self-adhesive alu.	246
PROROUND steel.....	54	PROSTYLE alu.....	127	SOL 40 P alu.	235,255
PROSANI STRIP pvc	54	PROSTYLE brass.....	126	SOL 40 self-adhesive alu.	247
PROSCREW 33 alu.	257	PROSTYLE GRIP ACC steel	118	SPACER FOR GLASS BRICK	293
PROSCREW 33 alu. BASE + TOP	250	PROSTYLE KL 10 alu.	159	SPACER FOR VERT/ORIZ. MESH.....	293
PROSCREW 34 alu.	257	PROSTYLE steel	126	SPACERS	281
PROSCREW 34 alu. BASE + TOP	250	PROSTYLE WOOD	129	SPACERS DISPLAY.....	310
PROSCREW 44 alu.	257	PROSUPPORT PROFILE A & B	280	SQUARE SHOW CASE.....	307
PROSCREW 44 alu. BASE + TOP	250	PROSUPPORT PROFILE T & N	280	STYLE STAIR alu.	240,255
PROSCREW 50 alu.	257	◊ PRORAIL SYSTEM	276	STYLE STAIR L alu.	241,255
PROSCREW 50 alu. BASE + TOP	251	◊ PROSUPPORT SLIM SYSTEM	277	SUPPORT / EYELET	131
PROSCREW BASE 07 alu.	257	PROSUPPORT SYSTEM	278	SUPPORT and LEVELLER.....	279
PROSEAL 25 pvc	56	PROSUPPORT SYSTEM ECO	279	PIPE COLLAR PROFOIL	187
PROSEAL 50 pvc	55	PROSUPPORT SYSTEM OPTIONAL	279	TERMINAL alu.	239
PROSEAL FLEX pvc	56	◊ PROSUPPORT TUBE DISPLAY.....	312	TERMINAL CURVE alu.	110
PROSEAL WOOD pvc	226,253	◊ PROSUPPORT TUBE SYSTEM	274	TERMINAL PIN alu.	238,255
PROSGUSCIO DA pvc	53	◊ PROSUPPORT TUBE SYSTEM OPTIONAL	275	TROLLEY	308
PROSHELL ALL alu.....	52	PROTECTIVE CAPS	294	TROWEL pvc.....	283
PROSHELL D ALL alu.	157	PROTERMINAL alu.	37-39, 66	TROWEL steel.....	283
PROSHELL R ALL alu.	157	PROTERMINAL brass.....	37, 65	TUBE for runners.....	131
◊ PROSHELL steel.....	50-51	PROTERMINAL CURVE alu.	105	TUBE PLUGS / END CAPS.....	131
PROSHOWER BASE BASIC pvc	187	PROTERMINAL CURVE brass.....	105	TUBES and ACCESSORIES.....	131
PROSHOWER BASE L steel	187	PROTERMINAL CURVE steel.....	104	TYPE "PAX/PAL/PAS/PAG" SPACER.....	295
◊ PROSHOWER CENTRAL PANEL	193	PROTERMINAL INT alu.....	35	WATERSTOP pvc	289
◊ PROSHOWER DRAIN KIT	181	PROTERMINAL pvc	39	WEDGE SHIMS.....	294
◊ PROSHOWER LINEAR KIT SYSTEM	186	PROTERMINAL steel.....	36, 64-65	◊ WOOD SAMPLES KEYRINGS	312
PROSHOWER PANEL	186	PROTERMSTEP ACC steel.....	122	ZERO CURVE alu.	236,255
◊ PROSHOWER PANEL EXTENSION	186	PROTERMSTEP ACC steel.....	59, 122	ZERO CURVE self-adhesive alu.	246
PROSHOWER PROFILE	192	PROTERMSTEP ALL alu.	122		
PROSHOWER PROFILE FRONT	192	◊ PROTERRACE DRAIN DRIP alu.	162		
PROSHOWER PROFILE GLASS.....	190	PROTERRACE DRAIN FDP alu.	163		
PROSHOWER PROFILE WALL	191	PROTERRACE ECO alu.	165		
◊ PROSHOWER SYSTEM CENTRAL KIT lateral drain	181,193	◊ PROTERRACE ECO DRIP alu.	162		
◊ PROSHOWER SYSTEM CENTRAL KIT vertical drain	181,193	PROTERRACE PC alu.	166		
PROSHOWER SYSTEM DISPLAY.....	312	PROTERRACE PC steel	166		
PROSHOWER TOP steel	188	PROTERRACE PCG alu.	164		
◊ PROSIDE WALK alu.	123, 163	PROTERRACE PCG steel	164		
PROSKID brass-alu.....	78	PROTERRACE PCJ alu.	165		
PROSKIRTING 40 alu.	211	PROTERRACE PTER alu.	167		
PROSKIRTING alu.	210	PROTERRACE PTER steel	167		
PROSKIRTING CHANNEL alu.	201	PROTERRACE SYSTEM DISPLAY.....	312		
PROSKIRTING FLAT alu.	201	PROTOP alu.	60		
PROSKIRTING GILED alu.	209	PROTOP T alu.	60		
PROSKIRTING INS alu. V	202	PROTRANS alu.	82		
PROSKIRTING ISP alu.	203	PROWALK 2510 & 2520 alu.	134		
PROSKIRTING LED alu.	207	PROWALK ACC steel.....	132		
PROSKIRTING LED/GILED DISPLAY.....	312	PROWALK brass-alu.....	133		
PROSKIRTING LINE alu.	202	RAPY 100	291		
◊ PROSKIRTING LIST.....	204-205	◊ RAPY 100 ECO.....	291		
PROSKIRTING SHELL alu.	211	RAPY 200	291		
PROSLIDER alu.....	75	RIBBED DISTANCE TUBE pvc.....	287		
PROSLIDER brass	74	ROLLER.....	283		
PROSLIDER CURVE alu.	111	ROTATING DISPLAY EXPOSURE	308		
PROSLIDER CURVE brass	111	ROUNDED TRIANGULAR CHAMFER FILLET pvc.....	288		
PROSLIDER KL ALL alu.	86	SAMPLE BOARDS	309		
◊ PROSLIDER LR alu.	75	SCISSORS for pvc PROFILES.....	282		
◊ PROSLIDER steel.....	74	SHEATH LAYING TROLLEY.....	303		
PROSLIDER WOOD	76	SKIRTING 100 alu.	221		
PROSOL 18-30-35-40 brass	95-96	SKIRTING 100-150 steel	220		
PROSOL 18-30-35-40 steel.....	93	SKIRTING 40 alu.	215		
PROSOL 30-35-40 alu.	97	SKIRTING 40 steel	214		
PROSOL 30-35-40 steel.....	94	SKIRTING 60 alu.	217		

● PROFILES FOR WALLS



Code	Pag.	Article
PJQSAC...	2-3	PROJOLLY SQUARE steel
PJQSACM...	3	PROJOLLY SQUARE steel 316L
PJQSOC...	5	PROJOLLY SQUARE brass
PJQS...	6-8	PROJOLLY SQUARE alu.
PJQ...	9	PROJOLLY SQUARE pvc



Code	Pag.	Article
PJAC...	15	PROJOLLY steel
PJACM	16	PROJOLLY steel 316L
PJO...	17	PROJOLLY brass
PJ...	18-21	PROJOLLY alu.
PJ...	22	PROJOLLY pvc
PJE...	24	PROJOLLY ECO pvc
PJE...	25	PROJOLLY ECO MARBLE pvc
PJ...	23	PROJOLLY MARBLE pvc
PJP	23	PROJOLLY OPEN pvc



Code	Pag.	Article
PJQTAC...	10	PROJOLLY QUART steel
PJQT...	11-13	PROJOLLY QUART alu.
PJQT...	14	PROJOLLY QUART pvc



Code	Pag.	Article
PJTRAC...	26	PROJOLLY TRIANGLE steel
PJTRO...	27	PROJOLLY TRIANGLE brass
PJTR...	28	PROJOLLY TRIANGLE alu.
PJTR135...	29	PROJOLLY ANGLE 135 steel



Code	Pag.	Article
PTI...	35	PROTERMINAL INT alu.
PTAC...	36	PROTERMINAL steel
PTACM	16-36	PROTERMINAL steel 316L
PTO...	37	PROTERMINAL brass
PT...	37-39	PROTERMINAL alu.
PT...	39	PROTERMINAL pvc




Code	Pag.	Article
PIAC...	30	PROINTER AC steel
PIKLAC... 15	30	PROINTER KL ACC steel
PIACM... 31	28	PROINTER ACC 316
PIKLACM... 31	29	PROINTER KL ACC 316
PI...	33	PROINTER AL alu.
PIKL...	33	PROINTER KL ALL brass / alu.
PI...	34	PROINTER pvc



Code	Pag.	Article
PLTAC...	40	PROLISTEL ACC steel
PLTACM...	41	PROLISTEL ACC steel 316L
PLTP...	42	PROLISTEL P ALL alu.
PLT...	43	PROLISTEL ALL alu.
PLTLED	43	PROLISTEL LED alu.
PLTCH ...	35	PROLISTEL CHANNEL alu.
PELT...	44	PROFINLIST 20 alu.
PLTPOL...	41	PROLISTEL P OTT



Code	Pag.	Article
PEBDAC...	45	PROBORD steel
PEGAC...	46	PROEDGE AC steel
PEGO...	46	PROEDGE OT brass
PEGRAC...	47	PROEDGE R AC steel
PEGRO...	47	PROEDGE R OT brass
PEG...	48	PROEDGE AL alu.
PFC...	45	PROEDGE FLEX pvc
PEG...	48	PROEDGE PVC pvc

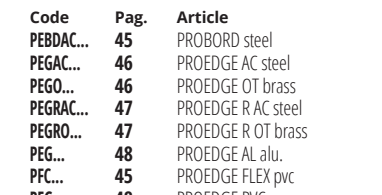

Code	Pag.	Article
PSHAC	50	PROSHELL steel
PSH...	52	PROSHELL ALL alu.
PS...	53	PROSGUSCIO DA pvc
PSHACM	51	PROSHELL steel 316



Code	Pag.	Article
PRDAC...	54	PROROUND steel
PSAA 50-...	55	PROSEAL 50 pvc
PSAA 25-...	56	PROSEAL 25 pvc
PSF...	56	PROSEAL FLEX pvc
PSB...	57	PROBATH pvc
PSBF...	57	PROBATH FLEX pvc
PSS...	54	PROSANI STRIP pvc



Code	Pag.	Article
PCT...	60	PROTOP alu.
PCT... T	60	PROTOP T alu.
PTSPAC...	59	PROTERMSTEP ACC steel



Code	Pag.	Article
PIKLAC...	160	PROINTER KL ACC steel
PIKL...	160	PROINTER KL ALL brass-alu.
PKJ...	156	PROKERLAM JOLLY alu.
PKLL...	59 - 156	PROKERLAM LINE alu.
PKLQ...	156	PROKERLAM SQUARE alu.
PSHD...	157	PROSHELL D ALL alu.
PSHR...	157	PROSHELL R ALL alu.

● LOW THICKNESSES

● PROFILES FOR FLOORS



Code	Pag.	Article
PTAC...	64	PROTERMINAL steel
PTACM...	65	PROTERMINAL steel 316L
PTO...	65	PROTERMINAL brass
PT...	66	PROTERMINAL alu.
PLGO...	67	PROLEVIGAL brass
PLGAN...	67	PROLEVIGAL alu.



Code	Pag.	Article
PELO...	68	PROELEGANT brass
PELA...	68	PROELEGANT alu.



Code	Pag.	Article
PRFAC...	70	PROFINAL steel
PRFO...	70	PROFINAL brass
PRFA...	71	PROFINAL alu.



Code	Pag.	Article
GPL...	73	PROFLAT steel-brass
PITON...	72	PROJOINT brass
PITAN...	72	PROJOINT alu.
PCL...	73	PROCANAL brass-alu.
PQEON 108	71	PRO SQUARE brass

● PROFILES FOR FLOORS



Code	Pag.	Article
PFRAC 712...	83	PROFLOOR 712 steel
PFROL 712...	83	PROFLOOR 712 brass
PFR... 712...	83	PROFLOOR 712 alu.
PFR... 1216...	84	PROFLOOR 1216 steel-brass
PFR... 24...	85	PROFLOOR 24 steel-brass
PRS... 712...	84	PROGRESS 712 steel-brass



Code	Pag.	Article
PDAC...	70	PROSLIDER steel
PDO...	70	PROSLIDER brass
PDA...	71	PROSLIDER alu.
PDWR...	72	PROSLIDER WOOD
PRTAC...	73	PROCARPET ACC steel
PRTO...	73	PROCARPET OTT brass
PRTA...	74	PROCARPET ALL alu.
PDLRA...	71	PROSLIDER LR alu.
PSLD...	74	PROSKID brass-alu.
PDKLAA	82	PROSLIDER KL ALL alu.



Code	Pag.	Article
PGAO...	67	PROANGLE brass
PLV...29...	75	PROLEVALL 29 alu.
PLVOL 33...	75	PROLEVALL 33 brass
PLV...30...	76	PROLEVALL 305 steel-brass
PLV...32...	76	PROLEVALL 32 alu.
PLVOL 358...	77	PROLEVALL 358 brass
PLV...4413...	77	PROLEVALL 4413 brass-alu.
PLV...	95	PROLEVALL 25-35-38 alu.
PNV...713A	78	PRONIVO alu.
PTS...613...	78	PROTRANS alu.



Code	Pag.	Article
PCRAC...	88	PROCOVER steel
PCRO...	88	PROCOVER brass
PCRA...	89	PROCOVER alu.
PCRA...	89	PROCOVER WOOD
PCR...1045	86	PROCOVER 1045 ALL alu.
PCRA...	91	PROCOVER 14PT alu.
PETAC...	90	PROPLATE steel
PETOL...	90	PROPLATE brass
PETAA...	91	PROPLATE 80 ALZ alu.



Code	Pag.	Article
PLU...16	81	PROLINOLEUM alu.
PMQ...	96	PROMOQUETTE alu.
PMF...	96	PROMOQUETTE FIX alu.
PMG...	97	PROMOQUETTE GIN alu.
PMC...	97	PROMOQUETTE CLIP alu.
PRS... 712...	84	PROMOQUETTE CLIP alu.

● CURVE AND BENDABLE PROFILES



Code	Pag.	Article
PTACCV...	104	PROTERMINAL CURVE inox
PTONCV...	105	PROTERMINAL CURVE brass
PTANCV...	105	PROTERMINAL CURVE alu.
PELONCV...	107	PROELEGANT CURVE brass
PELAACV...	107	PROELEGANT CURVE alu.



Code	Pag.	Article
PRFONCV...	108	PROFINAL CURVE brass
PRFAACV...	108	PROFINAL CURVE alu.
PJONCV...	109	PROJOLLY CURVE brass
PJAACV...	109	PROJOLLY CURVE alu.



Code	Pag.	Article
PINT...CV...	110	TERMINAL CURVE alu.
PCR...149	110	PROCOVER alu.
PCRA...149	110	PROCOVER WOOD
PDONCV...	111	PROSLIDER CURVE brass
PDAACV...	111	PROSLIDER CURVE alu.



Code	Pag.	Article
PCM 08	111	PROCURVE MACHINE

● STAIRS NOSINGS PROFILES



Code	Pag.	Article
PTRACS...	114	PROSTAIR ACC steel
PSYACS...	114	PROSTYLE 2610 steel



Code	Pag.	Article
PTRGRACS...	117	PROSTAIR GRIP ACC steel
PSYGRACS...	118	PROSTYLE GRIP ACC steel



Code	Pag.	Article
PTSPAC...	122, 59	PROTERMSTEP ACC steel
PTSPA...	122	PROTERMSTEP ALL alu.
PSDWK...	123	PROSIDE WALK alu.



Code	Pag.	Article
PSYAC...	124	PROSTYLE steel
PSY...	124	PROSTYLE brass
PSY...	127	PROSTYLE alu.
PTS...	127	PROSTEP INS alu.



Code	Pag.	Article
PWKAC...	132	PROWALK ACC steel
PWK...	134	PROWALK 2510 & 2520 alu.
PWK...	133	PROWALK brass-alu.



Code	Pag.	Article
PTR50...	119	PROSTAIR 50 alu.
PTR...	120	PROSTAIR alu.
PTP...	120	PROSTEP pvc



Code	Pag.	Article
PBPA...	121	PROBRATESTP alu.
PBPO...	121	PROBRATESTP brass
PTRB...	121	PROSTAIR BOTTOM / STRIP steel



Code	Pag.	Article
PTRLED...	124	PROSTAIR LED alu.



Code	Pag.	Article
PTRW...	128	PROSTAIR WOOD
PTRWZ...	128	PROSTAIR WOOD Z
PTPW...	129	PROSTEP WOOD
PSYW...	129	PROSTYLE WOOD



Code	Pag.	Article
PEGRAA...	136	PROEND 5050 alu.
PED... 45...	135	PROEND INS alu.
PED... 75...	135	PROEND INS 75 alu.
PED...	132	PROEND alu.
PEGR... 70...	136	PROEND GRIP 70 alu.
PEGR...	13	PROEND GRIP alu.
PGR...	117, 137	PROGRIP



Code	Pag.	Article
TCT...	131	TUBE and ACCESSORIES KIT
TGS...	131	TUBE
TET...	131	TUBE PLUGS/END CAPS
SO...	131	SUPPORT / EYELET
SCOL...	131	HINGE SUPPORT



Code	Pag.	Article
PTRKLA...	159	PROSTAIR KL 20 alu.
PSYKLA...	159	PROSTYLE KL 10 alu.

● LOW THICKNESSES

● MOVEMENT AND EXPANSION JOINTS



Code	Pag.	Article
PFXAC...	140	PROFLEX ACC steel
➤ PFXACN...	142	PROFLEX ACN steel
PFXALN...	142	PROFLEX ALN alu.
PFXAL...	141	PROFLEX AL alu.
PFXOT...	141	PROFLEX OT brass



Code	Pag.	Article
PFXACPR...	140	PROFLEX ACC PR steel
PFX5PR...	145	PROFLEX 5 PR pvc



Code	Pag.	Article
C51...	146	ADHESIVE-LAID JOINTS pvc



Code	Pag.	Article
PENF...	149	PROEXPAN 115-130-190-210 alu.
PEN...	150	PROEXPAN H20-H40 alu.
PETFX...	153	PROPLATE FIX alu.
PETFX...	153	PROPLATE FIX pvc



Code	Pag.	Article
PFX...	144	PROFLEX pvc
PFX5...	144	PROFLEX 5 pvc
PFX...	148	PROFLEX 25 pvc
PETFX...	153	



Code	Pag.	Article
GCAC...	143	PRODILAT steel
GCAN...	143	PRODILAT alu.



Code	Pag.	Article
G...	146	MORTAR-LAID JOINT steel-brass-alum.
C51...	147	MORTAR-LAID JOINT pvc
GDS...	147	MORTAR-LAID DOUBLE JOINT pvc
GPS...	148	MORTAR-LAID FULL JOINT pvc



Code	Pag.	Article
GDA...	150	GDA 25 - GDA 35 alu.
GDA...	151	GDA 55 alu.
CDT...	151	FIREPROOF CORD
GNS 30...	152	GNS 20 - GNS 50 alu.
GNS 75...	152	GNS 75 alu.

● PROFILES FOR TERRACES / BALCONIES & DRAINAGE SYSTEMS



Code	Pag.	Article
➤ PFDPP...	162	PROTERRACE DRAIN DRIP alu.
➤ PTEDP...	162	PROTERRACE ECO DRIP alu.
PFDP...	163	PROTERRACE DRAIN FDP alu.
➤ PSDWK...	163	PROSIDE WALK alu.
➤ PCJ...AL...	165	PROTERRACE PCJ alu.
PTEE...	165	PROTERRACE ECO alu.



Code	Pag.	Article
PCG...AC	164	PROTERRACE PCG steel
PCG...AL	164	PROTERRACE PCG alu.
PC...AC	166	PROTERRACE PC steel
PC...AL...	166	PROTERRACE PC alu.
PTER...AC	167	PROTERRACE PTER steel
PTER...AL...	167	PROTERRACE PTER alu.

● MEMBRANES AND PANELS



Pag.	Article
➤ 171	PRODESIO HEAT GRIP SYSTEM Cables - Thermost Kit - Accessories
173	PRODESIO HEAT SYSTEM Cables - Thermost Kit - Accessories
➤ 174	PRODESIO HEAT KIT SYSTEM
➤ 174	PRODESIO HEAT STICK SYSTEM
➤ 175	PRODESIO ECO MEMBRANE
➤ 175	PRODESIO ECO STICK MEMBRANE
➤ 176	PRODESIO DRAIN



Code	Pag.	Article
PDES 35...	179	PRODESIO MEMBRANE
PRBPE...	179	PROBAND 150/250
PRB...	180	CORNERS PROFOIL
PRBBU 7515	180	PROBAND BU
PRBKl	180	PROBAND KOLL
➤ PRBKLAB	180	PROBAND KOLL AB
➤ PRBFX...	180-194	PROBAND FIX
➤ PDRP	181	PRODRIP
PSH...	181	PROSHOWER DRAIN KIT

● MEMBRANES AND PANELS



Code	Pag.	Article
PFO 04...	182 - 194	PROFOIL
PFOPT...	182 - 194	PROFOIL PASTE
PRBPE...	182 - 194	PROBAND 150/250
PRB...	182 - 194	CORNERS AND PIPE COLLAR
PDSND 30	181	PRODESIO SOUND
PEF...	181	PROECOFON
PDSNDTP 550	181	PRODESIO SOUND TAPE
PDR1 10	182	PRODRAIN 10



Code	Pag.	Article
PFLPAN...	183 - 195	PROFOIL PANEL
PFLPANICH...	196	PROFOIL PANEL NICHE
PRBNET 100	183 - 195	PROBAND NET
	183 - 195	DOWELS, WASHERS, SCREWS
		PROFOIL
PGOBOR...	183 - 196	PRO GOBOARD PANEL

● SHOWER SYSTEMS



Code	Pag.	Article
➤ PSHPANEK	186	PROSHOWER SYSTEM LINEAR KIT
PSHPAN	186	PROSHOWER PANEL
➤ PSHPANXT...	186	PROSHOWER PANEL EXTENSION
PSHWDL...	187	PROSHOWER BASE L steel
PSHWBB...	187	PROSHOWER BASE BASIC pvc
PSHANT...	187	PROFOIL SECTION
PSHW...	188	PROSHOWER TOP steel
PSHWRD 5040	189	DRAIN REDUCTION
PSHWRD	189	MODULAR ASSEMBLY KIT
➤ PSHPANC	193	PROSHOWER CENTRAL PANEL
➤ PSHLDK	193	PROSHOWER DRAIN LATERAL KIT
➤ PSHVDK	193	PROSHOWER DRAIN VERTICAL KIT



Code	Pag.	Article
PSHWPGACS...	190	PROSHOWER PROFILE GLASS
PLTCH...	190	PROLISTEL CHANNEL alu.
PSHWPLACS...	191	PROSHOWER PROFILE WALL
PSHWPFACS...	192	PROSHOWER PROFILE FRONT
PSHWPACS...	192	PROSHOWER PROFILE

● SKIRTING BOARDS



Code	Pag.	Article
PKCH...55	201	PROSKIRTING CHANNEL alu.
PKFL...60	201	PROSKIRTING FLAT alu.



Code	Pag.	Article
PKINSAA 60	202	PROSKIRTING INS alu.
PKLIAA 60	202	PROSKIRTING LINE alu.
PKLTAA 40	204	PROSKIRTING LIST 40 alu.
PKLTAA 80	205	PROSKIRTING LIST 80 alu.



Code	Pag.	Article
PKLED...	207	PROSKIRTING LED alu.
PKGLED...	209	PROSKIRTING GILED alu.




Code	Pag.	Article
PKAA 80	210	PROSKIRTING alu.
PKAA 40	211	PROSKIRTING 40 alu.
PKSHAA 70	211	PROSKIRTING SHELL alu.
PKISP...	205	PROSKIRTING ISP alu.



Code	Pag.	Article
BTAC...40	214	SKIRTING 40 steel
BTAC...60	216	SKIRTING 60 steel
BTAC...80	218	SKIRTING 80 steel
BTAC...100	220	SKIRTING 100 steel
BTAC...150	220	SKIRTING 150 steel



Code	Pag.	Article
BT...40	215	SKIRTING 40 alu.
BT...60	217	SKIRTING 60 alu.
BTa...80	219	SKIRTING 80 alu.
BT...100	221	SKIRTING 100 alu.

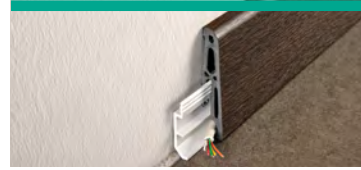

Code	Pag.	Article
BTEPR...7016	222	SKIRTING 7016 pvc
BTEPR...7011	222	SKIRTING 7011 pvc
BTPR... 70	223	SKIRTING pvc
AGE... 25	223	CORNER pvc



Code	Pag.	Article
BTVP...	224	SKIRTING 60/120 pvc
BTPF...62	224	SKIRTING 62F pvc
BTVCC...	225	SKIRTING COVECAP pvc
PRCP...	225	PROCAP S/L
PGAW... 15	226	PROANGLE WOOD pvc
PSAW... 20	226	PROSEAL WOOD pvc

● PROFILES FOR LAMINATE, PARQUET, CARPETED AND LVT FLOORS



Code	Pag.	Article
PMPFX...	231	PROMULTIFIX SYSTEM



Code	Pag.	Article
PISPC...	235	SOL 40P alu.
PINZC...	236	ZERO CURVE alu.



Code	Pag.	Article
PINTPC...	238	TERMINAL PIN alu.
PINT...	239	TERMINAL alu.




Code	Pag.	Article
PINYC...	240	STYLE STAIR alu.
PINYLC...	241	STYLE STAIR L alu.
PWK...	245	PROWALK 2510 & 2520 alu.
PTS...	245	PROSTEP INS alu.

LVT Profiles - low thicknesses



Code	Pag.	Article
PIKLC...	243	PROINTER KL ACC
PIKL...	243	PROINTER KL ALL
PSHD...	243	PROSHELL D ALL
PSHR...	243	PROSHELL R ALL

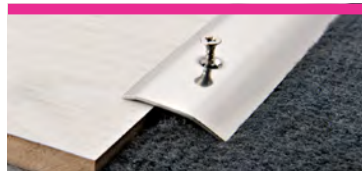

Code	Pag.	Article
PLV... 30	243	PROLEVAL 305
PLU ...	243	PROLINOLEUM
PFR... 24	243	PROFLOOR 24



Code	Pag.	Article
PCR...	243	PROCOVER 1045 ALL
PKL...	243	PROSLIDER KL ALL




Code	Pag.	Article
PSYKL...	243	PROSTYLE KL 10
PTRKL...	243	PROSTAIR KL 20

LVT Profiles - low thicknesses



Code	Pag.	Article
PISPC...	244	Profiles LVT SOL 30P base + top
PINZC...	244	Profiles LVT ZERO CURVE base + top
PINTPC...	244	Profiles LVT TERMINAL PIN base + top

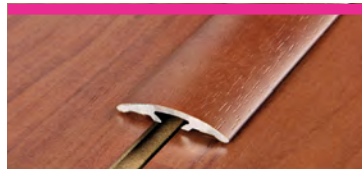

Code	Pag.	Article
PINS...	246	SOL 30 SELF-ADHESIVE alu.
PINZ...	246	ZERO CURVE SELF-ADHESIVE alu.
PNSP...	247	SOL 40 SELF-ADHESIVE alu.
PCRA...	247	PROCOVER WOOD
PIN...	248-249	PROFIXER LINE SYSTEM alu.
PGAW... 15	253	PROANGLE WOOD pvc
BTEPR... 7016	252	SKIRTING 7016 pvc
BTEPR... 7011	252	SKIRTING 7011 pvc
PSAW... 20	253	PROSEAL WOOD pvc
AGE... 25	254	CORNER pvc
BTPR... 70	254	SKIRTING pvc



Code	Pag.	Article
PSWC...34	250	PROSCREW 34 alu. base + top
PSWC...44	250	PROSCREW 44 alu. base + top
PSWC...33	250	PROSCREW 33 alu. base + top
PSWC...50	251	PROSCREW 50 alu. base + top
PSW... 34	257	PROSCREW 34 alu.
PSW... 44	257	PROSCREW 44 alu.
PSW... 33	257	PROSCREW 33 alu.
PSW... 50	257	PROSCREW 50 alu.
PSWBAN 07F	257	PROSCREW BASE 07 alu.




Code	Pag.	Article
PNSP...	242	Profiles LVT SOL 30P
PINZ...	254	Profiles LVT ZERO CURVE
PINTP...	254	Profiles LVT TERMINAL PIN
PIN...	256	INSERTI INTERCAMBIABILI
PINBFT...	256	PROINSERT BASE 45 e 40
PINS... 30	255	SOL 30 alu.
PNSP... 40P	255	SOL 40 P alu.
PINY...	255	STYLE STAIR alu.
PINYL...	255	STYLE STAIR L alu.
PINTP... 10	255	TERMINAL PIN alu.
PINZ...	255	ZERO CURVE alu.


● DO IT YOUR SELF PROFILES



Code	Pag.	Article
AGAC...	260	CORNER EQUAL SIDES steel
AGOL...	260	CORNER EQUAL SIDES brass
AG...	260	CORNER EQUAL SIDES alum.
AGP...	261	CORNER EQUAL SIDES pvc
AL...	261	CORNER "L-form" alum.
ALP...	261	CORNER "L-form" pvc

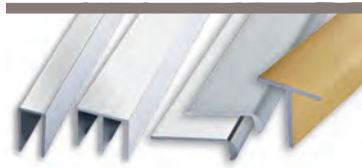

Code	Pag.	Article
CU...	262	CANAL "U-form" alum.
CW...	262	CANAL DOUBLE "U-form" alum.
T...	266	PROFILE "T-form" alum.
UG...	265	CURVE PROFILES alum.

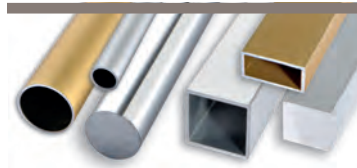

Code	Pag.	Article
TV...C	263	EMPTY ROUND TUBE alum.
TP...	264	FULL ROUND TUBE alum.
TQV...	264	EMPTY SQUARE TUBE alum.
TR...	264	EMPTY RECTANGULAR TUBE alum.
TQP...	265	FULL SQUARE TUBE alum.



Code	Pag.	Article
PL...	263	FLAT alum.
CT...	266	CURTAINBLACE alum.
	267	IRON

● PRODUCTS AND ACCESSORIES FOR FIXING AND LAYING



Code	Pag.	Article
⊕ PRS...	275	PROLEVELING SYSTEM
⊕ PRLW...	281	PROLEVELING WEDGE SYSTEM



Code	Pag.	Article
⊕ PST...	274	PROSUPPORT TUBE SYSTEM
⊕	275	PROSUPPORT TUBE SYSTEM OPTIONAL
⊕ PSTR...	276	PROSUPPORT RAIL SYSTEM
⊕ PSTS...	277	PROSUPPORT SLIM SYSTEM




Code	Pag.	Article
PSRG...	278	PROSUPPORT SYSTEM
PSEC...	279	PROSUPPORT SYSTEM ECO
PSPRP...	280	PROSUPPORT PROFILE T & N
BPPS...	280	PROSUPPORT PROFILE A & B
PSTS...	277	PROSUPPORT SLIM SYSTEM



Code	Pag.	Article
...QG	278	PROSUPPORT SYSTEM OPTIONAL SUPPORT & LEVELLER
PEF...	282	PROECOFON



Code	Pag.	Article
PRBFX...	282	PROBAND FIX
PRLISH	282	PROPOLISH
PRCLEAN	282	PROCARE CLEAN

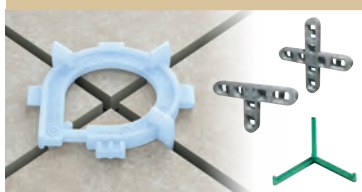

Code	Pag.	Article
⊕ MSP...	281	MULTISPACER
R...	281	SPACERS
PCU 5	281	LEVELLING WEDGES




Code	Pag.	Article
KMD	282	MAGNET KIT
FTPP	282	SCISSORS for pvc profiles




Code	Pag.	Article
PFTT...	283	TROWEL
PRSPD 10	283	TROWEL pvc
PSM...	283	ROLLER


● BUILDING SYSTEMS

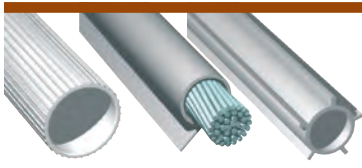


Code	Pag.	Article
R...	286	SNAP-ON STRAND SHEAT pvc
R...	286	SNAP-ON STRAND SHEAT TUBE pvc
TDA...	286	FINNED DISTANCE TUBE pvc
GCT...	287	DRIP pvc
PPD...	287	RIBBED DISTANCE TUBE pvc
GRP...	288	FISHBONE RIBBED JOINT pvc
PSD...	288	ROUNDED TRIANGULAR CHAMFER pvc
PST...	288	PROFILE WITH TRIANGULAR CHAMFER pvc
R 117	288	PROFILE WITH DOUBLE CHAMFER

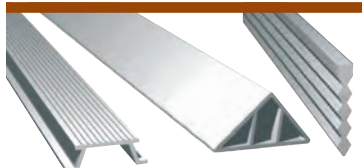

Code	Pag.	Article
W...	289	WATERSTOP pvc

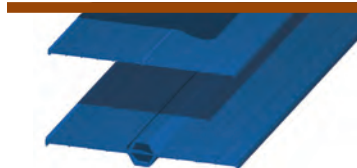


Code	Pag.	Article
PDZ...	290	Spacers PRODISTANZ
DMP...	291	Spacers MULTIPIEDE
PPY...	293	Spacers DOPPY
DVO...	293	Spacers FOR VERTICAL / HORIZONTAL MESH
DSVT	293	Spacers FOR GLASS BRICK
PP...	295	Spacers PAX-PAL-PAS-PAG

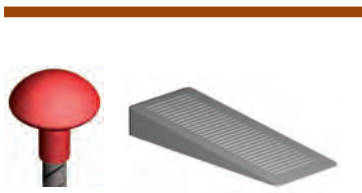

Code	Pag.	Article
PCPF...	294	PROTECTIVE CAPS for rods adjacent pours
PPN...	294	FLAT SPACER for monting prefabricated panels
SAC...	294	WEDGE SHIMS



Code	Pag.	Article
PPU...	292	spacer PAV
PPV...	292	spacer PAV
PAD...	293	spacer PAD
PLF...	291	spacer ROPY 100
PLFE...	291	spacer ROPY 100 ECO
PLF...	291	spacer ROPY 200

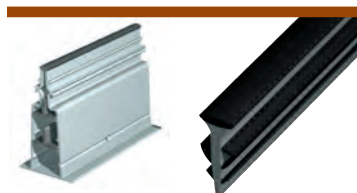



Code	Pag.	Article
CPGC	303	SHEAT LAYING TROLLEY
DD...	303	DIAMOND - SLITTING SICKS
M...	296-300	GASKETS FOR PRECAST FORMS
C 550...	301	GAP-COVERING BALLON SHEATH
PVJ 10	302	PAVJOINT pvc



● MARKETING AND SALES STAND SYSTEMS

Code	Pag.	Article	Code	Pag.	Article	Code	Pag.	Article	Code	Pag.	Article
ESHAPAN 250	306	EXPOSURE DISPLAY / WALL for SHOWROOM	ESPBLSH	310	EXPOSURE PROLISTEL/ SKIRTING	ESPST	312	EXPOSURE PROSUPPORT TUBE		317	MODULAR DISPLAY SYSTEM
ESPQC...	306	SQUARE SHOW CASE	PNPLSE	310	PROLEVELING SYSTEM PANELS	TUBLAM	312	PROINSERT SYSTEM SAMPLES	PEP	318	EXPOSURE DISPLAY PEP
ESPGSM18	308	ROTATING DISPLAY EXPOSURE STAND	PNPWLSE	310	PROLEVELING WEDGE SYSTEM PANELS	ESP...	312	PROSKIRTING LED PANEL / GILED	PEPINSP	318	EXPOSURE DISPLAY PEPINSP
CURAS	308	SMALL EXPOSURE STAND	PNPSR	310	EXHIBITION BOARD	COFP...	313	FINISHES CASES	PEPINS	318	EXPOSURE DISPLAY PEPINS
TRAG18	308	TROLLEY with 18 sample boards	PNPLSA3	310	PROLEVELING SYSTEM BOARD	COL...	313	COLOR RANGE	ESPSP	318	EXPOSURE DISPLAY ESPSP
PESP..	309	SAMPLE BOARD	CAT... / BOAM	311	CATALOGUE	SPCPD..	313	EXPOSURE PRODESO /PRODESO HEAT	PEM	319	EXPOSURE DISPLAY PEM
ESPPLS 70	310	EXPOSURE PROLEVELING SYSTEM 7 SPACES	BR...	311	BROCHURES	ESPP...	313	EXPOSURE Prodeso Heat /Prodeso/ Proterrace	ESPF	319	EXPOSURE DISPLAY ESPF
ESPPLS 50	310	EXPOSURE PROLEVELING SYSTEM 5 SPACES	FLY...	311	FOLDING BROCHURES	PBPLS	311	MEMBRANES CASE	ESPF2	319	EXPOSURE DISPLAY ESPF 2
ESPD	310	EXPOSURE DISPLAY SPACERS	PBPLS	311	COUNTER DISPLAY for folding brochures	GADGET	313/315	GADGET	ESPF2015	319	EXPOSURE DISPLAY ESPF 2015
			ESPSSH 70	312	EXPOSURE PROSHOWER SYSTEM for SHOWROOM		312	PROPOSALS OF SHOWROOM EQUIPMENT	ESPF2 2015	319	EXPOSURE DISPLAY ESPF 2 2015
			ESPFDDP	312	EXPOSURE PROTERRACE						
			COLBTPR 7016	312	COLOUR RANGE WOOD FINISHES						

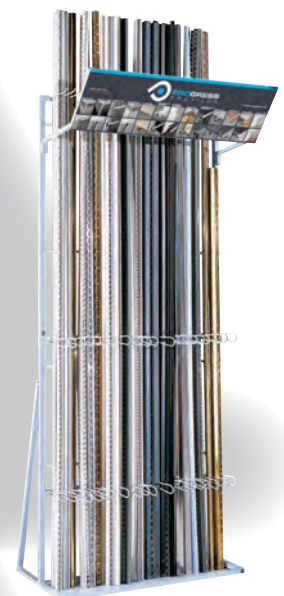

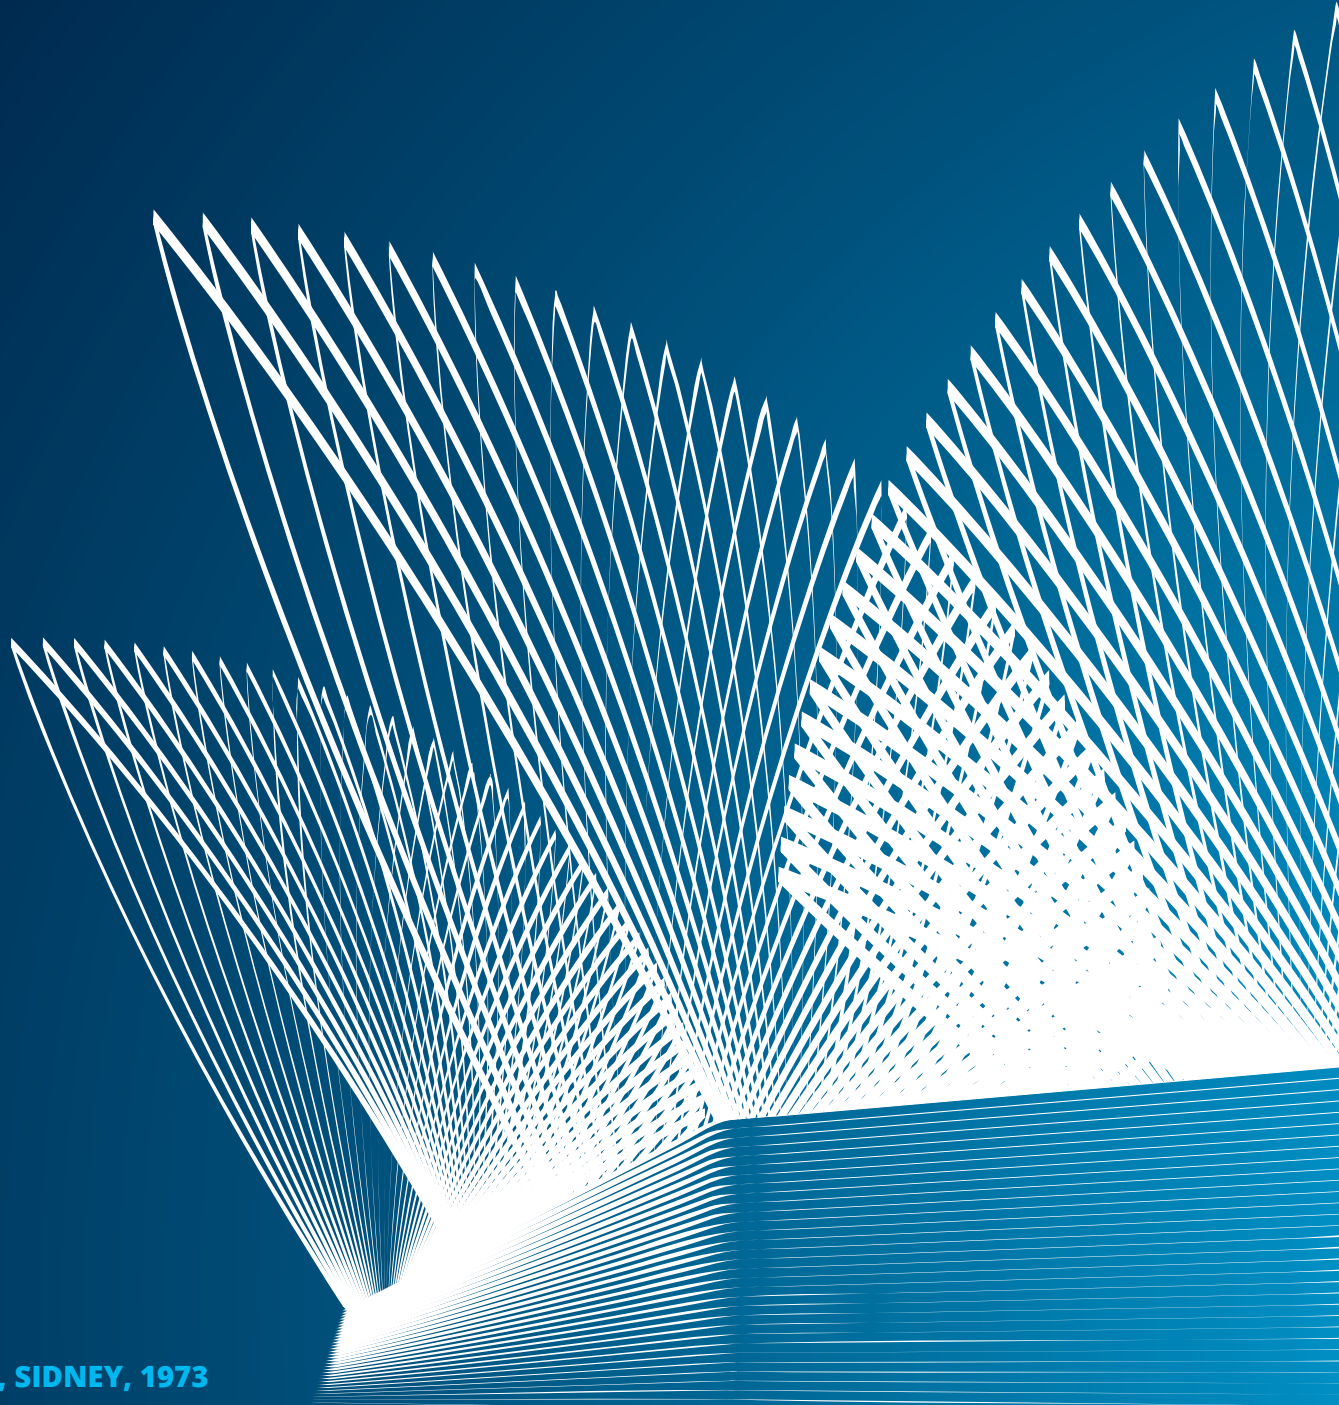


PROFILES FOR WALLS



PROJOLLY SQUARE


POLISHED, SUPER POLISHED, SANDED AND SATIN FINISH STAINLESS STEEL AISI 304/1.4301-V2A

PROJOLLY SQUARE is a square corner bead profile in polished, super polished, sanded, satin finish stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor and wall coverings. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

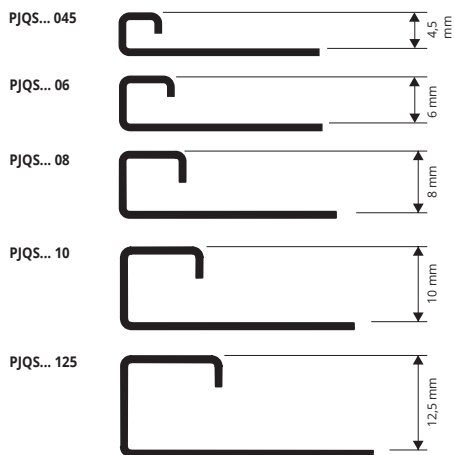

PJQSAC/S 11 & PJQSACML 11 AVAILABLE H 11 MM
PJQSAC/S 15 & PJQSACML 15 AVAILABLE H 15 MM

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

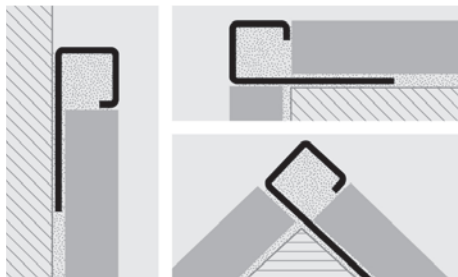

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish.
2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 4,5 - 108 lm) - 8/10 mm

Article	H mm		
PJQSAC 045	4,5		
PJQSAC 06	6		
PJQSAC 08	8		
PJQSAC 10	10		
PJQSAC 11	11		
PJQSAC 125	12,5		
PJQSAC 15	15		

SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 8/10 mm

Article	H mm		
PJQSACML 045	4,5		
PJQSACML 06	6		
PJQSACML 08	8		
PJQSACML 10	10		
PJQSACML 11	11		
PJQSACML 125	12,5		
PJQSACML 15	15		



SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 4,5 - 108 lm) - 8/10 mm

Article	H mm		
PJQSACS 045	4,5		
PJQSACS 06	6		
PJQSACS 08	8		
PJQSACS 10	10		
PJQSACS 11	11		
PJQSACS 125	12,5		
PJQSACS 15	15		

SANDED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 8/10 mm

Article	H mm		
PJQSACSB 08	8		
PJQSACSB 10	10		
PJQSACSB 125	12,5		


COLOURS

AC - Polished stainless st. AISI 304/1.4301-V2A	ACML - Super polished stainless st. AISI 304/1.4301-V2A	ACS - Satin finish stainless st. AISI 304/1.4301-V2A	ACSB - Sanded stainless st. AISI 304/1.4301-V2A

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

CAPSULES, END CAPS and THREE-WAYS JOINTS

POLISHED, SUPER POLISHED, SATIN AND SANDED FINISH STAINLESS STEEL AISI 304/1.4301-V2A / PLASTIC

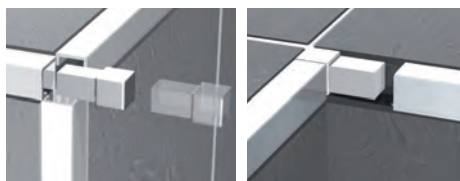

JOINTS - PLASTIC

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
GIJQ 045/...	4,5		
GIJQ 06/...	6		
GIJQ 08/...	8		
GIJQ 10/...	10		
GIJQ 11/...	11		
GIJQ 125/...	12,5		
GIJQ 15/...	15		

Choose the desired packaging: E.g.: GIJQ .../10 (Pack. 10 Pcs)
GIJQ .../2 (Pack. 2 Pcs)

CAPSULES and END CAPS - POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJQSAC 045/...	4,5		
CPJQSAC 06/...	6		
CPJQSAC 08/...	8		
CPJQSAC 10/...	10		
CPJQSAC 11/...	11		
CPJQSAC 125/...	12,5		
CPJQSAC 15/...	15		
TPJQSAC 045-06-08-10-11-125-15/...			

Choose the desired packaging: E.g.: CPJQSAC .../10 (Pack. 10 Pcs)
CPJQSAC .../2 (Pack. 2 Pcs)

CAPSULES - SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJQSACML 045/...	4,5		
CPJQSACML 06/...	6		
CPJQSACML 08/...	8		
CPJQSACML 10/...	10		
CPJQSACML 11/...	11		
CPJQSACML 125/...	12,5		
CPJQSACML 15/...	15		

Choose the desired packaging: E.g.: CPJQSACML .../10 (Pack. 10 Pcs)
CPJQSACML .../2 (Pack. 2 Pcs)

CAPSULES and END CAPS - SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJQSACS 045/...	4,5		
CPJQSACS 06/...	6		
CPJQSACS 08/...	8		
CPJQSACS 10/...	10		
CPJQSACS 11/...	11		
CPJQSACS 125/...	12,5		
CPJQSACS 15/...	15		
TPJQSACS 045-06-08-10-11-125-15/...			

Choose the desired packaging: E.g.: CPJQSACS .../10 (Pack. 10 Pcs)
CPJQSACS .../2 (Pack. 2 Pcs)

CAPSULES - SANDED STAINLESS STEEL AISI 304/1.4301-V2A

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJQSACSB 08/...	8		
CPJQSACSB 10/...	10		
CPJQSACSB 125/...	12,5		

Choose the desired packaging: E.g.: CPJQSACSB .../10 (Pack. 10 Pcs)
CPJQSACSB .../2 (Pack. 2 Pcs)

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROJOLLY SQUARE is a square corner bead profile in polished stainless steel AISI 316L/1.4404-V4A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor and wall coverings. Its particular section and the availability of special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

PROJOLLY SQUARE

POLISHED, SATIN FINISH STAINLESS STEEL
AISI 316L/1.4404-V4A



POLISHED STAINLESS STEEL AISI 316L/1.4404-V4A with protective film
bar length 2,7 LM - pack. 20 Pcs - 54 lm - 8/10 mm

Article	H mm		
PJQSACM 08	8		*
PJQSACM 10	10		
PJQSACM 11	11		
PJQSACM 125	12,5		

COLOURS




ACM - Polished stainless st.
AISI 316L

SATIN FINISH STAINLESS STEEL AISI 316L/1.4404-V4A with protective film
bar length 2,7 LM - pack. 20 Pcs - 54 lm - 8/10 mm


Article	H mm		
PJQSACMS 10	10		*
PJQSACMS 11	11		*
PJQSACMS 125	12,5		*

COLOURS



ACMS - Satin finish stainless st.
AISI 316L

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

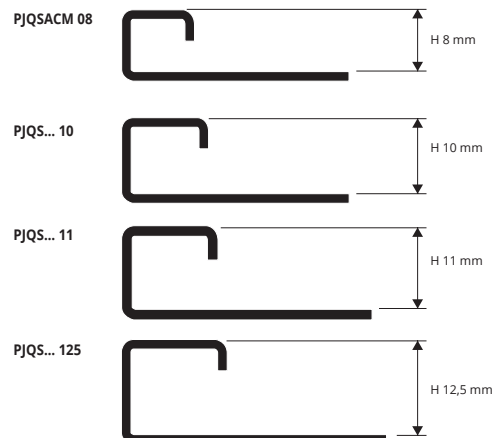

INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

CAPSULES, END CAPS and THREE-WAYS JOINTS

STAINLESS STEEL AISI 316L

CAPSULES and END CAPS - POLISHED STAINLESS STEEL AISI 316L/1.4404

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJQSACM 08/...	8		*
CPJQSACM 10/...	10		
CPJQSACM 11/...	11		
CPJQSACM 125/...	12,5		

TPJQSACM 08-10-11-125/..

Choose the desired packaging: E.g.: CPJQSACM .../10 (Pack. 10 Pcs)
CPJQSACM .../2 (Pack. 2 Pcs)

JOINTS - PLASTIC

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
GIJQ 08/...	8		
GIJQ 10/...	10		
GIJQ 11/...	11		
GIJQ 125/...	12,5		

Choose the desired packaging: E.g.: GIJQ .../10 (Pack. 10 Pcs)
GIJQ .../2 (Pack. 2 Pcs)




* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed



PROJOLLY SQUARE is a square corner bead profile in chromed brass or antique brass that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor and wall coverings. Its particular section and elegance and the availability of special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows an elegant workmanlike application.

PROJOLLY SQUARE

CHROMED BRASS, ANTIQUE BRASS

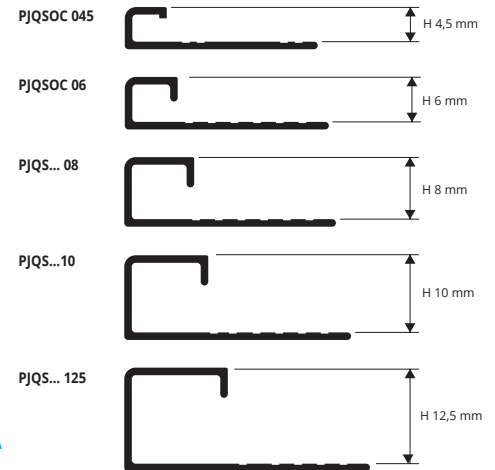

CHROMED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PJQSOC 045	4,5		*
PJQSOC 06	6		*
PJQSOC 08	8		*
PJQSOC 10	10		
PJQSOC 125	12,5		

ANTIQUÉ BRASS thermo packed bar length 2,7 lm
pack. 20 Pcs - 54 lm (PJQSOB 125 - pack. 10 Pcs)

Article	H mm		
PJQSOB 08	8		*
PJQSOB 10	10		
PJQSOB 125	12,5		


COLOURS



INSTRUCTIONS FOR LAYING

1. Choose "PROJOLLY SQUARE" according to the tile thickness.
2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

EXAMPLES OF LAYING

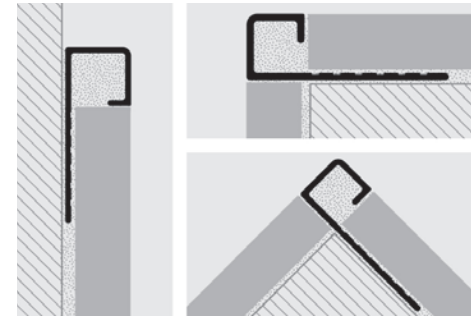

CAPSULES, END CAPS and THREE-WAYS JOINTS

CHROMED BRASS - PLASTIC

CAPSULES and END CAPS - CHROMED BRASS

Article	H mm		Pack. 10 Pcs	Pack. 2 Pcs
CPJQSOC 045/...	4,5			*
CPJQSOC 06/...	6			*
CPJQSOC 08/...	8			*
CPJQSOC 10/...	10			
CPJQSOC 125/...	12,5			
TPJQSOC 045-06-08-10-125/...				

Choose the desired packaging: E.g.: CPJQSOC .../10 (Pack. 10 Pcs)
CPJQSOC .../2 (Pack. 2 Pcs)

JOINTS - PLASTIC

Article	H mm		Pack. 10 Pcs	Pack. 2 Pcs
GIJQ 045/...	4,5			*
GIJQ 06/...	6			*
GIJQ 08/...	8			*
GIJQ 10/...	10			
GIJQ 125/...	12,5			

Choose the desired packaging: E.g.: GIJQ .../10 (Pack. 10 Pcs).
GIJQ .../2 (Pack. 2 Pcs).



© 2020 All rights reserved by Progress Profiles. Printed in Italy




* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


PROJOLLY SQUARE

ANODIZED AND POLISHED ALUMINIUM

PROJOLLY SQUARE is a square corner bead profile in anodized and polished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and elegance, the availability in eight finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows an elegant workmanlike application.

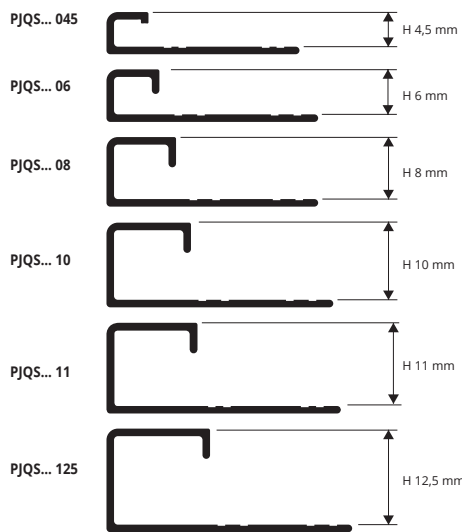

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

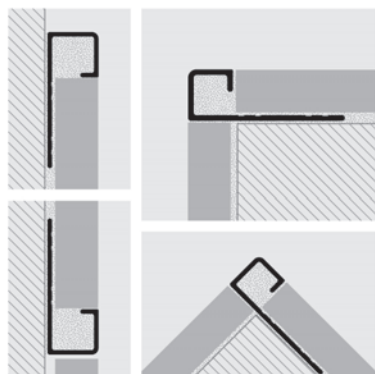

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



ANODIZED ALUMINIUM thermo packed (silver-gold-copper-titanium-black) bar length 2,7 lm - pack. 40 Pcs - 108 lm (H 12,5 mm - Pack 20 Pcs)

Article	H mm		
PJQSAA 045 (anod. silver)	4,5		
PJQSAR 045 (anod. copper)	4,5		*
PJQSAT 045 (anod. titanium)	4,5		
PJQSAA 06 (anod. silver)	6		
PJQSAR 06 (anod. copper)	6		*
PJQSAT 06 (anod. titanium)	6		
PJQSAA 08 (anod. silver)	8		
PJQSAO 08 (anod. gold)	8		*
PJQSAR 08 (anod. copper)	8		
PJQSAT 08 (anod. titanium)	8		
PJQSNE 08 (anod. black)	8		
PJQSAA 10 (anod. silver)	10		
PJQSAO 10 (anod. gold)	10		*
PJQSAR 10 (anod. copper)	10		
PJQSAT 10 (anod. titanium)	10		
PJQSNE 10 (anod. black)	10		
PJQSAA 11 (anod. silver)	11		
PJQSAT 11 (anod. titanium)	11		
PJQSNE 11 (anod. black)	11		
PJQSAA 125 (anod. silver)	12,5		
PJQSAO 125 (anod. gold)	12,5		*
PJQSAR 125 (anod. copper)	12,5		
PJQSAT 125 (anod. titanium)	12,5		
PJQSNE 125 (anod. black)	12,5		



POLISHED ALUMINIUM thermo packed (chrome-gold-titanium-copper-black) bar length 2,7 lm - pack. 40 Pcs - 108 lm (H 12,5 mm - pack. 20 Pcs)

Article	H mm		
PJQSBC 045 (polish. chrome)	4,5		
PJQSBT 045 (polish. titanium)	4,5		*
PJQSBR 045 (polish. copper)	4,5		*
PJQSBC 06 (polish. chrome)	6		
PJQSBT 06 (polish. titanium)	6		*
PJQSBR 06 (polish. copper)	6		*
PJQSBC 08 (polish. chrome)	8		
PJQSBT 08 (polish. titanium)	8		*
PJQSBR 08 (polish. copper)	8		*
PJQSBC 10 (polish. chrome)	10		
PJQSBT 10 (polish. titanium)	10		*
PJQSBR 10 (polish. copper)	10		*
PJQSBC 11 (polish. chrome)	11		
PJQSBT 11 (polish. titanium)	11		*
PJQSBN 11 (polish. black)	11		
PJQSBC 125 (polish. chrome)	12,5		
PJQSBT 125 (polish. titanium)	12,5		*
PJQSBR 125 (polish. copper)	12,5		*
PJQSBN 125 (polish. black)	12,5		

COLOURS



CAPSULES, END CAPS and THREE-WAYS JOINTS

ANODIZED AND POLISHED ALUMINIUM / PLASTIC

JOINTS - PLASTIC

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
GIJQ 045/...	4,5		
GIJQ 06/...	6		
GIJQ 08/...	8		
GIJQ 10/...	10		
GIJQ 11/...	11		
GIJQ 125/...	12,5		

Choose the desired packaging: E.g.: GIJQ .../10 (Pack. 10 Pcs)
GIJQ .../2 (Pack. 2 Pcs)



CAPSULES and END CAPS - ANODIZED ALUMINIUM

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJQSAA 045/...	4,5		
CPJQSAR 045/...	4,5		*
CPJQSAT 045/...	4,5		
CPJQSAA 06/...	6		
CPJQSAR 06/...	6		*
CPJQSAT 06/...	6		
CPJQSAA 08/...	8		
CPJQSAO 08/...	8		*
CPJQSAT/AR 08/...	8		
CPJQSNE 08-10/...	8-10		
CPJQSAA 10/...	10		
CPJQSAO 10/...	10		*
CPJQSAR/AT 10/...	10		
CPJQSAA 11/...	11		
CPJQSAT 11/...	11		
CPJQSNE 11-125/...	11-12,5		
CPJQSAA 125/...	12,5		
CPJQSAO 125/...	12,5		*
CPJQSAR/AT 125/...	12,5		
TPJQS... 045-06-08-10-11-125/...			

Choose the desired packaging: E.g.: CPJQSAA .../10 (Pack. 10 Pcs)
CPJQSAA .../2 (Pack. 2 Pcs)

CAPSULES and END CAPS - POLISHED ALUMINIUM

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJQSBC 045/...	4,5		
CPJQSBR 045/...	4,5		*
CPJQSBT 045/...	4,5		*
CPJQSBC 06/...	6		
CPJQSBR 06/...	6		*
CPJQSBT 06/...	6		*
CPJQSBC 08/...	8		
CPJQSBR/BO 08/...	8		*
CPJQSBT 08/...	8		
CPJQSBN 08-10/...	8-10		
CPJQSBC 10/...	10		
CPJQSBO 10/...	10		*
CPJQSBR/BT 10/...	10		
CPJQSBC 11/...	11		
CPJQSBT 11/...	11		
CPJQSBN 11-125/...	11-12,5		
CPJQSBC 125/...	12,5		
CPJQSBO 125/...	12,5		*
CPJQSBR/BT 125/...	12,5		
TPJQS... 045-06-08-10-11-125/...			

Choose the desired packaging: E.g.: CPJQSBC .../10 (Pack. 10 Pcs)
CPJQSBC .../2 (Pack. 2 Pcs)

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

News 2020

PROJOLLY SQUARE is a square corner bead profile in brushed and tiltex aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and elegance, the availability in eight finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows an elegant workmanlike application.

PROJOLLY SQUARE

BRUSHED POLISHED AND ANODIZED BRUSHED TILTEX




BRUSHED POLISHED ALUM. thermo packed (silver-gold-copper titanium-black) bar length 2,7 lm - pack. 40 Pcs - 108 lm (H 12,5 mm - pack. 20 Pcs)


Article	H mm		
PJQSBS 045 (brush. silver)	4,5		
PJQSRS 045 (brush. copper)	4,5		*
PJQSTS 045 (brush. titanium)	4,5		
PJQSBS 06 (brush. silver)	6		
PJQSRS 06 (brush. copper)	6		*
PJQSTS 06 (brush. titanium)	6		
PJQSBS 08 (brush. silver)	8		
PJQSBS 08 (brush. gold)	8		*
PJQSRS 08 (brush. copper)	8		
PJQSTS 08 (brush. titanium)	8		
PJQSNS 08 (brush. black)	8		
PJQSBS 10 (brush. silver)	10		
PJQSBS 10 (brush. gold)	10		
PJQSRS 10 (brush. copper)	10		
PJQSTS 10 (brush. titanium)	10		
PJQSNS 10 (brush. black)	10		
PJQSBRAS 10 (brush. antique bronze)	10		*
PJQSBS 11 (brush. silver)	11		
PJQSTS 11 (brush. titanium)	11		
PJQSNS 11 (brush. black)	11		
PJQSBS 125 (brush. silver)	12,5		
PJQSBS 125 (brush. gold)	12,5		
PJQSRS 125 (brush. copper)	12,5		
PJQSTS 125 (brush. titanium)	12,5		
PJQSNS 125 (brush. black)	12,5		
PJQSBRAS 125 (brush. antique bronze)	12,5		*

ANOD. BRUSHED TILTEX ALUM. thermo packed (silver-copper-titanium) - bar length 2,7 lm - pack. 40 Pcs - 108 lm (H 12,5 mm - pack. 20 Pcs)

Article	H mm		
PJQSBX 06 (tiltex silver)	6		*
PJQSRX 06 (tiltex copper)	6		*
PJQSTX 06 (tiltex titanium)	6		
PJQSBX 08 (tiltex silver)	8		
PJQSRX 08 (tiltex copper)	8		
PJQSTX 08 (tiltex titanium)	8		
PJQSBX 10 (tiltex silver)	10		
PJQSRX 10 (tiltex copper)	10		
PJQSTX 10 (tiltex titanium)	10		
PJQSBX 11 (tiltex silver)	11		
PJQSTX 11 (tiltex titanium)	11		
PJQSBX 125 (tiltex silver)	12,5		
PJQSRX 125 (tiltex copper)	12,5		
PJQSTX 125 (tiltex titanium)	12,5		

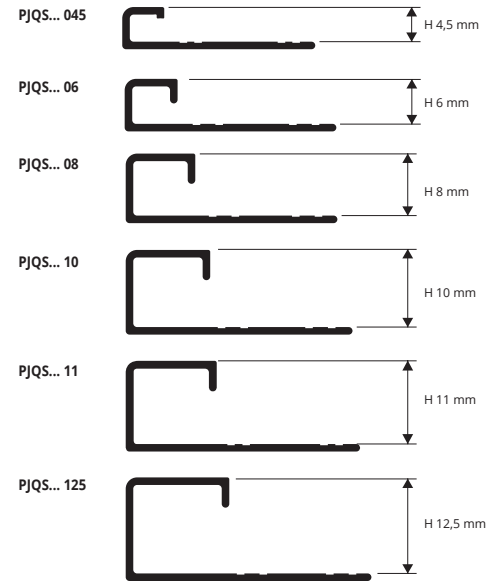

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

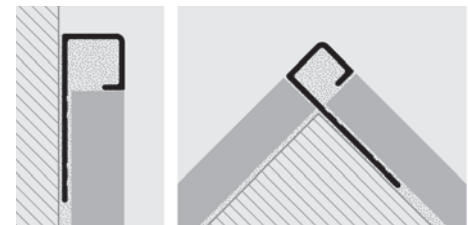

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

© 2020 All rights reserved by Progress Profiles. Printed in Italy

COLOURS



CAPSULES, END CAPS and THREE-WAYS JOINTS

ANODIZED BRUSHED POLISHED ALUMINIUM, TILTEX / PLASTIC

CAPSULES and END CAPS - BRUSHED POLISHED ALUMINIUM

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJQS... 045/...	4,5		
CPJQSRS 045/...	4,5		*
CPJQS... 06/...	6		
CPJQSRS 06/...	6		*
CPJQS... 08/...	8		
CPJQSBS 08/...	8		*
CPJQS... 10/...	10		
CPJQSBRAS 10/...	10		*
CPJQS... 11/...	11		
CPJQS... 125/...	12,5		
CPJQSBRAS 125/...	12,5		*
CPJQSNS 08-10-11-125/...			
TPJQS... 045-06-08-10-11-125/...			

Available in the colours: BS - BOS - RS - TS - NS.
The code of the selected colour must be added to the article code.
E.g.: CPJQS...08/... (chosen finish brushed copper) CPJQSRS 08/10

CAPSULES and END CAPS - ANODIZED BRUSHED TILTEX ALUMINIUM

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJQSBX... 06/...	6		*
CPJQSRX... 06/...	6		*
CPJQS... 06/...	6		
CPJQS... 08/...	8		
CPJQS... 10/...	10		
CPJQS... 11/...	11		
CPJQS... 125/...	12,5		
TPJQS... 045-06-08-10-11-125/...			

Available in the colours: BX - RX - TX.
The code of the selected colour must be added to the article code.
E.g.: CPJQS...06/... (chosen finish brushed copper) CPJQSRX 06/10

JOINTS - PLASTIC

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
GIJQ 045/...	4,5		
GIJQ 06/...	6		
GIJQ 08/...	8		
GIJQ 10/...	10		
GIJQ 11/...	11		
GIJQ 125/...	12,5		

Choose the desired packaging: E.g.: GIJQ .../10 (Pack. 10 Pcs)
GIJQ .../2 (Pack. 2 Pcs)




* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROJOLLY SQUARE

ALUMINIUM STONE LINE, VARNISHED ALUMINIUM AND TUSCANY LINE

PROJOLLY SQUARE is a corner bead profile in powder coated aluminum that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section and the availability of several finishes and special pieces such as internal and external corners, junctions and end caps make **PROJOLLY SQUARE** an elegant and much-sought after profile. workmanlike application.

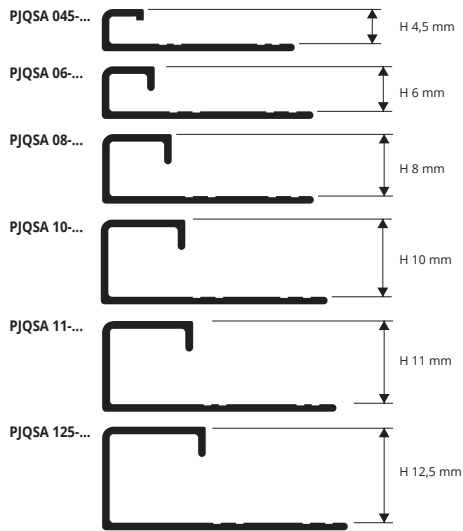

STONE LINE thermo packed
bar length 2,7 lm - pack. 20 Pcs-54 lm

Article	H mm		
PJQSA 06-SL...	6		*
PJQSA 08-SL...	8		
PJQSA 10-SL...	10		
PJQSA 11-SL...	11		
PJQSA 125-SL...	12,5		

Available in the colours: SL01 - SL02 - SL03 - SL04 - SL05 - SL06 - SL07 - SL08 - SL09 - SL10 - SL11 - SL12 - SL13.

WHITE VARNISHED ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (white colour 40 Pcs-108 lm)

Article	H mm		
PJQSA 045-01 (varn. white)	4,5		*
PJQSA 08-01 (varn. white)	8		
PJQSA 10-...	10		
PJQSA 11-01 (varn. white)	11		*
PJQSA 125-01 (varn. white)	12,5		


Available in the colours: 01 - 0106 - 02 - 11. Available on demand 03 - 0211 - 0311 - 06 - 10 - 17 with a minimum quantity order of 100 pcs.

TUSCANY LINE thermo packed
bar length 2,7 lm - pack. 40 Pcs- 108 lm (H 12,5 mm - pack. 20 Pcs)

Article	H mm		
PJQSA 08-...	8		*
PJQSA 10-...	10		
PJQSA 125-...	12,5		

Available in the colours: 03TU - 05TU - 20TU.
The code of the selected colour must be added to the article code.
E.g.: PJQA 08-... (chosen colour tuscanly grey) PJQA 08-03TU.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

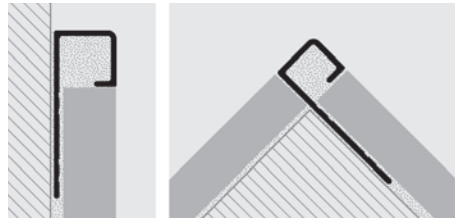

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS

STONE LINE						
SL01 - Stone white	SL02 - Stone cream	SL03 - Stone greyvory	SL04 - Stone sand	SL05 - Stone gray	SL06 - Stone cristal gray	SL07 - Stone antragraj
SL08 - Stone antradark	SL09 - Stone bronze	SL10 - Stone corten	SL11 - Stone brown	SL12 - Stone black	SL13 - Stone oyster grey	
VARNISHED			TUSCANY LINE			
01 - White varnished aluminium (9016)	0106 - White ivory varnished aluminium (9001)	11 - Black varnished aluminium (9005)	03TU - Tuscanly grey	05TU - Tuscanly beige	20TU - Tuscanly bronze	

AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)

03 - Stone grey varnished alum. (7030)	0211 - Varnished quartz grey alum. (7039)	0311 - Varnished asphalt grey alum. (7043)	06 - Varnished ivory alum. (1015)	10 - Klinker red varnished alum. (8004)	17 - Varnished bahama beige alum.	02 - Light grey varnished aluminium (7035)	CR - Black varnished alum. crepè
--	---	--	-----------------------------------	---	-----------------------------------	--	----------------------------------

CAPSULES, END CAPS and THREE-WAYS JOINTS

ALUMINIUM STONE LINE, TUSCANY LINE AND VARNISHED ALUMINIUM / PLASTIC

JOINTS - PLASTIC

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
GIJQ 045/...	4,5		
GIJQ 06/...	6		
GIJQ 08/...	8		
GIJQ 10/...	10		
GIJQ 11/...	11		
GIJQ 125/...	12,5		

Choose the desired packaging: E.g.: GIJQ .../10 (Pack. 10 Pcs)
GIJQ .../2 (Pack. 2 Pcs)

CAPSULES and END CAPS - STONE LINE

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJQSA 06-SL-.../...	6		*
CPJQSA 08-SL-.../...	8		
CPJQSA 10-SL-.../...	10		
CPJQSA 11-SL-.../...	11		
CPJQSA 125-SL-.../...	12,5		
TPJQSA 06-08-10-11-125-.../...			

Available in the colours: SL01 - SL02 - SL03 - SL04 - SL05 - SL06 - SL07 - SL08 - SL09 - SL10 - SL11 - SL12 - SL13.

CAPSULES and END CAPS - VARNISHED ALUMINIUM

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJQSA 045-01/...	4,5		*
CPJQSA 08-01/...	8		
CPJQSA 10-.../...	10		
CPJQSA 11-01/...	11		*
CPJQSA 125-01/...	12,5		
TPJQSA 045-08-10-11-125-.../...			

Available on demand 0106-02-03-0211-0311-06-10-11-17.
The code of the selected colour must be added to the article code.
E.g.: CPJQSA ...-.../... (chosen colour white ivory) CPJQSA 08-0106/10

CAPSULES - TUSCANY LINE

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJQSA 08-.../...	8		*
CPJQSA 10-.../...	10		
CPJQSA 125-.../...	12,5		

Available in the colours: 03TU-05TU-20TU.
The code of the selected colour must be added to the article code.
E.g.: CPJQSA ...-.../... (chosen colour grey tuscanly) CPJQSA 08-03TU/10



* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROJOLLY SQUARE is a square corner bead profile in shockproof non - toxic colored vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section, the availability in different colours also on demand and special pieces such as internal and external corners make **PROJOLLY SQUARE** a much sought-after profile. It can be easily matched with the wall covering and that allows an elegant workmanlike application.

PROJOLLY SQUARE

SHOCKPROOF NON - TOXIC COLORED VINYL RESIN




NON-TOXIC SHOCKPROOF VINYL RESIN
bar length 2,7 lm - pack. 20 Pcs - 54 lm (white colour 40 Pcs-108 lm)


Article	H mm
PJQ 06-01	6
PJQ 08-...	8
PJQ 10-...	10
PJQ 125-...	12,5

H 6 mm available the colours 01, other colours on demand.
Available in the colours: 00-01-0106-03-06-12-17. On demand 02-04-05-07-08-09-10-11-13-14-15-16-18-19-20-21-22-23-24-25-26-27-28-29 with a minimum quantity order of 800 pcs.
The code of the selected colour must be added to the article code.
E.g.: PJQ 08-... (chosen colour white) PJQ 08-01.

WHITE NOT FOR SALE SINGLY

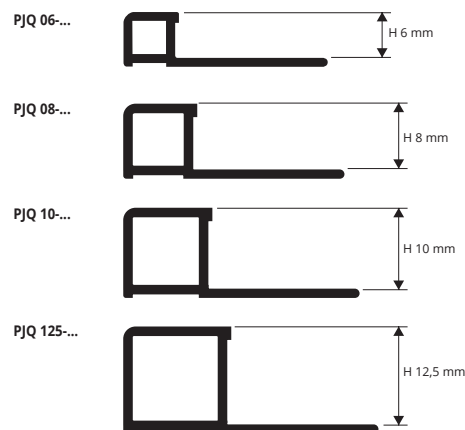


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

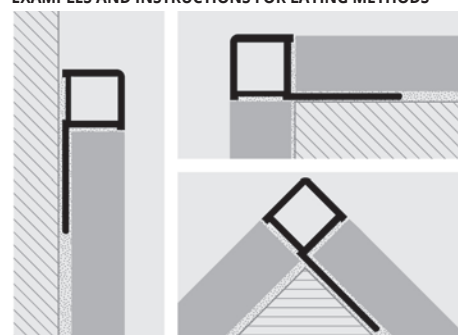

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired colour. 2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

© 2020 All rights reserved by Progress Profiles. Printed in Italy

COLOURS

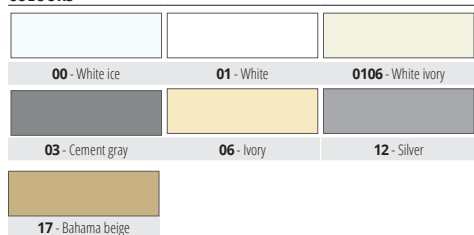


AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)



CAPSULES and THREE-WAYS JOINTS

POLYPROPYLENE / POLYETHYLENE UV RESISTANT

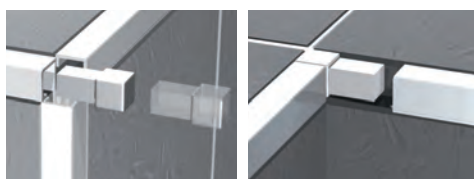

EXTERNAL CAPSULES POLYPROPYLENE/POLYETHYLENE

Article	H mm	Pack. 20 Pcs	Pack. 5 Pcs
CPJQ 06-.../...	6		
CPJQ 08-.../...	8		
CPJQ 10-.../...	10		
CPJQ 125-.../...	12,5		

INTERNAL CAPSULES

EXTERNAL CAPSULES



IPJQ .../.../...

CPJQ .../.../...

INTERNAL CAPSULES POLYPROPYLENE/POLYETHYLENE


Article	H mm	Pack. 20 Pcs	Pack. 5 Pcs
IPJQ 06-.../...	6		
IPJQ 08-.../...	8		
IPJQ 10-.../...	10		
IPJQ 125-.../...	12,5		

Available in the colours: 01-03-06-12-17-0106. On demand 02-04-05-07-08-09-10-11-13-14-15-16-18-19-20-21-22-23-24-25-26-27-28-29
The code of the selected colour must be added to the article code.
E.g.: CPJQ 08-.../... (chosen colour white) CPJQ 08-01/20.
IPJQ 08-.../... (chosen colour white) IPJQ 08-01/20.


PROJOLLY QUART

POLISHED, SUPER POLISHED AND SATIN FINISH STAINLESS STEEL AISI 304/1.4301-V2A

PROJOLLY QUART is a quarter-circle rounded bead profile in polished, super polished and satin finish stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY QUART** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

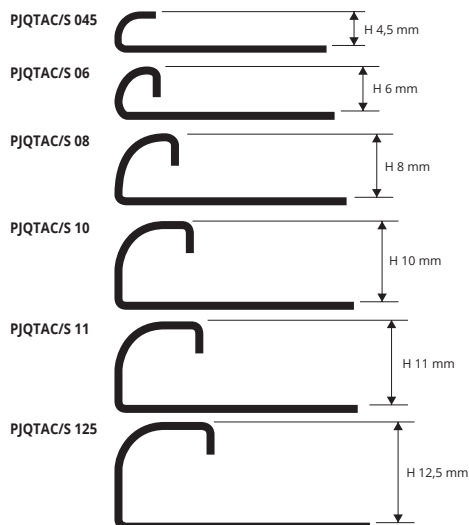

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

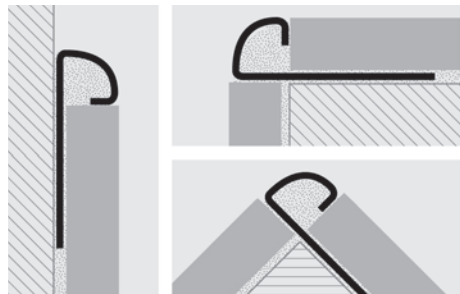

1. Choose "PROJOLLY QUART" according to the tile thickness and desired finish.
2. Cut "PROJOLLY QUART" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY QUART" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 4,5 mm - 108 lm) - 10/10 mm

Article	H mm		
PJQTAC 045	4,5		
PJQTAC 06	6		
PJQTAC 08	8		
PJQTAC 10	10		
PJQTAC 11	11		
PJQTAC 125	12,5		

SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm		
PJQTACML 045	4,5		*
PJQTACML 06	6		*
PJQTACML 08	8		*
PJQTACML 10	10		
PJQTACML 11	11		*
PJQTACML 125	12,5		*



SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 4,5 mm - 108 lm) - 10/10 mm

Article	H mm		
PJQTACS 045	4,5		
PJQTACS 06	6		
PJQTACS 08	8		
PJQTACS 10	10		
PJQTACS 11	11		
PJQTACS 125	12,5		

COLOURS

AC - Polished stainless st. AISI 304/1.4301-V2A	ACML - Super polished stainless st. AISI 304/1.4301-V2A	ACS - Satin finish stainless st. AISI 304/1.4301-V2A

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

CAPSULES, END CAPS and THREE-WAYS JOINTS

POLISHED, SUPER POLISHED AND SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A / PLASTIC

CAPSULES and END CAPS - POLISHED STAINLESS ST. AISI 304/1.4301-V2A

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJQTAC 045/... (external)	4,5		
IPJQTAC 045/... (internal)	4,5		
CPJQTAC 06/... (external)	6		
IPJQTAC 06/... (internal)	6		
CPJQTAC 08/... (external)	8		
IPJQTAC 08/... (internal)	8		
CPJQTAC 10/... (external)	10		
IPJQTAC 10/... (internal)	10		
CPJQTAC 11/... (external)	11		
IPJQTAC 11/... (internal)	11		
CPJQTAC 125/... (external)	12,5		
IPJQTAC 125/... (internal)	12,5		
TPJQTAC 045-06-08-10-11-125-.../...			

Choose the desired packaging: E.g.: CPJQTAC .../10 (Pack. 10 Pcs)
CPJQTAC .../2 (Pack. 2 Pcs)

JOINTS - PLASTIC

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
GJJQT 045/...	4,5		
GJJQT 06/...	6		
GJJQT 08/...	8		
GJJQT 10/...	10		
GJJQT 11/...	11		
GJJQT 125/...	12,5		

Choose the desired packaging: E.g.: GJJQT .../10 (Pack. 10 Pcs)
GJJQT .../2 (Pack. 2 Pcs)

CAPSULES and END CAPS - SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJQTACS 045/... (external)	4,5		
IPJQTACS 045/... (internal)	4,5		
CPJQTACS 06/... (external)	6		
IPJQTACS 06/... (internal)	6		
CPJQTACS 08/... (external)	8		
IPJQTACS 08/... (internal)	8		
CPJQTACS 10/... (external)	10		
IPJQTACS 10/... (internal)	10		
CPJQTACS 11/... (external)	11		
IPJQTACS 11/... (internal)	11		
CPJQTACS 125/... (external)	12,5		
IPJQTACS 125/... (internal)	12,5		
TPJQTACS 045-06-08-10-11-125-.../...			

Choose the desired packaging: E.g.: CPJQTACS .../10 (Pack. 10 Pcs)
CPJQTACS .../2 (Pack. 2 Pcs)

CAPSULES - SUPER POLISHED STAINLESS ST. AISI 304/1.4301-V2A

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJQTACML 045/... (external)	4,5		*
IPJQTACML 045/... (internal)	4,5		*
CPJQTACML 06/... (external)	6		*
IPJQTACML 06/... (internal)	6		*
CPJQTACML 08/... (external)	8		*
IPJQTACML 08/... (internal)	8		*
CPJQTACML 10/... (external)	10		
IPJQTACML 10/... (internal)	10		
CPJQTACML 11/... (external)	11		*
IPJQTACML 11/... (internal)	11		*
CPJQTACML 125/... (external)	12,5		*
IPJQTACML 125/... (internal)	12,5		*

Choose the desired packaging: E.g.: CPJQTACML .../10 (Pack. 10 Pcs)
CPJQTACML .../2 (Pack. 2 Pcs)

EXTERNAL CAPSULES
CPJQT.../...




INTERNAL CAPSULES
IPJQT.../...



END CAP
TPJQTA.../...



JOINT
GJJQT.../...



* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROJOLLY QUART is a quarter-circle rounded bead profile in anodized and polished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step treads and riser of stairs coated with ceramic and natural stone tiles. Its particular section and elegance, the availability in four finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY QUART** a much sought-after profile that allows an elegant workmanlike application.

PROJOLLY QUART

ANODIZED AND POLISHED ALUMINIUM




ANODIZED ALUMINIUM (silver-titanium-gold-antique bronze) thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm (H 12,5 mm, 15 mm - pack. 20 Pcs)


Article	H mm		
PJQTAA 06 (anod. silver)	6		
PJQTAO 06 (anod. gold)	6		*
PJQTAA 08 (anod. silver)	8		
PJQTAO 08 (anod. gold)	8		*
PJQTAT 08 (anod. titanium)	8		*
PJQTAA 10 (anod. silver)	10		
PJQTAO 10 (anod. gold)	10		
PJQTAT 10 (anod. titanium)	10		
PJQTBRA 10 (anod. bronze)	10		
PJQTAA 11 (anod. silver)	11		
PJQTAO 11 (anod. gold)	11		*
PJQTAT 11 (anod. titanium)	11		*
PJQTAA 125 (anod. silver)	12,5		
PJQTAO 125 (anod. gold)	12,5		*
PJQTAT 125 (anod. titanium)	12,5		*
PJQTBRA 125 (anod. bronze)	12,5		
PJQTAA 15 (anod. silver)	15		

POLISHED ALUMINIUM (chrome-titanium-gold) thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm (H 15 mm - 54 lm) (H 12,5 mm, 15 mm - pack. 20 Pcs)

Article	H mm		
PJQTBC 06 (polish. chrome)	6		
PJQTBO 06 (polish. gold)	6		*
PJQTBC 08 (polish. chrome)	8		
PJQTBO 08 (polish. gold)	8		*
PJQBTB 08 (polish. titanium)	8		*
PJQTBC 10 (polish. chrome)	10		
PJQTBO 10 (polish. gold)	10		
PJQBTB 10 (polish. titanium)	10		
PJQTBC 11 (polish. chrome)	11		
PJQTBO 11 (polish. gold)	11		*
PJQBTB 11 (polish. titanium)	11		*
PJQTBC 125 (polish. chrome)	12,5		
PJQTBO 125 (polish. gold)	12,5		*
PJQBTB 125 (polish. titanium)	12,5		*
PJQTBC 15 (polish. chrome)	15		

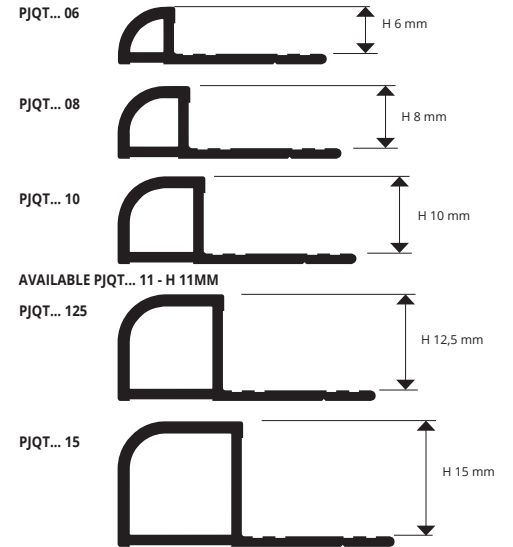


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

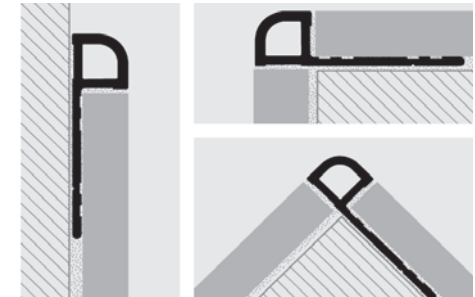

1. Choose "PROJOLLY QUART" according to the tile thickness and desired finish. 2. Cut "PROJOLLY QUART" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY QUART" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS

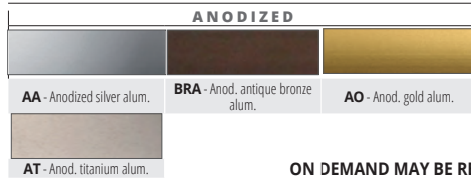

ON DEMAND MAY BE REALISED IN OTHER FINISHES OF THE COLOUR CHART. CONTACT OUR CUSTOMER SERVICE FOR MINIMUM QUANTITY, TIMING AND PRICE.

CAPSULES, END CAPS and THREE-WAYS JOINTS

ANODIZED, POLISHED ALUMINIUM / PLASTIC

CAPSULES and END CAPS - ANODIZED ALUMINIUM

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJQTAA 06-08/... (external)	6-8		
IPJQTAA 06-08/... (internal)	6-8		
CPJQTAO 06-08/... (external)	6-8		*
IPJQTAO 06-08/... (internal)	6-8		*
CPJQTAT 08/... (external)	8		*
IPJQTAT 08/... (internal)	8		*
CPJQTAA/AO 10/... (external)	10		
IPJQTAA/AO 10/... (internal)	10		
CPJQTAT/BRA10/... (external)	10		
IPJQTAT/BRA 10/... (internal)	10		
CPJQTAA 11-125/... (external)	11-12,5		
IPJQTAA 11-125/... (internal)	11-12,5		
CPJQTAO 11-125/... (external)	11-12,5		*
IPJQTAO 11-125/... (internal)	11-12,5		*
CPJQTAT 11-125/... (external)	11-12,5		*
IPJQTAT 11-125/... (internal)	11-12,5		*
CPJQTBRA 125/... (external)	12,5		
IPJQTBRA 125/... (internal)	12,5		
CPJQTAA 15/... (external)	15		
IPJQTAA 15/... (internal)	15		
TPJQT... 06-08-10-11-125-15-.../...			

Choose the desired packaging: E.g.: CPJQTAA .../10 (Pack. 10 Pcs)
CPJQTAA .../2 (Pack. 2 Pcs)

CAPSULES and END CAPS - POLISHED ALUMINIUM


Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJQTBC 06-08/... (external)	6-8		
IPJQTBC 06-08/... (internal)	6-8		
CPJQTBO 06-08/... (external)	6-8		*
IPJQTBO 06-08/... (internal)	6-8		*
CPJQBTB 08/... (external)	8		*
IPJQBTB 08/... (internal)	8		*
CPJQTBC/BO 10/... (external)	10		
IPJQTBC/BO 10/... (internal)	10		
CPJQBTB10/... (external)	10		
IPJQBTB 10/... (internal)	10		
CPJQTBT11/... (external)	11		
IPJQBTB 11/... (internal)	11		
CPJQTBC 11-125/... (external)	11-12,5		
IPJQTBC 11-125/... (internal)	11-12,5		
CPJQTBO 11-125/... (external)	11-12,5		*
IPJQTBO 11-125/... (internal)	11-12,5		*
CPJQBTB 125/... (external)	12,5		
IPJQBTB 125/... (internal)	12,5		
CPJQTBC 15/... (external)	15		
IPJQTBC 15/... (internal)	15		
TPJQT... 06-08-10-11-125-15-.../...			

Choose the desired packaging: E.g.: CPJQTBC .../10 (Pack. 10 Pcs)
CPJQTBC .../2 (Pack. 2 Pcs)

JOINTS - PLASTIC

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
GIJQT 06/...	6		
GIJQT 08/...	8		
GIJQT 10/...	10		
GIJQT 11/...	11		
GIJQT 125/...	12,5		
GIJQT 15/...	15		

Choose the desired packaging: E.g.: GIJQT.../10 (Pack. 10 Pcs)
GIJQT.../2 (Pack. 2 Pcs)



EXTERNAL CAPSULES
CPJQT.../.../...

INTERNAL CAPSULES
IPJQT.../.../...



END CAP
TPJQT.../.../...

JOINT
GIJQT.../.../...




* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


PROJOLLY QUART

BRUSHED POLISHED, BRUSHED AND VARNISHED ALUMINIUM

PROJOLLY QUART is a quarter-circle rounded bead profile in brushed and varnished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and (only brushed version) like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles. Its particular section and elegance, the availability in three finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY QUART** a much sought-after profile that allows an elegant workmanlike application.

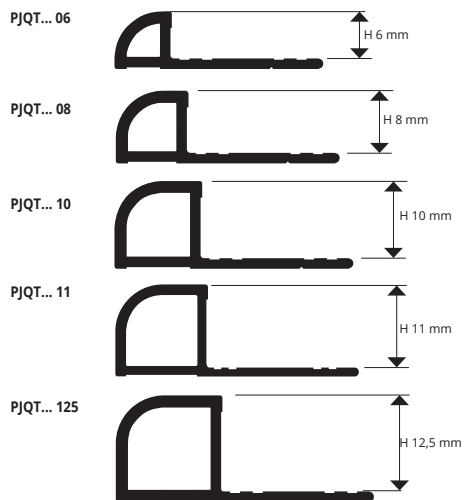

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

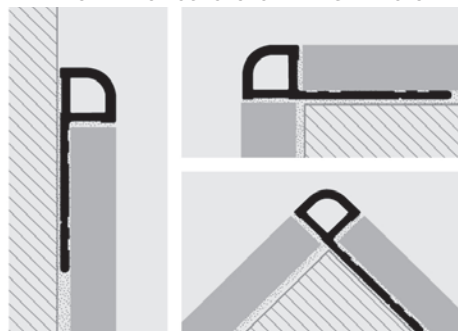

1. Choose "PROJOLLY QUART" according to the tile thickness and desired finish.
2. Cut "PROJOLLY QUART" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY QUART" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.




BRUSHED POLISHED ALUMINIUM (silver) thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm (H 12,5 mm, 15 mm - pack. 20 Pcs)

Article	H mm		
PJQTBS 08	8		
PJQTBS 08	8		*
PJQTBS 10	10		
PJQTBS 10	10		*
PJQTBS 11	11		*
PJQTBS 11	11		*
PJQTBS 125	12,5		
PJQTBS 125	12,5		*

BRUSHED ANTIQUE BRONZE ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm (H 12,5 mm, 15 mm - pack. 20 Pcs)

Article	H mm		
PJQTBRAS 10	10		
PJQTBRAS 125	12,5		

COLOURS




ON DEMAND MINIMUM QUANTITY 100 PCS



BOS - Brushed gold alum.

(Price to be agreed. Production delay 4/5 weeks)

ON DEMAND MAY BE REALISED IN OTHER FINISHES OF THE COLOUR CHART. CONTACT OUR CUSTOMER SERVICE FOR MINIMUM QUANTITY, TIMING AND PRICE.

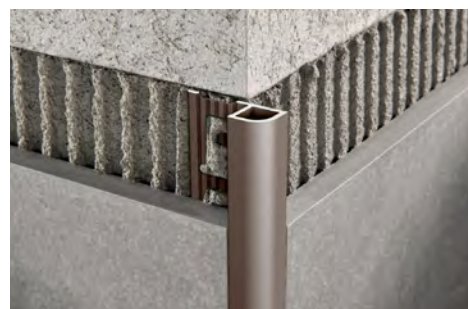

VARNISHED ALUMINIUM thermo packed - bar length 2,7 M
pack. 20 Pcs - 54 lm (white colour 40 Pcs - 108 lm)

Article	H mm		
PJQTA 06-01 (varn. white)	6		
PJQTA 08-01 (varn. white)	8		
PJQTA 10-01 (varn. white)	10		
PJQTA 11-01 (varn. white)	11		
PJQTA 125-01 (varn. white)	12,5		


Available in the colours: 01. Available on demand 0106 - 02 - 03 - 11 - 17. The code of the selected colour must be added to the article code. E.g.: PJQTA 08... (chosen colour White) PJQTA 08-01.

COLOURS

PJQTA 06-..., PJQTA 11-... & PJQTA 125-...
FOR OTHER COLOURS, DIFFERENT FROM WHITE, PLEASE CONTACT OUR CUSTOMER SERVICE FOR QUANTITY AND PRICE

01 - Varnished white aluminium (9016)

ON DEMAND MINIMUM QUANTITY 100 PCS



0106 - Varnished white ivory alum. (9001)

02 - Varnished light grey alum. (7035)

03 - Varnished stone grey alum. (7030)



11 - Varnished black aluminium (9005)

17 - Varnished bahama beige alum.

(Price to be agreed. Production delay 4/5 weeks)

CAPSULES, END CAPS and THREE-WAYS JOINTS

POLISHED BRUSHED, VARNISHED ALUMINIUM/ PLASTIC

JOINTS - PLASTIC


Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
GJJQT 06/...	6		
GJJQT 08/...	8		
GJJQT 10/...	10		
GJJQT 11/...	11		
GJJQT 125/...	12,5		

Choose the desired packaging: E.g.: GJJQT .../10 (Pack. 10 Pcs)
GJJQT .../2 (Pack. 2 Pcs)

JOINT



GJJQT ...

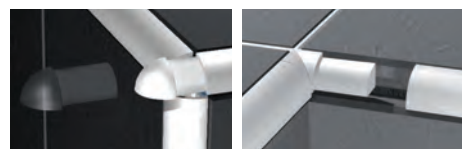

CAPSULES & CAPS - POLISHED BRUSHED ALUMINIUM

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJQTBS 08/... (external)	8		
IPJQTBS 08/... (internal)	8		
CPJQTBS 08/... (external)	8		*
IPJQTBS 08/... (internal)	8		*
CPJQTBS 10/... (external)	10		
IPJQTBS 10/... (internal)	10		
CPJQTBS 10/... (external)	10		*
IPJQTBS 10/... (internal)	10		*
CPJQTBRAS 10/... (external)	10		
IPJQTBRAS 10/... (internal)	10		
CPJQTBS 11/... (external)	11		*
IPJQTBS 11/... (internal)	11		*
CPJQTBS 11/... (external)	11		*
IPJQTBS 11/... (internal)	11		*
CPJQTBS 125/... (external)	12,5		
IPJQTBS 125/... (internal)	12,5		
CPJQTBS 125/... (external)	12,5		*
IPJQTBS 125/... (internal)	12,5		*
CPJQTBRAS 125/... (external)	12,5		
IPJQTBRAS 125/... (internal)	12,5		
TPJQT... 08-10-11-125-.../...			

CAPSULES & CAP - VARNISHED ALUMINIUM

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJQTA 06-01/... (external)	6		
IPJQTA 06-01/... (internal)	6		
CPJQTA 08-01/... (external)	8		
IPJQTA 08-01/... (internal)	8		
CPJQTA 10-01/... (external)	10		
IPJQTA 10-01/... (internal)	10		
CPJQTA 11-01/... (external)	11		
IPJQTA 11-01/... (internal)	11		
CPJQTA 125-01/... (external)	12,5		
IPJQTA 125-01/... (internal)	12,5		
TPJQTA 06-08-10-11-125-.../...			

Choose the desired packaging: E.g.: CPJQTA .../10 (Pack. 10 Pcs)
CPJQTA .../2 (Pack. 2 Pcs)

EXTERNAL CAPSULES



CPJQT... .../...

INTERNAL CAPSULES



IPJQT... .../...

END CAP



TPJQT... .../...

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROJOLLY QUART is a quarter-circle rounded bead profile in powder coated aluminum that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section and the availability of thirteen finishes and special pieces such as internal and external corners, junctions and end caps make **PROJOLLY QUART** an elegant and much-sought after profile.

PROJOLLY QUART

STONE LINE ALUMINIUM




STONE LINE ALUMINIUM thermo packed
bar length 2,7 M - pack. 20 Pcs - 54 lm

Article	H mm		
PJQTA 06-SL...	6		*
PJQTA 08-SL...	8		
PJQTA 10-SL...	10		
PJQTA 11-SL...	11		*
PJQTA 125-SL...	12,5		


Available in the colours: SL01 - SL02 - SL03 - SL04 - SL05 - SL06 - SL07 - SL08 - SL09 - SL10 - SL11 - SL12 - SL13.
The code of the selected colour must be added to the article code.
E.g.: PJQTA 08... (chosen colour stone white) PJQTA 08-SL01.

COLOURS

STONE LINE						
SL01 - Stone white	SL02 - Stone cream	SL03 - Stone greyvory	SL04 - Stone sand	SL05 - Stone gray	SL06 - Stone cristal gray	SL07 - Stone antragray
SL08 - Stone antradark	SL09 - Stone bronze	SL10 - Stone corten	SL11 - Stone brown	SL12 - Stone black	SL13 - Stone oyster grey	

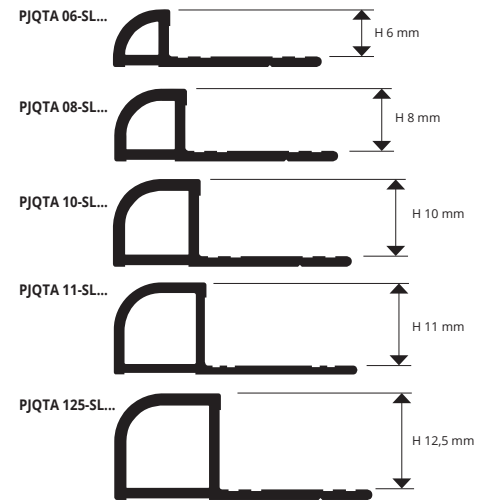

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

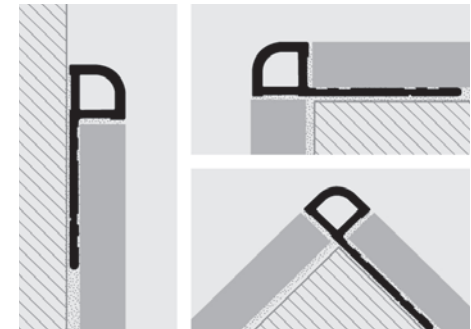

1. Choose "PROJOLLY QUART" according to the tile thickness and desired finish.
2. Cut "PROJOLLY QUART" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY QUART" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

© 2020 All rights reserved by Progress Profiles. Printed in Italy

CAPSULES, END CAPS and THREE-WAYS JOINTS

STONE LINE ALUMINIUM / PLASTIC

JOINTS - PLASTIC

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
GJJQT 06/...	6		
GJJQT 08/...	8		
GJJQT 10/...	10		
GJJQT 11/...	11		
GJJQT 125/...	12,5		

Choose the desired packaging: E.g.: GJJQT .../10 (Pack. 10 Pcs)
GJJQT .../2 (Pack. 2 Pcs)

END CAP
GJJQT .../...




JOINT
TPJQT.../...



CAPSULES & CAP - STONE LINE ALUMINIUM

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJQTA 06-.../... (external)	6		*
IPJQTA 06-.../... (internal)	6		*
CPJQTA 08-.../... (external)	8		
IPJQTA 08-.../... (internal)	8		
CPJQTA 10-.../... (external)	10		
IPJQTA 10-.../... (internal)	10		
CPJQTA 11-.../... (external)	11		*
IPJQTA 11-.../... (internal)	11		*
CPJQTA 125-.../... (external)	12,5		
IPJQTA 125-.../... (internal)	12,5		
TPJQTA 06-08-10-11-125-.../...			

Choose the desired packaging: E.g.: CPJQTA .../10 (Pack. 10 Pcs)
CPJQTA .../2 (Pack. 2 Pcs)

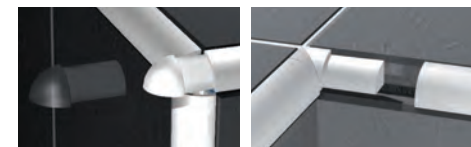

EXTERNAL CAPSULES

INTERNAL CAPSULES



CPJQTA .../...




IPJQTA .../...

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


PROJOLLY QUART

SHOCKPROOF NON - TOXIC COLORED VINYL RESIN

PROJOLLY QUART is a quarter-circle rounded bead profile in shockproof non - toxic colored vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section, the availability in different colours also on demand and special pieces such as internal and external corners make **PROJOLLY QUART** a much sought-after profile. It can be easily matched with the wall covering and allows an elegant workmanlike application.

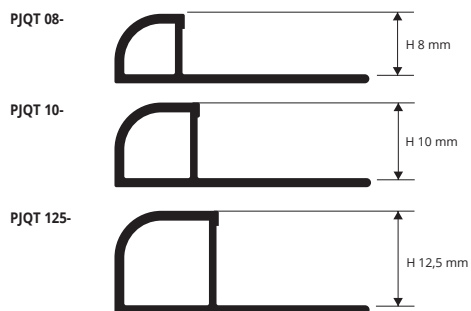

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

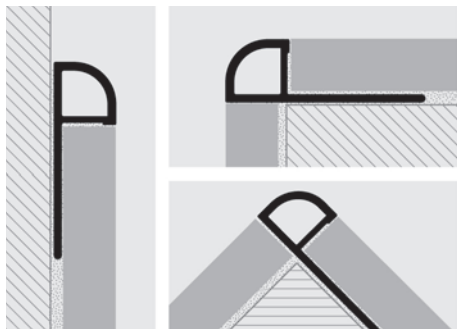

1. Choose "PROJOLLY QUART" according to the tile thickness and desired colour.
2. Cut "PROJOLLY QUART" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY QUART" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.



NON-TOXIC SHOCKPROOF VINYL RESIN

bar length **2,7 lm** - pack. **54 lm** (white colour pack. **108 lm**)

Article	H mm		
PJQT 08-...	8		
PJQT 10-...	10		
PJQT 125-...	12,5		

Available in the colours: 00-01-02-03-05-06-11-17-18.

Available on demand 0106 - 04 - 07 - 08 - 09 - 10-12-13-14-15-16-19-20-21-22-23-24-25-26-27-28-29 with a minimum quantity order of 800 pcs. The code of the selected colour must be added to the article code. E.g.: PJQT 08-... (chosen colour white) PJQT 08-01.

WHITE NOT FOR SALE SINGLY

COLOURS


00 - White ice	01 - White	02 - Light grey	03 - Cement gray	05 - Dark beige	06 - Ivory
11 - Black	17 - Bahama beige	18 - Grey			

ON DEMAND - MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)

0106 - White ivory	04 - Light beige	07 - Pink	08 - Sky blue	09 - Yellow	10 - Red
12 - Silver	13 - Gold	14 - Green	15 - Brown	16 - Blue	19 - Beige
20 - Dark ivory	21 - Light pink	22 - Dark pink	23 - Dark antique pink	24 - Dark sky blue	25 - Brick red
26 - Turquoise green	27 - Dark green	28 - Hazel brown	29 - Dark brown		

CAPSULES and THREE-WAYS JOINTS

POLYPROPYLENE/POLYETYLENE UV RESISTANT

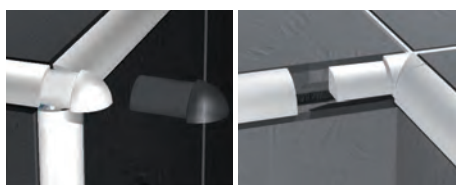

POLYPROPYLENE/POLYETYLENE UV RESISTANT

Article	H mm	Pack. 20 Pcs	Pack. 5 Pcs
CPJQT 08-.../... (external)	8		
IPJQT 08-.../... (internal)	8		
CPJQT 10-.../... (external)	10		
IPJQT 10-.../... (internal)	10		
CPJQT 125-.../... (external)	12,5		
IPJQT 125-.../... (internal)	12,5		

Available in the colours: 01-02-03-05-06-11-17-18 (available on demand 0106-04-07-08-09-10-12-13-14-15-16-19-20-21-22-23-24-25-26-27-28-29). The code of the selected colour must be added to the article code. E.g.: CPJQT 08-.../... (chosen colour white) CPJQT 08-01/20.

EXTERNAL CAPSULES



CPJQT .../.../...

INTERNAL CAPSULES



IPJQT .../.../...



PROJOLLY is a rounded bead profile in polished, super polished, sanded and satin finish stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

PROJOLLY

POLISHED, SUPER POLISHED, SANDED AND SATIN FINISH STAINLESS STEEL AISI 304/1.4301-V2A



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm		
PJAC 06	6		
PJAC 08	8		
PJAC 10	10		
PJAC 11	11		
PJAC 125	12,5		
PJAC 15	15		

SUPER POLISHED STAINLESS ST. AISI 304/1.4301-V2A
thermo packed - bar length 2,7 lm - pack. 20 Pcs
54 lm - 10/10 mm

Article	H mm		
PJACML 06	6		
PJACML 08	8		
PJACML 10	10		
PJACML 11	11		
PJACML 125	12,5		
PJACML 15	15		

MIRROR LINE



SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm		
PJACS 06	6		
PJACS 08	8		
PJACS 10	10		
PJACS 11	11		
PJACS 125	12,5		
PJACS 15	15		


SANDED STAINLESS INOX AISI 304/1.4301-V2A with protective film
bar length 2,7 ml - pack. 20 Pcs 54 lm - 10/10 mm

Article	H mm		
PJACSB 08	8		
PJACSB 10	10		
PJACSB 125	12,5		


COLOURS

AC - Polished stainless st. AISI 304/1.4301-V2A	ACML - Super polished stainless st. AISI 304/1.4301-V2A	ACS - Satin finish stainless st. AISI 304/1.4301-V2A
ACSB - Sanded stainless st. AISI 304/1.4301-V2A		

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

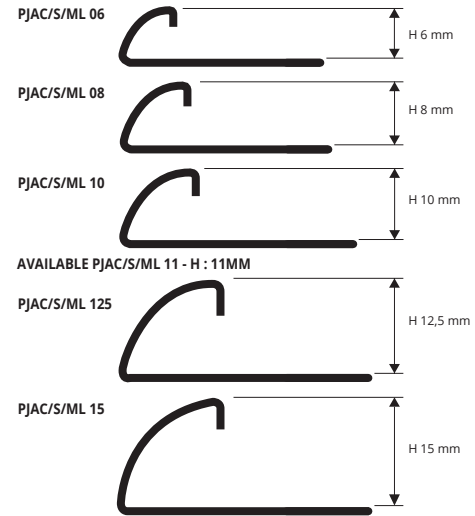

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

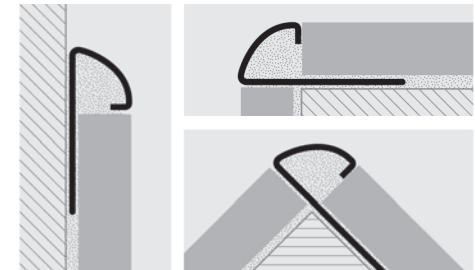

1. Choose "PROJOLLY" according to the tile thickness and desired finish. 2. Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

CAPSULES, END CAPS and THREE-WAYS JOINTS

POLISHED, SUPER POLISHED AND SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A / PLASTIC

CAPSULES and END CAPS - POLISHED STAINLESS ST. AISI 304/1.4301-V2A

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJAC 06/... (external)	6		
IPJAC 06/... (internal)	6		
CPJAC 08/... (external)	8		
IPJAC 08/... (internal)	8		
CPJAC 10/... (external)	10		
IPJAC 10/... (internal)	10		
CPJAC 11/... (external)	11		
IPJAC 11/... (internal)	11		
CPJAC 125/... (external)	12,5		
IPJAC 125/... (internal)	12,5		
CPJAC 15/... (external)	15		
IPJAC 15/... (internal)	15		

TPJAC 06-08-10-11-125-15-.../...
Choose the desired packaging: E.g.: CPJAC .../10 (Pack. 10 Pcs)
CPJAC .../2 (Pack. 2 Pcs)

CAPSULES and END CAPS - SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJACS 06/... (external)	6		
IPJACS 06/... (internal)	6		
CPJACS 08/... (external)	8		
IPJACS 08/... (internal)	8		
CPJACS 10/... (external)	10		
IPJACS 10/... (internal)	10		
CPJACS 11/... (external)	11		
IPJACS 11/... (internal)	11		
CPJACS 125/... (external)	12,5		
IPJACS 125/... (internal)	12,5		
CPJACS 15/... (external)	15		
IPJACS 15/... (internal)	15		

TPJACS 06-08-10-11-125-15-.../...
Choose the desired packaging: E.g.: CPJACS .../10 (Pack. 10 Pcs)
CPJACS .../2 (Pack. 2 Pcs)

CAPSULES - SUPER POLISHED STAINLESS ST. AISI 304/1.4301-V2A

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJACML 06/... (external)	6		
IPJACML 06/... (internal)	6		
CPJACML 08/... (external)	8		
IPJACML 08/... (internal)	8		
CPJACML 10/... (external)	10		
IPJACML 10/... (internal)	10		
CPJACML 11/... (external)	11		
IPJACML 11/... (internal)	11		
CPJACML 125/... (external)	12,5		
IPJACML 125/... (internal)	12,5		
CPJACML 15/... (external)	15		
IPJACML 15/... (internal)	15		

Choose the desired packaging: E.g.: CPJACML .../10 (Pack. 10 Pcs)
CPJACML .../2 (Pack. 2 Pcs)


JOINTS - PLASTIC

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
GIJAC 06/...	6		
GIJAC 08/...	8		
GIJAC 10/...	10		
GIJAC 11/...	11		
GIJAC 125/...	12,5		
GIJAC 15/...	15		

Choose the desired packaging: E.g.: GIJAC .../10 (Pack. 10 Pcs)
GIJAC .../2 (Pack. 2 Pcs)

CAPSULES - SANDED STAINLESS INOX AISI 304/1.4301-V2A

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJACSB 08/... (external)	8		
IPJACSB 08/... (internal)	8		
CPJACSB 10/... (external)	10		
IPJACSB 10/... (internal)	10		
CPJACSB 125/... (external)	12,5		
IPJACSB 125/... (internal)	12,5		



END CAP TPJ.../... EXTERNAL CAPSULES CPJ.../... INTERNAL CAPSULES IPJ.../... JOINT GIJAC .../...


News 2020

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


PROJOLLY

POLISHED STAINLESS STEEL INOX AISI 316L/1.4404-V4A

PROJOLLY is a rounded bead profile in polished stainless steel INOX AISI 316L/1.4404-V4A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical and chemical stresses.

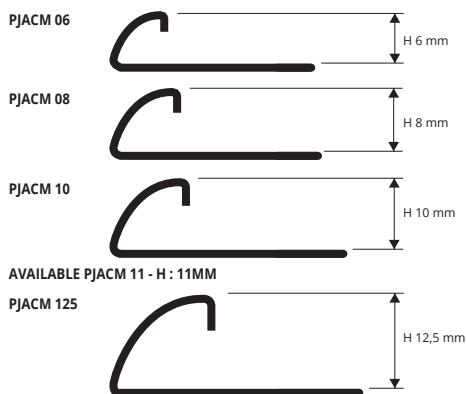

EXAMPLES OF LAYING

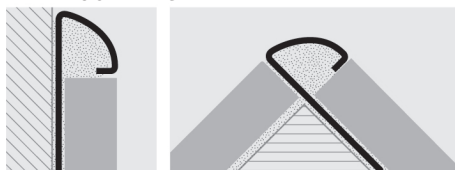

POLISHED STAINLESS STEEL AISI 316L/1.4404-V4A with protective film - bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm		
PJACM 06	6		
PJACM 08	8		
PJACM 10	10		
PJACM 11	11		
PJACM 125	12,5		

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

COLOURS



ACM - Polished stainless st. AISI 316L

1. Choose "PROJOLLY" according to the tile thickness. 2. Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

CAPSULES and THREE-WAYS JOINTS

POLISHED STAINLESS STEEL AISI 316L/1.4404-V4A



POLISHED STAINLESS STEEL AISI 316L/1.4404-V4A

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJACM 06/... (external)	6		
IPJACM 06/... (internal)	6		
CPJACM 08/... (external)	8		
IPJACM 08/... (internal)	8		
CPJACM 10/... (external)	10		
IPJACM 10/... (internal)	10		
CPJACM 11/... (external)	11		
IPJACM 11/... (internal)	11		
CPJACM 125/... (external)	12,5		
IPJACM 125/... (internal)	12,5		

Choose the desired packaging: E.g.: CPJACM .../10 (Pack. 10 Pcs)
IPJACM .../2 (Pack. 2 Pcs)

EXTERNAL CAPSULES



CPJACM .../...

INTERNAL CAPSULES




IPJACM .../...

PROTERMINAL

POLISHED STAINLESS STEEL INOX AISI 316L/1.4404-V4A

PROTERMINAL is a "L-shaped" profile in polished stainless steel INOX AISI 316L/1.4404-V4A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor coverings. Its particular section and the availability in three different finishes make **PROTERMINAL** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical and chemical stresses.

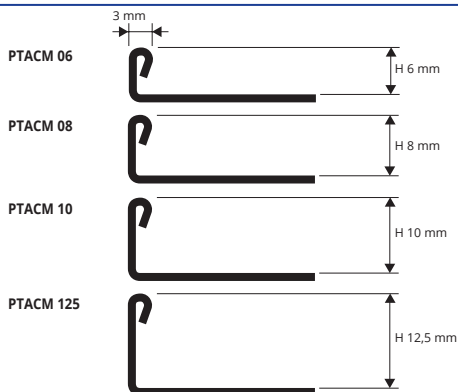

EXAMPLES OF LAYING



COLOURS



ACM - Polished stainless st. AISI 316L

1. Choose "PROTERMINAL" according to the tile thickness. 2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTERMINAL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

POLISHED STAINLESS STEEL AISI 316L/1.4404-V4A
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10 mm


Article	H mm		
PTACM 06	6		
PTACM 08	8		
PTACM 10	10		
PTACM 125	12,5		

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PROJOLLY is a rounded bead profile in natural, antique brass, polished varnished and chromed brass that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like (only natural and chromed version) a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after and elegant profile that allows a workmanlike application.

PROJOLLY

NATURAL, POLISHED VARNISHED, CHROMED AND ANTIQUE BRASS

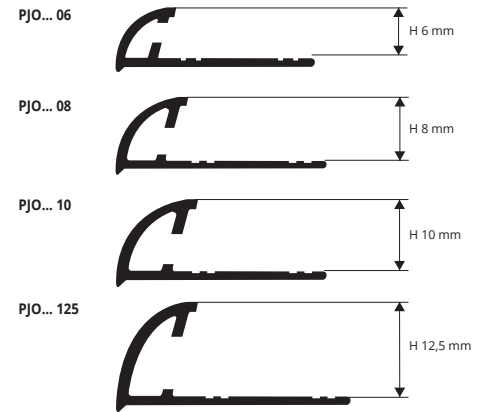

NATURAL BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PJON 08	8		*
PJON 10	10		
PJON 125	12,5		*

SUPER POLISHED VARNISHED CHROMED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PJOC 06	6		*
PJOC 08	8		
PJOC 10	10		
PJOC 125	12,5		



POLISHED VARNISHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm		
PJOL 06	6		*
PJOL 08	8		
PJOL 10	10		
PJOL 125	12,5		

Polished varnished brass is not suitable for frequent pedestrian traffic places and/or scratching.


ANTIQUÉ BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PJOB 08	8		*
PJOB 10	10		
PJOB 125	12,5		

COLOURS

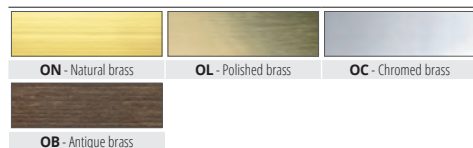

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

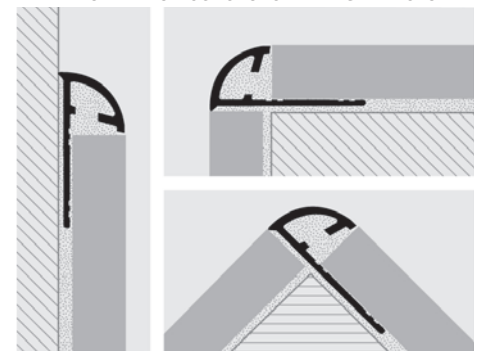

1. Choose "PROJOLLY" according to the tile thickness and desired finish.
2. Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.


CAPSULES, END CAPS and THREE-WAYS JOINTS

VARNISHED POLISHED BRASS AND CHROMED BRASS EFFECT / PLASTIC

CAPS and JOINTS - CHROMED BRASS / PLASTIC

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
TPJOC 06-08-10-125/...	6-8-10-12,5		
GJJA 06-08-10-125/...	6-8-10-12,5		

Choose the desired packaging: E.g.: GJJA.../10 (Pack. 10 Pcs)
GJJA.../2 (Pack. 2 Pcs)



TPJOC .../...



GJJA .../...

EXTERNAL CAPSULES



CPJ... ../...

CPJD... ../...

INTERNAL CAPSULES



IPJD... ../...

IPJ... ../...

LEFT CAPSULES - POLISHED VARNISHED BRASS

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJOL 06/... (external)	6		*
IPJOL 06/... (internal)	6		*
CPJOL 08/... (external)	8		
IPJOL 08/... (internal)	8		
CPJOL 10/... (external)	10		
IPJOL 10/... (internal)	10		
CPJOL 125/... (external)	12,5		
IPJOL 125/... (internal)	12,5		

Choose the desired packaging: E.g.: CPJOL.../10 (Pack. 10 Pcs)
CPJOL.../2 (Pack. 2 Pcs)

The right capsules are available on demand and must be used only in the following cases:

A) when you are laying the cut base of the profile perpendicularly on the floor;



Add "D" to the article code.
For example: CPJDOL 06.


Add "D" to the article code.
For example: IPJDOL 06.

LEFT CAPSULES - CHROMED BRASS

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
CPJOC 06/... (external)	6		*
IPJOC 06/... (internal)	6		*
CPJOC 08/... (external)	8		
IPJOC 08/... (internal)	8		
CPJOC 10/... (external)	10		
IPJOC 10/... (internal)	10		
CPJOC 125/... (external)	12,5		
IPJOC 125/... (internal)	12,5		

Choose the desired packaging: E.g.: CPJOC.../10 (Pack. 10 Pcs)
CPJOC.../2 (Pack. 2 Pcs)

B) as an alternative to end-caps (right side).

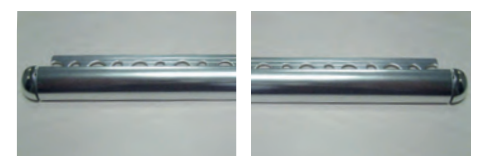

LEFT CAPSULES


RIGHT CAPSULES

Add "D" to the article code. For example: CPJDOL 06.


PROJOLLY

ANODIZED ALUMINIUM
SILVER, COPPER, TITANIUM, GOLD AND BLACK

PROJOLLY is a rounded bead profile in anodized aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section and elegance, the availability in five different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after and elegant profile that allows a workmanlike application.

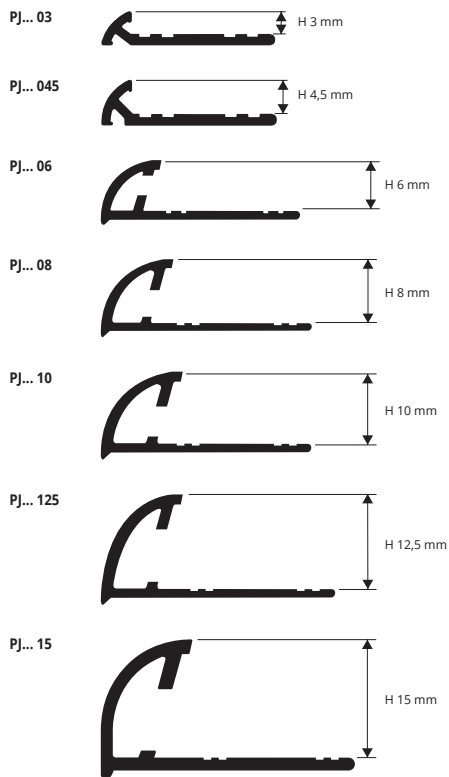

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

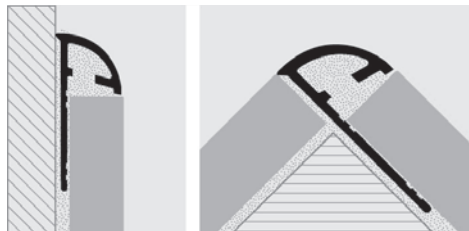

1. Choose "PROJOLLY" according to the tile thickness and desired finish.
2. Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

ANODIZED ALUM. (silver-copper-gold-titanium-black) thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm (for H 15 anodized silver alum. pack. 20 Pcs - 54 lm)

Article	H mm		
PJAA 03 (anodized silver)	3		*
PJAO 03 (anodized gold)	3		*
PJAA 045 (anodized silver)	4,5		*
PJAO 045 (anodized gold)	4,5		*
PJAA 06 (anodized silver)	6		
PJAO 06 (anodized gold)	6		*
PJAA 08 (anodized silver)	8		
PJAR 08 (anodized copper)	8		
PJAT 08 (anodized titanium)	8		
PJAO 08 (anodized gold)	8		
PJNE 08 (anodized black)	8		
PJAA 10 (anodized silver)	10		
PJAR 10 (anodized copper)	10		
PJAT 10 (anodized titanium)	10		
PJAO 10 (anodized gold)	10		
PJNE 10 (anodized black)	10		
PJAA 125 (anodized silver)	12,5		
PJAR 125 (anodized copper)	12,5		*
PJAT 125 (anodized titanium)	12,5		
PJNE 125 (anodized black)	12,5		
PJAA 15 (anodized silver)	15		
PJAO 15 (anodized gold)	15		*

COLOURS



CAPSULES, END CAPS and THREE-WAYS JOINTS

Anodized ALUMINIUM (silver, copper, titanium, gold and black) / PLASTIC

LEFT CAPSULES ANODIZED ALUMINIUM (silver, copper, titanium and gold)

Article	H mm		Pack. 10 pcs	Pack. 2 pcs
CPJAA 06/... (external)	6	4,91	49,10	10,80
IPJAA 06/... (internal)	6	4,91	49,10	10,80
CPJAO 06/... (external)	6	4,91	49,10	10,80
IPJAO 06/... (internal)	6	4,91	49,10	10,80
CPJAA/AO 08/... (external)	8	4,91	49,10	10,80
IPJAA/AO 08/... (internal)	8	4,91	49,10	10,80
CPJAR/AT 08/... (external)	8	5,08	50,80	11,64
IPJAR/AT 08/... (internal)	8	5,08	50,80	11,64
CPJAA/AO 10/... (external)	10	4,91	49,10	10,80
IPJAA/AO 10/... (internal)	10	4,91	49,10	10,80
CPJAR/AT 10/... (external)	10	5,08	50,80	11,64
IPJAR/AT 10/... (internal)	10	5,08	50,80	11,64
CPJAA 125/... (external)	12,5	4,91	49,10	10,80
IPJAA 125/... (internal)	12,5	4,91	49,10	10,80
CPJAT 125/... (external)	12,5	5,08	50,80	11,64
IPJAT 125/... (internal)	12,5	5,08	50,80	11,64
CPJAR 125/... (external)	12,5	5,08	50,80	11,64
IPJAR 125/... (internal)	12,5	5,08	50,80	11,64
CPJAA 15/... (external)	15	5,45	54,50	11,99
IPJAA 15/... (internal)	15	5,71	57,10	12,56
CPJAO 15/... (external)	15	5,45	54,50	11,99
IPJAO 15/... (internal)	15	5,71	57,10	12,56

Choose the desired packaging: E.g.: CPJAA.../10 (Pack. 10 Pcs) CPJAA.../2 (Pack. 2 Pcs)

LEFT CAPSULES ANODIZED ALUMINIUM (black)

Article	H mm		Pack. 10 pcs	Pack. 2 pcs
CPJNE 08/...	8			
IPJNE 08/...	8			
CPJNE 10/...	10			
IPJNE 10/...	10			
CPJNE 125/...	12,5			
IPJNE 125/...	12,5			

Choose the desired packaging: E.g.: CPJNE.../10 (Pack. 10 Pcs) CPJNE.../2 (Pack. 2 Pcs)

CAPS - ANODIZED ALUMINIUM (silver, copper, titanium, gold, black)

Article		Pack. 10 pcs	Pack. 2 pcs
TPJ... 06-08-10-125-15/...			


JOINTS - PLASTIC

Article		Pack. 10 pcs	Pack. 2 pcs
GIJA 06-08-10-125-15/...			

EXTERNAL CAPSULES



INTERNAL CAPSULES



The right capsules are available on demand and must be used only in the following cases:


A) when you are laying the cut base of the profile perpendicularly on the floor;



Add "D" to the article code. For example: CPJDAA 06.


Add "D" to the article code. For example: IPJDAA 06.

B) as an alternative to end-caps (right side).

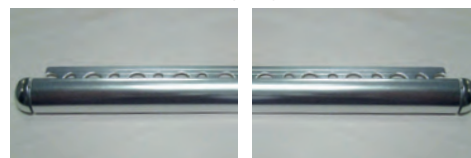

Add "D" to the article code. For example: CPJDAA 06.

CAPS



TPJ... ..

JOINTS




GIJA... ..

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROJOLLY is a rounded bead profile in polished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section and elegance, the availability in five different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after and elegant profile that allows a workmanlike application.

PROJOLLY


POLISHED ALUMINIUM
CHROME, COPPER, TITANIUM, GOLD AND BLACK

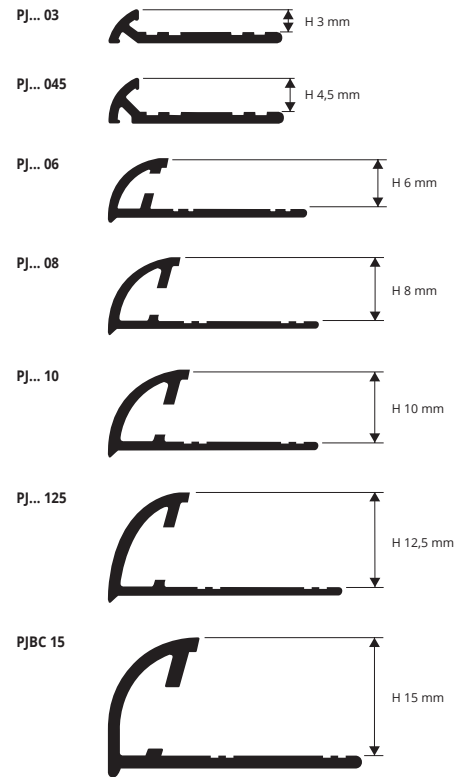

POLISHED ALUMINIUM (chrome-copper-titanium-gold-black)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm (H 15 mm - 54 lm)

Article	H mm		
PJBC 03 (polished chrome)	3		
PJBO 03 (polished gold)	3		*
PJBC 045 (polished chrome)	4,5		
PJBO 045 (polished gold)	4,5		
PJBC 06 (polished chrome)	6		
PJBO 06 (polished gold)	6		*
PJBR 08 (polished copper)	8		*
PJBT 08 (polished titanium)	8		*
PJBO 08 (polished gold)	8		
PJBC 08 (polished chrome)	8		
PJBN 08 (polished black)	8		*
PJBR 10 (polished copper)	10		
PJBT 10 (polished titanium)	10		
PJBO 10 (polished gold)	10		
PJBC 10 (polished chrome)	10		*
PJBN 10 (polished black)	10		*
PJBR 125 (polished copper)	12,5		*
PJBT 125 (polished titanium)	12,5		*
PJBO 125 (polished gold)	12,5		
PJBC 125 (polished chrome)	12,5		
PJBN 125 (polished black)	12,5		
PJBC 15 (polished chrome)	15		

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

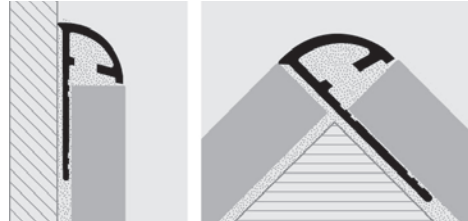

1. Choose "PROJOLLY" according to the tile thickness and desired finish. 2. Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS



© 2020 All rights reserved by Progress Profiles. Printed in Italy

CAPSULES, END CAPS and THREE-WAYS JOINTS

POLISHED ALUMINIUM (chrome, copper, titanium, gold, black) / PLASTIC

END CAPS - POLISHED ALUMINIUM chrome, copper, titanium, black

Article	Pack. 10 pcs	Pack. 2 pcs
TPJ... 06-08-10-125-15/...		

JOINTS - PLASTIC

Article	Pack. 10 pcs	Pack. 2 pcs
GJJA 06-08-10-125-15/...		

Choose the desired packaging: E.g.:
GJJA .../10 (Pack. 10 Pcs)
GJJA .../2 (Pack. 2 Pcs)



LEFT CAPSULES POLISHED ALUMINIUM chrome, copper, titanium and gold

Article	H mm	Pack. 10 pcs	Pack. 2 pcs
CPJBO 06/... (external)	6		*
IPJBO 06/... (internal)	6		*
CPJBC 06/... (external)	6		
IPJBC 06/... (internal)	6		
CPJBC/BO 08/... (external)	8		
IPJBC/BO 08/... (internal)	8		
CPJBR 08/... (external)	8		*
IPJBR 08/... (internal)	8		*
CPJBT 08-10/... (external)	8-10		
IPJBT 08-10/... (internal)	8-10		
CPJBC/BO 10/... (external)	10		
IPJBC/BO 10/... (internal)	10		
CPJBR 10/... (external)	10		
IPJBR 10/... (internal)	10		
CPJBO 125/... (external) (*)	12,5		
IPJBO 125/... (internal)	12,5		
CPJBC 125/... (external) (*)	12,5		
IPJBC 125/... (internal)	12,5		
CPJBR 125/... (external) (*)	12,5		
IPJBR 125/... (internal)	12,5		*
CPJBT 125/... (external) (*)	12,5		*
IPJBT 125/... (internal)	12,5		
CPJBC 15/... (external) (*)	15		
IPJBC 15/... (internal)	15		

Choose the desired packaging: E.g.:
CPJBC .../10 (Pack. 10 Pcs)
CPJBC .../2 (Pack. 2 Pcs)

(*) NOT SUITABLE FOR THREE-WAYS CORNER

LEFT CAPSULES POLISHED ALUMINIUM black


Article	H mm	Pack. 10 pcs	Pack. 2 pcs
CPJBN 08/...	8		*
IPJBN 08/...	8		*
CPJBN 10/...	10		
IPJBN 10/...	10		
CPJBN 125/...	12,5		*
IPJBN 125/...	12,5		*

The right capsules are available on demand and must be used only in the following cases:
A) when you are laying the cut base of the profile perpendicularly on the floor;



Add "D" to the article code. For example: CPJDBC 06. Add "D" to the article code. For example: IPJDBC 06.

B) as an alternative to end-caps (right side).

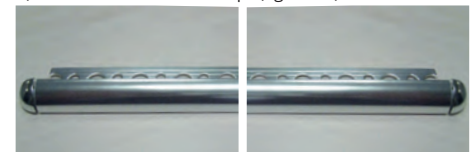


LEFT CAPSULES RIGHT CAPSULES
Add "D" to the article code. For example: CPJDBC 06.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROJOLLY

BRUSHED ALUMINIUM

PROJOLLY is a rounded bead profile in brushed aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section and elegance, the availability in four different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after and elegant profile that allows a workmanlike application.

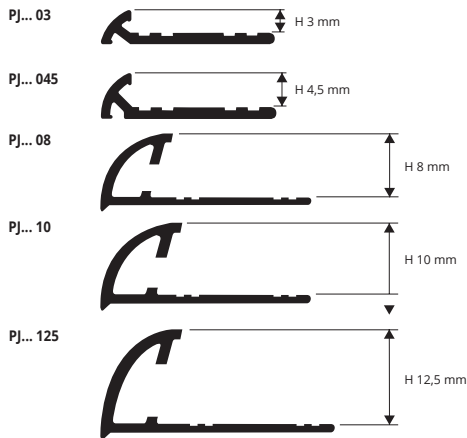

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROJOLLY" according to the tile thickness and desired finish.
2. Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.




BRUSHED POLISHED ALUMINIUM (silver-gold-copper-titanium-black)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PJBS 03 (Brushed silver)	3		
PJRS 03 (Brushed copper)	3		*
PJBOS 03 (Brushed gold)	3		*
PJTS 03 (Brushed titanium)	3		
PJBS 045 (Brushed silver)	4,5		
PJRS 045 (Brushed copper)	4,5		*
PJBOS 045 (Brushed gold)	4,5		*
PJTS 045 (Brushed titanium)	4,5		
PJBS 08 (Brushed silver)	8		
PJRS 08 (Brushed copper)	8		*
PJTS 08 (Brushed titanium)	8		
PJBOS 08 (Brushed gold)	8		*
PJNS 08 (Brushed black)	8		
PJBS 10 (Brushed silver)	10		
PJRS 10 (Brushed copper)	10		
PJTS 10 (Brushed titanium)	10		
PJBOS 10 (Brushed gold)	10		*
PJNS 10 (Brushed black)	10		
PJBS 125 (Brushed silver)	12,5		
PJRS 125 (Brushed copper)	12,5		
PJTS 125 (Brushed titanium)	12,5		
PJBOS 125 (Brushed gold)	12,5		*
PJNS 125 (Brushed black)	12,5		



COLOURS

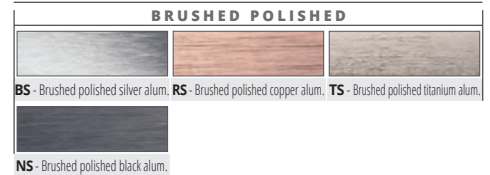

AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height



(Price to be agreed. Production delay 4/5 weeks)

CAPSULES, END CAPS and THREE-WAYS JOINTS

BRUSHED POLISHED ALUMINIUM (silver, copper, titanium, black) / PLASTIC

LEFT CAPSULES - BRUSHED POLISHED ALUMINIUM

Article	H mm	Pack. 10 pcs	Pack. 2 pcs
CPJBS 08/... (external)	8		
IPJBS 08/... (internal)	8		
CPJRS 08/... (external)	8		*
IPJRS 08/... (internal)	8		*
CPJTS 08/... (external)	8		
IPJTS 08/... (internal)	8		
CPJBOS 08/... (external)	8		*
IPJBOS 08/... (internal)	8		*
CPJNS 08/... (external)	8		
IPJNS 08/... (internal)	8		
CPJBS 10/... (external)	10		
IPJBS 10/... (internal)	10		
CPJRS 10/... (external)	10		
IPJRS 10/... (internal)	10		
CPJTS 10/... (external)	10		
IPJTS 10/... (internal)	10		
CPJBOS 10/... (external)	10		*
IPJBOS 10/... (internal)	10		*
CPJNS 10/... (external)	10		
IPJNS 10/... (internal)	10		
CPJBS 125/... (external)	12,5		
IPJBS 125/... (internal)	12,5		
CPJRS 125/... (external)	12,5		
IPJRS 125/... (internal)	12,5		
CPJTS 125/... (external)	12,5		
IPJTS 125/... (internal)	12,5		
CPJBOS 125/... (external)	12,5		*
IPJBOS 125/... (internal)	12,5		*
CPJNS 125/... (external)	12,5		
IPJNS 125/... (internal)	12,5		

END CAPS - BRUSHED ALUMINIUM

Article	Pack. 10 pcs	Pack. 2 pcs
TPJ... 08-10-125/...		

JOINTS - PLASTIC

Article	Pack. 10 pcs	Pack. 2 pcs
GJJA 08-10-125/...		

Choose the desired packaging: E.g.: CPJBS .../10 (Pack. 10 Pcs) CPJBS .../2 (Pack. 2 Pcs)

EXTERNAL CAPSULES



INTERNAL CAPSULES




The right capsules are available on demand and must be used only in the following cases:
A) when you are laying the cut base of the profile perpendicularly on the floor;




Add "D" to the article code. For example: CPJDBS 08.

Add "D" to the article code. For example: IPJDBS 08.

B) as an alternative to end-caps (right side).

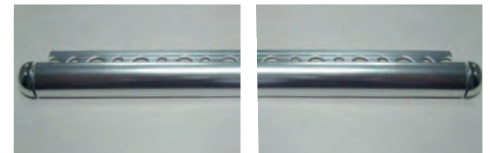


LEFT CAPSULES
RIGHT CAPSULES
Add "D" to the article code. For example: CPJDBS 08.



END CAP

TPJ... /...



JOINT


GJJA .../...

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROJOLLY is a rounded bead profile in varnished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section and elegance, the availability in five different colours and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after and elegant profile that allows a workmanlike application.

PROJOLLY

VARNISHED ALUMINIUM

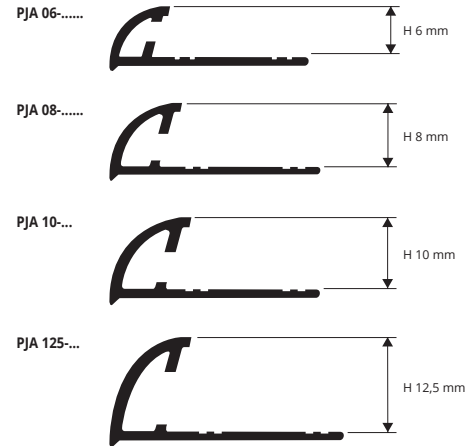

VARNISHED ALUMINIUM (HOT-WORKED 200°) thermo packed bar length 2,7 lm - pack. 20 Pcs-54 lm (colour white 40 Pcs - 108 lm)

Article	H mm		
PJA 06-01 (white)	6		
PJA 08-...	8		
PJA 10-...	10		
PJA 125-01 (white)	12,5		

With H 8 and 10 mm available in the colours: 01 - 0106 - 0311 - 06 - 11
Available on demand: 02-03-0211-10-17.
The code of the selected colour must be added to the article code.
E.g.: PJA 08... (chosen colour white) PJA 08-01.

On demand may be realised in other finishes of the colour chart. Contact our customer service for minimal quantity, timing and price.


COLOURS

01 - Varnished white alum. (9016)	0106 - Varnished white ivory alum. (9001)	0311 - Varnished sphalt grey alum. (7043)
06 - Varnished ivory alum. (1015)	11 - Varnished black alum. (9005)	

AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height
(Price to be agreed. Production delay 4/5 weeks)

02 - Varnished light grey alum. (7035)	03 - Varnished stone grey alum. (7030)	0211 - Varnished quartz grey alum. (7039)
10 - Varnished klinker red alum. (8004)	17 - Varnished bahama beige alum.	

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

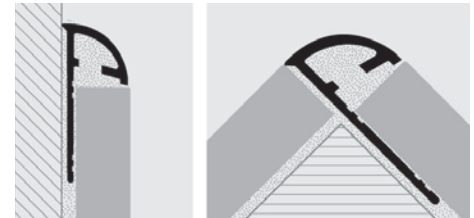

1. Choose "PROJOLLY" according to the tile thickness and desired colour.
2. Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint.
5. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

CAPSULES, END CAPS and THREE-WAYS JOINTS

VARNISHED ALUMINIUM / PLASTIC

LEFT CAPSULES VARNISHED ALUMINIUM (HOT-WORKED 200°)

Article	H mm	Pack. 10 pcs	Pack. 2 pcs
CPJA 06-01/... (external)	6		
IPJA 06-01/... (internal)	6		
CPJA 08-.../... (external)	8		
IPJA 08-.../... (internal)	8		
CPJA 10-.../... (external)	10		
IPJA 10-.../... (internal)	10		
CPJA 125-01/... (external)	12,5		
IPJA 125-01/... (internal)	12,5		

With H 8 and 10 mm available in the colours: 01 - 0106 - 0311 - 06 - 11
Available on demand: 02-03-0211-10-17.
The code of the selected colour must be added to the article code.
E.g.: CPJA 08-.../... (chosen colour white) CPJA 08-01/10.

EXTERNAL CAPSULES



CPJA... /.../...



CPJA... /.../...

INTERNAL CAPSULES



IPJA... /.../...



IPJA... /.../...

END CAPS - VARNISHED ALUMINIUM (HOT-WORKED 200°)


Article	H mm	Pack. 10 pcs	Pack. 2 pcs
TPJA... 06/...	6		
TPJA... 08/...	8		
TPJA... 10/...	10		
TPJA... 125/...	12,5		

JOINTS - PLASTIC

Article	H mm	Pack. 10 pcs	Pack. 2 pcs
GIIA 06/...	6		
GIIA 08/...	8		
GIIA 10/...	10		
GIIA 125/...	12,5		

Choose the desired packaging: E.g.:
GIIA .../10 (Pack. 10 Pcs)
GIIA .../2 (Pack. 2 Pcs)

END CAP



TPJA... /.../...

JOINT



GIIA .../...


The right capsules are available on demand and must be used only in the following cases:

A) when you are laying the cut base of the profile perpendicularly on the floor;



Add "D" to the article code. For example: CPJDA 06-01.
Add "D" to the article code. For example: IPJDA 06-01.

B) as an alternative to end-caps (right side).

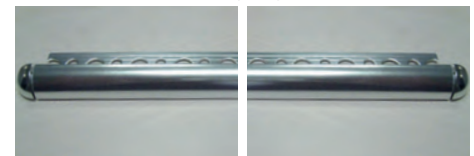

LEFT CAPSULES


RIGHT CAPSULES

Add "D" to the article code. For example: CPJDA 06-01.


PROJOLLY

SHOCKPROOF NON - TOXIC
COLORED VINYL RESIN

PROJOLLY is a rounded bead profile in shockproof non - toxic colored vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section, the availability in different colours also on demand and special pieces such as internal and external corners make **PROJOLLY** a much sought-after profile. It can be easily matched with the wall covering and allows an elegant workmanlike application.

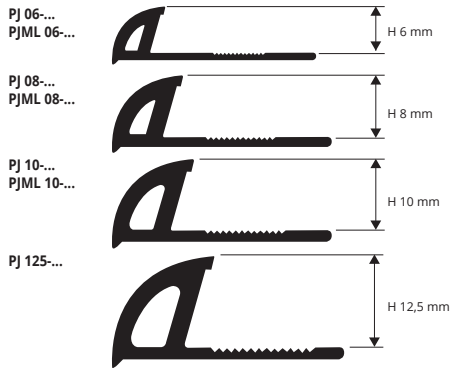

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

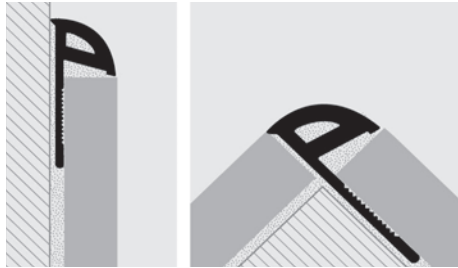

1. Choose "PROJOLLY" according to the tile thickness and desired colour.
2. Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

COLOURS

00 - White ice	01 - White	0106 - White ivory	02 - Light grey	03 - Cement gray
04 - Light beige	05 - Dark beige	06 - Ivory	08 - sky blue	11 - Black
12 - Silver	13 - Gold	15 - Brown	17 - Bahama beige	18 - Grey



NON-TOXIC SHOCKPROOF VINYL RESIN

bar length 2,7 lm - pack. 54 lm (colour white pack. 108 lm)

Article	H mm		
PJ 06-...	6		
PJ 08-...	8		
PJ 10-...	10		
PJ 125-...	12,5		

Available in the colours: 00 - 01 - 02 - 03 - 04 - 05 - 06 - 07 - 08 - 09 - 11-12 - 13 - 14 - 15 - 17 - 18 - 0106.
Available on demand 10 -16-19 - 20 - 21 - 22 - 23 - 24 - 25 - 26 - 27 - 28 - 29 with a minimum quantity order of 800 pcs.
The code of the selected colour must be added to the article code.
E.g.: PJ 06... (chosen colour white) PJ 06-01.

WHITE NOT FOR SALE SINGLY



NON-TOXIC SHOCKPROOF VINYL RESIN

MIRROR LINE EXTRA POLISHED - bar length 2,7 lm
pack. 54 lm (colour white pack. 108 lm)

Article	H mm		
PJML 06-00	6	1,21	3,27
PJML 06-...	6		
PJML 08-00	8		
PJML 08-...	8		
PJML 10-...	10		
PJML 125-...	12,5	1,53	4,13

H 10 mm available in the colours: 01-06-18.
Available on demand 2-03-04-05-07-08-09-10-11-14-15-16-17-0106-19-20-21-22-23-24-25-26-27-28-29 with a minimum quantity order of 800 pcs.
The code of the selected colour must be added to the article code.
E.g.: PJ 06... (chosen colour white) PJ 06-01.
Prices per metre are approximate. Articles not for sale singly.

WHITE NOT FOR SALE SINGLY

AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height
(Price to be agreed. Production delay 4/5 weeks)

10 - Red	07 - Pink	09 - Yellow	14 - Green
16 - Blue	19 - Beige	20 - Dark ivory	21 - Light pink
22 - Dark pink	23 - Dark antique pink	24 - Dark sky blue	25 - Brick red
26 - Turquoise green	27 - Dark green	28 - Hazel brown	29 - Dark brown

CAPSULES for three-ways joints

POLYPROPYLENE/POLYETYLENE UV RESISTANT

POLYPROPYLENE / POLYETYLENE UV RESISTANT

Article	H mm	Pack. 20 pcs	Pack. 5 pcs
CPJ 06-.../... (external)	6		
IPJ 06-.../... (internal)	6		
CPJ 08-.../... (external)	8		
IPJ 08-.../... (internal)	8		
CPJ 10-.../... (external)	10		
IPJ 10-.../... (internal)	10		
CPJ 125-.../... (external)	12,5		
IPJ 125-.../... (internal)	12,5		

Available in the colours: 01-02-03-04-05-06-07-08-09-10-11-12-13-14-15-16-17-18-0106 (not available 19-20-21-22-23-24-25-26-27-28-29).
The code of the selected colour must be added to the article code.
E.g.: CPJ 06-.../... (chosen colour white) CPJ 06-01/20.

EXTERNAL CAPSULES




CPJ .../.../...

INTERNAL CAPSULES



IPJ .../.../...

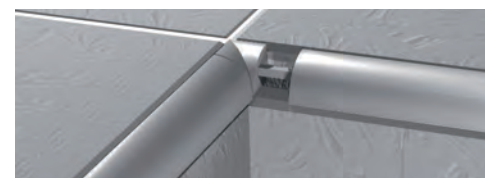


* = Production on demand with minimum quantity of 800 pcs. Production delay 4/5 weeks. Price to be agreed

PROJOLLY MARBLE is a rounded bead profile in shockproof non - toxic marbled vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section, the availability of different marble effect finishes also on demand and special pieces such as internal and external corners make **PROJOLLY MARBLE** a much sought-after profile. It can be easily matched with the wall covering and allows an elegant workmanlike application.

PROJOLLY MARBLE

SHOCKPROOF NON - TOXIC MARBLED VINYL RESIN

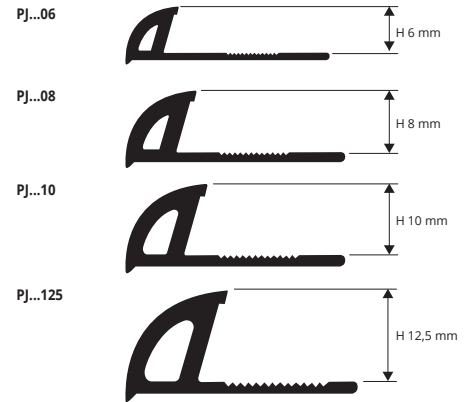

MARBLED NON-TOXIC VYNIL RESIN
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm
PJ... 06	6
PJ... 08	8
PJ... 10	10
PJ... 125	12,5

Available on demand MC - MB - MR - MA - MV - MVA - MAS - MBS - MRS - MVAS - MTC - MTS (MAB - MBC - MBO - MAM - MBD - MCRI - MCRC - MBDX - MGX - MGV - MNA - MBPS - MVBL with a minimum quantity order of 800 pcs).
The code of the selected colour must be added to the article code. E.g.: PJ... 10 (chosen colour carrara) PJMC 10.

INSTRUCTIONS FOR LAYING

1. Choose "PROJOLLY MARBLE" according to the tile thickness and desired colour. 2. Cut "PROJOLLY MARBLE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY MARBLE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

EXAMPLES OF LAYING

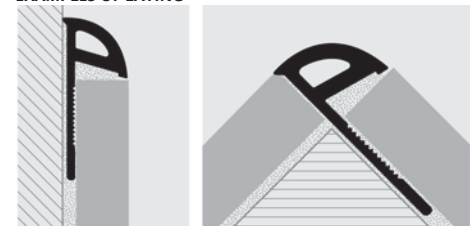

COLOURS



AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)



© 2020 All rights reserved by Progress Profiles. Printed in Italy

PROJOLLY OPEN is a rounded bead profile in shockproof non - toxic marbled vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular open section and the availability in white colour make **PROJOLLY OPEN** a practical and economic profile. It can be used where low cost and workmanlike application are required.

PROJOLLY OPEN

SHOCKPROOF NON - TOXIC WHITE VINYL RESIN




WHITE VINYL RESIN
bar length 2,7 lm - pack. 80 Pcs - 216 lm

Article	H mm
PJP 06-01	6
PJP 09-01	9

ARTICLES NOT FOR SALE SINGLY

INSTRUCTIONS FOR LAYING


1. Choose "PROJOLLY OPEN" according to the tile thickness. 2. Cut "PROJOLLY OPEN" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY OPEN" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

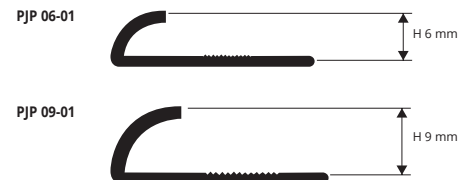

EXAMPLES OF LAYING



COLOURS




OTHER COLOURS ON DEMAND FOR A MINIMUM OF 800 pcs

* = Production on demand with minimum quantity of 800 pcs. Production delay 4/5 weeks. Price to be agreed

PROJOLLY ECO

SHOCKPROOF NON - TOXIC
COLORED VINYL RESIN

PROJOLLY ECO is a rounded bead profile in shockproof non - toxic colored vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section, the availability of different colours also on demand and special pieces such as internal and external corners make **PROJOLLY ECO** a practical and economic profile. It can be easily matched with the wall covering and allows an elegant workmanlike application.

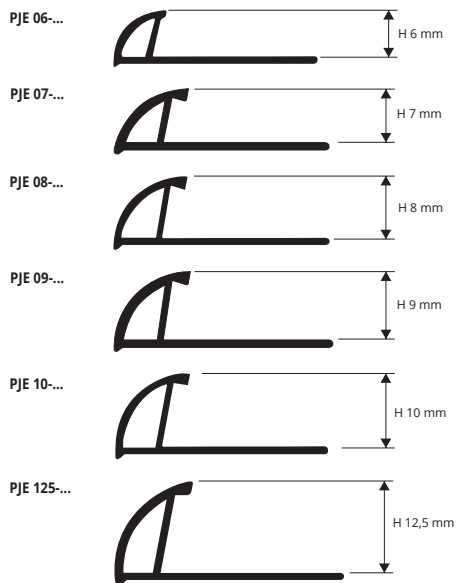

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROJOLLY ECO" according to the tile thickness and desired colour. 2. Cut "PROJOLLY ECO" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY ECO" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

COLOURS

01 - White	02 - Light grey	03 - Cement gray	04 - Light beige	05 - Dark beige	06 - Ivory
07 - Pink	08 - Sky blue	09 - Yellow	10 - Red	11 - Black	12 - Silver
13 - Gold	14 - Green	15 - Brown	16 - Blue	17 - Bahama beige	18 - Grey



COLOURED VINYL RESIN

bar length 2,7 lm - pack. 80 Pcs - 216 lm

Article	H mm		
PJE 06-01/06/18	6		*
PJE 08-...	8		
PJE 10-...	10		
PJE 125-...	12,5		

ARTICLES NOT FOR SALE SINGLY

H 6 mm available the colours 01 - 06 - 18, other colours on demand. Available on demand in the colours 01 - 02 - 03 - 04 - 05 - 06 - 07 - 08 - 09 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 (0106 - 19 - 20 - 21 - 22 - 23 - 24 - 25 - 26 - 27 - 28 - 29 with a minimum quantity order of 800 pcs. The code of the selected colour must be added to the article code. E.g.: PJE 08... (chosen colour white) PJE 08-01.



COLOURED VINYL RESIN

bar length 2,7 lm - pack. 80 Pcs - 216 lm

Article	H mm		
PJE 07-...	7		*
PJE 09-...	9		*

ARTICLES NOT FOR SALE SINGLY

PRODUCTION ON DEMAND
MINIMUM QUANTITY 800 PCS BY COLOUR AND HEIGHT
(Production delay 4/5 weeks)

Available on demand in the colours: 01 - 02 - 03 - 04 - 05 - 06 - 07 - 08 - 09 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 23 - 24 - 25 - 26 - 27 - 28 - 29 - 0106 with a minimum quantity order of 800 pcs. The code of the selected colour must be added to the article code. E.g.: PJE 07... (chosen colour white) PJE 07-01.

AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height
(Price to be agreed. Production delay 4/5 weeks)

0106 - White ivory	19 - Beige	20 - Dark ivory
21 - Light pink	22 - Dark pink	23 - Dark antique pink
24 - Dark sky blue	25 - Brick red	26 - Turquoise green
27 - Dark green	28 - Hazel brown	29 - Dark brown

CAPSULES for three-ways joints

COLOURED PLASTIC



EXTERNAL CAPSULES



CPJE .../.../...

COLOURED PLASTIC

Article	H mm	Pack. 20 pcs	Pack. 5 pcs
CPJE 06-01/06/18/... (external)	6		*
CPJE 08-.../.../... (external)	8		
CPJE 10-.../.../... (external)	10		
CPJE 125-.../.../... (external)	12,5		

ARTICLES NOT FOR SALE SINGLY


H 6 mm available the colours 01 - 06 - 18, other colours on demand. Available in the colours: 01 - 02 - 03 - 04 - 05 - 06 - 07 - 08 - 09 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 (not available 0106 - 19 - 20 - 21 - 22 - 23 - 24 - 25 - 26 - 27 - 28 - 29). The code of the selected colour must be added to the article code. E.g.: CPJE 08-.../.../... (chosen colour white) CPJE 08-01/20.

* = Production on demand with minimum quantity of 800 pcs. Production delay 4/5 weeks. Price to be agreed

PROJOLLY ECO MARBLE is a rounded bead profile in shockproof non - toxic marbled vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section and the availability of different marble effect finishes, also on demand, and special pieces such as internal and external corners make **PROJOLLY ECO MARBLE** a much sought-after profile. It can be easily matched with the wall covering and allows an elegant workmanlike application.

PROJOLLY ECO MARBLE

SHOCKPROOF NON - TOXIC
MARBLED VINYL RESIN

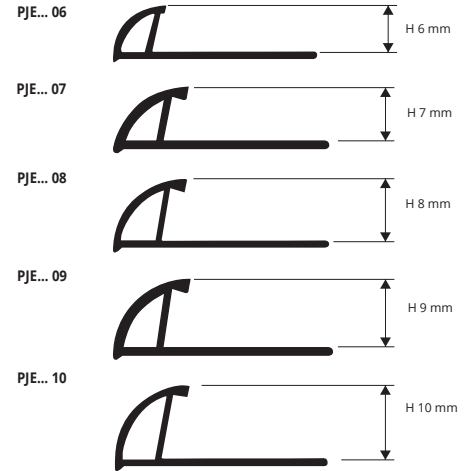

SHOCKPROOF MARBLED VINYL RESIN
bar length 2,7 lm - pack. 80 Pcs - 216 lm

Article	H mm		
PJE... 06	6		*
PJE... 08	8		
PJE... 10	10		

SHOCKPROOF MARBLED VINYL RESIN
bar length 2,7 lm - pack. 80 Pcs - 216 lm

Article	H mm		
PJE... 07	7		*
PJE... 09	9		*

ARTICLES NOT FOR SALE SINGLY

PJE... 125 available on demand.

Available on demand in the colours: MC - MB - MR - MA - MV - MVA - MAS - MBS - MRS - MVAS - MTC - MTS (MAB - MBC - MBO - MAM - MBD - MCRI - MCRC - MBDX - MG - MGVC - MNA - MBPS - MVBL with a minimum quantity order of 800 pcs).

The code of the selected colour must be added to the article code.
E.g.: PJE... 06 (chosen colour carrara) PJEMC 06.


ARTICLES NOT FOR SALE SINGLY

PRODUCTION ON DEMAND MINIMUM QUANTITY 800 PCS BY COLOUR AND HEIGHT (Production delay 4/5 weeks)

Available on demand in the colours: MC - MB - MR - MA - MV - MVA - MAS - MBS - MRS - MVAS - MTC - MTS - MAB - MBC - MBO - MAM - MBD - MCRI - MCRC - MBDX - MG - MGVC - MNA - MBPS - MVBL with a minimum quantity order of 800 pcs.

The code of the selected colour must be added to the article code.
E.g.: PJE... 06 (chosen colour carrara) PJEMC 06.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

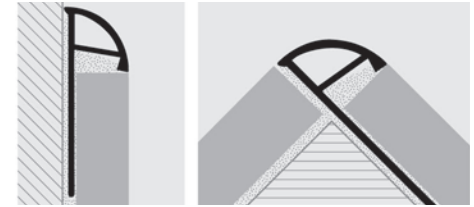

1. Choose "PROJOLLY ECO MARBLE" according to the tile thickness and desired finish.
2. Cut "PROJOLLY ECO MARBLE" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY ECO MARBLE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

COLOURS



AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)




* = Production on demand with minimum quantity of 800 pcs. Production delay 4/5 weeks. Price to be agreed

PROJOLLY TRIANGLE

POLISHED, SUPER POLISHED AND SATIN FINISH STAINLESS STEEL AISI 304/1.4301-V2A

PROJOLLY TRIANGLE is a triangle-shaped bead profile polished, super polished and satin finish stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY TRIANGLE** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

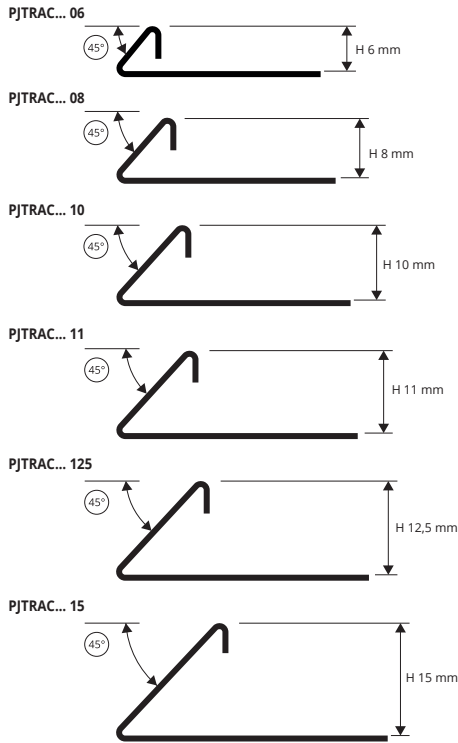

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 8/10 mm

Article	H mm		
PJTRAC 06	6		
PJTRAC 08	8		
PJTRAC 10	10		
PJTRAC 11	11		
PJTRAC 125	12,5		
PJTRAC 15	15		

SATIN STAINLESS STEEL AISI 304/1.4301-V2A
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 8/10 mm

Article	H mm		
PJTRACS 06	6		
PJTRACS 08	8		
PJTRACS 10	10		
PJTRACS 11	11		
PJTRACS 125	12,5		
PJTRACS 15	15		

SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 8/10 mm


Article	H mm		
PJTRACML 06	6		
PJTRACML 08	8		
PJTRACML 10	10		
PJTRACML 11	11		
PJTRACML 125	12,5		
PJTRACML 15	15		



COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

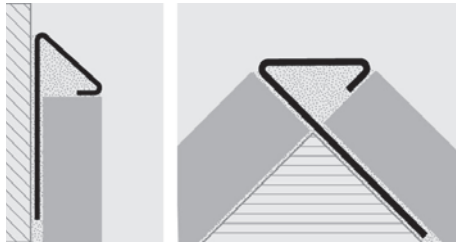

1. Choose "PROJOLLY TRIANGLE" according to the tile thickness and desired finish.
2. Cut "PROJOLLY TRIANGLE" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY TRIANGLE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint.
5. Remove immediately all remains of adhesive from the surface of the profile.
6. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.
7. Remove immediately all the remains of grout from the surface of the profile.

CAPSULES, END CAPS, THREE-WAYS JOINTS and JOINTS

POLISHED, SUPER POLISHED AND SATIN STAINLESS STEEL AISI 304/1.4301-V2A / PLASTIC

EXTERNAL / INTERNAL / THREE-WAYS CAPSULES and END CAPS - POLISHED STAINLESS STEEL

Article	H mm	Pack. 10 pcs	Pack. 2 pcs
CPJTRAC 06 ÷ 15/.. (external)	06-08-10-11-12,5-15		
IPJTRAC 06 ÷ 15/.. (internal)	06-08-10-11-12,5-15		
CTPJTRAC 06 ÷ 15/.. (three-ways)	06-08-10-11-12,5-15		
TPJTRAC 06 ÷ 15/.. (caps)	06-08-10-11-12,5-15		

Choose the desired packaging: E.g.: CPJTRAC.../10 (Pack. 10 Pcs)
CPJTRAC.../2 (Pack. 2 Pcs)

ARTICLES NOT FOR SALE SINGLY

EXTERNAL / INTERNAL / THREE-WAYS CAPSULES and END CAPS - SUPER POLISHED STAINLESS STEEL

Article	H mm	Pack. 10 pcs	Pack. 2 pcs
CPJTRACML 06 ÷ 15/.. (external)	06-08-10-11-12,5-15		
IPJTRACML 06 ÷ 15/.. (internal)	06-08-10-11-12,5-15		
CTPJTRACML 06 ÷ 15/.. (three-ways)	06-08-10-11-12,5-15		
TPJTRACML 06 ÷ 15/.. (caps)	06-08-10-11-12,5-15		

Choose the desired packaging: E.g.: CPJTRACML.../10 (Pack. 10 Pcs)
CPJTRACML.../2 (Pack. 2 Pcs)

ARTICLES NOT FOR SALE SINGLY

EXTERNAL / INTERNAL / THREE-WAYS CAPSULES AND and CAPS - SATIN STAINLESS STEEL

Article	H mm	Pack. 10 pcs	Pack. 2 pcs
CPJTRACS 06 ÷ 15/.. (external)	06-08-10-11-12,5-15		
IPJTRACS 06 ÷ 15/.. (internal)	06-08-10-11-12,5-15		
CTPJTRACS 06 ÷ 15/.. (three-ways)	06-08-10-11-12,5-15		
TPJTRACS 06 ÷ 15/.. (caps)	06-08-10-11-12,5-15		

Choose the desired packaging: E.g.: CPJTRACS.../10 (Pack. 10 Pcs)
CPJTRACS.../2 (Pack. 2 Pcs)

ARTICLES NOT FOR SALE SINGLY


JOINTS - PLASTIC

Article	H mm	Pack. 10 pcs	Pack. 2 pcs
GJTRA 06 ÷ 15/..	06-08-10-11-12,5-15		

Choose the desired packaging: E.g.: GJTRA.../10 (Pack. 10 Pcs)
GJTRA.../2 (Pack. 2 Pcs)

ARTICLES NOT FOR SALE SINGLY


EXTERNAL CAPSULE INTERNAL CAPSULE THREE-WAYS CAPSULE END CAPS JOINTS

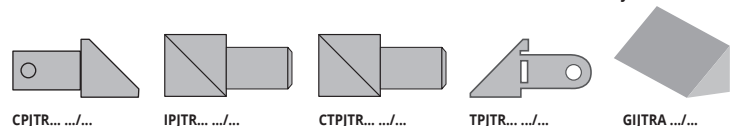

PROJOLLY TRIANGLE is a triangle-shaped bead profile in brass that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in different finishes make **PROJOLLY TRIANGLE** a much sought-after profile that allows an elegant workmanlike application.

PROJOLLY TRIANGLE

NATURAL, POLISHED VARNISHED, CHROMED AND ANTIQUE BRASS

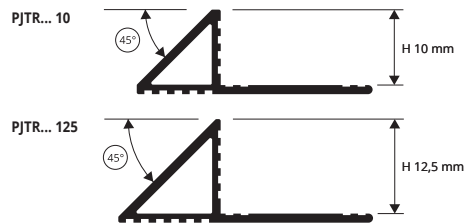

NATURAL BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
PJTRON 10	10
PJTRON 125	12,5

SUPER POLISHED CHROMED BRASS
thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm



Article	H mm
PJTROC 10	10
PJTROC 125	12,5


POLISHED VARNISHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
PJTROL 10	10
PJTROL 125	12,5

ANTIQUÉ BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
PJTROB 10	10
PJTROB 125	12,5

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

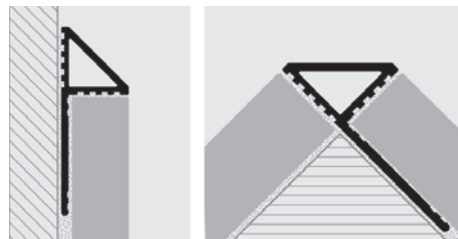

1. Choose "PROJOLLY TRIANGLE" according to the tile thickness and desired finish.
2. Cut "PROJOLLY TRIANGLE" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY TRIANGLE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS




© 2020 All rights reserved by Progress Profiles. Printed in Italy




PROJOLLY TRIANGLE

ANODIZED, POLISHED AND BRUSHED ALUMINIUM

PROJOLLY TRIANGLE is a triangle-shaped bead profile in anodized, polished and brushed aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in seven different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY TRIANGLE** a much sought-after profile that allows an elegant workmanlike application.

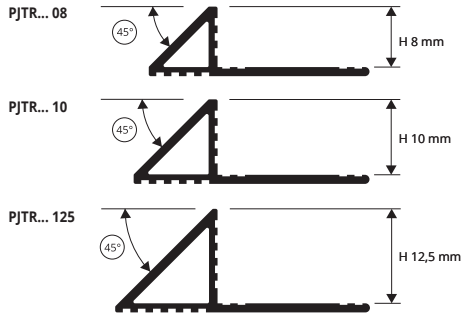

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

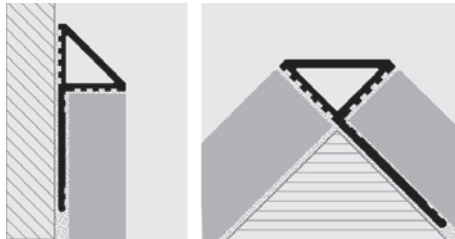

1. Choose "PROJOLLY TRIANGLE" according to the tile thickness and desired finish.
2. Cut "PROJOLLY TRIANGLE" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY TRIANGLE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

ANODIZED ALUMINIUM (silver - titanium - gold) thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PJTRAA 08	8		
PJTRAT 08	8		
PJTRAO 08	8		
PJTRAA 10	10		
PJTRAT 10	10		
PJTRAO 10	10		
PJTRAA 125	12,5		
PJTRAT 125	12,5		
PJTRAO 125	12,5		

POLISHED ALUMINIUM (chrome - titanium - gold) thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PJTRBC 08	8		
PJTRBT 08	8		
PJTRBO 08	8		
PJTRBC 10	10		
PJTRBT 10	10		
PJTRBO 10	10		
PJTRBC 125	12,5		
PJTRBT 125	12,5		
PJTRBO 125	12,5		

BRUSHED POLISHED ALUMINIUM (silver - gold) thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PJTRBS 08	8		
PJTRBOS 08	8		*
PJTRBS 10	10		
PJTRBOS 10	10		*
PJTRBS 125	12,5		
PJTRBOS 125	12,5		*

ON DEMAND MAY BE REALISED IN OTHER FINISHES OF THE COLOUR CHART.

CONTACT OUR CUSTOMER SERVICE FOR MINIMAL QUANTITY, TIMING AND PRICE.

COLOURS

ANODIZED			POLISHED			BRUSHED POLISHED	
AA - Anodized silver alum.	AT - Anodized titanium alum.	AO - Anodized gold alum.	BC - Polished chrome alum.	BT - Polished titanium alum.	BO - Polished gold alum.	BS - Brushed pol. silver alum.	BOS - Brushed pol. gold alum.

CAPSULES, END CAPS, THREE-WAYS JOINTS and JOINTS

ANODIZED, POLISHED, BRUSHED POLISHED ALUMINIUM

CAPSULES, END CAPS, THREE-WAYS - ANODIZED ALUMINIUM

Article	H mm	Pack. 10 pcs	Pack. 2 pcs
CPJTR... 08/.. (external)	8		
IPJTR... 08/.. (internal)	8		
CTPJTR... 08/.. (three-ways)	8		
CPJTR... 10/.. (external)	10		
IPJTR... 10/.. (internal)	10		
CTPJTR... 10/.. (three-ways)	10		
CPJTR... 125/.. (external)	12,5		
IPJTR... 125/.. (internal)	12,5		
CTPJTR... 125/.. (three-ways)	12,5		
TPJTR... 08-10-125/.. (caps)			

Available in the colours: AA-AT-AO. Choose the desired packaging: E.g.: CPJTRAA.../10 (Pack. 10 Pcs) - CPJTRAA.../2 (Pack. 2 Pcs)

ARTICLES NOT FOR SALE SINGLY

CAPSULES, END CAPS, THREE-WAYS - POLISHED ALUM.

Article	H mm	Pack. 10 pcs	Pack. 2 pcs
CPJTR... 08/.. (external)	8		
IPJTR... 08/.. (internal)	8		
CTPJTR... 08/.. (three-ways)	8		
CPJTR... 10/.. (external)	10		
IPJTR... 10/.. (internal)	10		
CTPJTR... 10/.. (three-ways)	10		
CPJTR... 125/.. (external)	12,5		
IPJTR... 125/.. (internal)	12,5		
CTPJTR... 125/.. (three-ways)	12,5		
TPJTR... 08 + 125/.. (caps)			

Available in the colours: BC-BT-BO. Choose the desired packaging: E.g.: CPJTRBC.../10 (Pack. 10 Pcs) - CPJTRBC.../2 (Pack. 2 Pcs)

ARTICLES NOT FOR SALE SINGLY

CAPSULES, END CAPS, THREE-WAYS - BRUSHED POLISHED ALUM.

Article	H mm	Pack. 10 pcs	Pack. 2 pcs
CPJTRBS 08/.. (external)	8		
IPJTRBS 08/.. (internal)	8		
CTPJTRBS 08/.. (three-ways)	8		
CPJTRBOS 08/.. (external)	8		*
IPJTRBOS 08/.. (internal)	8		*
CTPJTRBOS 08/.. (three-ways)	8		*
CPJTRBS 10/.. (external)	10		
IPJTRBS 10/.. (internal)	10		
CTPJTRBS 10/.. (three-ways)	10		
CPJTRBOS 10/.. (external)	10		*
IPJTRBOS 10/.. (internal)	10		*
CTPJTRBOS 10/.. (three-ways)	10		*
CPJTRBS 125/.. (external)	12,5		
IPJTRBS 125/.. (internal)	12,5		
CTPJTRBS 125/.. (three-ways)	12,5		
CPJTRBOS 125/.. (external)	12,5		*
IPJTRBOS 125/.. (internal)	12,5		*
CTPJTRBOS 125/.. (three-ways)	12,5		*
TPJTRBS 08 + 125/.. (caps)			
TPJTRBOS 08 + 125/.. (caps)			*

Available in the colours: BS-BOS. Choose the desired packaging: E.g.: CPJTRBS.../10 (Pack. 10 Pcs) - CPJTRBS.../2 (Pack. 2 Pcs)

ARTICLES NOT FOR SALE SINGLY


JOINTS - PLASTIC

Article	Pack. 10 pcs	Pack. 2 pcs
GIJTRA 8-10-125/..		


Choose the desired packaging: E.g.: GIJTRA.../10 (Pack. 10 Pcs) GIJTRA.../2 (Pack. 2 Pcs)

ARTICLES NOT FOR SALE SINGLY

EXTERNAL CAPSULE INTERNAL CAPSULE THREE-WAYS CAPSULE



END CAPS JOINTS



PROJOLLY ANGLE 135 is a polished and satin stainless steel profile that can be used as protection for the 135° corners of coverings. Its particular section, the availability in two different finishes make **PROJOLLY ANGLE 135** a much sought-after profile that allows an elegant workmanlike application.

PROJOLLY ANGLE 135

POLISHED AND SATIN FINISH
STAINLESS STEEL AISI 304/1.4301-V2A



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 8/10 mm

Article	H mm		
PJTR135AC 08	8		
PJTR135AC 10	10		
PJTR135AC 11	11		
PJTR135AC 125	12,5		

SATINATED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 8/10 mm

Article	H mm		
PJTR135ACS 08	8		
PJTR135ACS 10	10		
PJTR135ACS 11	11		
PJTR135ACS 125	12,5		

COLOURS




AC - Polished stainless steel
AISI 304/1.4301-V2A

ACS - Satinated stainless steel AISI
304/1.4301-V2A

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

PJTR135... 08



PJTR135... 10




PJTR135... 11



PJTR135... 125



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

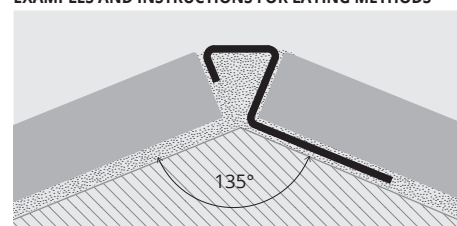


1. Choose "PROJOLLY ANGLE 135" according to the tile thickness and desired finish.
2. Cut "PROJOLLY ANGLE 135" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY ANGLE 135" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.




PRINTER AC

POLISHED, SUPER POLISHED AND SATIN FINISH STAINLESS STEEL AISI 304/1.4301-V2A

PRINTER AC is a cove-shaped profile in polished, super polished and satin finish stainless steel AISI 304 / 1.4301 - V2A. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in three finishes and special pieces, such as internal and external corners, make **PRINTER AC** a much sought after profile. The profile is easy to match with the wall covering and allows a workmanlike application even in environments subject to high mechanical stresses.

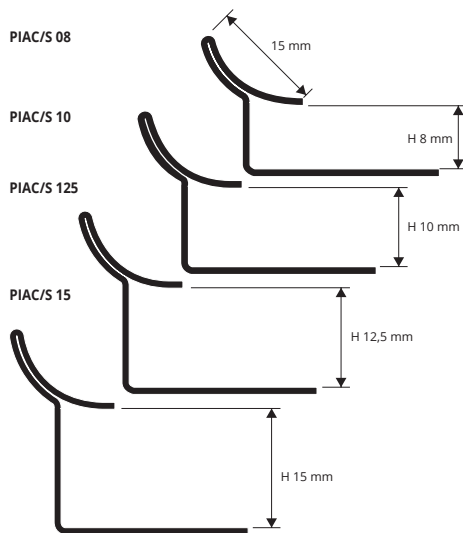

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

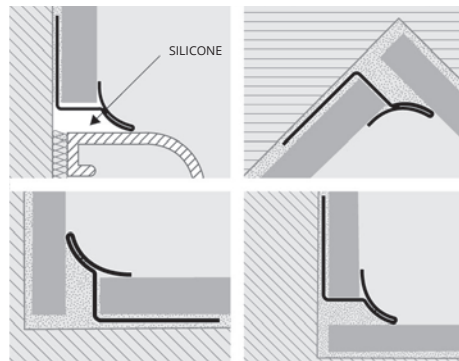

1. Choose "PRINTER AC" according to the tile thickness and desired finish.
2. Cut "PRINTER AC" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PRINTER AC" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



POLISHED STAINLESS STEEL AISI 304/1.4301 V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm
PIAC 08	8
PIAC 10	10
PIAC 125	12,5
PIAC 15	15

SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm
PIACML 08	8
PIACML 10	10
PIACML 125	12,5
PIACML 15	15

COLOURS



SATIN STAINLESS STEEL AISI 304/1.4301 V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm
PIACS 08	8
PIACS 10	10
PIACS 125	12,5
PIACS 15	15

INTERNAL, EXTERNAL, THREE-WAYS PRINTER CORNER JOINTS
PLASTIC for POLISHED STAINLESS STEEL - pack. 10 Pcs

Article
REPIAC (external corner)
RIPIAC (2 ways corner)
RITPIAC (3 ways corner)


INTERNAL, EXTERNAL, THREE-WAYS PRINTER CORNER JOINTS
PLASTIC for SATIN STAINLESS STEEL - pack. 10 Pcs

Article
REPIACS (external corner)
RIPIACS (2 ways corner)
RITPIACS (3 ways corner)


PRINTER KL ACC

STAINLESS STEEL AISI 304/1.4301-V2A

PRINTER KL ACC is a cove-shaped profile in stainless steel AISI 304/1.4301-V2A. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section makes **PROSHELL KL ALL** a much sought after profile.

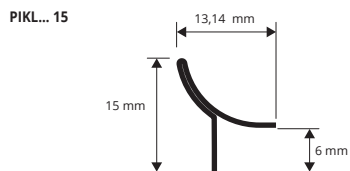

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

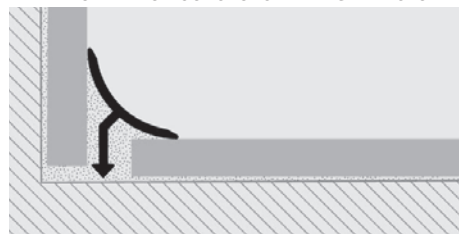

1. Choose "PRINTER KL ACC" according to the desired finish.
2. Cut "PRINTER KL ACC" to the desired length.
3. Apply the silicone along the floor-wall connection.
4. Press the arrowhead of "PRINTER KL ACC" into the silicone evenly until it is completely adherent to the floor and wall.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS




POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	H mm
PIKLAC 15	15

SATIN STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	H mm
PIKLACS 15	15

COLOURS

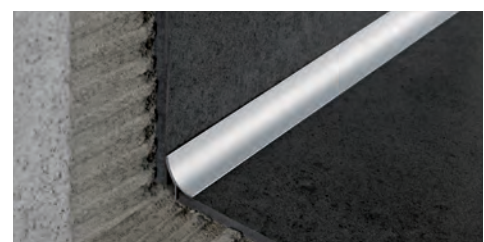

SANDED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	H mm
PIKLACSB 15	15

SUPER POLISHED ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	H mm
PIKLACML 15	15

AVAILABLE MINIMUM QUANTITY 100 PCS




* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROINTER AC 316 is a cove-shaped profile in polished, super polished and satin finish stainless steel AISI 316 / 1.404 - V4A. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in three finishes and special pieces, such as internal and external corners, make **PROINTER AC 316** a much sought after profile. The profile is easy to match with the wall covering and allows a workmanlike application even in environments subject to high mechanical stresses.

PROINTER AC

POLISHED AND SATIN FINISH STAINLESS STEEL AISI 316/1.4401-V4A

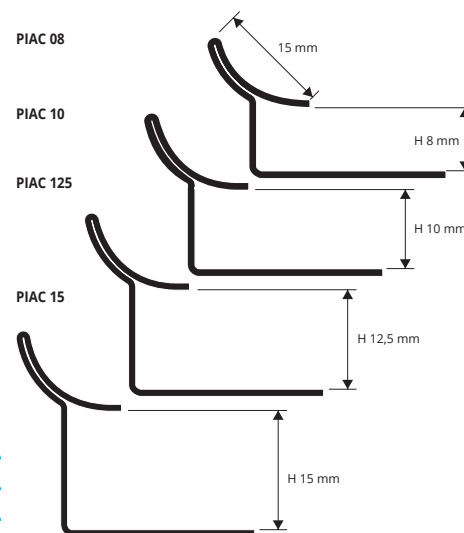

POLISHED STAINLESS STEEL AISI 316/1.4404-V4A
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm		
PIACM 08	8		
PIACM 10	10		
PIACM 125	12,5		
PIACM 15	15		

SATINATED STAINLESS STEEL AISI 316/1.4404-V4A
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm		
PIACMS 08	8		
PIACMS 10	10		
PIACMS 125	12,5		
PIACMS 15	15		

INTERNAL, EXTERNAL, THREE-WAYS PROINTER CORNER JOINTS
PLASTIC for POLISHED STAINLESS STEEL - pack. 10 Pcs

Article			
REPIACM (external corner)			
RIPIACM (2 ways corner)			
RITPIACM (3 ways corner)			

INTERNAL, EXTERNAL, THREE-WAYS PROINTER CORNER JOINTS
PLASTIC for SATINATED STAINLESS STEEL - pack. 10 Pcs


Article			
REPIACMS (external corner)			
RIPIACMS (2 ways corner)			
RITPIACMS (3 ways corner)			

GAMMA COLORI



ACM - Polished stainless steel AISI 316/1.4404-V4A
ACMS - Satinated stainless steel AISI 316/1.4404-V4A

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

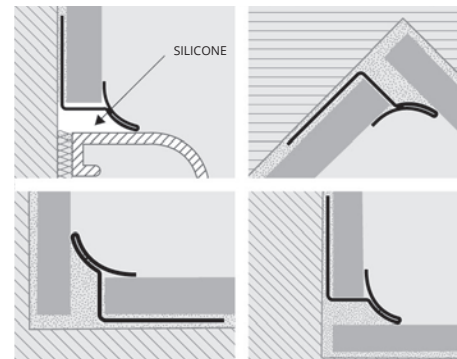


1. Choose "PROINTERAC 316" according to the tile thickness and desired finish.
2. Cut "PROINTER AC 316" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROINTER AC 316" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.


PROINTER KL ACC 316 is a cove-shaped profile in stainless steel AISI 316/1.4404-V4A. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section makes **PROSHELL KL ALL 316** a much sought after profile.

PROINTER KL ACC

STAINLESS STEEL AISI 316/1.4401-V4A

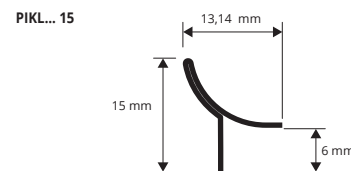

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

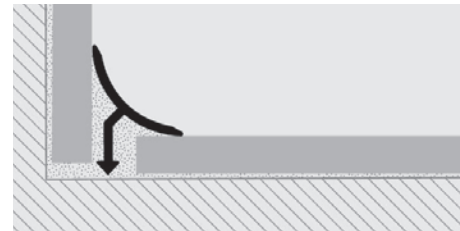

1. Choose "PROINTER KL ACC 316" according to the desired finish.
2. Cut "PROINTER KL ACC 316" to the desired length.
3. Apply the silicone along the floor-wall connection.
4. Press the arrowhead of "PROINTER KL ACC 316" into the silicone evenly until it is completely adherent to the floor and wall.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS


* = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed



PRINTER AL is a cove-shaped profile in anodized and polished aluminium. It is particularly suitable to ensure cleanliness and hygiene in indoors environment where good resistance to mechanical and chemical stresses are required. Its particular section and the availability in four finishes and special pieces, such as internal and external corners, make **PRINTER AL** a much sought after profile. The profile is easy to match with the wall covering and allows a workmanlike application.

PRINTER AL

ANODIZED AND POLISHED ALUMINIUM

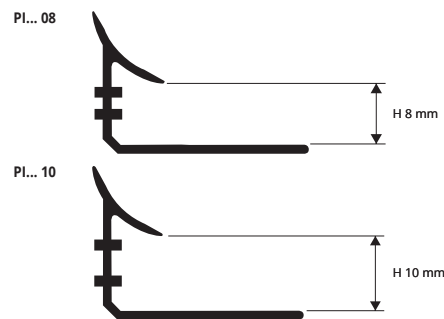

ANODIZED GOLD OR SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PIAA 08	8		
PIAO 08	8		*
PIAA 10	10		
PIAO 10	10		*

POLISHED GOLD OR CHROMED ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PIBC 08	8		
PIBO 08	8		*
PIBC 10	10		
PIBO 10	10		*

INTERNAL, EXTERNAL, THREE-WAYS PRINTER CORNER JOINTS
Varnished PLASTIC for aluminium - pack. 10 Pcs

Article			
REPI...	(external corner)		
RIPi...	(2 ways corner)		
RITPI...	(3 ways corner)		

Available in the colours: BC - BO - AA - AO. The code of the selected colour must be added to the article code.
Example for metal: RIPi... (chosen finish polished chrome BC) RIPiBC.


COLOURS



PROTERMINAL, PROJOLLY SQUARE, PROJOLLY QUART (NO PRINTER)



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

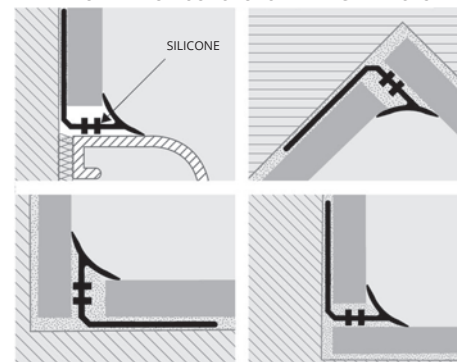


1. Choose "PRINTER AL" according to the tile thickness and desired finish.
2. Cut "PRINTER AL" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PRINTER AL" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

© 2010 All rights reserved by Progress Profiles. Printed in Italy

PROSHELL KL ALL is a cove-shaped profile in polished and chromed brass and anodized and polished aluminium. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section and availability in five different finishes, make **PROSHELL KL ALL** a much sought after profile.

PRINTER KL ALL

POLISHED AND CHROMED BRASS AND ANODIZED AND POLISHED ALUMINIUM

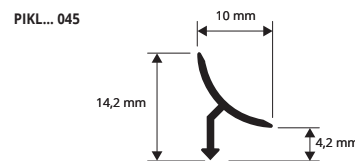

POLISHED / CHROMED BRASS thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PIKLOL 045 (polished)	4,5		
PIKLOC 045 (chromed)	4,5		*

POLISHED CHROME ALUMINIUM / GOLD thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PIKLBC 045	4,5		
PIKLBO 045	4,5		

CAPS - VARNISHED PLASTIC

Article	Pack. 2 Pcs	Pack. 10 Pcs
TPIKL ...		


ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PIKLAA 045	4,5		


CAPS - VARNISHED PLASTIC

Article	Pack. 2 Pcs	Pack. 10 Pcs
TPIKL ...		


COLOURS



COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

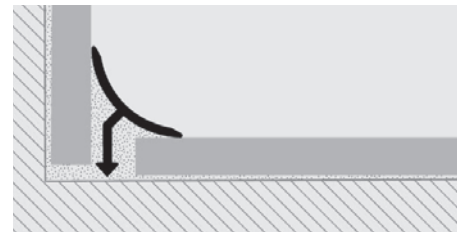


1. Choose "PRINTER KL ALL" according to the desired finish.
2. Cut "PRINTER KL ALL" to the desired length.
3. Apply the silicone along the floor-wall connection.
4. Press the arrowhead of "PRINTER KL ALL" into the silicone evenly until it is completely adherent to the floor and wall.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROINTER

SHOCKPROOF NON - TOXIC COLORED VINYL RESIN


PROINTER is a cove-shaped profile in shockproof non - toxic colored vinyl resin. It is particularly suitable to ensure cleanliness and hygiene in public and industrial environments. Its particular section and the availability in twelve colours and special pieces, such as internal and external corners, make **PROINTER** a much sought after profile. It can be easily matched with the wall covering and allows an elegant workmanlike application.

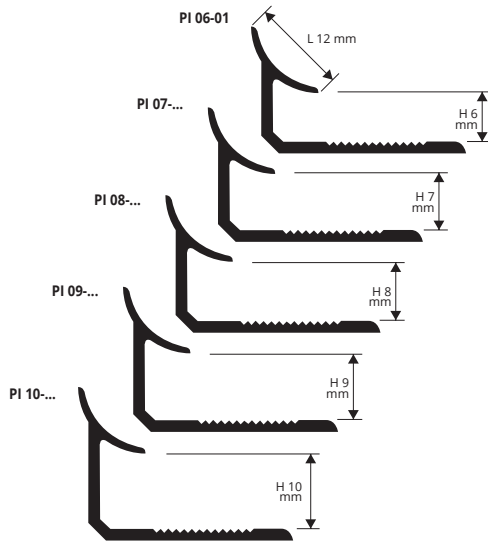

PI 07-... E PI 09-...
PRODUCTION ON DEMAND
MINIMUM QUANTITY 800 PCS BY COLOUR AND HEIGHT
(PRODUCTION DELAY 4/5 WEEKS)



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

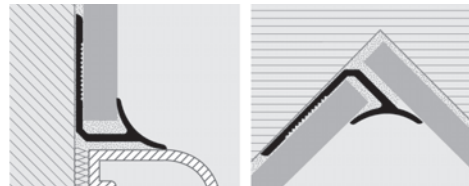

1. Choose "PROINTER" according to the tile thickness and desired colour. 2. Cut "PROINTER" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROINTER" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.



NON-TOXIC SHOCKPROOF VINYL RESIN
 bar length **2,7 lm** - pack. **20 Pcs - 54 lm** (white 108 lm)

Article	H mm		
PI 06-01	6		*
PI 07-01	7		*
PI 08-...	8		
PI 09-01	9		*
PI 10-...	10		

H 6 mm available in white. Other colours on demand.
 Available on demand in the colours 01-02-03-05-06-10-11-12-15-17-18-0106 (04-07-08-09-13-14-19-20-21-22-23-24-25-26-27-28-29 with a minimum quantity order of 800 pcs.
 The code of the selected colour must be added to the article code.
 E.g.: PI 06-... (chosen colour white) PI 06-01.

WHITE NOT FOR SALE SINGLY

COLOURS

01 - White	0106 - White ivory	02 - Light grey	03 - Cement gray
05 - Dark beige	06 - Ivory	10 - Red	11 - Black
12 - Silver	15 - Brown	17 - Bahama beige	18 - Grey

AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)

04 - Light beige	07 - Pink	19 - Beige	20 - Dark ivory	21 - Light pink
08 - Sky blue	09 - Yellow	22 - Dark pink	23 - Dark antique pink	24 - Dark sky blue
13 - Gold	14 - Green	25 - Brick red	26 - Turquoise green	27 - Dark green
16 - Blue	28 - Hazel brown	29 - Dak brown		

JOINTS

COLOURS



To facilitate and complete the application of **PROINTER** in Pl.. plastic internal and external corners are available to seamlessly connect the wall lining to ceramic tiles, wooden floors, parquet, etc. The connections are available with different finishes: all the solid colour finishes (4 finishes) for non-toxic, shockproof, vinyl resin **PROINTER**. **PROINTER** can also be used to connect **PROJOLLY**.

INTERNAL, EXTERNAL, THREE-WAYS PROINTER CORNER JOINTS
 VARNISHED PLASTIC (Vinyl Resin) - pack. **10 Pcs**

Article		
REPI ... (external corner)		
RIPI ... (2 ways internal corner)		
RITPI ... (3 ways internal corner)		

Available in the colours: 01-02-03-05-06-10-11-12-15-17-18-0106.
 Available on demand 04-07-08-09-13-14-19-20-21-22-23-24-25-26-27-28-29.
 The code of the selected colour must be added to the article code.
 E.g.: RIPI... (Chosen colour Ivory 06) RIPI 06.
 PLEASE CHOOSE THE DESIRED COLOUR CODE FROM OUR COLOUR CHART. SPECIFICATION OF THE HEIGHT IS NOT REQUIRED.

COLOURS


01 - White	0106 - White ivory	02 - Light grey	03 - Cement gray	05 - Dark beige	06 - Ivory
10 - Red	11 - Black	12 - Silver	15 - Brown	17 - Bahama beige	18 - Grey

* = Production on demand with minimum quantity of 800 pcs. Production delay 4/5 weeks. Price to be agreed

PROTERMINAL INT is a profile in anodized and polished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section and the availability in four different finishes make **PROTERMINAL INT** a much sought-after profile that allows an elegant workmanlike application.

PROTERMINAL INT

ANODIZED AND POLISHED ALUMINIUM

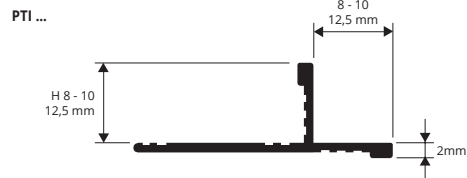

ANODIZED ALUMINIUM (silver - titanium) thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PTIAA 08	8
PTIAT 08	8
PTIAA 10	10
PTIAT 10	10
PTIAA 125	12,5
PTIAT 125	12,5


POLISHED ALUMINIUM (chrome - titanium) thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PTIBC 08	8
PTIBT 08	8
PTIAC 10	10
PTIBT 10	10
PTIAC 125	12,5
PTIBT 125	12,5

INTERNAL, EXTERNAL, THREE-WAYS JOINTS
ANODIZED POLISHED ALUMINIUM - pack. 3 Pcs

Article
RIPTI ... 08 - 10 - 125 (internal corner)
REPTI ... 08 - 10 - 125 (external corner)
RTPIT ... 08 - 10 - 125 (3 ways joint)

INTERNAL CORNER
RIPTI ... 08 - 10 - 125




EXTERNAL CORNER
REPTI ... 08 - 10 - 125



3 WAYS JOINT
RTPIT ... 08 - 10 - 125



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROTERMINAL INT" according to the tile thickness and desired finish.
2. Cut "PROTERMINAL INT" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROTERMINAL INT" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS

ANODIZED		POLISHED	
AA - Anodized silver alum.	AT - Anodized titanium alum.	BC - Polished chrome alum.	BT - Polished titanium alum.

On demand may be realised in other finishes of the colour chart. Contact our customer service for minimal quantity, timing and price.


PROLISTEL CHANNEL is a F-shaped strip in anodized and polished aluminium suitable to decorate the wall coverings in ceramic tiles and natural stones. Its section allows the realization of a decorative joint which can also be used as a guide for the fixing of sheets of glass on floors and walls. Its particular section and the availability in two different finishes make **PROLISTEL CHANNEL** a much sought-after profile that allows an easy workmanlike application.

PROLISTEL CHANNEL

ANODIZED AND POLISHED ALUMINIUM



PLTCH... 08 - 10 - 11 - 12,5

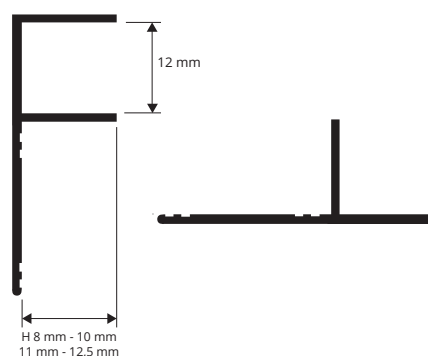

ANODIZED SILVER ALUMINIUM
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PLTCHAA 08	8
PLTCHAA 10	10
PLTCHAA 11	11
PLTCHAA 125	12,5

POLISHED CHROME ALUMINIUM
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm
PLTCHBC 08	8
PLTCHBC 10	10
PLTCHBC 11	11
PLTCHBC 125	12,5

COLOURS

ANODIZED	POLISHED
AA - Anodized silver alum.	BC - Polished chrome alum.

1. Choose "PROLISTEL CHANNEL" according to the visible surface and desired finish.
2. Cut "PROLISTEL CHANNEL" to the desired length and apply the adhesive on the surface where the profile will be laid.
3. Press "PROLISTEL CHANNEL" into the adhesive, aligning it with the tiles leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
4. Fill the joint between the profile and tiles with grout in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

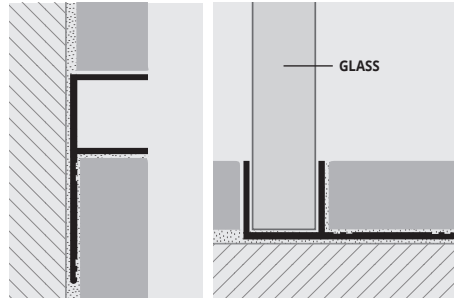

PROTERMINAL

POLISHED AND SATIN FINISH
STAINLESS STEEL AISI 304/1.4301-V2A

PROTERMINAL is a L-shaped profile in polished and satin finish stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor coverings. Its particular section and the availability in two different finishes make **PROTERMINAL** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

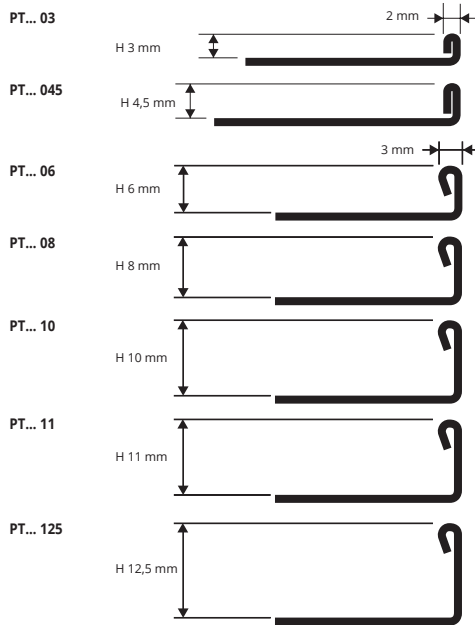


POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10 mm

Article	H mm		
PTAC 03	3		
PTAC 045	4,5		
PTAC 06	6		
PTAC 08	8		
PTAC 10	10		
PTAC 11	11		
PTAC 125	12,5		



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

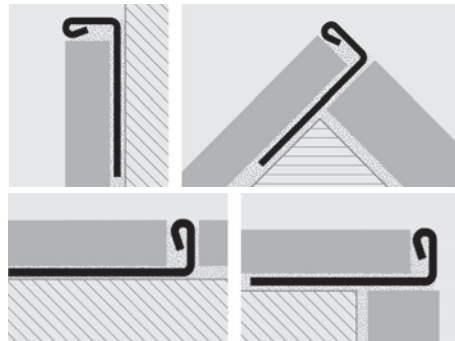

1. Choose "PROTERMINAL" according to the tile thickness and desired finish. 2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTERMINAL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

SATINATED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10 mm

Article	H mm		
PTACS 03	3		
PTACS 045	4,5		
PTACS 06	6		
PTACS 08	8		
PTACS 10	10		
PTACS 11	11		
PTACS 125	12,5		



Curve available, see page 104

COLOURS




SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

© 2020 All rights reserved by Progress Profiles, Printed in Italy

PROTERMINAL

POLISHED STAINLESS STEEL
AISI 316L/1.4404-V4A

PROTERMINAL is a L-shaped profile in polished stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and the availability in two different finishes make **PROTERMINAL** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical and chemical stresses.

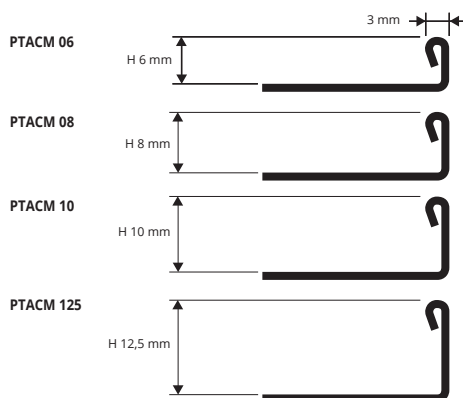

POLISHED STAINLESS ST. AISI 316/1.4404-V4A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10 mm

Article	H mm		
PTACM 06	6		
PTACM 08	8		
PTACM 10	10		
PTACM 125	12,5		

COLOURS



ACM - Polished stainless steel
AISI 316L

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

1. Choose "PROTERMINAL" according to the tile thickness. 2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTERMINAL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROTERMINAL is a L-shaped profile in chromed and antique brass that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and elegance make PROJOLLY a much sought-after profile that allows a workmanlike application.

PROTERMINAL

CHROMED BRASS AND ANTIQUE BRASS



CHROMED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
PTOC 06	6
PTOC 08	8
PTOC 10	10
PTOC 125	12,5

COLOURS




ANTIQUÉ BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm
PTOB 08	8
PTOB 10	10
PTOB 125	12,5

INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROTERMINAL" according to the tile thickness. 2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTERMINAL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

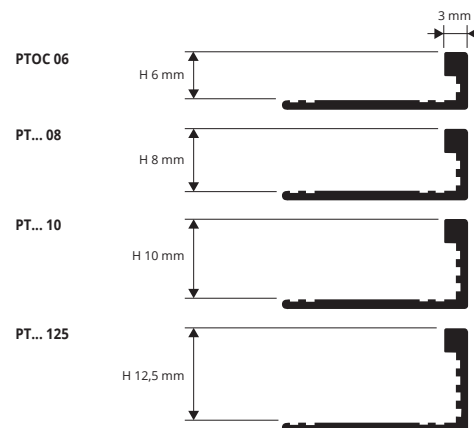

EXEMPLES OF LAYING

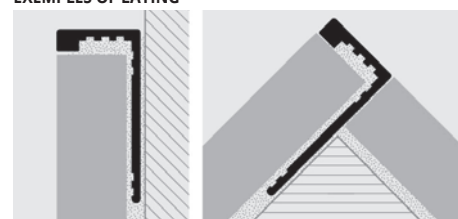

PROTERMINAL is a L-shaped profile in natural and anodized aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and the availability in six different finishes make **PROTERMINAL** a much sought-after profile that allows a workmanlike application.

PROTERMINAL

NATURAL AND ANODIZED ALUMINIUM



ANODIZED ALUMINIUM (gold - silver) thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PTAO 03 (anodized gold)	3
PTAA 03 (anodized silver)	3
PTAO 045 (anodized gold)	4,5
PTAA 045 (anodized silver)	4,5
PTAO 06 (anodized gold)	6
PTAA 06 (anodized silver)	6
PTAO 08 (anodized gold)	8
PTAA 08 (anodized silver)	8
PTAO 10 (anodized gold)	10
PTAA 10 (anodized silver)	10
PTAO 11 (anodized gold)	11
PTAA 11 (anodized silver)	11
PTAO 125 (anodized gold)	12,5
PTAA 125 (anodized silver)	12,5
PTAA 15 (anodized silver)	15
PTAA 20 (anodized silver)	20

COLOURS



ANODIZED ALUMINIUM (black-titanium-copper-bronze- antique bronze) thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PTAT 08 (anodized titanium)	8
PTAR 08 (anodized copper)	8
PTNE 08 (anodized black)	8
PTAB 08 (anodized. bronze)	8
PTAT 10 (anodized titanium)	10
PTAR 10 (anodized copper)	10
PTNE 10 (anodized black)	10
PTAB 10 (anodized bronze)	10
PTBRA 10 (anod. antique bronze)	10
PTAT 11 (anodized titanium)	11
PTAT 125 (anodized titanium)	12,5
PTAR 125 (anodized copper)	12,5
PTNE 125 (anodized black)	12,5
PTAB 125 (anodized. bronze)	12,5
PTBRA 125 (anod. antique bronze)	12,5

NATURAL ALUMINIUM


bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PTAN 03 (natural)	3
PTAN 045 (natural)	4,5


COLOURS



On demand may be realised in other finishes of the colour chart. Contact our customer service for minimal quantity, timing and price.

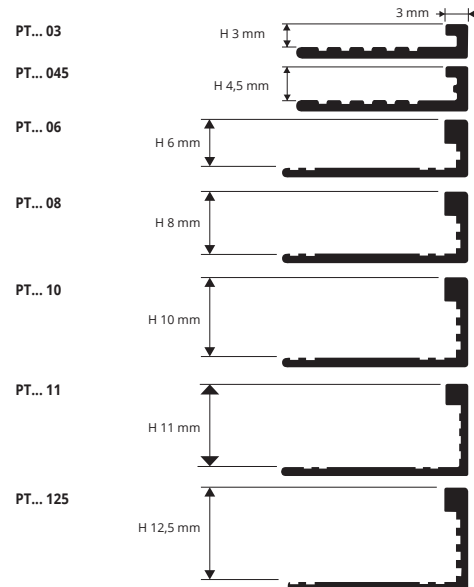

EXEMPLES AND INSTRUCTIONS FOR LAYING METHODS

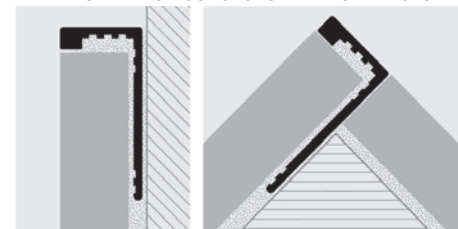


1. Choose "PROTERMINAL" according to the tile thickness and desired finish. 2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTERMINAL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


PROTERMINAL

POLISHED, BRUSHED AND VARNISHED ALUMINIUM

PROTERMINAL is a L-shaped profile in polished, brushed and varnished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles and also as separation profile for floor and wall coverings (the varnished only for wall application). Its particular section and the availability in different finishes make **PROTERMINAL** a much sought-after profile that allows a workmanlike application.

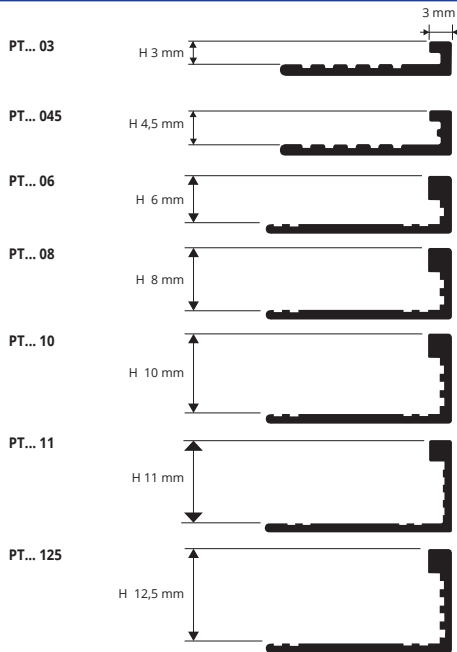

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

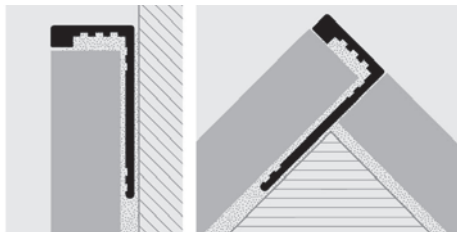

1. Choose "PROTERMINAL" according to the tile thickness and desired finish (color).
2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROTERMINAL" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



POLISHED ALUMINIUM (chrome, gold, copper, titanium, black)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PTBC 03 (polished chrome)	3		
PTBO 03 (polished gold)	3		*
PTBC 045 (polished chrome)	4,5		
PTBO 045 (polished gold)	4,5		*
PTBC 06 (polished chrome)	6		
PTBO 06 (polished gold)	6		
PTBN 06 (polished black)	6		*
PTBC 08 (polished chrome)	8		
PTBO 08 (polished gold)	8		
PTBN 08 (polished black)	8		*
PTBT 08 (polished titanium)	8		*
PTBR 08 (polished copper)	8		*
PTBC 10 (polished chrome)	10		
PTBO 10 (polished gold)	10		
PTBN 10 (polished black)	10		
PTBT 10 (polished titanium)	10		
PTBR 10 (polished copper)	10		*
PTBC 11 (polished chrome)	11		
PTBO 11 (polished gold)	11		*
PTBT 11 (polished titanium)	11		*
PTBC 125 (polished chrome)	12,5		
PTBO 125 (polished gold)	12,5		
PTBN 125 (polished black)	12,5		
PTBT 125 (polished titanium)	12,5		
PTBR 125 (polished copper)	12,5		*



BRUSHED ALUMINIUM (silver, titanium, black, copper, antique bronze)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PTBS 045 (brushed silver)	4,5		*
PTRS 045 (brushed copper)	4,5		*
PTTS 045 (brushed titanium)	4,5		*
PTBS 08 (brushed silver)	8		
PTBS 08 (brushed gold)	8		*
PTTS 08 (brushed titanium)	8		
PTNS 08 (brushed black)	8		*
PTRS 08 (brushed copper)	8		*
PTBS 10 (brushed silver)	10		
PTBOS 10 (brushed gold)	10		*
PTTS 10 (brushed titanium)	10		
PTNS 10 (brushed black)	10		
PTRS 10 (brushed copper)	10		
PTBRAS 10 (brush, antique bronze)	10		
PTBS 11 (brushed silver)	11		
PTTS 11 (brushed titanium)	11		
PTBS 125 (brushed silver)	12,5		
PTBOS 125 (brushed gold)	12,5		*
PTTS 125 (brushed titanium)	12,5		
PTNS 125 (brushed black)	12,5		
PTRS 125 (brushed copper)	12,5		
PTBRAS125 (brush, antique bronze)	12,5		

COATED ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (colour white 40 Pcs - 108 lm)

Article	H mm		
PTA 06-01	6		
PTA 08-01	8		
PT A 10-...	10		
PTA 11-01	11		
PTA 125-01	12,5		

H 10 available in the colours: 01 - 0106 - 11.
The code of the selected colour must be added to the article code.
E.g.: PTA 10-... (chosen colour white ivory varnished alum.)
PTA 10-0106.

COLOURS

01 - Varnished white alum. (9016)	0106 - Varnished white ivory alum. (9001)	11 - Varnished black alum. (9005)
BRUSHED POLISHED		
BS - Brushed polished silver alum.	RS - Brushed Polished copper alum.	TS - Brushed Polished titanium alum.
NS - Brushed Polished black alum.	BRAS - Brushed polished antique bronze alum.	
POLISHED		
BC - Polished chrome alum.	BO - Polished gold alum.	BT - Polished titanium alum.

AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)

02 - Varnished light grey alum. (7035)	03 - Varnished grey stone alum. (7030)	0211 - Varnished quartz grey alum. (7039)	0311 - Varnished asphalt grey alum. (7043)	06 - Varnished ivory alum. (1015)
17 - Varnished bahama beige alum. (no RAL)	10 - Varnished red klinker alum. (8004)			
POLISHED			BRUSHED POLISHED	
BR - Polished copper alum.	BN - Polished black alum.	BOS - Brushed polished gold alum.		

PTA 06-... & PTA 125-... For other colours different from white, please contact our company for quantity and price. Production on demand, production delay 4/5 weeks. (minimum quantity order of 100 pcs).

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROTERMINAL is a L-shaper profile in powder coated aluminum that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section and the availability in different finishes make **PROTERMINAL** an elegant and much-sought after profile.

PROTERMINAL

STONE LINE ALUMINIUM AND TUSCANY LINE



STONE LINE thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm		
PTA 06-SL...	6		*
PTA 08-SL...	8		
PTA 10-SL...	10		
PTA 11-SL...	11		
PTA 125-SL...	12,5		

The code of the selected colour must be added to the article code.
E.g.: PTA 08... (chosen colour Stone white) PTA 08-SL01.


TUSCANY LINE thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PTA 08-...	8		
PTA 10-...	10		
PTA 125-...	12,5		

The code of the selected colour must be added to the article code.
E.g.: PTA 08-... (chosen colour tuscan grey) PTA 08-03TU.

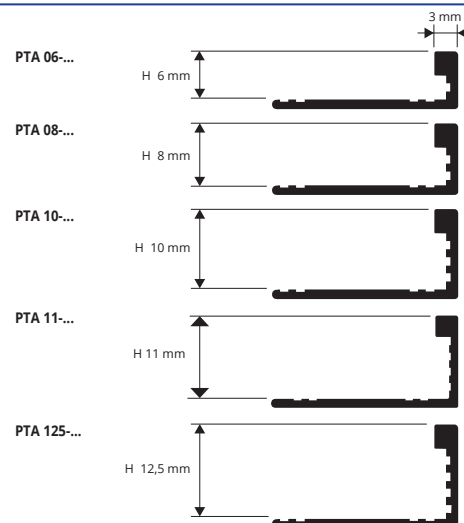

EXAMPLES FOR LAYING METHODS

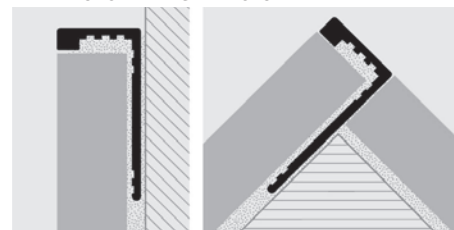

COLOURS

STONE LINE						
SL01 - Stone white	SL02 - Stone cream	SL03 - Stone greyvory	SL04 - Stone sand	SL05 - Stone gray	SL06 - Stone cristal gray	SL07 - Stone antragray
SL08 - Stone antradark	SL09 - Stone bronze	SL10 - Stone corten	SL11 - Stone brown	SL12 - Stone black	SL13 - Stone oyster grey	
TUSCANY						
03TU - Tuscany grey	05TU - Tuscany beige	20TU - Tuscany bronze				

PROTERMINAL is a L-shaped profile in shockproof non - toxic colored vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section and the availability in different colours also on demand make **PROTERMINAL** a much sought-after profile. It can be easily matched with the wall covering and allows an elegant workmanlike application.

PROTERMINAL

SHOCKPROOF NON - TOXIC COLOURED VINYL RESIN

NON-TOXIC SHOCKPROOF COLOURED VINYL RESIN
bar length 2,7 lm - pack. 54 lm (white 108 lm)

Article	H mm		
PT 06-...	6		
PT 08-...	8		
PT 10-...	10		
PT 125-...	12,5		


Available in the colours: 01-0106-02-03-04-05-06-11-12-17-18
Available on demand 19-20-21-22-23-24-25-26-27-28-29-07-08-09-10-13-14-15-16 with a minimum quantity order of 800 pcs. The code of the selected colour must be added to the article code.
E.g.: PT 06-... (chosen colour white) PT 06-01.

WHITE NOT FOR SALE SINGLY



EXAMPLE AND INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROTERMINAL" according to the tile thickness and desired colour. 2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTERMINAL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

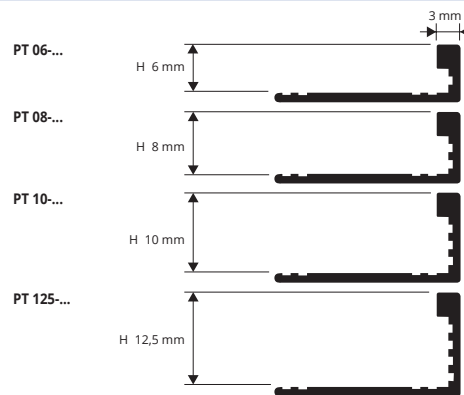

COLOURS

01 - White	0106 - White ivory	02 - Light grey	03 - Cement gray
04 - Light Beige	05 - Dark Beige	06 - Ivory	11 - Black
12 - Silver	17 - Bahama Beige	18 - Grey	

AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)


19 - Beige	20 - Dark ivory	21 - Light pink	22 - Dark pink	23 - Dark antique pink
24 - Dark sky blue	25 - Brick red	26 - Turquoise green	27 - Dark green	28 - Hazel brown
29 - Dak brown	07 - Pink	08 - Sky blue	09 - Yellow	10 - Red
13 - Gold	14 - Green	15 - Brown	16 - Blue	

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


PROLISTEL ACC

POLISHED, SATIN FINISH, SANDED
STAINLESS STEEL AISI 304/1.4301-V2A

PROLISTEL ACC is a listel in polished, satin finish, sanded stainless steel AISI 304/1.4301-V2A with a flat and U-shaped (internal use) visible surface, suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes, make **PROLISTEL ACC** a much sought after profile. It can be used with the range of PROJOLLY profiles to decorate the wall coverings and to allow an elegant workmanlike application.

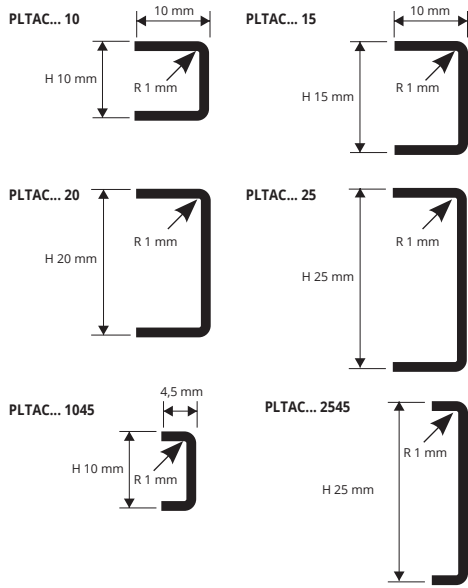

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

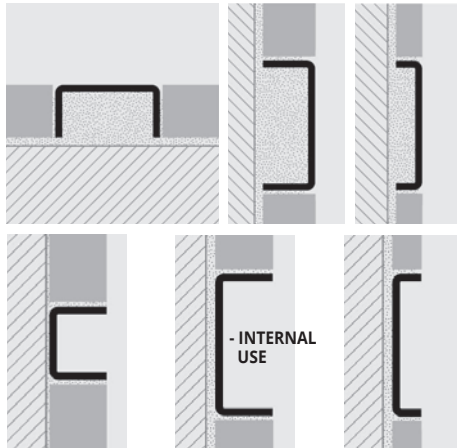

1. Choose "PROLISTEL ACC" according to the width and desired finish. 2. Cut "PROLISTEL ACC" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press "PROLISTEL ACC" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	HxL mm		
PLTAC 10	10 x 10		
PLTAC 1045	10 x 4,5		
PLTAC 15	15 x 10		
PLTAC 20	20 x 10		
PLTAC 25	25 x 10		
PLTAC 2545	25 x 4,5		

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A - INTERNAL USE
with protective film - bar length 2,7 lm
pack. 40 Pcs 108 lm - 8/10mm

Article	HxL mm		
PLTACI 10	10 x 10		*
PLTACI 1045	10 x 4,5		*
PLTACI 15	15 x 10		*
PLTACI 20	20 x 10		*
PLTACI 25	25 x 10		*
PLTACI 2545	25 x 4,5		*

SATINATED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	HxL mm		
PLTACS 10	10 x 10		
PLTACS 1045	10 x 4,5		
PLTACS 15	15 x 10		
PLTACS 20	20 x 10		
PLTACS 25	25 x 10		
PLTACS 2545	25 x 4,5		*


SATINATED STAINLESS STEEL AISI 304/1.4301-V2A - INTERNAL USE
with protective film - bar length 2,7 lm
pack. 40 Pcs 108 lm - 8/10mm

Article	HxL mm		
PLTACSI 10	10 x 10		*
PLTACSI 1045	10 x 4,5		*
PLTACSI 15	15 x 10		*
PLTACSI 20	20 x 10		*
PLTACSI 25	25 x 10		*
PLTACSI 2545	25 x 4,5		*

SANDED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs 108 lm - 8/10mm

Article	HxL mm		
PLTACSB 10	10 x 10		*

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

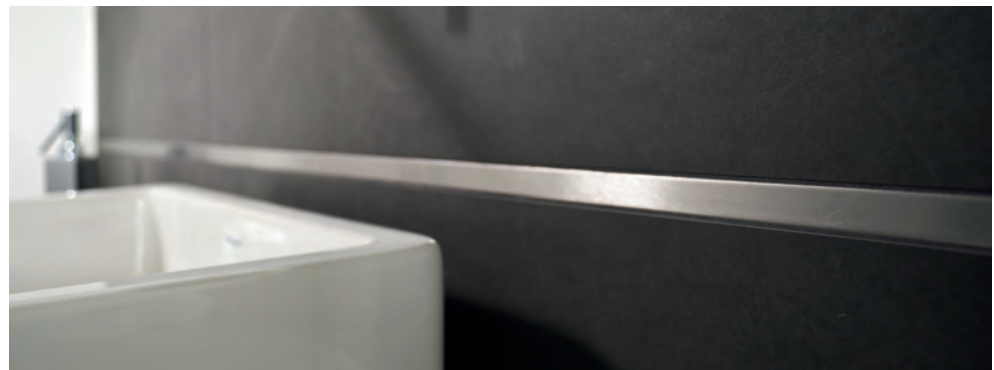

© 2020 All rights reserved by Progress Profiles, Printed in Italy


= News 2020

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROLISTEL ACC is a range of decorative profiles/strips that are ideal for easily creating chromatic effects on ceramic tile/marble/mosaic coverings or, in the stainless steel AISI 316L/1.4301-V4A range, for creating separations and decorations between floors in the same or differing material. Thanks to their design, shape and thickness of 4.5 and 10 mm, may be laid using the same adhesive to create horizontal and vertical lines, on the wall or on the floor, irrespective of the thickness of the covering. Various widths available in stainless steel AISI 04/1.4301-V2A, polished. Match with the same basic colours in the PROJOLLY, PROTERMINAL and PROJOLLY SQUARE and the new PROKERLAM SQUARE-LINE-JOLLY range.

PROLISTEL ACC

POLISHED STAINLESS STEEL
AISI 316/1.4404 - V4A

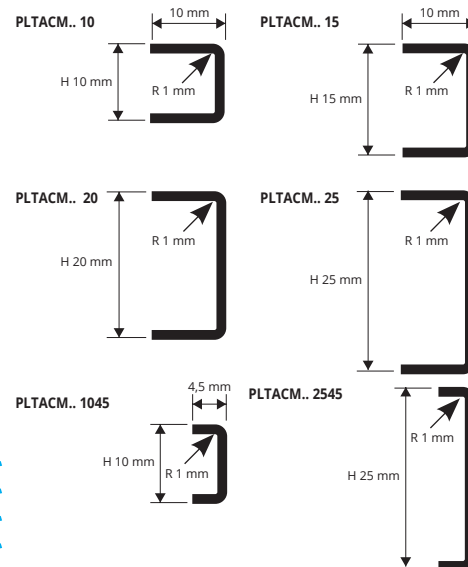


POLISHED STAINLESS STEEL AISI 316L/1.4404-V4A with protective film - bar length 2,7 lm
pack. 40 Pcs - 108 lm - 8/10mm

Article	HxL mm	
PLTACM 10	10 X 10	*
PLTACM 1045	10 X 4,5	*
PLTACM 15	15 X 10	*
PLTACM 20	20 X 10	*
PLTACM 25	25 X 10	*
PLTACM 2545	25 X 4,5	*

POLISHED STAINLESS STEEL AISI 316L/1.4404-V4A - INTERNAL USE with protective film - bar length 2,7 lm
pack. 40 Pcs - 108 lm - 8/10mm

Article	HxL mm	
PLTACMI 10	10 X 10	*
PLTACMI 1045	10 X 4,5	*
PLTACMI 15	15 X 10	*
PLTACMI 20	20 X 10	*
PLTACMI 25	25 X 10	*
PLTACMI 2545	25 X 4,5	*

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

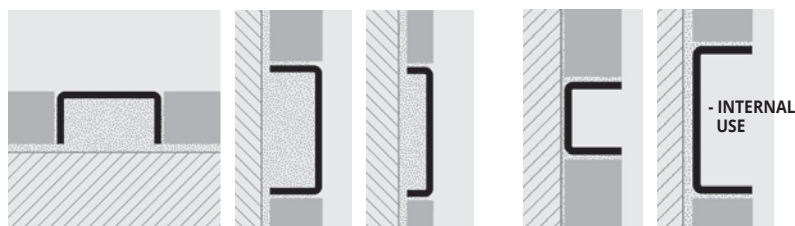

1. Choose the PROLISTEL ACC in the required width. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing it into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is flush with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids. Pay attention to the external edges of the PROLISTEL ACC. They must be protected against agents such as adhesives and sealants and against grinding or scraping actions.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

COLOURS



PROLISTEL P OTT is a decorative listel in polished, chromed and antique brass with a flat visible surface. The profile is suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes and two widths, make **PROLISTEL P OTT** a much sought after profile. It could be matched with PROJOLLY, PROJOLLY SQUARE e PROTERMINAL profiles to decorate the wall coverings and to allow an elegant workmanlike application.

PROLISTEL P OTT



POLISHED, CHROMED,
ANTIQU BRASS



POLISHED, CHROMED AND ANTIQU BRASS thermo packed - Bar length 2,7 lm - pack 40 PCS - 108 lm

Article	H mm	
PLTPOL 25	25	
PLTPOC 25	25	
PLTPOB 25	25	

COLOURS





EXAMPLES AND INSTRUCTIONS FOR LAYING

1. Choose "PROLISTEL P OTT" according to the width and desired finish. 2. Cut "PROLISTEL P OTT" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press "PROLISTEL P OTT" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.


PROLISTEL P ALL

ANODIZED, POLISHED, STONE LINE, BRUSHED, TUSCANY AND TILTEX ALUMINIUM

PROLISTEL P ALL is a decorative listel in anodized, polished, brushed, tiltex aluminium and varnished tuscanly and stone aluminium with a flat visible surface. The profile is suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes and two widths, make PROLISTEL P ALL a much sought after profile. It could be matched with PROJOLLY, PROJOLLY SQUARE e PROTERMINAL profiles to decorate the wall coverings and to allow an elegant workmanlike application.



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

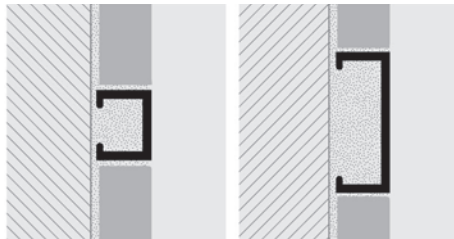

1. Choose "PROLISTEL P ALL" according to the width and desired finish. 2. Cut "PROLISTEL P ALL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press "PROLISTEL P ALL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

ALUMINIUM TUSCANY LINE thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PLTPA 10-...	10		*
PLTPA 25-...	25		*



ANODIZED ALUMINIUM thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PLTPAA 10 (anodized silver)	10		
PLTPAO 10 (anodized gold)	10		*
PLTPAR 10 (anodized copper)	10		
PLTPAT 10 (anodized titanium)	10		
PLTPNE 10 (anodized black)	10		
PLTPAA 25 (anodized silver)	25		
PLTPAO 25 (anodized gold)	25		*
PLTPAR 25 (anodized copper)	25		*
PLTPAT 25 (anodized titanium)	25		
PLTPNE 25 (anodized black)	25		

POLISHED ALUMINIUM thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PLTPBC 10 (polished chrome)	10		
PLTPBO 10 (polished gold)	10		*
PLTPBR 10 (polished copper)	10		
PLTPBT 10 (polished titanium)	10		
PLTPBN 10 (polished black)	10		
PLTPBC 25 (polished chrome)	25		
PLTPBO 25 (polished gold)	25		*
PLTPBR 25 (polished copper)	25		*
PLTPBT 25 (polished titanium)	25		
PLTPBN 25 (polished black)	25		*

POLISHED BRUSHED ALUMINIUM thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PLTPBS 10 (brushed polished silver)	10		
PLTPBOS 10 (brushed polished gold)	10		*
PLTPRS 10 (brushed polished copper)	10		*
PLTPTS 10 (brushed polished titanium)	10		
PLTPNS 10 (brushed polished black)	10		*
PLTPBS 25 (brushed polished silver)	25		
PLTPBOS 25 (brushed polished gold)	25		*
PLTPRS 25 (brushed polished copper)	25		*
PLTPTS 25 (brushed polished titanium)	25		
PLTPNS 25 (brushed polished black)	25		*

ANODIZED BRUSHED ALUMINIUM TILTEX thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PLTPBX 10 (silver) TILTEX	10		
PLTPRX 10 (copper) TILTEX	10		*
PLTPTX 10 (titanium) TILTEX	10		
PLTPBX 25 (silver) TILTEX	25		
PLTPRX 25 (copper) TILTEX	25		*
PLTPTX 25 (titanium) TILTEX	25		

STONE LINE ALUMINIUM thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PLTPA 10-...	10		
PLTPA 25-...	25		

COLOURS

STONE LINE						
SL01 - Stone white	SL02 - Stone cream	SL03 - Stone greywory	SL04 - Stone sand	SL05 - Stone gray	SL06 - Stone cristal gray	SL07 - Stone antragray
SL08 - Stone antradark	SL09 - Stone bronze	SL10 - Stone corten	SL11 - Stone brown	SL12 - Stone black	SL13 - Stone oyster gray	
ANODIZED			POLISHED			
AA - Anodized silver alum.	AR - Anodized copper alum.	AT - Anodized titanium alum.	BC - Polished chrome alum.	BR - Polished copper alum.	BT - Polished titanium alum.	
BRUSHED		BRUSHED TILTEX		BLACK LINE		
BS - Brush, pol. silver alum.	TS - Brush, Pol. titanium alum.	BX - Tiltex silver alum.	TX - Tiltex titanium alum.	BN - Polished black alum.	NE - Anodized black alum.	

AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)

ANODIZED	POLISHED	BRUSHED	BRUSHED TILTEX	TUSCANY	BLACK LINE
AO - Anodized gold alum.	BO - Polished gold alum.	BOS - Brush, Pol. gold alum.	RS - Brush, Pol. copper alum.	RX - Tiltex copper alum.	03TU - Tuscanly grey
				05TU - Tuscanly beige	20TU - Tuscanly bronze
					NS - Brush, Pol. black alum.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROLISTEL ALL is a listel in anodized, polished and brushed aluminium with a rounded visible surface, suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes, make **PROLISTEL P ALL** a much sought after profile. It can be used with the range of PROJOLLY profiles to decorate the wall coverings and to allow an elegant workmanlike application.

PROLISTEL ALL

ANODIZED, POLISHED AND BRUSHED ALUMINIUM



POLISHED ALUMINIUM (chrome-gold-copper-titanium-black)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm		
PLTBC 15 (polished chrome)	15		
PLTBR 15 (polished copper)	15		*
PLTBT 15 (polished titanium)	15		*
PLTBO 15 (polished gold)	15		*
PLTBN 15 (polished black)	15		*
PLTBC 25 (polished chrome)	25		
PLTBR 25 (polished copper)	25		*
PLTBT 25 (polished titanium)	25		
PLTBO 25 (polished gold)	25		
PLTBN 25 (polished black)	25		*

ANODIZED ALUMINIUM (silver-gold-copper-titanium-black)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PLTAA 15 (anodized silver)	15		
PLTAR 15 (anodized copper)	15		*
PLTAT 15 (anodized titanium)	15		*
PLTAO 15 (anodized gold)	15		*
PLTNE 15 (anodized black)	15		
PLTAA 25 (anodized silver)	25		
PLTAR 25 (anodized copper)	25		*
PLTAT 25 (anodized titanium)	25		
PLTAO 25 (anodized gold)	25		*
PLTNE 25 (anodized black)	25		

BRUSHED POLISHED ALUMINIUM (silver-gold-copper-titanium-black)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PLTBS 15 (brushed polished silver)	15		
PLTRS 15 (brushed polished copper)	15		*
PLTTS 15 (brushed polished titanium)	15		
PLTBOS 15 (brushed polished gold)	15		*
PLTNS 15 (brushed polished black)	15		*
PLTBS 25 (brushed polished silver)	25		
PLTRS 25 (brushed polished copper)	25		*
PLTTS 25 (brushed polished titanium)	25		
PLTBOS 25 (brushed polished gold)	25		*
PLTNS 25 (brushed polished black)	25		*

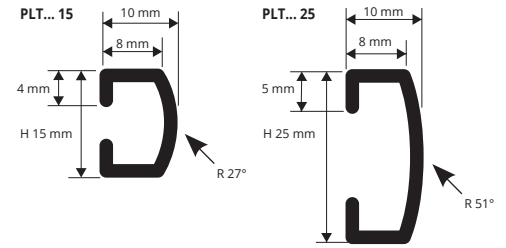

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROLISTEL ALL" according to the width and desired finish.
2. Cut "PROLISTEL ALL" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press "PROLISTEL ALL" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS



AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)




On demand may be realised in other finishes of the colour chart. Contact our customer service for minimal quantity, timing and price.

PROLISTEL LED is a listel in anodized and polished aluminium equipped with an integrated LED lighting system that can generate a cold, hot and neutral suffused light. It is suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes, make **PROLISTEL LED** a much sought after profile that decorates the wall coverings.

PROLISTEL LED

ANODIZED AND POLISHED ALUMINIUM



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROLISTEL LED" according to the width and desired finish.
2. Cut "PROLISTEL LED" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press "PROLISTEL LED" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

ANODIZED ALUM. SILVER, POLISHED CHROME ALUMINIUM
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm
ADAPTOR LED, LED & FLAT NOT INCLUDED

Article	H mm		
PLTLEDA 20 (anodized silver)	20		
PLTLEDBC 20 (polished chrome)	20		

ADHESIVE FLEXIBLE LED COIL
length 5 lm - pack. 1 ROLL

Article			
LEDN (neutral light)			
LEDF (cold light)			
LEDC (hot light)			

COLOURS



POLYCARBONATE FLAT
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	Finish		
PIAL 17	transp.		
PIAO 17	matt		

END CAPS - R/L (3 right & 3 left)

Article	H mm		
TPLTLEDA 20	20		
TPLTLEDBC 20	20		

LED ADAPTOR AC/DC 75W - 12V (15 lm)

Article			
ALL 7512 (supplies 15 lm)			

LED ADAPTOR AC/DC 25W - 12V (5 lm)


Article			
ALL 2512 (supplies 5 lm)			

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


PROFINLIST 20

ANODIZED, POLISHED, BRUSHED
AND TILTEX ALUMINIUM

PROFINLIST 20 is a listel in anodized, polished, brushed and tiltex aluminium with a flat visible surface, suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes, make **PROFINLIST 20** a much sought after profile. It can be used with the range of PROJOLLY profiles to decorate the wall coverings and to allow an elegant workmanlike application.

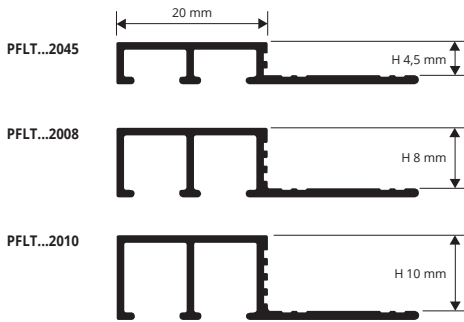

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

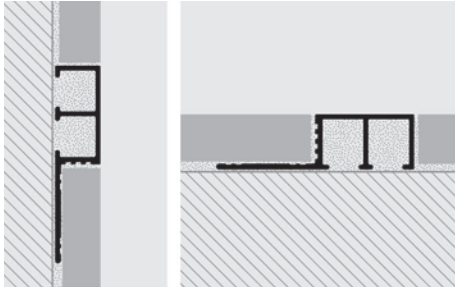

1. Choose "PROFINLIST 20" according to the width and desired finish.
2. Cut "PROFINLIST 20" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROFINLIST 20" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



ANODIZED ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PFLTAA 2045	4,5		*
PFLTAA 2008	8		
PFLTAR 2008	8		*
PFLTAT 2008	8		*
PFLTAA 2010	10		
PFLTAR 2010	10		*
PFLTAT 2010	10		*

POLISHED ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PFLTBC 2045	4,5		*
PFLTBO 2045	4,5		*
PFLTBC 2008	8		
PFLTBR 2008	8		*
PFLTBT 2008	8		*
PFLTBC 2010	10		
PFLTBR 2010	10		*
PFLTBT 2010	10		*

BRUSHED POLISHED ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PFLTBS 2045	4,5		*
PFLTBS 2008	8		
PFLTRS 2008	8		*
PFLTTS 2008	8		*
PFLTBS 2010	10		
PFLTRS 2010	10		*
PFLTTS 2010	10		*

BRUSHED TILTEX ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PFLTBX 2008	8		*
PFLTRX 2008	8		*
PFLTXX 2008	8		*
PFLTBX 2010	10		
PFLTRX 2010	10		*
PFLTXX 2010	10		*



COLOURS

ANODIZED	POLISHED
AA - Satin anodized silver alu.	BC - Polished chrome alu.
BRUSHED POLISHED	ANOD. BRUSHED TILTEX
BS - Brushed silver alu.	BX - Silver TILTEX

AVAILABLE MINIMUM QUANTITY 100 PCS

by colour and height. (Price to be agreed. Production delay 4/5 weeks)

ANODIZED			
AR - Anodized copper alu.	AT - Anodized titanium alu.		
POLISHED			
BR - Polished copper alu.	BT - Polished titanium alu.	BO - Polished gold alu.	
BRUSHED POLISHED		ANOD. BRUSHED TILTEX	
RS - Brushed polished copper alu.	TS - Brushed polished titanium alu.	RX - Brushed tiltex copper alu.	TX - Titanium tiltex

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROBORD is a round corner bead profile in polished and satin finish stainless steel AISI 304/1.4301-V2A suitable to protect the external corner of wall coverings in ceramic. Its particular section and availability in different finishes, make **PROBORD** a much sought after profile. It can be used with the range of PROLISTEL and PROSHELL profiles to obtain an elegant workmanlike application even in environments subject to high mechanical stresses.

PROBORD

POLISHED AND SATIN FINISH STAINLESS STEEL AISI 304/1.4301-V2A



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm - 10/10mm

Article	H mm
PEBDAC 08	08
PEBDAC 10	10
PEBDAC 125	12,5

SATINATED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm - 10/10mm

Article	H mm
PEBDACS 08	08
PEBDACS 10	10
PEBDACS 125	12,5

COLOURS




SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




1. Choose "PROBORD" according to the tile thickness and desired finish.
2. Cut "PROBORD" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROBORD" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.


PEBDAC/ACS 08

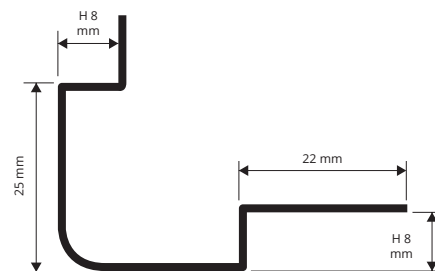

PEBDAC/ACS 10

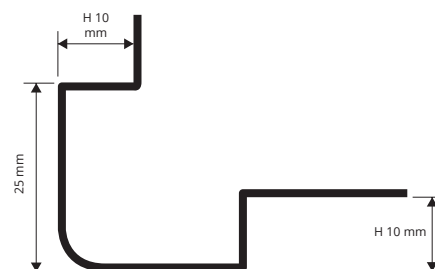

PEBDAC/ACS 125

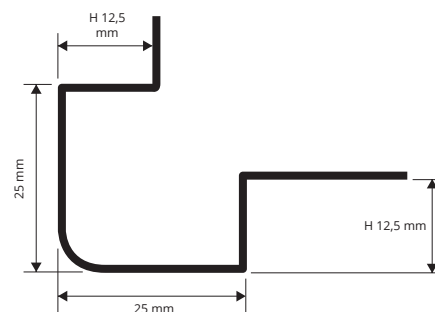

PROEDGE FLEX

SHOCKPROOF NON - TOXIC CO-EXTRUDED COLORED VINYL RESIN

PROEDGE FLEX is a corner bead profile in shockproof non-toxic co-extruded colored vinyl resin composed by an internal rigid structure and by a soft external one. The profile is suitably shaped to protect the external corner of wall coverings. Its particular section and the availability in different colours make **PROEDGE FLEX** a much sought after and easy to lay profile that allows a workmanlike application.



CO-EXTRUDED PVC - L 40 X 40 mm
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	H mm
PFC...40 (without adhesive)	40
PFC...40A (with adhesive)	40


COLOURS



AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)



PFC... 40/40A



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




1. Choose "PROEDGE FLEX" according to the desired colour.
2. Cut "PROEDGE FLEX" to the desired length.
3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid.
4. When the surface is perfectly dry, remove the protective film (version with adhesive), place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

PROEDGE AC

POLISHED AND SATIN FINISH
STAINLESS STEEL AISI 304/1.4301-V2A

PROEDGE AC is a corner bead profile in polished and satin finish stainless steel AISI 304/1.4301-V2A, with a radius of curvature of 1.5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make **PROEDGE AC** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

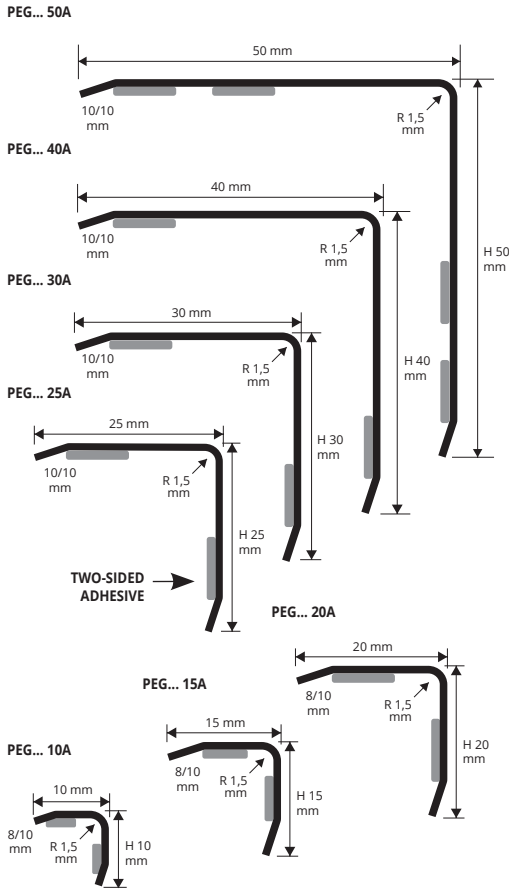

POLISHED AND SATINATED STAINLESS STEEL WITH ADHESIVE with protective film - bar length 2,7 lm - pack. 81 lm - 8/10 mm

Article	LxH mm		
PEGAC 10A (polished stainless steel)	10 x 10		
PEGACS 10A (satin finish stainless steel)	10 x 10		
PEGAC 15A (polished stainless steel)	15 x 15		
PEGACS 15A (satin finish stainless steel)	15 x 15		
PEGAC 20A (polished stainless steel)	20 x 20		
PEGACS 20A (satin finish stainless steel)	20 x 20		

POLISHED AND SATINATED STAINLESS STEEL WITH ADHESIVE with protective film - bar length 2,7 lm - pack. 27 lm - 12/10 mm

Article	LxH mm		
PEGAC 40A (polished stainless steel)	40 x 40		
PEGACS 40A (satin finish stainless steel)	40 x 40		
PEGAC 50A (polished stainless steel)	50 x 50		
PEGACS 50A (satin finish stainless steel)	50 x 50		

PEG... 40A / 50A on demand with thickness 12/10.
Quantity, timing and prices to be agreed.

For items without adhesive, write the item without the last A.
E.g.: PEGAC 40

POLISHED AND SATINATED STAINLESS STEEL WITH ADHESIVE with protective film - bar length 2,7 lm - pack. 40,5 lm - 10/10 mm

Article	LxH mm		
PEGAC 25A (polished stainless steel)	25 x 25		
PEGACS 25A (satin finish stainless steel)	25 x 25		
PEGAC 30A (polished stainless steel)	30 x 30		
PEGACS 30A (satin finish stainless steel)	30 x 30		

For items without adhesive write the item without the last A.
E.g.: PEGAC 10

Suitable for use in contact with foodstuffs.

COLOURS




PROEDGE OT

POLISHED AND CHROMED BRASS

PROEDGE OT is a corner bead profile in polished and chromed brass, with a radius of curvature of 1.5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make **PROEDGE OT** a much sought-after profile that allows an elegant workmanlike application.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

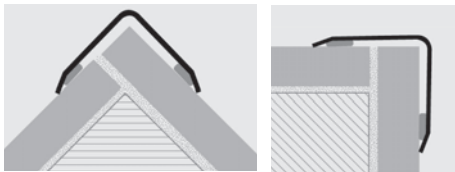

1. Choose "PROEDGE OT" according to the desired finish and width.
2. Cut "PROEDGE OT" to the desired length.
3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid.
4. When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

COLOURS



CHROMED BRASS WITH ADHESIVE thermo packed - bar length 2,7 lm - pack. 54 lm

Article	LxH mm		
PEGOC 10A	10 x 10		
PEGOC 15A	15 x 15		
PEGOC 20A	20 x 20		
PEGOC 25A	25 x 25		
PEGOC 30A	30 x 30		

MIRROR LINE

POLISHED BRASS WITH ADHESIVE bar length 2,7 lm - pack. 27 lm - 10/10 mm

Article	LxH mm		
PEGOL 25A	25 x 25		*
PEGOL 30A	30 x 30		*

MIRROR LINE

POLISHED BRASS WITH ADHESIVE bar length 2,7 lm - pack. 54 lm - 8/10 mm

Article	LxH mm		
PEGOL 10A	10 x 10		
PEGOL 15A	15 x 15		*
PEGOL 20A	20 x 20		*

MIRROR LINE

POLISHED BRASS WITH ADHESIVE bar length 2,7 lm - pack. 27 lm - 12/10 mm

Article	LxH mm		
PEGOL 40A	40 x 40		*
PEGOL 50A	50 x 50		*

MIRROR LINE

PEG... 40A / 50A on demand with thickness 12/10.
Quantity, timing and prices to be agreed.

For items without adhesive, write the item without the last A.
E.g.: PEGOL 40

For items without adhesive, write the item without the last A.
E.g.: PEGOL 10

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROEDGE R AC is a corner bead profile in polished and satin finish stainless steel AISI 304/1.4301-V2A, with a radius of curvature of 5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make **PROEDGE R AC** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

PROEDGE R AC

POLISHED AND SATIN FINISH
STAINLESS STEEL AISI 304/1.4301-V2A



POLISHED AND SATINATED STAINLESS STEEL WITH ADHESIVE
with protective film - bar length 2,7 lm - pack. 81 lm - 8/10 mm

Article	LxH mm		
PEGRAC 15A (polished stainless steel)	15 x 15		*
PEGRACS 15A (satin finish stainless steel)	15 x 15		*
PEGRAC 20A (polished stainless steel)	20 x 20		*
PEGRACS 20A (satin finish stainless steel)	20 x 20		*

POLISHED AND SATINATED STAINLESS STEEL WITH ADHESIVE
with protective film - bar length 2,7 lm - pack. 40,5 lm - 10/10 mm

Article	LxH mm		
PEGRAC 25A (polished stainless steel)	25 x 25		*
PEGRACS 25A (satin finish stainless steel)	25 x 25		*
PEGRAC 30A (polished stainless steel)	30 x 30		*
PEGRACS 30A (satin finish stainless steel)	30 x 30		*

For items without adhesive write the item without the last A.
E.g.: PEGRAC 15

Suitable for use in contact with foodstuffs.

POLISHED AND SATINATED STAINLESS STEEL WITH ADHESIVE
with protective film - bar length 2,7 lm - pack. 27 lm - 12/10 mm

Article	LxH mm		
PEGRAC 40A (polished stainless steel)	40 x 40		*
PEGRACS 40A (satin finish stainless steel)	40 x 40		*
PEGRAC 50A (polished stainless steel)	50 x 50		*
PEGRACS 50A (satin finish stainless steel)	50 x 50		*


PEGR... 40A / 50A on demand with thickness 12/10.
Quantity, timing and prices to be agreed.

For items without adhesive, write the item without the last A.
E.g.: PEGRAC 40


COLOURS

 AC - Polished stainless steel AISI 304/1.4301-V2A	 ACS - Satin finish stainless steel AISI 304/1.4301-V2A
---	--

PEG... 50A

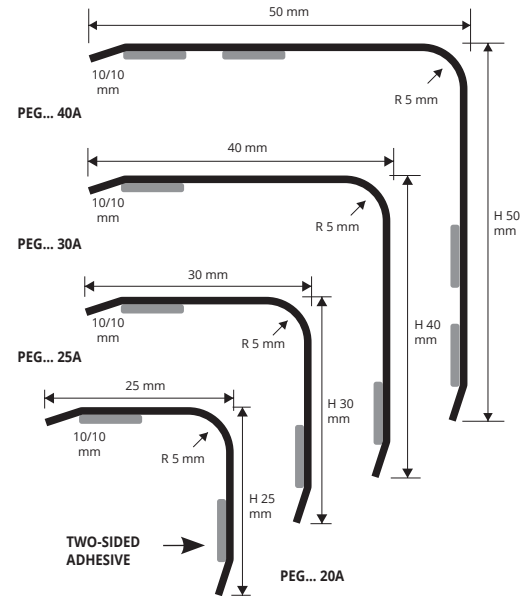

PEG... 15A

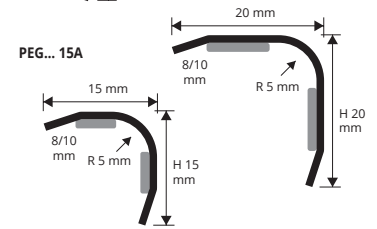

PROEDGE R OT is a corner bead profile in polished and chromed brass, with a radius of curvature of 5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make **PROEDGE R OT** a much sought-after profile that allows an elegant workmanlike application.

PROEDGE R OT

POLISHED AND CHROMED BRASS



CHROMED BRASS WITH ADHESIVE
thermo packed - bar length 2,7 lm - pack. 54 lm

Article	LxH mm		
PEGROC 15A	15 x 15		*
PEGROC 20A	20 x 20		*
PEGROC 25A	25 x 25		*
PEGROC 30A	30 x 30		*

MIRROR LINE

POLISHED BRASS WITH ADHESIVE
bar length 2,7 lm - pack. 27 lm - 10/10 mm

Article	LxH mm		
PEGROL 25A	25 x 25		*
PEGROL 30A	30 x 30		*

MIRROR LINE

POLISHED BRASS WITH ADHESIVE
bar length 2,7 lm - pack. 54 lm - 8/10 mm

Article	LxH mm		
PEGROL 15A	15 x 15		*
PEGROL 20A	20 x 20		*

MIRROR LINE

POLISHED BRASS WITH ADHESIVE
bar length 2,7 lm - pack. 27 lm - 12/10 mm

Article	LxH mm		
PEGROL 40A	40 x 40		*
PEGROL 50A	50 x 50		*


MIRROR LINE

For items without adhesive, write the item without the last A.
E.g.: PEGROL 15

PEGR... 40A / 50A on demand with thickness 12/10.
Quantity, timing and prices to be agreed.



For items without adhesive, write the item without the last A.
E.g.: PEGROL 25

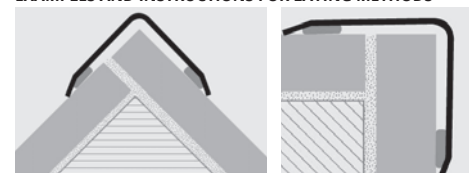EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROEDGE R OT" according to the desired finish and width.
2. Cut "PROEDGE R OT" to the desired length.
3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid.
4. When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

COLOURS

 OC - Chromed brass	 OL - Polished Brass
--	---


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROEDGE AL

PROEDGE AL is a corner bead profile in anodized and varnished aluminium suitably shaped to protect the external corner of wall coverings. Its particular section and the availability in four different finishes make **PROEDGE AL** a much sought-after profile that allows a workmanlike application.

ANODIZED AND VARNISHED ALUMINIUM

PEG... 25A
PEGA 25-01A



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROEDGE AL" according to the desired finish and width.
2. Cut "PROEDGE AL" to the desired length.
3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid.
4. When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.



ANODIZED ALUM. (gold, silver and bronze) **WITH ADHESIVE**
thermo packed - bar length 2,7 lm - pack. 30 Pcs - 81 lm

Article	LxH mm		
PEGAO 25A (anodized gold)	25 x 25		
PEGAA 25A (anodized silver)	25 x 25		
PEGAB 25A (anodized bronze)	25 x 25		

For items without adhesive, write the article without the last A.
E.g.: PEGAO 25

WHITE VARNISHED ALUMINIUM - WITH ADHESIVE
thermo packed - bar length 2,7 lm - pack. 30 Pcs - 81 lm

Article	LxH mm		
PEGA 25-01A (varn. white)	25 x 25		


COLOURS

ANODIZED		
AO - Anodized gold alum.	AA - Anodized silver alum.	AB - Anod. bronze alum.
01 - White varnished alum.		

PROEDGE PVC

PROEDGE PVC is a corner bead profile in shockproof non-toxic co-extruded white vinyl resin suitably shaped to protect the external corner of wall coverings. Its particular section and the availability in four different widths make **PROEDGE PVC** a much sought-after profile that allows a workmanlike application.

SHOCKPROOF NON - TOXIC CO-EXTRUDED
WHITE VINYL RESIN

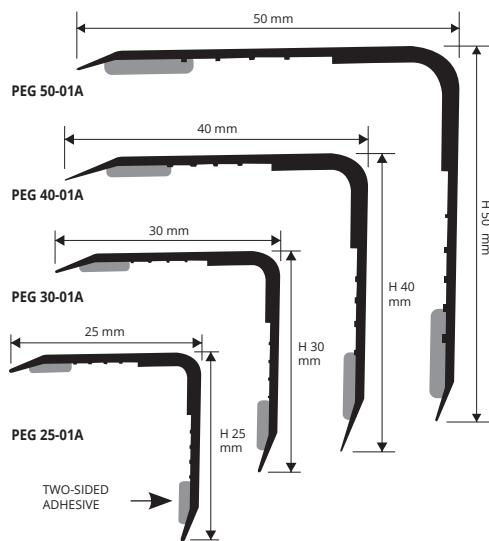

SHOCKPROOF VINYL RESIN WITH ADHESIVE
bar length 2,7 lm - pack. 30 Pcs - 81 lm

Article	LxH mm		
PEG 25-01A	25 x 25		
PEG 30-01A	30 x 30		

For items without adhesive, write the article without the last A.
E.g.: PEG 25-01

SHOCKPROOF VINYL RESIN WITH ADHESIVE
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	LxH mm		
PEG 40-01A	40 x 40		
PEG 50-01A	50 x 50		

For items without adhesive, write the article without the last A.
E.g.: PEG 40-01

COLOURS

	FOR OTHER COLORS MINIMUM ORDER 400 pcs
01 - White	

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




1. Choose "PROEDGE PVC" according to the desired width.
2. Cut "PROEDGE PVC" to the desired length.
3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid.
4. When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.



PROSHELL

POLISHED AND SATIN FINISH
STAINLESS STEEL AISI 304/1.4301-V2A

PROSHELL is a cove-shaped profile in polished and satin finish stainless steel AISI 304/1.4301-V2A particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in two finishes, four heights and special pieces, such as internal and external corners, end caps and junctions, make **PROSHELL** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

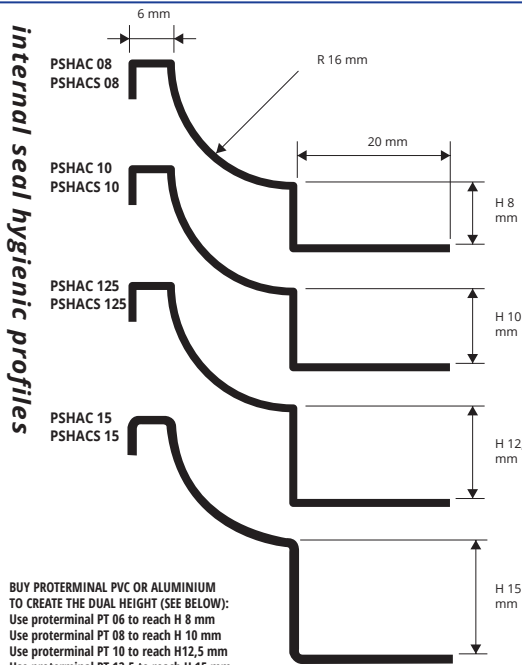

BUY PROTERMINAL PVC OR ALUMINIUM TO CREATE THE DUAL HEIGHT (SEE BELOW):
Use proterminal PT 06 to reach H 8 mm
Use proterminal PT 08 to reach H 10 mm
Use proterminal PT 10 to reach H 12,5 mm
Use proterminal PT 12,5 to reach H 15 mm

EXAMPLES AND INSTRUCTIONS FOR LAYING



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
with protective film - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
PSHAC 08	8
PSHAC 10	10
PSHAC 125	12,5
PSHAC 15	15



SATINATED STAINLESS STEEL AISI 304/1.4301-V2A
with protective film - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
PSHACS 08	8
PSHACS 10	10
PSHACS 125	12,5
PSHACS 15	15

Suitable for use in contact with foodstuffs.

COLOURS




1. Choose "PROSHELL" according to the tile thickness and desired finish.
 - (*) 2. Cut "PROSHELL" to the desired length and apply the adhesive on the support where the profile will be laid.
 3. Press the anchoring flange of "PROSHELL" into the adhesive.
 4. Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.
- (*) to obtain double height, use the joint of the same size as the selected profile and choose the PROTERMINAL PVC or ALUMINIUM according to the required thickness, see INSTRUCTIONS FOR LAYING.

PREWELDED CORNER, CAPS and THREE-WAYS JOINTS


POLISHED AND SATINATED STAINLESS STEEL

INTERNAL CORNER
RPI...

EXTERNAL CORNER
RPE...



THREE WAYS JOINTS
RPT...



PREWELDED CORNER - POLISHED STAINLESS STEEL

H 08 - 10 - 12,5 - 15 mm - pack. 10 Pcs

Article	Lmm
RPI 8-10-125 (internal)	100
RPI 15 (internal)	100
RPE 8-10-125 (external)	100
RPE 15 (external)	100
RPT 8-10-125 (three-ways)	100
RPT 15 (three-ways)	100


Specify height of joint: E.g.: RPI 8 for H 8 mm.

PREWELDED CORNER - SATINATED STAINLESS STEEL

H 08 - 10 - 12,5 - 15 mm - pack. 10 Pcs

Article	Lmm
RPIS 8-10-125 (internal)	100
RPIS 15 (internal)	100
RPES 8-10-125 (external)	100
RPES 15 (external)	100
RPTS 8-10-125 (three-ways)	100
RPTS 15 (three-ways)	100

Specify height of joint: E.g.: RPIS 8 for H 8 mm.




PROTERMINAL, PROJOLLY SQUARE
E PROJOLLY QUART
(NO PROJOLLY)




To facilitate and complete the application of PROSHELL (PSH..) (in AISI 304-1.4301 stainless steel), joints and right (R) and left (L) caps are available to close the profile ends and provide a connection with ceramic tiles, brickwork, wooden floors, etc. The caps are made of painted plastic with: in the bright stainless steel effect and satin stainless steel effect.

END CAPS
TPSH...



JOINT
GISHN...



CAPS AND JOINTS IN RIGID GREY PLASTIC

pack. 10 Pcs

Article
TPSHAC caps R-L (poli. stainless steel effect)
TPSHACS caps R-L (satin stainless steel effect)
GISHN 08
GISHN 10
GISHN 125
GISHN 15


News 2020

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROSHELL is a cove-shaped profile in polished and satin finish stainless steel AISI 316/1.4404-V4A particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in two finishes, four heights and special pieces, such as internal and external corners, end caps and junctions, make **PROSHELL** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

PROSHELL

POLISHED AND SATIN FINISH
STAINLESS STEEL AISI 316/1.4404-V4A

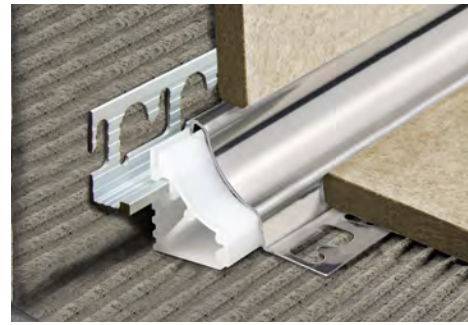


POLISHED STAINLESS STEEL AISI 316/1.4404-V4A
with protective film - bar length 2,7 lm - pack. 20 Pcs - 54 lm

SATINATED STAINLESS STEEL AISI 316/1.4404-V4A
with protective film - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
PSHACM 08	8
PSHACM 10	10
PSHACM 125	12,5
PSHACM 15	15


Article	H mm
PSHACMS 08	8
PSHACMS 10	10
PSHACMS 125	12,5
PSHACMS 15	15

Suitable for use in contact with foodstuffs.

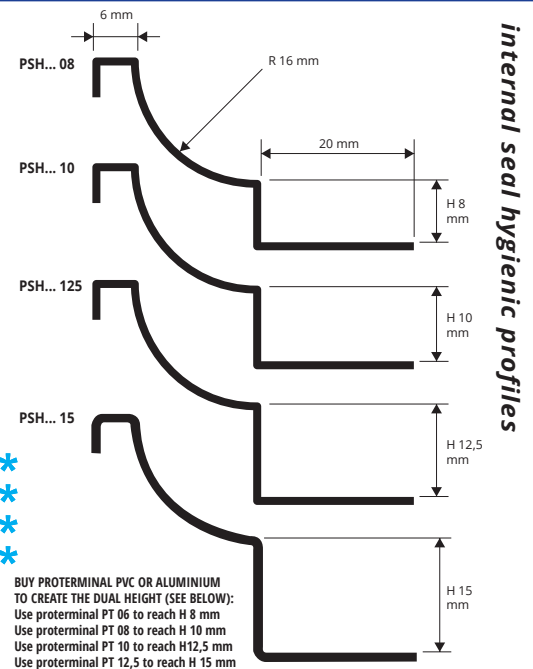

BUY PROTERMINAL PVC OR ALUMINIUM TO CREATE THE DUAL HEIGHT (SEE BELOW):
Use proterminal PT 06 to reach H 8 mm
Use proterminal PT 08 to reach H 10 mm
Use proterminal PT 10 to reach H 12,5 mm
Use proterminal PT 12,5 to reach H 15 mm

EXAMPLES AND INSTRUCTIONS FOR LAYING

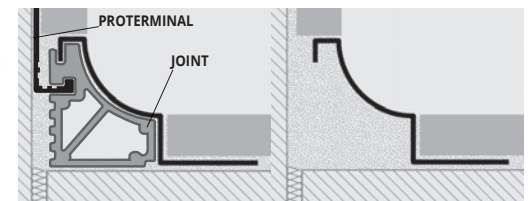

1. Choose "PROSHELL" according to the tile thickness and desired finish. (*) 2. Cut "PROSHELL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROSHELL" into the adhesive. 4. Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. (*) to obtain double height, use the joint of the same size as the selected profile and choose the PROTERMINAL PVC or ALUMINIUM according to the required thickness, see INSTRUCTIONS FOR LAYING.

COLOURS



PREWELDED CORNER, CAPS and THREE-WAYS JOINTS

POLISHED AND SATINATED STAINLESS STEEL

PREWELDED CORNER - POLISHED STAINLESS STEEL
H 08 - 10 - 12,5 - 15 mm - pack. 10 Pcs

Article	Lmm
RPIACM 8-10-125 (internal)	100
RPIACM 15 (internal)	100
RPEACM 8-10-125 (external)	100
RPEACM 15 (external)	100
RPTACM 8-10-125 (three ways)	100
RPTACM 15 (three ways)	100

PREWELDED CORNER - SATINATED STAINLESS STEEL
H 08 - 10 - 12,5 - 15 mm - pack. 10 Pcs


Article	Lmm
RPIACMS 8-10-125 (internal)	100
RPIACMS 15 (internal)	100
RPEACMS 8-10-125 (external)	100
RPEACMS 15 (external)	100
RPTSACMS 8-10-125 (three ways)	100
RPTSACMS 15 (three ways)	100

Specify height of joint: E.g.: RPI 8 for H 8 mm.



Specify height of joint: E.g.: RPIS 8 for H 8 mm.

INTERNAL CORNER
RPI...

EXTERNAL CORN
RPE...



THREE WAYS CORNER
RPT...

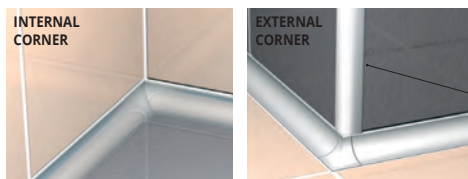


PROTERMINAL, PROJOLLY SQUARE
E PROJOLLY QUART
(NO PROJOLLY)




To facilitate and complete the application of PROSHELL (PSH.) (in AISI 316-1.4404 stainless steel), joints and right (R) and left (L) caps are available to close the profile ends and provide a connection with ceramic tiles, brickwork, wooden floors, etc. The caps are made of painted plastic with: in the bright stainless steel effect and satin stainless steel effect.

CAPS AND JOINTS IN RIGID GREY PLASTIC
pack. 10 Pcs

Article
TPSHAC caps R-L (poli. stainless steel effect)
TPSHACS caps R-L (satin stainless steel effect)
GISHN 08
GISHN 10
GISHN 125
GISHN 15



END CAPS
TPSH...

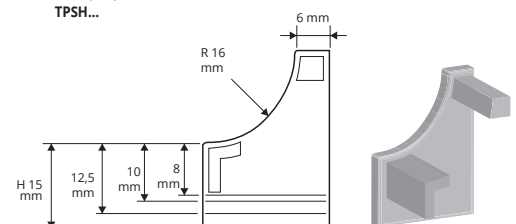


* = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed
** = Production on demand with minimum quantity of 20 pcs. Production delay 4/5 weeks. Price to be agreed

PROSHELL ALL


ANODIZED, POLISHED AND VARNISHED ALUMINIUM

PROSHELL ALL is a cove-shaped profile in anodized, polished and varnished aluminium particularly suitable to ensure cleanliness and hygiene in indoors environment where good resistance to mechanical and chemical stresses are required. Its particular section and the availability in three finishes, three heights and special pieces, such as internal and external corners, end caps and junctions, make **PROSHELL ALL** a much sought-after profile that allows a workmanlike application.


PSH... 8

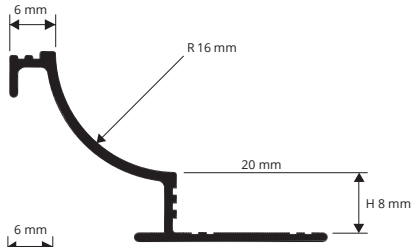

PSH... 10

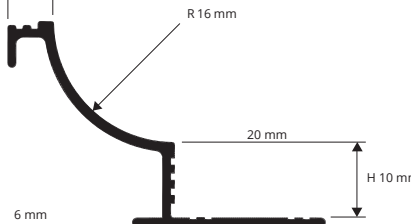

PSH... 125

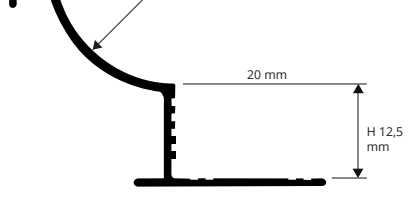

BUY PROTERMINAL PVC OR ALUMINIUM TO CREATE THE DUAL HEIGHT (SEE NEXT PIC):
Use proterminal PT 08 to reach H 10 mm
Use proterminal PT 10 to reach H 12,5 mm
Use proterminal PT 12,5 to reach H 15 mm




ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
PSHAA 08	8
PSHAA 10	10
PSHAA 125	12,5

VARNISHED WHITE ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
PSHA 08-01	8
PSHA 10-01	10
PSHA 125-01	12,5

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

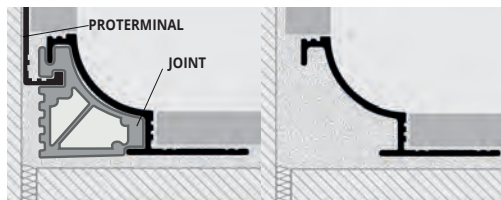

POLISHED CHROME ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
PSHBC 08	8
PSHBC 10	10
PSHBC 125	12,5

COLOURS

AA - Anod. Silver alum.	BC - Polished chrome alum.	O1 - White varnished alum.
-------------------------	----------------------------	----------------------------

1. Choose "PROSHELL ALL" according to the tile thickness and desired finish. 2. Cut "PROSHELL ALL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROSHELL ALL" into the adhesive. 4. Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. (*) to obtain double height, use the joint of the same size as the selected profile and choose the PROTERMINAL PVC or ALUMINIUM according to the required thickness, see INSTRUCTIONS FOR LAYING.

CORNERS, END CAPS and JOINTS


SILVER ANODIZED, POLISHED CHROME AND VARNISHED WHITE ALUMINIUM / PLASTIC



INTERNAL CORNER
RPSHIA.../...



EXTERNAL CORNER
RPSHEA.../...



END CAP
TPSH.../...



JOINT
GISHN.../...



EXTERNAL/INTERNAL CORNER - ANODIZED SILVER ALUMINIUM

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
RPSHIAA 08/...	8		
RPSHEAA 08/...	8		
RPSHIAA 10/...	10		
RPSHEAA 10...	10		
RPSHIAA 125/...	12,5		
RPSHEAA 125/...	12,5		

EXTERNAL/INTERNAL CORNER VARNISHED WHITE ALUMINIUM

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
RPSHIA 08-01/...	8		
RPSHEA 08-01/...	8		
RPSHIA 10-01/...	10		
RPSHEA 10-01...	10		
RPSHIA 125-01/...	12,5		
RPSHEA 125-01/...	12,5		

JOINTS IN RIGID GREY PLASTIC - pack. 10 Pcs

Article	H mm
GISHN 08/...	8
GISHN 10/...	10
GISHN 125/...	12,5

EXTERNAL/INTERNAL CORNER POLISHED CHROME ALUMINIUM

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
RPSHIBC 08/...	8		
RPSHEBC 08/...	8		
RPSHIBC 10/...	10		
RPSHEBC 10...	10		
RPSHIBC 125/...	12,5		
RPSHEBC 125/...	12,5		

CAPS - ANODIZED SILVER ALUMINIUM/POLISHED CHROME/VARNISHED WHITE ALUM.
pack. 10 Pcs (5 right and 5 left) - pack. 2 Pcs (1 right and 1 left)

Article	H mm	Pack. 10 Pcs	Pack. 2 Pcs
TPSHAA 08/...	8		
TPSHBC 08/...	8		
TPSHA 08/...	8		
TPSHAA 10/...	10		
TPSHBC 10/...	10		
TPSHA 10/...	10		
TPSHAA 125/...	12,5		
TPSHBC 125/...	12,5		
TPSHA 125/...	12,5		

Choose the desired packaging. E.g.: TPSH... ..-01/5 (Pack 10 Pcs)
TPSH... ..-01/1 (Pack 2 Pcs)



PROSGUSCIO DA is a cove-shaped profile in shockproof non - toxic coloured vinyl resin particularly suitable to ensure cleanliness and hygiene in public and industrial environments. Its particular section, the availability in three finishes, four heights and special pieces, such as internal and external corners, end caps and junctions, make **PROSGUSCIO DA** a much sought-after profile that allows a workmanlike application.

PROSGUSCIO DA

SHOCKPROOF NON - TOXIC COLOURED VINYL RESIN



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

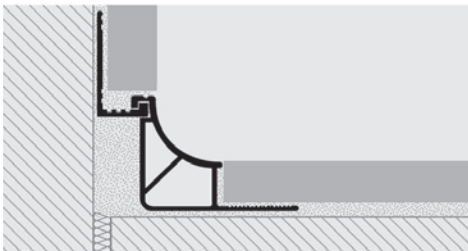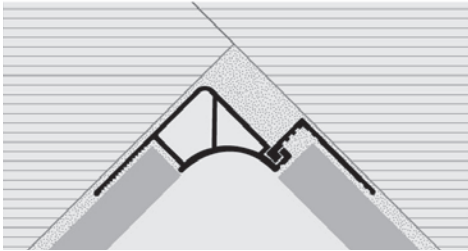

1. Choose "PROSGUSCIO DA" according to the tile thickness and desired colour. 2. Cut "PROSGUSCIO DA" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROSGUSCIO DA" into the adhesive. 4. Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.


NON-TOXIC SHOCKPROOF VINYL RESIN
bar length 2,5 lm - pack. 20 Pcs - 50 lm

Article	H mm		
PS 06-...	6		
PS 08-...	8		
PS 10-...	10		
PS 125-...	12,5		

H 06 available in the colours: 01-04.
H 08, H 10 and H 125 available in the colours: 01-03-04.
The code of the selected colour must be added to the article code.
E.g.: PS 06... (chosen colour white) PS 06-01. The interchangeable flange corresponds to white Proterminal pvc H 6-8-10 mm.

COLOURS

01 - White	03 - Cement gray	04 - Light beige
------------	------------------	------------------

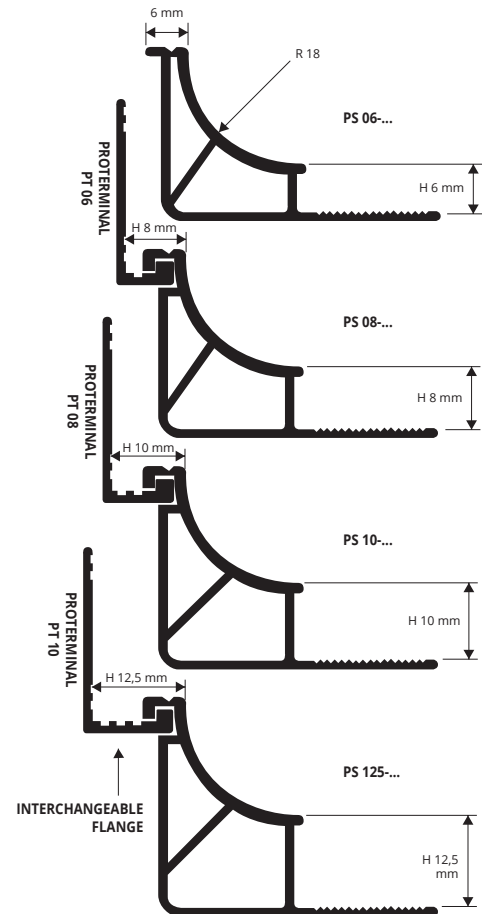

BUY WHITE PROTERMINAL TO CREATE THE DUAL HEIGHT:
Use proterminal PT 06 to reach H 8 mm
Use proterminal PT 08 to reach H 10 mm
Use proterminal PT 10 to reach H 12,5 mm

© 2020 All rights reserved by Progress Profiles. Printed in Italy

CORNERS, END CAPS and JOINTS

NON- TOXIC VINYL RESIN - 3 COLOURS

EXTERNAL / INTERNAL CORNER - RVA COLOURED

Article	H mm	Pack. 2 Pcs	Pack. 10 Pcs
RAI 06-.../... (internal)	6		
RAI 08-.../... (internal)	8		
RAI 10-.../... (internal)	10		
RAI 125-.../... (internal)	12,5		
RAE 06-.../... (external)	6		
RAE 08-.../... (external)	8		
RAE 10-.../... (external)	10		
RAE 125-.../... (external)	12,5		

Available in the colours: 01 - 03 - 04.
The code of the selected colour must be added to the article code.
E.g.: RAI 06-... (chosen colour white) RAI 06-01.

Choose the desired packaging. Ex. RAI 06-01/10 (pack. 10 Pcs)
RAI 06-01/2 (pack. 2 Pcs)

END CAP RT / LF - RVA COLOURED

pack. 10 Pcs (5 right and 5 left) - pack. 2 Pcs (1 right and 1 left)

Article	H mm	Pack. 2 Pcs	Pack. 10 Pcs
TCE 08-.../... caps right-left	8		
TCE 10-.../... caps right-left	10		
TCE 125-.../... caps right-left	12,5		

Available in the colours: 01 - 03 - 04.
The code of the selected colour must be added to the article code.
E.g.: TCE 08-... (chosen colour white) TCE 08-01.
Choose the desired packaging. Ex. TCE 08-01/5 (pack. 10 Pcs)
TCE 08-01/1 (pack. 2 Pcs)

JOINTS - RVA COLOURED

pack. 10 Pcs - pack. 2 Pcs

Article	H mm	Pack. 2 Pcs	Pack. 10 Pcs
GIN 08-.../...	8		
GIN 10-.../...	10		
GIN 125-.../...	12,5		

Available in the colours: 01 - 03 - 04.
The code of the selected colour must be added to the article code.
E.g.: GIN 08-... (chosen colour white) GIN 08-01.
Choose the desired packaging. Ex. GIN 08-01/10 (pack. 10 Pcs)
GIN 08-01/2 (pack. 2 Pcs)



PROJOLLY - PROJOLLY QUART

INTERNAL CORNER
RAI.../.../...



EXTERNAL CORNER
RAE.../.../...



END CAP
TCE.../.../...



JOINT
GIN.../.../...




PROROUND


POLISHED AND SATIN FINISH STAINLESS STEEL
AISI 304/1.4301-V2A

PROROUND is a cove-shaped profile in polished and satin finish stainless steel AISI 304/1.4301-V2A particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in two finishes and special pieces, such as internal and external corners, make **PROROUND** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

internal seal hygienic profiles

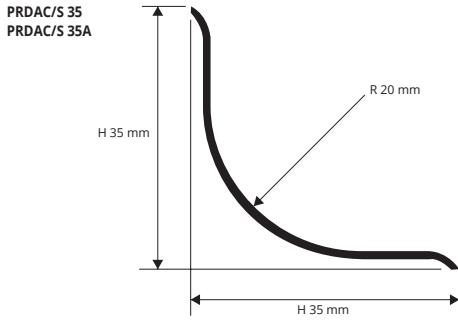

EXAMPLES OF LAYING

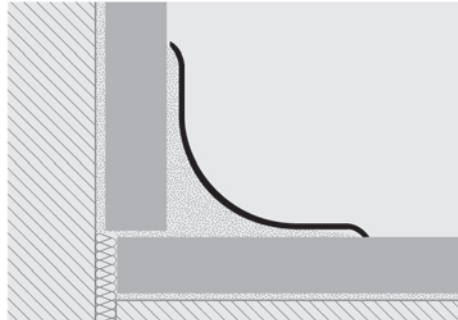

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
35 x 35 mm - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PRDAC 35	35		
PRDAC 35A (with adhesive)	35		



SATINATED STAINLESS ST. AISI 304/1.4301-V2A with protective film
35 x 35 mm - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PRDACS 35	35		
PRDACS 35A (with adhesive)	35		

1. Choose "PROROUND" according to the desired finish and width.
2. Cut "PROROUND" to the desired length.
3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid.
4. When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.


COLOURS



Suitable for use in contact with foodstuffs.

PREWELDED CORNERS and THREE-WAYS JOINTS without gaps

POLISHED AND SATINATED STAINLESS STEEL

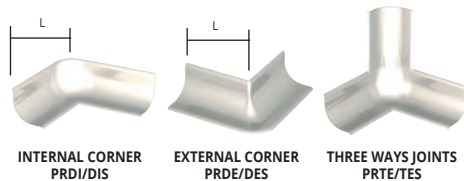

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A - pack. 10 Pcs

Article	L mm		
PRDI (internal)	100		
PRDE (external)	100		
PRTE (three-ways)	80		

SATINATED STAINLESS STEEL AISI 304/1.4301-V2A - pack. 10 Pcs


Article	L mm		
PRDIS (internal)	100		
PRDES (external)	100		
PRTES (three-ways)	80		

PROSANI STRIP & PROSANI STRIP KIT


NON-TOXIC FLEXIBLE WHITE VINYL RESIN

PROSANI STRIP and **PROSANI STRIP KIT** are profiles in non-toxic flexible white vinyl resin particularly suitable to ensure cleanliness and hygiene along the connection between the wall tile coverings and sinks, bathtubs and shower trays. **PROSANI STRIP KIT** is provided with a double-sided butyl tape while **PROSANI STRIP** can be applied with silicone. Their particular section and ease of application, and make **PROSANI STRIP KIT** and **PROSANI STRIP** a much sought after profiles that allow a workmanlike application.

internal seal hygienic profiles

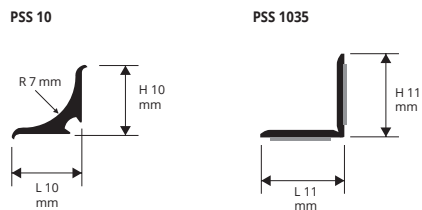

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

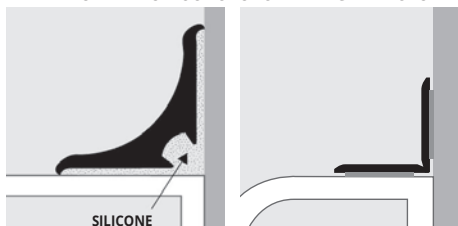

1. Choose the desired profile.
2. Cut the profile to the desired length.
3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid.
4. When the surface is perfectly dry, remove the protective film (PROSANI STRIP KIT), place correctly the profile and press it without hitting / apply the equipment double-sided butyl tape on the back of the profile (PROSANI STRIP), apply the silicone along the floor-wall joint and place the profile.




FLEXIBLE WHITE VINYL RESIN
roll 25 lm

Article	LxH mm		
PSS 10	10 X 10		

PROSANI STRIP KIT ROLL - WHITE
roll 3,5 lm

Article	LxH mm		
PSS 1035	11 X 11		

COLOURS




PROSEAL 50 is a cove-shaped profile in shockproof non - toxic coextruded coloured vinyl resin particularly suitable to ensure cleanliness and hygiene in public and industrial environments. Its particular section and the availability in two different colours and special pieces, such as internal and external corners, end caps and joints, make **PROSEAL 50** a much sought-after profile that allows a workmanlike application.

PROSEAL 50

SHOCKPROOF NON - TOXIC COEXTRUDED
COLORED VINYL RESIN



PSA 50-... / PSAA 50-...

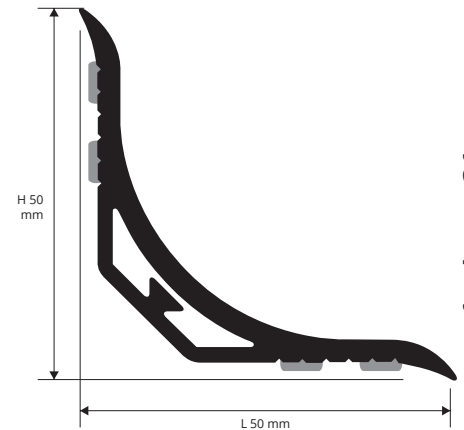

Internal seal hygienic profiles

COEXTRUDED VINYL RESIN NON-TOXIC SHOCKPROOF
bar length **2,5 lm**

Article		
PSA 50-... pack. 40 lm		
PSAA 50-... pack. 30 lm (with adhesive)		

Available in the colours: 01 - 03 (on demand 04).
The code of the selected colour must be added to the article code.
E.g.: PSA 50... (chosen colour white) PSA 50-01.




AVAILABLE MINIMUM QUANTITY 100 PCS By colour and height
(Price and delivery time to be agreed)

COLOURS

01 - White	03 - Cement Grey

04 - Light Beige

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

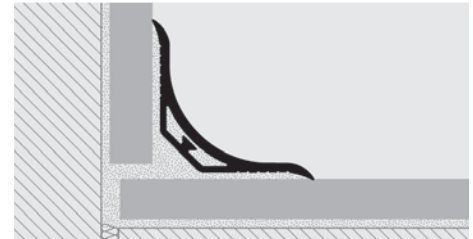

1. Choose "PROSEAL 50" according to the tile thickness and desired finish. **2.** Cut "PROSEAL 50" to the desired length. **3.** Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. **4.** When the surface is perfectly dry, remove the protective film (version with adhesive), place the profile and press it without hitting / apply the double-sided butyl tape on the back of the profile (version without adhesive), apply the silicone along the floor-wall joint and place the profile.

© 2020 All rights reserved by Progress Profiles. Printed in Italy




CORNERS and END CAPS

NON - TOXIC VINYL RESIN

INTERNAL / EXTERNAL CORNER AND END CAPS (for PROSEAL 50)

Article	Pack. 2 Pcs	Pack. 10 Pcs
TRI 50-... (internal corner)		
TRE 50-... (external corner)		
TRT 50-... (three-ways)		
TRC 50-... (end cap)		
TGN 50-... (joints)		

Available in the colours: 01 - 03 - 04.
The code of the selected colour must be added to the article code.
E.g.: TRI 50-... (chosen colour white) TRI 50-01.
Choose the desired packaging. Ex. TRI 50-01/10 (pack. 10 Pcs)
TRI 50-01/2 (pack. 2 Pcs)

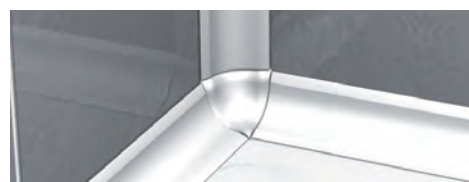



EXTERNAL CORNER

THREE WAYS

END CAP

JOINTS

INTERNAL CORNER



TRE 50-.../...

TRT 50-.../...

TRC 50-.../...

TGN 50-.../...


TRI 50-.../...

PROSEAL 25

SHOCKPROOF NON - TOXIC COEXTRUDED COLORED VINYL RESIN

PROSEAL 25 is a cove-shaped profile in shockproof non - toxic coextruded coloured vinyl resin particularly suitable to ensure cleanliness and hygiene in public and industrial environments. Its particular section and the availability in three different colours and special pieces, such as internal and external corners, end caps and joints, make **PROSEAL 25** a much sought-after profile that allows a workmanlike application.

internal seal hygienic profiles

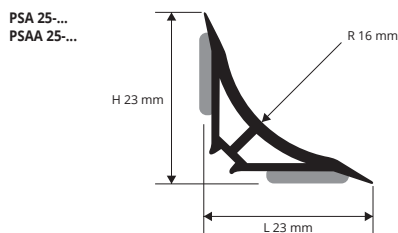

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROSEAL 25" according to the tile thickness and desired finish. 2. Cut "PROSEAL 25" to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry, remove the protective film (version with adhesive), place the profile and press it without hitting / apply the double-sided butyl tape on the back of the profile (version without adhesive), apply the silicone along the floor-wall joint and place the profile.



COEXTRUDED VINYL RESIN NON-TOXIC SHOCKPROOF
bar length 2,5 lm

Article		
PSA 25-...	Pack. 50 lm	
PSAA 25-...	Pack. 50 lm (with adhesive)	

Available in the colours: 01 - 03 - 04.
The code of the selected colour must be added to the article code.
E.g.: PSA 25-... (chosen colour white) PSA 25-01..

COLOURS




PROSEAL KIT 25 (1 Pc of 1,80 lm + 2 Pcs of 0,90 lm + 2 INTERNAL CORNERS and 2 END CAPS 1 R and 1 L)

Description	Article	
Kit PROSEAL 25	KTPSA 25-01	
1 Pc PROSEAL 25 of 1,80 lm	PSA 25-01	
2 Pcs PROSEAL 25 of 0,90 lm	PSA 25-01	
2 Internal corner	TRI 25-01	
2 End caps	TRC 2501	

CORNERS, END CAPS and THREE-WAYS JOINTS


NON - TOXIC VINYL RESIN

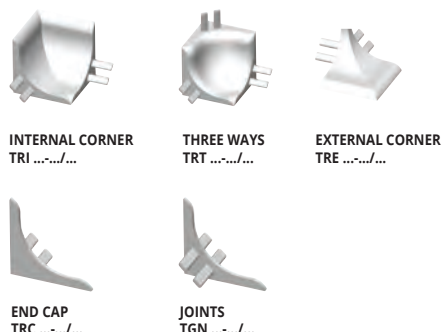

INTERNAL / EXTERNAL CORNERS AND END CAPS (for PROSEAL 25)

Article	Pack. 2 Pcs	Pack. 10 Pcs
TRI 25-... (internal corner)		
TRE 25-... (external corner)		
TRT 25-... (three - ways)		
TRC 25-... (end cap)		
TGN 25-... (joints)		


Available in the colours: 01 - 03 - 04.
The code of the selected colour must be added to the article code.
E.g.: TRI 25-... (chosen colour white) TRI 25-01.
Choose the desired packaging. Ex. TRI 25-01/10 (pack. 10 Pcs)
TRI 25-01/2 (pack. 2 Pcs)

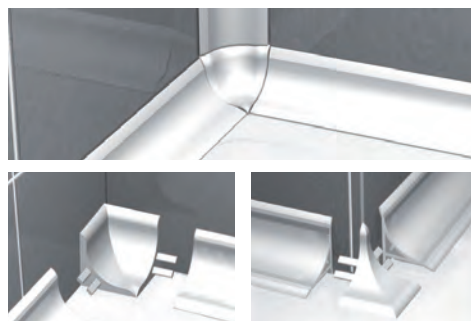

PROSEAL FLEX

NON-TOXIC FLEXIBLE VINYL RESIN

PROSEAL FLEX is a flexible non-toxic vinyl resin profile suitable to realize cove-shaped connection with resilient flooring in public and industrial environments. Its particular section makes **PROSEAL FLEX** a very sought after profile that allows that allows a workmanlike application.

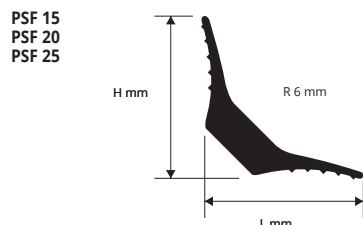

INSTRUCTIONS FOR LAYING

1. Apply a suitable adhesive for resilient flooring on the support. 2. Place "PROSEAL FLEX" over the adhesive. 3. Apply the adhesive on the profile and the support and lay the resilient flooring.



FLEXIBLE BLACK NON-TOXIC VINYL RESIN
bar length 2,5 lm - pack. 40 Pcs - 100 lm

Article	L x H mm	
PSF 15-11	15x15	
PSF 20-11	20x20	
PSF 25-11	25x25	


COLOURS



PROBATH is a cove-shaped profile in shockproof non - toxic coextruded white vinyl resin particularly suitable to ensure cleanliness and hygiene along the connection between the wall tile coverings and sinks, bathtubs and shower trays. Its particular section and the availability in two different height and special pieces, such as internal and external corners, (only for PSB-20) end caps and joints, make **PROBATH** a much sought-after and easy to lay profile that allows a workmanlike application.

PROBATH

SHOCKPROOF NON - TOXIC
COEXTRUDED VINYL RESIN

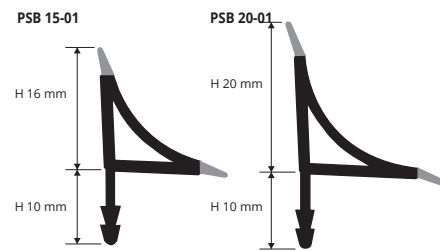


Internal seal hygienic profiles

CO-EXTRUDED VINYL RESIN NON - TOXIC IMPACT - RESISTANT
bar length 2,5 lm - pack. 40 Pcs - 100 lm

Article	H mm
PSB 15-01	15
PSB 20-01	20

AVAILABLE ONLY IN WHITE

COLOURS




01 - White

PROBATH KIT (1 PC of 1,80 LM + 2 PCS of 0,90 LM + 2 INTERNAL CORNERS and 2 END CAPS 1 R and 1 L)

Description	Article
Kit PROBATH	KTPSB 20-01
1 Pc PROBATH of 1,80 lm	PSB 20-01
2 Pc PROBATH of 0,90 lm	PSB 20-01
2 Internal Corner	TRI 25-01
2 End caps	TRC 25-01

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

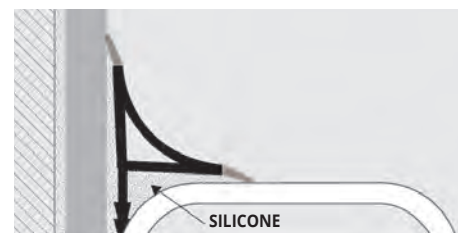


1. Choose "PROBATH" according to the desired height.
2. Cut "PROBATH" to the desired length.
3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid.
4. When the surface is perfectly dry apply the silicone on the back of the profile and place it without hitting.

FOR OTHER COLORS MINIMUM ORDER 400 pcs

PROBATH FLEX is a cove-shaped profile in shockproof non - toxic flexible white vinyl resin particularly suitable to ensure cleanliness and hygiene along the connection between the wall tile coverings and sinks, bathtubs and shower trays. Its particular section and the availability in two different height and special pieces, such as internal and external corners, (only for PSB-20) end caps and joints, make **PROBATH FLEX** a much sought-after and easy to lay profile that allows a workmanlike application.

PROBATH FLEX

SHOCKPROOF NON - TOXIC FLEXIBLE
VINYL RESIN

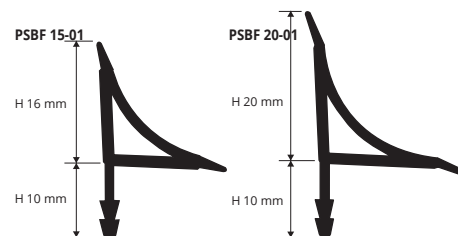

Internal seal hygienic profiles

FLEXIBLE WHITE VYNIL RESIN

bar length 2,5 lm - pack. 40 Pcs - 100 lm

Article	H mm
PSBF 15-01	15
PSBF 20-01	20

AVAILABLE ONLY IN WHITE



01 - White

1. Choose "PROBATH FLEX" according to the desired height.
2. Cut "PROBATH FLEX" to the desired length.
3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid.
4. When the surface is perfectly dry apply the silicone on the back of the profile and place it without hitting.

CORNERS, END CAPS and THREE-WAYS JOINTS

NON-TOXIC VINYL RESIN

CORNERS INTERNAL / EXTERNAL, THREE-WAYS, JOINTS AND END CAP


Article	Pack. 2 Pcs	Pack. 10 Pcs
TRI 25-01/... (internal corner)		
TRE 25-01/... (external corner)		
TRT 25-01/... (three-ways)		
TRC 25-01/... (end cap)		
TGN 25-01/... (joints)		

Choose the desired packaging. Ex. TRI 25-01/10 (pack. 10 Pcs)
TRI 25-01/2 (pack. 2 Pcs)

CORNERS INTERNAL / EXTERNAL AND END CAP - (for PSB 15 - PSBF 15)

Article	Pack. 2 Pcs	Pack. 10 Pcs
TPSB 15-01/... (end cap)		
RIPSB 15-01/... (internal corner)		
REPSB 15-01/... (external corner)		

Choose the desired packaging. Ex. TPSB 15-01/10 (pack. 10 Pcs)
TPSB 15-01/2 (pack. 2 Pcs)

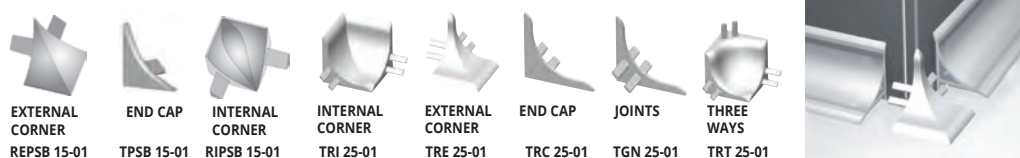

EXTERNAL CORNER REPSB 15-01 **END CAP** TPSB 15-01 **INTERNAL CORNER** RIPSB 15-01 **INTERNAL CORNER** TRI 25-01 **EXTERNAL CORNER** TRE 25-01 **END CAP** TRC 25-01 **JOINTS** TGN 25-01 **THREE WAYS** TRT 25-01

* = Production on demand with minimum quantity of 400 pcs. Production delay 4/5 weeks. Price to be agreed



PROKERLAM LINE is a Y-shaped profile in anodized and polished aluminium suitable to protect the external corners of coverings in low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different heights and finishes and special pieces such as internal and external corners, end caps and joints make **PROKERLAM LINE** a much sought-after profile that allows a workmanlike application even with low thickness coverings.

PROKERLAM LINE

ANODIZED AND POLISHED ALUMINIUM
SILVER, CHROME AND GOLD




ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PKLLAA 045	4,5
PKLLAA 10	10
PKLLAA 125	12,5

POLISHED CHROME/GOLD ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PKLLBO 045	4,5
PKLLBC 045	4,5
PKLLBC 10	10
PKLLBC 125	12,5

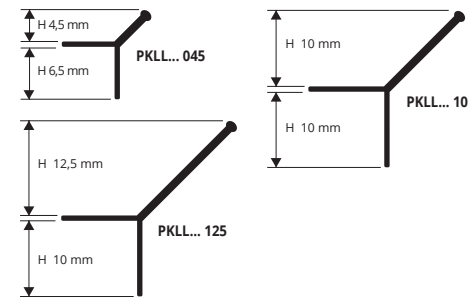

COLOURS



EXAMPLES OF LAYING



PROTERMSTEP ACC is a profile for stair in polished and satin finish stainless steel AISI 304/1.4301-V2A. The profile protects the tread and cover the joint between the tread and the riser of the step. It can also be used overturned and for this reason it is suitable for two different tile thickness. Its particular geometry and the availability of two finishes and different heights make **PROTERMSTEP ACC** suitable for every kind of stair with ceramic, terracotta floorings, wood and natural stone coverings.

PROTERMSTEP ACC

POLISHED AND SATIN FINISH STAINLESS
STEEL AISI 304/1.4301-V2A




POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	h / H mm
PTSPAC 0815	08 / 15
PTSPAC 10125	10 / 12,5
PTSPAC 1530	15 / 30
PTSPAC 2025	20 / 25

SATINED STAINLESS STEEL AISI 304/1.4301-V2A
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	h / H mm
PTSPACS 0815	08 / 15
PTSPACS 10125	10 / 12,5
PTSPACS 1530	15 / 30
PTSPACS 2025	20 / 25

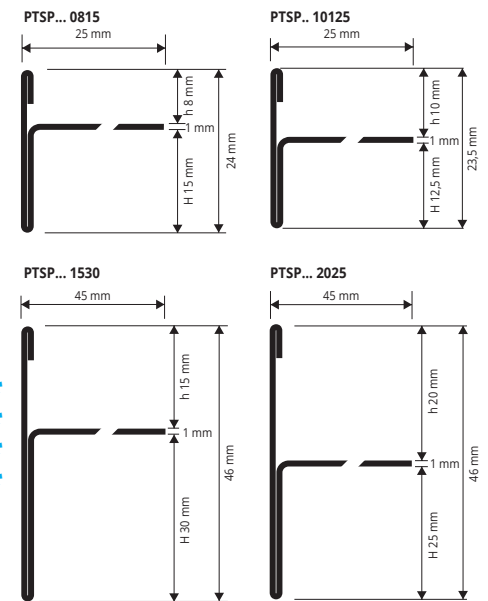

COLOURS



ON DEMAND



INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROTERMSTEP ACC" according to the tile thickness and desired finish.
2. Cut "PROTERMSTEP ACC" to the desired length.
3. Lay the riser of the step and apply the adhesive on the support where the profile will be laid.
4. Press the anchoring flange of "PROTERMSTEP ACC" into the adhesive.
5. Lay the tiles aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
6. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

ANGLE AND JOINT

CORNER - pack. 10 Pcs

Article	h / H mm
REPTSAC 0815	08 / 15
REPTSAC 10125	10 / 12,5
REPTSAC 1530	15 / 30
REPTSAC 2025	20 / 25


JOINT - pack. 10 Pcs

Article	h / H mm
GIPTSAC 0815	08 / 15
GIPTSAC 10125	10 / 12,5
GIPTSAC 1530	15 / 30
GIPTSAC 2025	20 / 25

JOINT
GIPTSAC ..



CORNER
REPTSAC ..





* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROTOP


ANODIZED AND POLISHED ALUMINIUM

PROTOP is a rounded profile in anodized and polished aluminium. The profile protects the tile edges and decorates the countertops of kitchens realized with ceramic. Its particular section and elegance, the availability of three different finishes and special pieces such as internal and external corner at 90° and 135°, make **PROTOP** a much sought-after profile that allows an elegant workmanlike application.

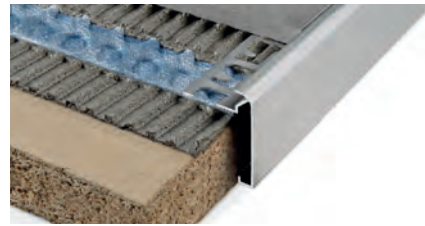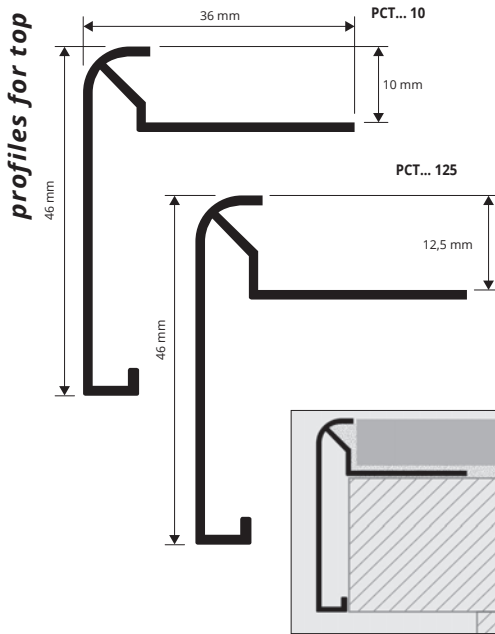

ANODIZED SILVER ALUMINIUM
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm
PCTAA 10	10
PCTAA 125	12,5

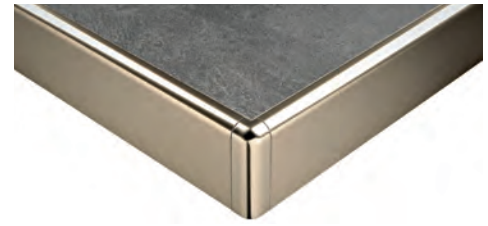

POLISHED TITANIUM ALUMINIUM
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm
PCTBT 10	10
PCTBT 125	12,5

POLISHED CHROME ALUMINIUM
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm
PCTBC 10	10
PCTBC 125	12,5

COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS


1. Choose "PROTOP" according to the tile thickness and desired finish. 2. Cut "PROTOP" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTOP" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

CORNERS

INTERNAL / EXTERNAL CORNERS ANODIZED SILVER ALUMINIUM

pack. 10 Pcs

Article
EPCTAA 90 (external 90°)
IPCTAA 90 (internal 90°)
EPCTAA 135 (external 135°)
IPCTAA 135 (internal 135°)




EXTERNAL CORNER
EPCT... 90

INTERNAL / EXTERNAL CORNERS POLISHED TITANIUM ALUMINIUM

pack. 10 Pcs

Article
EPCTBT 90 (external 90°)
IPCTBT 90 (internal 90°)
EPCTBT 135 (external 135°)
IPCTBT 135 (internal 135°)



EXTERNAL CORNER
EPCT... 135



INTERNAL CORNER
IPCT... 90

INTERNAL / EXTERNAL CORNERS POLISHED CHROME ALUMINIUM

pack. 10 Pcs

Article
EPCTBC 90 (external 90°)
IPCTBC 90 (internal 90°)
EPCTBC 135 (external 135°)
IPCTBC 135 (internal 135°)




INTERNAL CORNER
IPCT... 135

PROTOP T

ANODIZED AND POLISHED ALUMINIUM

PROTOP T is a square profile in anodized and polished aluminium. The profile protects the tile edges and decorates the countertops of kitchens realized with ceramic. Its particular section and elegance, the availability of two different finishes and special pieces such as internal and external corner at 90° and 135°, make **PROTOP T** a much sought-after profile that allows an elegant workmanlike application.

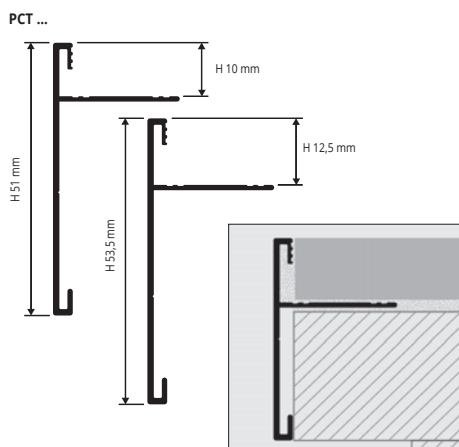

ANODIZED SILVER ALUMINIUM
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm
PCTAA 10T	10
PCTAA 125T	12,5



POLISHED CHROME ALUMINIUM
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm
PCTBC 10T	10
PCTBC 125T	12,5

INTERNAL / EXTERNAL CORNER ANODIZED SILVER ALUMINIUM

pack. 10 Pcs

Article
IEPCTAA 12590T (90°)
IEPCTAA 1090T (90°)
IEPCTAA 10135T (135°)
IEPCTAA 125135T (135°)



IEPCT... 90T



IEPCT... 135T

INTERNAL / EXTERNAL CORNER ANODIZED CHROME ALUMINIUM

pack. 10 Pcs

Article
IEPCTBC 12590T (90°)
IEPCTBC 1090T (90°)
IEPCTBC 10135T (135°)
IEPCTBC 125135T (135°)

COLOURS




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROTOP T" according to the tile thickness and desired finish. 2. Cut "PROTOP T" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTOP T" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



GUGGENHEIM MUSEUM, NY, 1943
Frank Ll. Wright

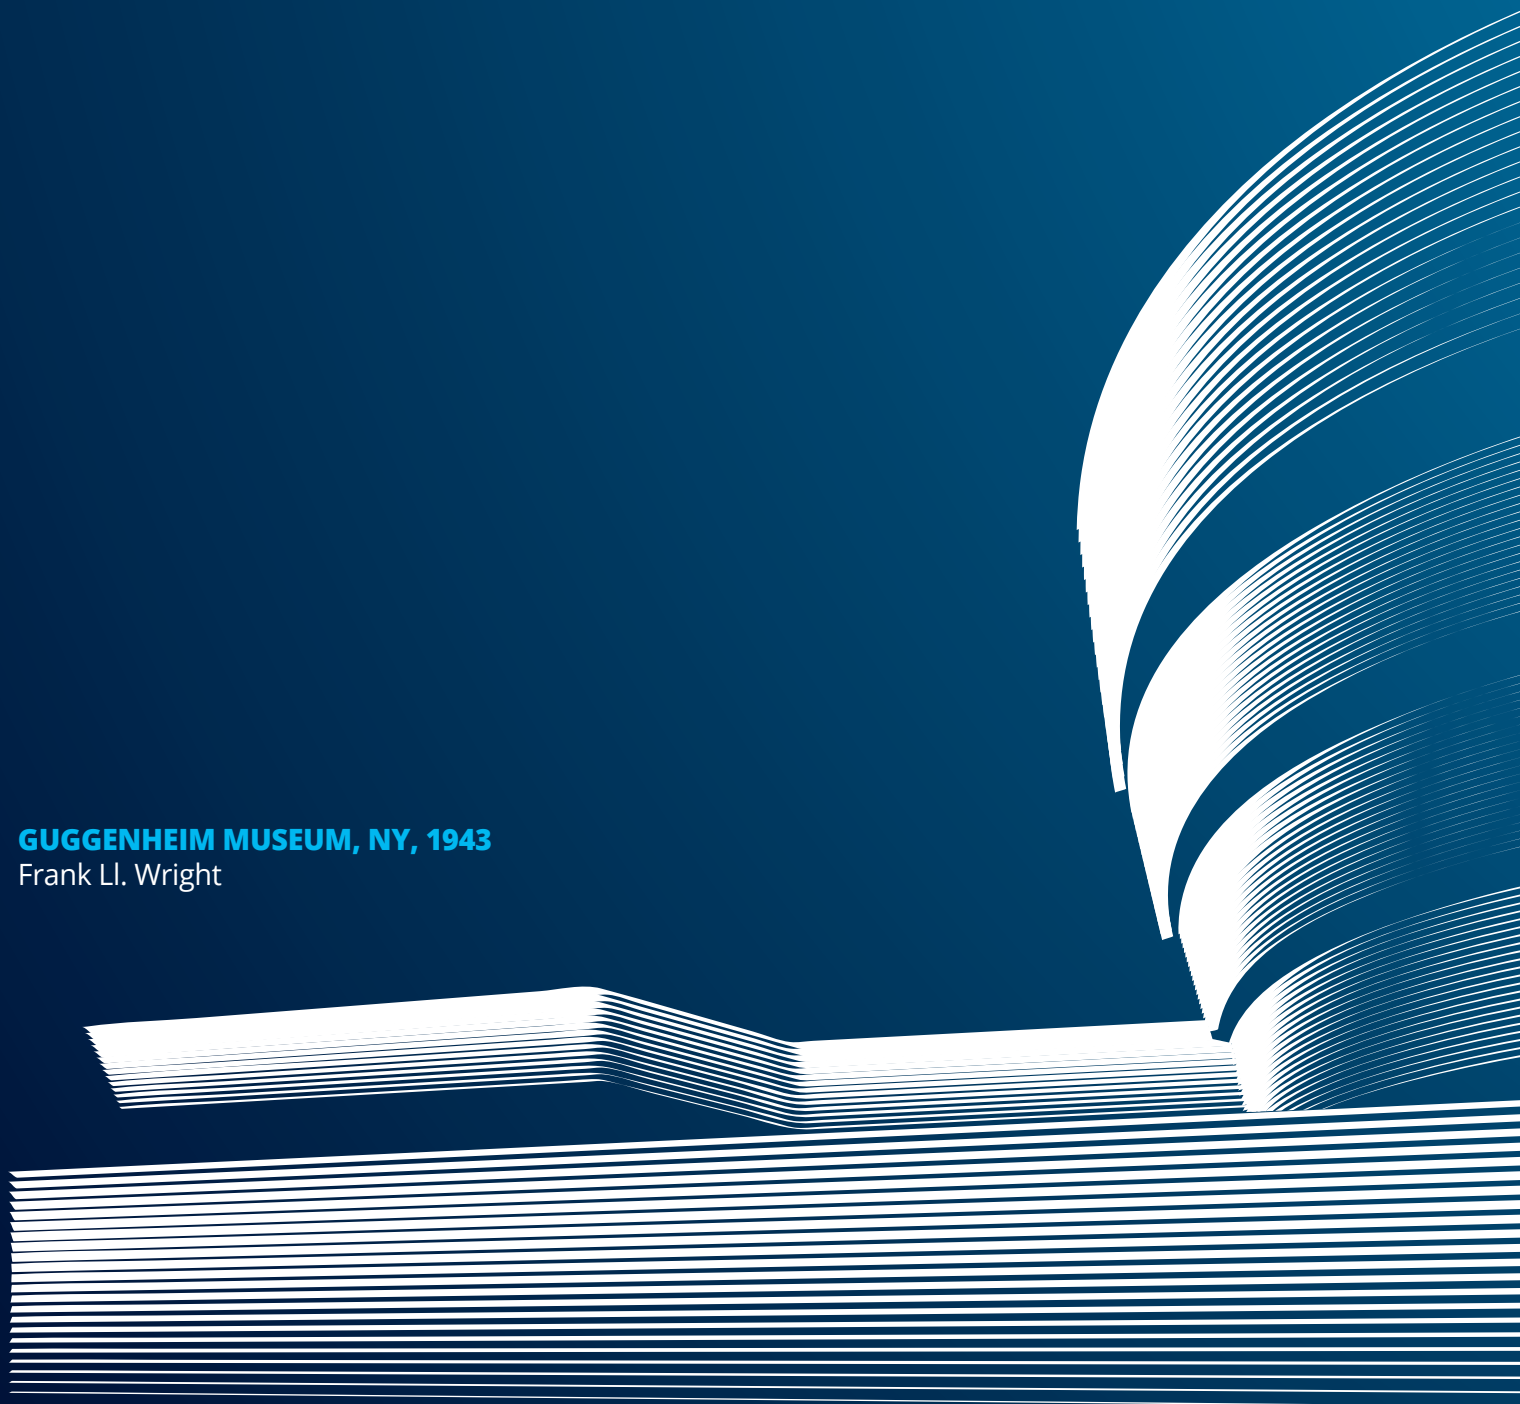

PROFILES FOR FLOORS




PROTERMINAL

POLISHED AND SATIN FINISH
STAINLESS STEEL AISI 304/1.4301-V2A

PROTERMINAL is a professional edging profile used mainly to join similar or different floor materials (e.g. tiles/ tiles - parquet/marble/laminates/carpeting /linoleum, etc.) of differing thickness.

PROTERMINAL in stainless steel is also used to protect steps and decking, as a floor edging profile and skirting covering. Match with PROLISTEL strips in stainless steel AISI 304/1.4301-V2A with polished or satin finish and in aluminium with anodized or polished chrome finish.

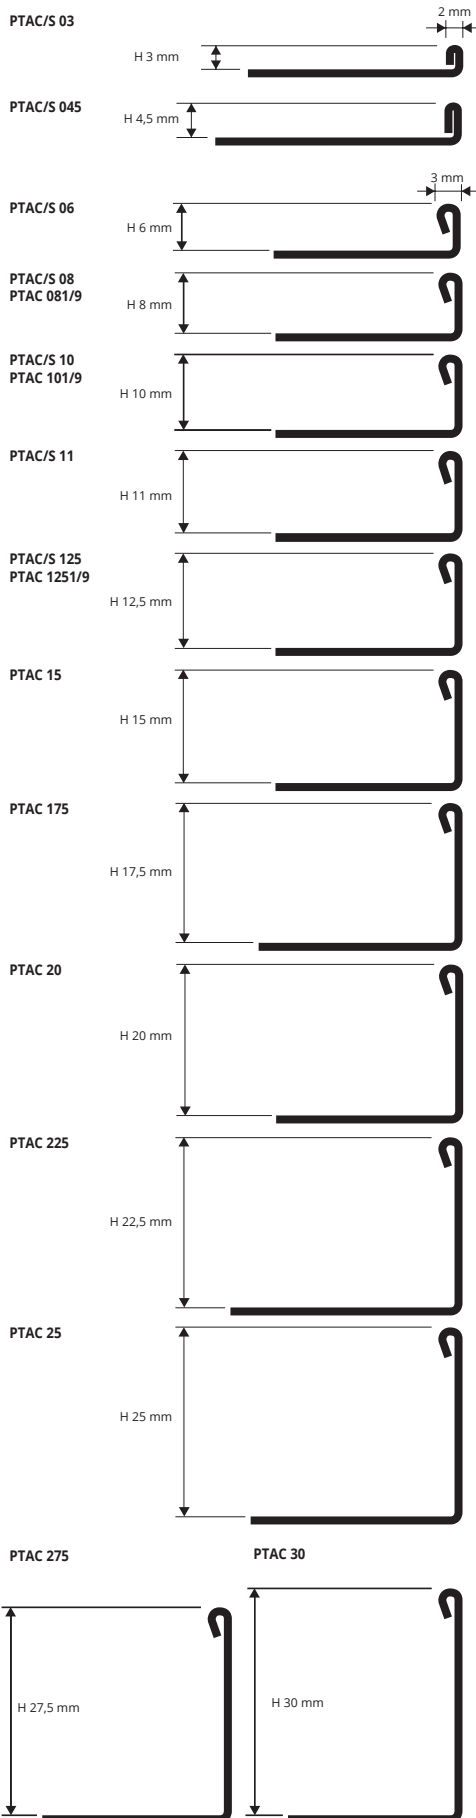

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10 mm

Article	H mm		
PTAC 03	3		
PTAC 045	4,5		
PTAC 06	6		
PTAC 08	8		
PTAC 10	10		
PTAC 11	11		
PTAC 125	12,5		
PTAC 15	15		
PTAC 175	17,5		
PTAC 20	20		
PTAC 225	22,5		
PTAC 25	25		
PTAC 275	27,5		
PTAC 30	30		

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 1 lm - pack. 40 Pcs - 40 lm - 10/10 mm

Article	H mm		
PTAC 081	8		
PTAC 101	10		
PTAC 1251	12,5		

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 0,9 lm - pack. 40 Pcs - 36 lm - 10/10 mm

Article	H mm		
PTAC 089	8		
PTAC 109	10		
PTAC 1259	12,5		


SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10 mm

Article	H mm		
PTACS 03	3		
PTACS 045	4,5		
PTACS 06	6		
PTACS 08	8		
PTACS 10	10		
PTACS 11	11		
PTACS 125	12,5		
PTACS 15	15		
PTACS 20	20		

COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

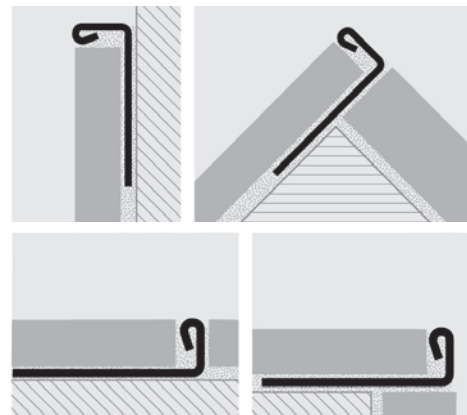

1. Choose the PROTERMINAL with the same height as the thickness of the covering.
2. Apply the adhesive onto the area of application of the profile.
3. Lay and align the profile pressing the perforated flange into the adhesive.
4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile.
5. Use the adhesive to seal any empty interstices.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.




Curve available, see page 104

© 2020 All rights reserved by Progress Profiles, Printed in Italy

PROTERMINAL are manufactured with the same forms and sections, as well as in the very resistant material, the stainless shiny steel 316/1.4401-V4A, suitable for outdoors and marine environment with much presence of saltiness and considerable atmospheric agents. They are used as protection for the external angles of tiles, in order to separate or to create the separating joints in the pavements, to terminate the finishing of wall coverings, for platforms, stair steps, bathtubs, etc. They guarantee the impeccable work, ensuring considerable aesthetic effect as well. They strengthen the tile edge and prevents from chipping and breakages. Required by new European regulations on safety and accident prevention in public and private places.

PROTERMINAL

POLISHED STAINLESS STEEL
AISI 316/1.4404-V4A

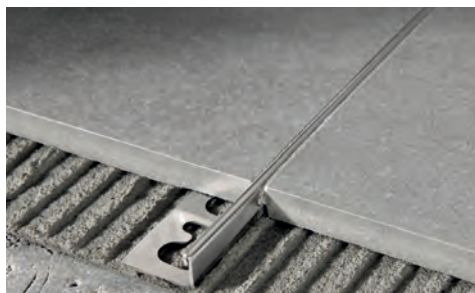


POLISHED STAINLESS ST. AISI 316L/1.4404-V4A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10 mm

Article	H mm		
PTACM 06	6		
PTACM 08	8		
PTACM 10	10		
PTACM 125	12,5		

COLOURS



SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

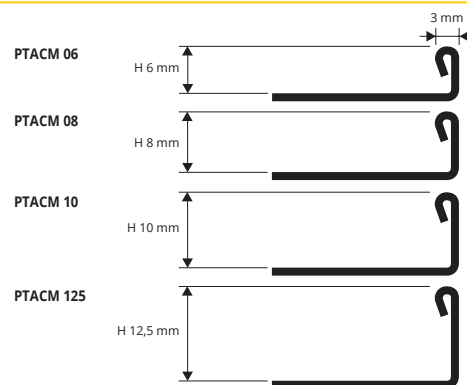

EXAMPLES OF LAYING



PROTERMINAL is a professional edging profile used mainly to join similar or different floor materials (e.g. tiles/tiles - tiles/parquet/marble/granite, etc.) of differing thickness.

PROTERMINAL in brass is also used to protect steps and decking, as a floor edging profile, to cover skirting, decking and worktops and to frame doormats.

PROTERMINAL

POLISHED, NATURAL AND ANTIQUE BRASS



NATURAL BRASS thermo packed - 10 Pcs
bar length 2,70 lm pack. 20 Pcs 54 lm (H 6 mm - 40 Pcs 108 lm)

Article	H mm		
PTON 06	6		
PTON 08	8		
PTON 10	10		
PTON 125	12,5		
PTON 15	15		
PTON 20	20		
PTON 25	25		


POLISHED BRASS thermo packed 10 Pcs
bar length 2,70 lm - pack. 20 Pcs 54 lm

Article	H mm		
PTOL 08	8		
PTOL 10	10		
PTOL 125	12,5		

ANTIQUÉ BRASS thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PTOB 08	8		*
PTOB 10	10		
PTOB 125	12,5		

COLOURS




Chrome-plated Brass version page 37

NATURAL BRASS thermo packed 10 Pcs
bar length 1 lm - pack. 40 Pcs - 40 lm

Article	H mm		
PTON 061	6		*
PTON 081	8		*
PTON 101	10		*
PTON 1251	12,5		*



NATURAL BRASS thermo packed 10 Pcs
bar length 0,90 lm - pack. 40 Pcs - 36 lm

Article	H mm		
PTON 069	6		*
PTON 089	8		*
PTON 109	10		*
PTON 1259	12,5		*



Curve available, see page 105

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

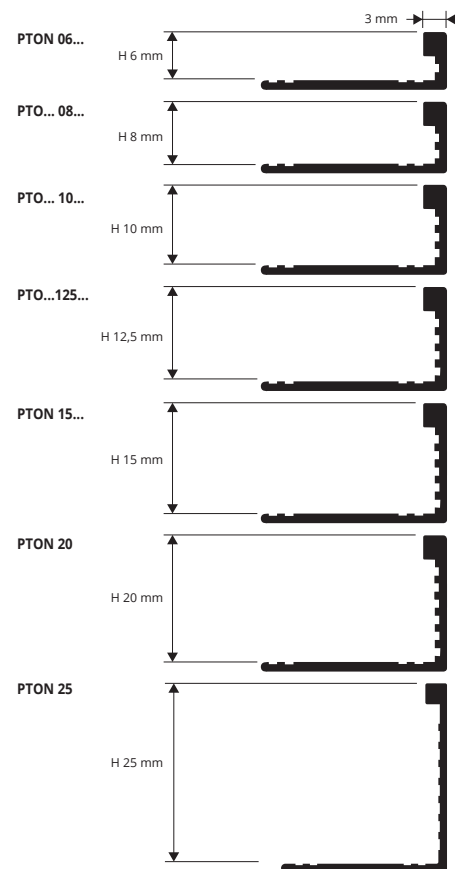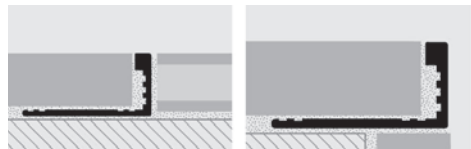


1. Choose the "PROTERMINAL" with the same height as the thickness of the floor/wall covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

PROTERMINAL

NATURAL ALUMINIUM AND ANODIZED SILVER ALUMINIUM

PROTERMINAL is a professional edging profile designed to protect and decorate the outside corners of tile, mosaic and marble coverings of differing thickness.

PROTERMINAL in aluminium is also used to join different floor materials and to protect steps and decking. Excellent as the edging trim skirtings and for bathroom and kitchen wall coverings. Match with PROLISTEL ALL strips in anodized aluminium with silver and polished chrome finish and with PROLISTEL ACC strips in AISI 304-1.4301 stainless steel with polished or satin finish.

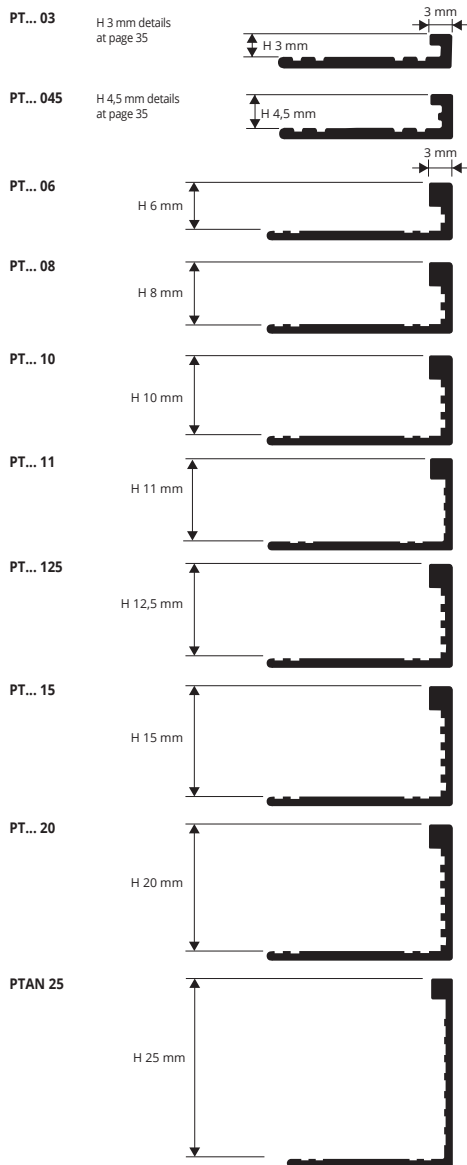

NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 2,70 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PTAN 06	6		
PTAN 08	8		
PTAN 10	10		
PTAN 11	11		
PTAN 125	12,5		
PTAN 15	15		
PTAN 20	20		
PTAN 25	25		

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,70 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PTAA 06	6		
PTAA 08	8		
PTAA 10	10		
PTAA 11	11		
PTAA 125	12,5		
PTAA 15	15		
PTAA 20	20		

NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 0,90 lm - pack. 40 Pcs - 36 lm

Article	H mm		
PTAN 069	6	*	
PTAN 089	8	*	
PTAN 109	10	*	
PTAN 1259	12,5	*	

NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 1 lm - pack. 40 Pcs - 40 lm

Article	H mm		
PTAN 061	6	*	
PTAN 081	8	*	
PTAN 101	10	*	
PTAN 1251	12,5	*	


COLOURS




Polished version page 38

Curve available, see page 105

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

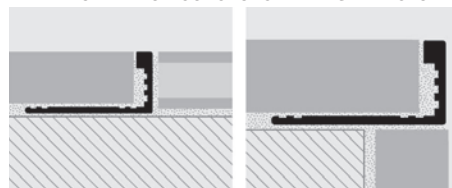

1. Choose the "PROTERMINAL" with the same height as the thickness of the covering.
2. Apply the adhesive onto the area of application of the profile.
3. Lay and align the profile pressing the perforated flange into the adhesive.
4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile.
5. Use the adhesive to seal any empty interstices.

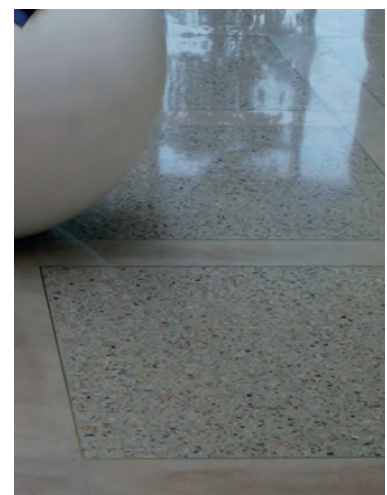

© 2020 All rights reserved by Progress Profiles, Printed in Italy

PROLEVIGAL are separating profiles used to create the technical joint in the special types of pavements such as marble- Venice- palladium ones, that must be smoothed after their laying process. The particular "L" shape with the cut/drilled base and 2,5 mm thick vertical edge consent the perfect smoothing and constant thickness as well. Available in natural aluminium and natural brass, various thickness, as well in outlined/bent **PROLEVIGAL CURVES** BRASS versions.


PROLEVIGAL

NATURAL BRASS




NATURAL BRASS thermo packed 10 Pcs
bar length 2,7 lm - pack. 40 Pcs-108 lm (H 15;17,5;20 mm - 20 Pcs 54 lm)

Article	H mm		
PLGON 08	8		*
PLGON 10	10		
PLGON 125	12,5		
PLGON 15	15		
PLGON 175	17,5		*
PLGON 20	20		

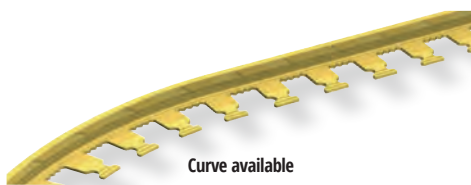


Curve available
ADD **CV** AFTER THE ARTICLE CODE.
E.g.: PLGON 08 (CURVE) PLGON**CV** 08

AVAILABLE MINIMUM QUANTITY 100 PCS by color and height




Price to be agreed. Production delay 4/5 weeks

COLOURS



ON - Natural brass

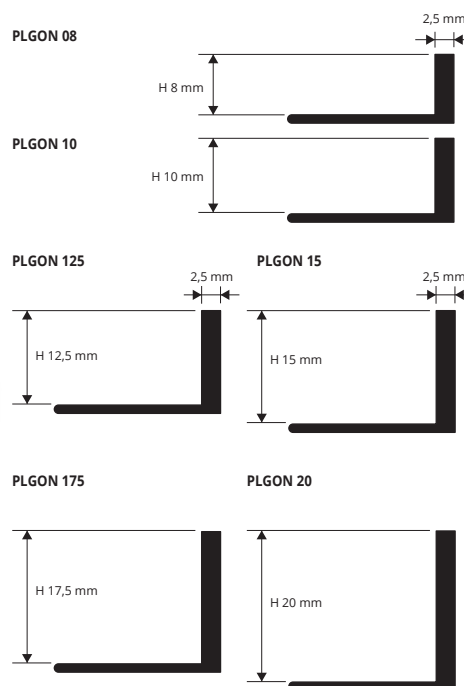

© 2020 All rights reserved by Progress Profiles. Printed in Italy

PROLEVIGAL are separating profiles used to create the technical joint in the special types of pavements such as marble- Venice- palladium ones, that must be smoothed after their laying process. The particular "L" shape with the cut/drilled base and 2,5 mm thick vertical edge consent the perfect smoothing and constant thickness as well. Available in natural aluminium and natural brass, various thickness, as well in outlined/bent **PROLEVIGAL CURVE** AL versions.


PROLEVIGAL

NATURAL ALUMINIUM




NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm		
PLGAN 045	4,5		
PLGAN 06	6		
PLGAN 08	8		
PLGAN 10	10		
PLGAN 125	12,5		
PLGAN 15	15		
PLGAN 175	17,5		
PLGAN 20	20		

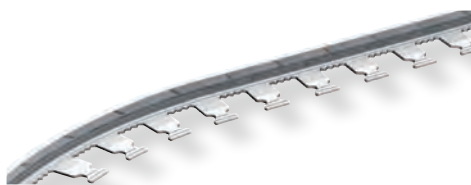

Curve available
ADD **CV** AFTER THE ARTICLE CODE.
E.g.: PLGAN 08 (CURVES) PLGAN**CV** 08

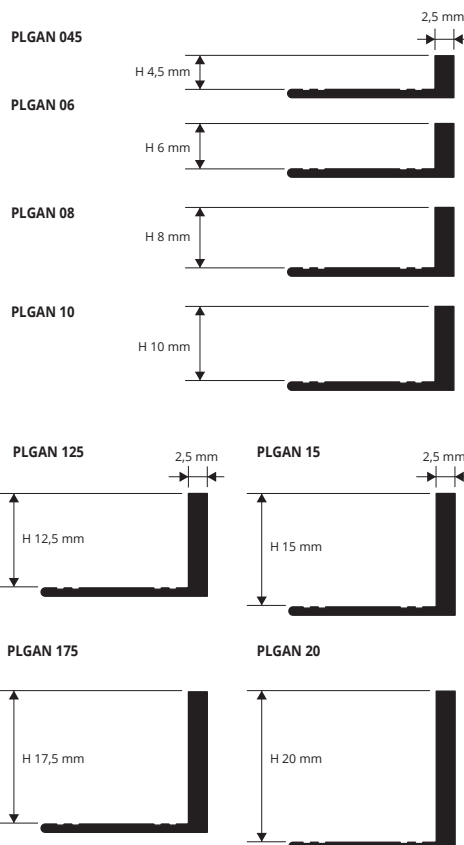

COLOURS




AN - Natural alum.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


PROELEGANT

NATURAL, POLISHED
AND CHROMED BRASS

PROELEGANT is a refined profile, with 6 mm visible surface, designed to cover the joint between two types of floor covering, tiles - parquet, marble or granite, bestowing a prestige aesthetic effect that is ideal for indoor and outdoor finishes, even when subject to considerable loads. **PROELEGANT** is available in polished, natural and chromed brass. It is available in various heights in order to satisfy all technical, practical and, in particular, decorative requirements. The chromed version may be used as a decorative strip in the wall covering.

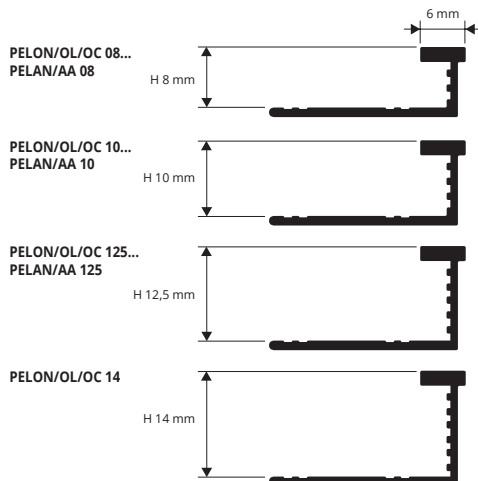

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

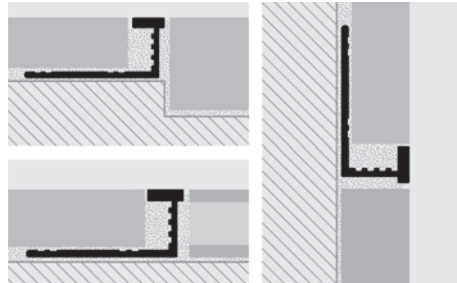

1. Choose the "PROELEGANT" with the same height as the thickness of the wall covering/floor. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.




POLISHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PELOL 08	8		*
PELOL 10	10		
PELOL 125	12,5		
PELOL 14	14		*

NATURAL BRASS thermo packed 10 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PELON 08	8		*
PELON 10	10		
PELON 125	12,5		
PELON 14	14		*

COLOURS



CHROMED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PELOC 08	8		*
PELOC 10	10		
PELOC 125	12,5		
PELOC 14	14		*

NATURAL BRASS thermo packed 5 Pcs
bar length 0,90 lm - pack. 40 Pcs - 36 lm

Article	H mm		
PELON 089	8		*
PELON 109	10		*
PELON 1259	12,5		*



© 2020 All rights reserved by Progress Profiles, Printed in Italy

PROELEGANT

NATURAL ALUMINIUM AND
ANODIZED SILVER ALUMINIUM

PROELEGANT is a refined profile, with 6 mm visible surface, designed to cover the joint between two types of floor covering, tiles - parquet, marble or granite, bestowing a prestige aesthetic effect that is ideal for indoor and outdoor finishes, even when subject to considerable loads. **PROELEGANT** is available in natural and anodized silver aluminium. It is available in various heights in order to satisfy all technical, practical and, in particular, decorative requirements. The anodized version may be used as a decorative strip in the wall covering.

EXAMPLES OF LAYING (for instructions see the product above)

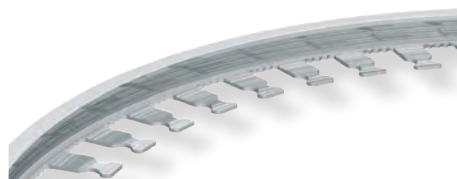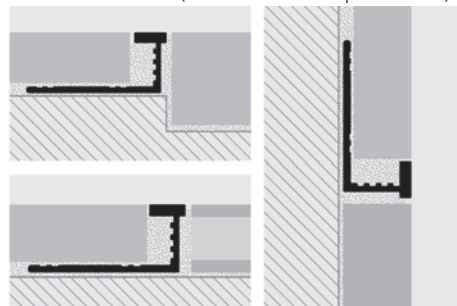

Curve available, see page 103



NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PELAN 08	8		*
PELAN 10	10		
PELAN 125	12,5		

COLOURS



ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PELAA 08	8		*
PELAA 10	10		
PELAA 125	12,5		


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed




PROFINAL

POLISHED, SATIN FINISH AND SANDED
STAINLESS STEEL AISI 304/1.4301-V2A

PROFINAL is a profile in stainless steel AISI 304/1.4301-V2A polished, satined and sanded. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.

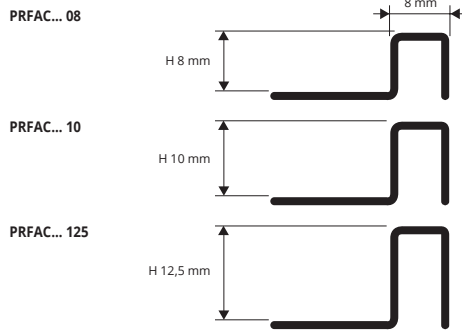

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

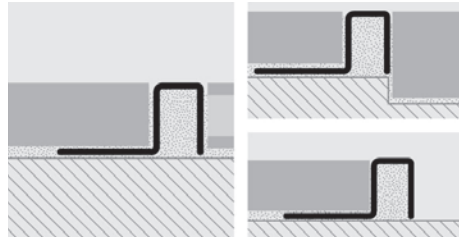

1. Choose the "PROFINAL" with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm		
PRFAC 08	8		
PRFAC 10	10		
PRFAC 125	12,5		

COLOURS



SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm		
PRFACS 08	8		
PRFACS 10	10		
PRFACS 125	12,5		

SANDED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm


Article	H mm		
PRFACSB 08	8		*
PRFACSB 10	10		
PRFACSB 125	12,5		

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.


PROFINAL

NATURAL, POLISHED,
CHROMED AND ANTIQUE BRASS

PROFINAL is a profile in natural, polished, chromed and antique brass. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.

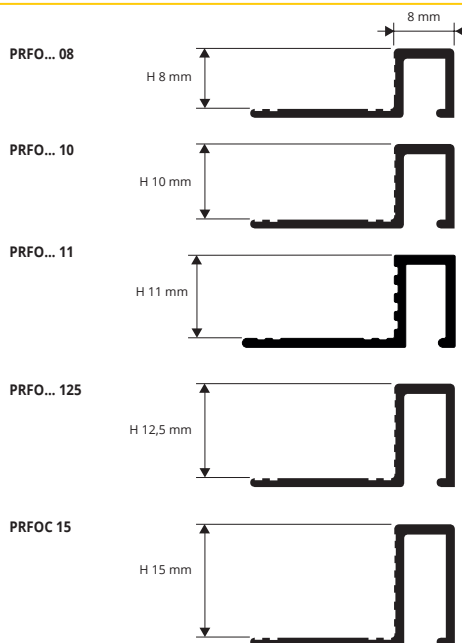


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

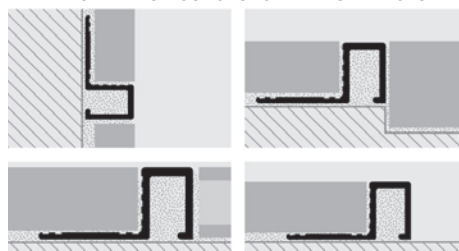

NATURAL BRASS thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PRFON 08	8		
PRFON 10	10		
PRFON 125	12,5		

COLOURS

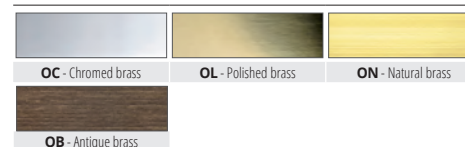

POLISHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PRFOL 08	8		
PRFOL 10	10		
PRFOL 125	12,5		

CHROMED BRASS thermo packed

bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 15 mm - 40,5 lm)

Article	H mm		
PRFOC 08	8		
PRFOC 10	10		
PRFOC 11	11		
PRFOC 125	12,5		
PRFOC 15	15		

ANTIQUÉ BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PRFOB 08	8		*
PRFOB 10	10		
PRFOB 125	12,5		

1. Choose the "PROFINAL" with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

= News 2020

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROFINAL is a profile in natural and anodized silver aluminium. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.

PROFINAL

NATURAL ALUMINIUM AND ANODIZED SILVER ALUMINIUM



NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm		
PRFAN 08	8		*
PRFAN 10	10		
PRFAN 125	12,5		

COLOURS




ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PRFAA 08	8		
PRFAA 10	10		
PRFAA 125	12,5		

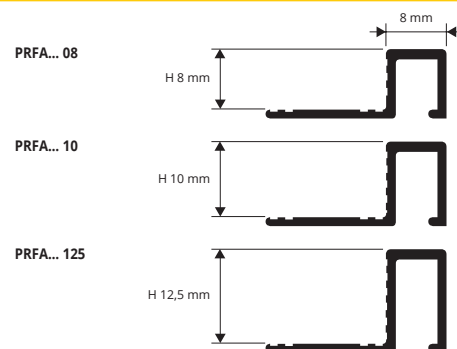

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

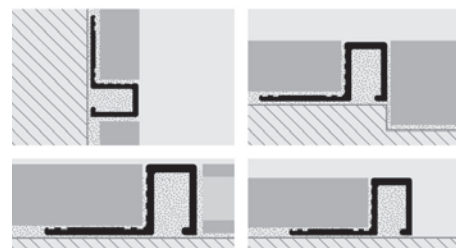

1. Choose the "PROFINAL" with the same height as the thickness of the covering.
2. Apply the adhesive onto the area of application of the profile.
3. Lay and align the profile pressing the perforated flange into the adhesive.
4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile.
5. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

© 2020 All rights reserved by Progress Profiles. Printed in Italy

PROSQUARE

NATURAL BRASS




NATURAL BRASS
bar length 3 lm - pack. 20 Pcs - 60 lm

Article	H x L mm		
PQEON 108	10 X 8		

COLOURS



PQEON 108



PROANGLE

CHROMED, POLISHED BRASS




CHROMED, POLISHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (PGAOC 10 : 27 lm)

Article	L x H mm		
PGAOC 10 (chromed)	10 X 10		
PGAOL 10 (polished)	10 X 10		*

COLOURS



PGAOL/OC 10




* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROJOINT

NATURAL AND POLISHED BRASS

PROJOINT is a natural and polished brass joint for joining two floors laid with mortar or glue/adhesive. The head thickness allows perfect smoothing and sanding of over 3 mm. It is usually used for tile-wood-marble-Venetian-Palladian floors. Available in various heights and widths. The vertical arrowhead part in the PIT 510 and PIT 514 glue version allows excellent anchorage with the adhesive.

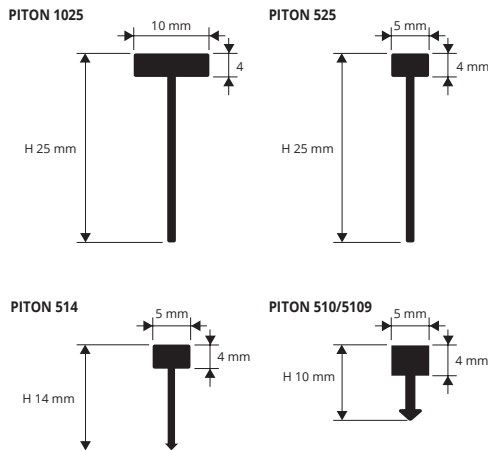

POLISHABLE NATURAL BRASS
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm		
PITON 1025	10 X 25		
PITON 525	5 X 25		
PITON 514	5 X 14		
PITON 510	5 X 10		

POLISHABLE NATURAL BRASS
bar length 0,90 lm - pack. 40 Pcs

Article	L x H mm		
PITON 5109	5 X 10		

CONSISTING OF 1 ECOBLISTER WITH 2 PCS. OF 0.90 LM

POLISHED BRASS
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	L x H mm		
PITOL 1025	10 X 25		*
PITOL 525	5 X 25		*
PITOL 514	5 X 14		*
PITOL 510	5 X 10		*

POLISHED BRASS
bar length 0,90 lm - pack. 40 Pcs

Article	L x H mm		
PITOL 5109	5 X 10		*

CONSISTING OF 1 ECOBLISTER WITH 2 PCS. OF 0.90 LM

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

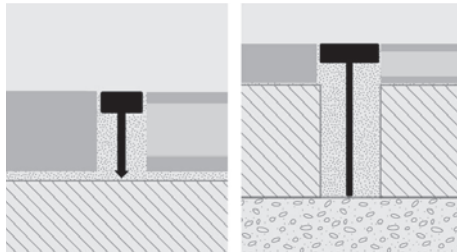


1. Choose "PROJOINT" according to the desired height.
 2. Cut "PROJOINT" to the desired length.
 3. Cut with a trowel the fresh screed following the floor edges.
 4. Apply the profile inside the fresh screed taking care to align it with the surface of the floor. After laying the joint should be 0,5 mm below the floor covering surface.
 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.
- Mortar laying**
3. Apply the adhesive on the support where the profile will be laid. After laying the joint should be 0,5 mm below the floor covering surface.
 4. Lay the tiles aligning them with the profile leaving a 2 mm joint. Remove immediately all the remains of adhesive from the profile surface.
 5. Fill the joints between the profile and the tile with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.


PROJOINT

NATURAL ALUMINIUM

PROJOINT is a natural aluminium joint for joining two floors laid with mortar or glue/adhesive. The head thickness allows perfect smoothing and sanding of over 3 mm. It is usually used for tile-wood-marble-Venetian-Palladian floors. Available in various heights and widths. The vertical arrowhead part in the PIT 510 and PIT 514 glue version allows excellent anchorage with the adhesive.

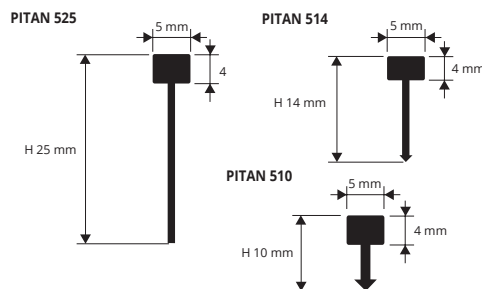

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

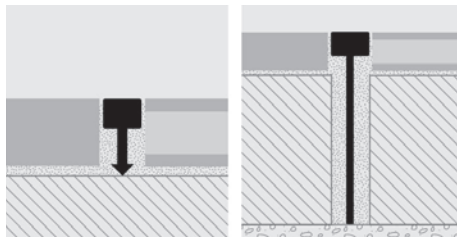

1. Choose "PROJOINT" according to the desired height.
 2. Cut "PROJOINT" to the desired length.
 3. Cut with a trowel the fresh screed following the floor edges.
 4. Apply the profile inside the fresh screed taking care to align it with the surface of the floor. After laying the joint should be 0,5 mm below the floor covering surface.
 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.
- Mortar laying**
3. Apply the adhesive on the support where the profile will be laid. After laying the joint should be 0,5 mm below the floor covering surface.
 4. Lay the tiles aligning them with the profile leaving a 2 mm joint. Remove immediately all the remains of adhesive from the profile surface.
 5. Fill the joints between the profile and the tile with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.

NATURAL ALUMINIUM
bar length 2,70 lm - pack. 40 Pcs - 108 lm

Article	L x H mm		
PITAN 525	5 X 25		
PITAN 514	5 X 14		
PITAN 510	5 X 10		

COLOURS




AN - Natural alum.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


PROCANAL is a channel for joining floors and also for use as strips in wall coverings. This profile is made in natural, polished and chromed brass as well as natural or anodized silver aluminium. It is also used as a cable channel for the insertion of wires and conduits in all types of floor.

PROCANAL

NATURAL, POLISHED,
CHROMED AND ANTIQUE BRASS
NATURAL AND ANODIZED SILVER ALUMINIUM

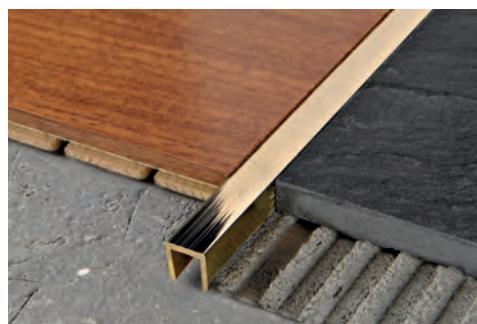

PCL... 10



NATURAL BRASS thermo packed 10 Pcs
POLISHED and CHROMED BRASS thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - 108 lm (PCLOC 10 - 81 lm)


Article	L x H mm
PCLON 10 (natural)	10 X 10
PCLOL 10 (polished)	10 X 10
PCLOC 10 (chromed)	10 X 10
PCLOB 10 (antique)	10 X 10

NATURAL ALUMINIUM thermo packed 10 Pcs
ANODIZED SILVER ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - 108 lm


Article	L x H mm
PCLAN 10 (natural)	10 X 10
PCLAA 10 (anodized silver)	10 X 10

Available Stainless steel AISI 304/1.4301-V2A
"PROLISTEL" 10x10 PLTAC 10 / PLTACS 10 (page 38)

COLOURS




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

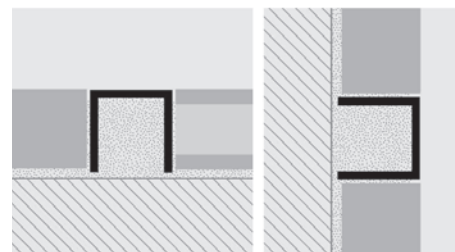

1. Choose the profile in the required material and finish. 2. Apply the adhesive onto the area of application. 3. Lay the "PROCANAL". 4. Continue laying by aligning it "flush" with the covering. 5. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

COLOURS

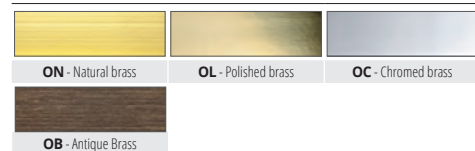

PROFLAT is a range of 20 and 40 mm natural brass or steel strips 3 mm thick. Ideal for dividing up flooring on the same level, they may be polished in situ and also curved/shaped to create decorative patterns that are particularly recommended for marble, Palladian, Venetian and cement or resin-based floors.

PROFLAT

STAINLESS STEEL AISI 304/1.4301-V2A
NATURAL BRASS



STAINLESS STEEL AISI 304/1.4301-V2A
bar length **3 lm** - pack. **5 Pcs** - 15 lm

Article	L x H mm
GPLAC 2033	3 X 20
GPLAC 4033	3 X 40

STAINLESS STEEL AISI 304/1.4301-V2A
bar length **3 lm** - pack. **5 Pcs** - 15 lm

Article	L x H mm
GPLAC 2053	5 X 20
GPLAC 5053	5 X 50

POLISHABLE NATURAL BRASS
bar length **2,7 lm** - pack. **5 Pcs** - 13,5 lm

Article	L x H mm
GPLON 2025	2,5 X 20
GPLON 4025	2,5 X 40

COLOURS




Available ON REQUEST IN SATINED Stainless steel


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

1. Choose "PROFLAT" according to the desired height and visible surface. 2. Cut "PROFLAT" to the desired length. 3. Cut with a trowel the fresh screed following the floor edges. 4. Apply the profile inside the fresh screed taking care to align it with the surface of the floor. After laying the joint should be 0,5 mm below the floor covering surface. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.


GPLAC 203../205..




GPLON 2025




GPLAC 403../505..



GPLON 4025




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

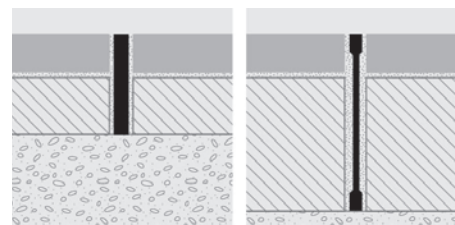

PROSLIDER

POLISHED AND SATIN FINISH
STAINLESS STEEL AISI 304/1.4301-V2A

PROSLIDER is a sloping terminal transition profile in stainless steel AISI 304/1.4301-V2A designed to join different height floors in a perfect, stepless way. This particularly sturdy profile with the bent base sloping inwards withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER** is used in particular to join tile or wood to an existing floor. Available in AISI 304/1.4301-V2A stainless steel in various heights to accommodate all differences in level.

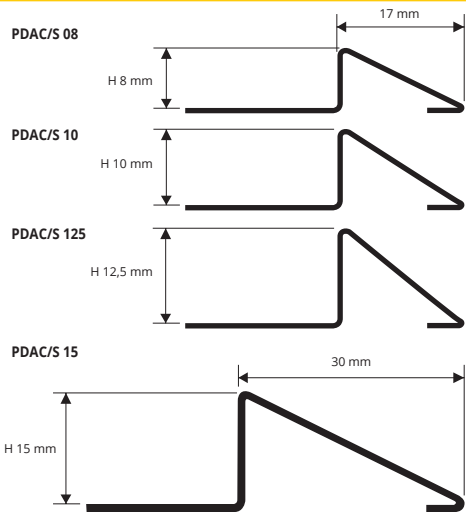


POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm		
PDAC 08	8	11,09	29,94
PDAC 10	10	11,99	32,37
PDAC 125	12,5	13,71	37,02
PDAC 15	15	17,14	46,28
PDAC 20	20	21,46	57,94

SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm		
PDACS 08	8	13,80	37,26
PDACS 10	10	14,60	39,42
PDACS 125	12,5	17,40	46,98
PDACS 15	15	18,50	49,95
PDACS 20	20	23,20	62,64

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

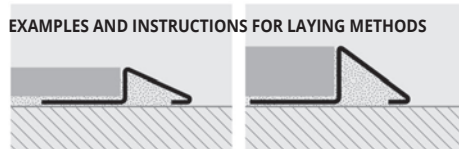

1. Choose the profile with the required height and finish.
2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application.
3. Lay the "PROSLIDER".
4. Align it "flush" with the floor/covering.
5. Use the adhesive to seal any empty interstices.

COLOURS




PROSLIDER

POLISHED AND NATURAL BRASS

PROSLIDER is a sloping terminal transition profile designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER** is used in particular to join tile or wood to an existing floor. Available in natural and polished brass in various heights to accommodate all differences in level.

transition profiles

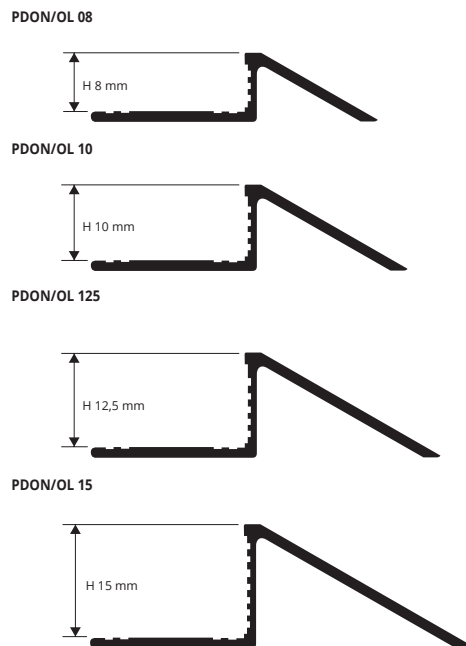

NATURAL BRASS thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PDON 08	8		*
PDON 10	10		
PDON 125	12,5		*
PDON 15	15		*


POLISHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PDOL 08	8		*
PDOL 10	10		
PDOL 125	12,5		*
PDOL 15	15		*

INSTRUCTIONS FOR LAYING

1. Choose the profile with the required height H, material and finish.
 2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application.
 3. Lay the "PROSLIDER".
 4. Align it "flush" with the floor/covering.
 5. Use the adhesive to seal any empty interstices.
- Oxidation marks on profiles in natural and polished brass may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

COLOURS

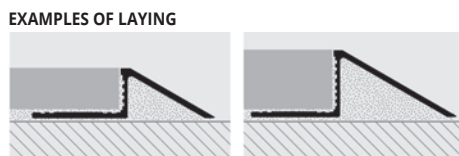

= News 2020

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROSLIDER is a sloping terminal transition profile designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER** is used in particular to join tile or wood to an existing floor.

Available in natural and anodized silver aluminium in various heights to accommodate all differences in level.

PROSLIDER

NATURAL ALUMINIUM AND ANODIZED SILVER ALUMINIUM




NATURAL ALUMINIUM thermo packed 5 Pcs
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
P DAN 08	8		
P DAN 10	10		
P DAN 125	12,5		


ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
P DAA 08	8		
P DAA 10	10		
P DAA 125	12,5		

COLOURS

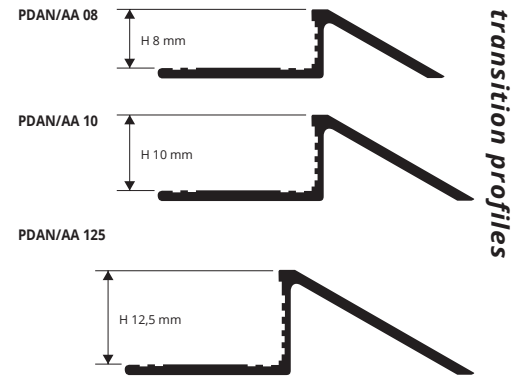

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

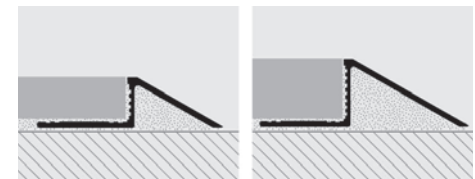


1. Choose the profile with the required height H, material and finish.
2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application.
3. Lay the "PROSLIDER".
4. Align it "flush" with the floor/covering.
5. Use the adhesive to seal any empty interstices.

PROSLIDER LR is a sloping terminal transition profile designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER LR** is used in particular to join tile or wood to an existing floor.

Available in natural and anodized silver aluminium in various heights to accommodate all differences in level.

PROSLIDER LR

NATURAL ALUMINIUM AND ANODIZED SILVER ALUMINIUM

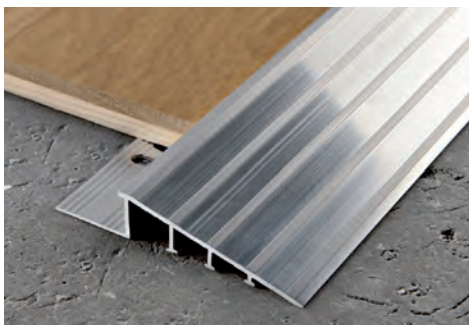


NATURAL ALUMINIUM thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
P DL RAN 10	10	10,63	28,70
P DL RAN 125	12,5	13,23	35,72
P DL RAN 15	15	15,18	40,99
P DL RAN 20	20	19,25	51,98


ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
P DL RAA 10	10	13,85	37,40
P DL RAA 125	12,5	15,60	42,12
P DL RAA 15	15	17,93	48,41
P DL RAA 20	20	21,44	57,92

COLOURS

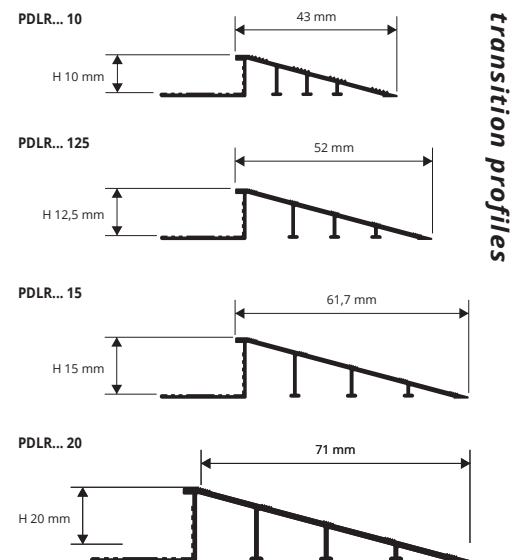

EXAMPLES OF LAYING

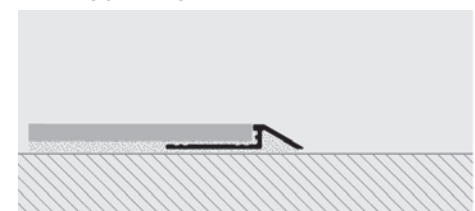


INSTRUCTIONS FOR LAYING

1. Choose the profile with the required height H, material and finish.
2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application.
3. Lay the "PROSLIDER LR".
4. Align it "flush" with the floor/covering.
5. Use the adhesive to seal any empty interstices.

PROSLIDER WOOD

NATURAL OAK WITH ALUMINIUM BASE

PROSLIDER WOOD is a sloping terminal transition profile in real natural oak with glued-on, punched aluminium base, designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. Available in various heights to accommodate all differences in level.

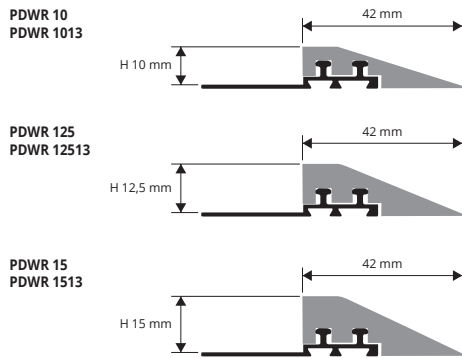

NATURAL OAK with ALUMINIUM BASE

bar length 2,7 lm - pack. 10 Pcs - 27 lm


Article	H mm		
PDWR 10	10		*
PDWR 125	12,5		*
PDWR 15	15		*

NATURAL OAK with ALUMINIUM BASE

bar length 1,35 lm - pack. 20 Pcs - 27 lm

Article	H mm		
PDWR 1013	10		*
PDWR 12513	12,5		*
PDWR 1513	15		*

EXAMPLES OF LAYING

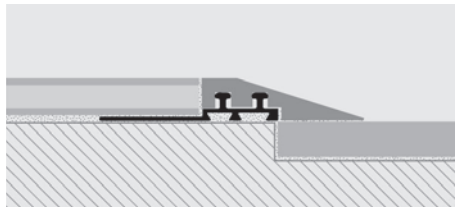

INSTRUCTIONS FOR LAYING

1. Choose the "PROSLIDER WOOD" with the required height.
2. Apply the adhesive onto the area of application of the profile.
3. Lay and align the profile pressing the perforated flange into the adhesive.
4. Align it "flush" with the floor/covering.
5. Use the adhesive to seal any empty interstices.

CLOURS



Natural oak



PROCARPET ACC is a profile in stainless steel 304/1.4301-V2A used for joining two floors of differing thickness and in particular for joining a tiled or parquet floor to wall-to-wall carpeting, making a perfect join thanks to the vertical part of less than 4 mm. In addition to completely protecting the edge of the higher floor, this particularly sturdy profile withstands high loads and supports the frequent passage of manual trolleys, vehicles and intense pedestrian traffic.

PROCARPET ACC

STAINLESS STEEL AISI 304/1.4301-V2A



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm		
PRTAC 08	8		*
PRTAC 10	10		
PRTAC 125	12,5		*

SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm


Article	H mm		
PRTACS 08	8		*
PRTACS 10	10		
PRTACS 125	12,5		*

COLOURS




INSTRUCTIONS FOR LAYING

1. Choose the "PROCARPET ACC" taking into consideration the exact height of the floor. 2. Using a notched spreader apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.

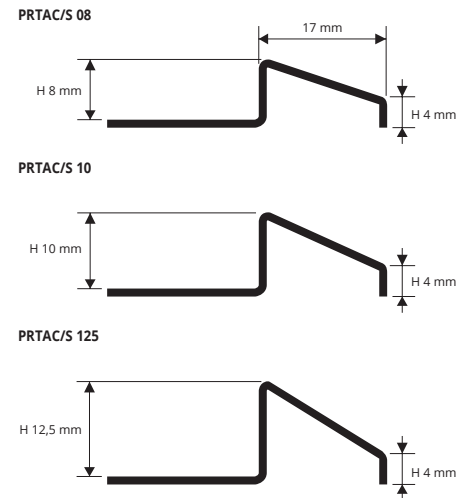

transition profiles

EXAMPLES OF LAYING

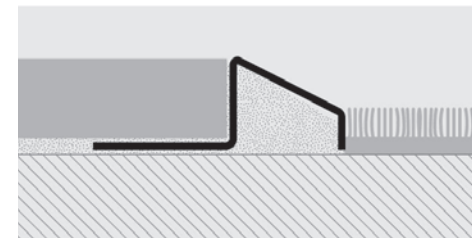


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PROCARPET OTT is a profile in brass (natural or polished) used for joining two floors of differing thickness and in particular for joining a tiled or parquet floor to wall-to-wall carpeting, making a perfect join thanks to the vertical part of less than 4 mm. In addition to completely protecting the edge of the higher floor, this particularly sturdy profile withstands high loads and supports the frequent passage of manual trolleys, vehicles and intense pedestrian traffic.

PROCARPET OTT

POLISHED AND NATURAL BRASS

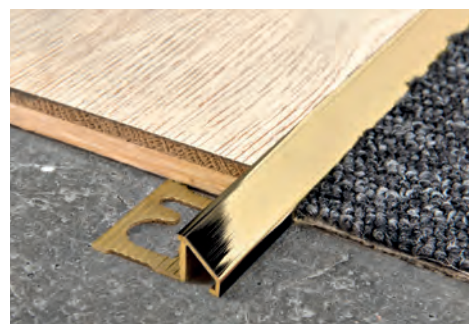


NATURAL BRASS thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PRTON 08	8		*
PRTON 10	10		*

POLISHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm		
PRTOL 08	8		*
PRTOL 10	10		*

COLOURS




INSTRUCTIONS FOR LAYING

1. Choose the "PROCARPET OTT" taking into consideration the exact height of the floor. 2. Using a notched spreader apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids. Profiles in natural or polished brass may be subject to oxidation in environments with high degrees of humidity. Resulting marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and.

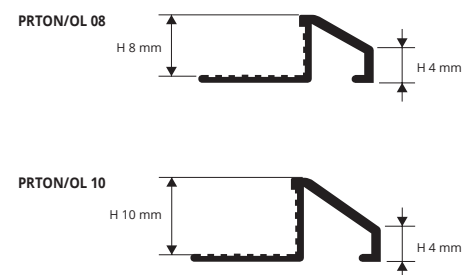

transition profiles

EXAMPLES OF LAYING

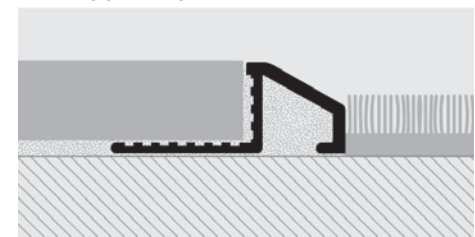


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROCARPET ALL

NATURAL AND ANODIZED SILVER ALUMINIUM

PROCARPET ALL is a profile in aluminium (natural or silver anodized) used for joining two floors of differing thickness and in particular for joining a tiled or parquet floor to wall-to-wall carpeting, making a perfect joint thanks to the vertical part of less than 4 mm. In addition to completely protecting the edge of the higher floor, this particularly sturdy profile withstands high loads and supports the frequent passage of manual trolleys, vehicles and intense pedestrian traffic.

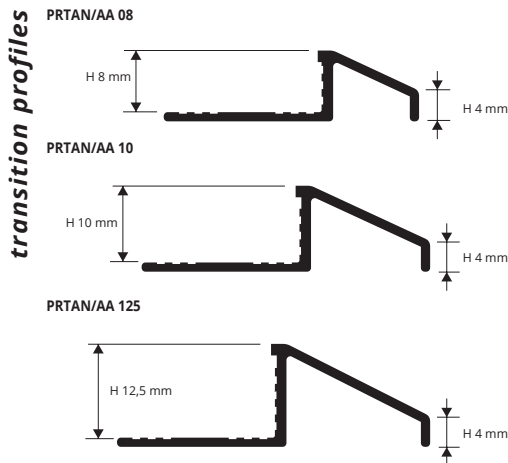


NATURAL ALUMINIUM thermo packed 5 Pcs
bar length 2,70 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PRTAN 08	8		
PRTAN 10	10		
PRTAN 125	12,5		

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PRTAA 08	8		
PRTAA 10	10		
PRTAA 125	12,5		

EXAMPLES OF LAYING

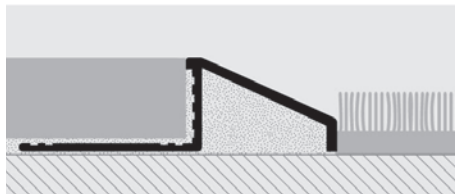

INSTRUCTIONS FOR LAYING

1. Choose the "PROCARPET ALL" taking into consideration the exact height of the floor. 2. Using a notched spreader apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.


COLOURS




PROSKID

POLISHED BRASS AND ANODIZED SILVER ALUMINIUM

PROSKID is a sloping profile ideal for the stepless joining of two existing floors of differing heights where no transition profile was installed at the time of laying. Silicone is used for the laying. The notching on the profile helps anchorage of the silicone or adhesive. Hardwearing and attractive.

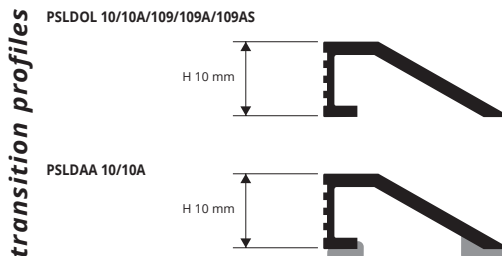

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

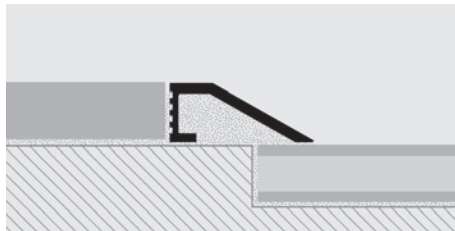

1. Choose the "PROCARPET" taking into consideration the exact height of the floor. 2. Using a notched spreader apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.

POLISHED BRASS thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PSLDOL 10	10		*
PSLDOL 10A (with adhesive)	10		*

POLISHED BRASS thermo packed
bar length 0,90 lm - pack. 20 Pcs

Article	H mm		
PSLDOL 109AS (with adhesive)	10		



POLISHED BRASS thermo packed
bar length 0,90 lm - pack. 20 Pcs

Article	H mm		
PSLDOL 109	10		
PSLDOL 109A (with adhesive)	10		



ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PSLDAA 10	10		
PSLDAA 10A (with adhesive)	10		

COLOURS



* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


PROLEVALL 29 is a transition profile in anodized aluminium available in the self-adhesive or punched versions. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 4 and 6mm. **PROLEVALL 29** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

PROLEVALL 29


ANODIZED ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED



PLV... 29A
PLV... 299AS
PLV... 2910AS



PLV... 29F
PLV... 298FS
PLV... 299FS
PLV... 2910FS



transition profiles

ANODIZED ALUM. with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm
PLV... 29A	5,5 X 29

ANODIZED ALUM. with adhesive thermo packed
bar length 0,83 lm - pack. 20 Pc

Article	H x L mm
PLV... 298AS	5,5 X 29



ANODIZED ALUM. with adhesive thermo packed
bar length 0,93 lm - pack. 20 Pc

Article	H x L mm
PLV... 299AS	5,5 X 29



ANODIZED ALUM. with adhesive thermo packed
bar length 1,03 lm - pack. 20 Pc

Article	H x L mm
PLV... 2910AS	5,5 X 29



ANODIZED ALUM. punched thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm
PLV... 29F	5,5 X 29

ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length 0,83 lm - pack. 20 Pc

Article	H x L mm
PLV... 298FS	5,5 X 29



ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length 0,93 lm - pack. 20 Pc

Article	H x L mm
PLV... 299FS	5,5 X 29




ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length 1,03 lm - pack. 20 Pc

Article	H x L mm
PLV... 2910FS	5,5 X 29



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

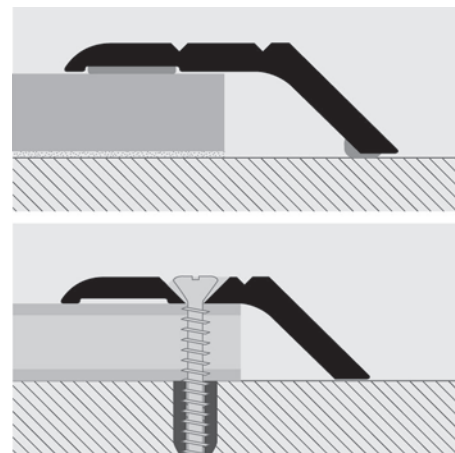

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

Available in the colours: AA - AO (AB, AT, CH e SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLV... 29A (chosen colour anodized gold alum.) PLVAO 29A.

COLOURS



AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



(Price to be agreed. Production delay 4/5 weeks)

PROLEVALL 33 is a transition profile in extruded polished brass, available in the self-adhesive or punched versions. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 4 and 6mm. **PROLEVALL 33** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

PROLEVALL 33

POLISHED BRASS WITH SELF-ADHESIVE AND PUNCHED

POLISHED BRASS with adhesive thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm
PLVOL 33A	5,5 X 33

POLISHED BRASS with adhesive thermo packed
bar length 0,83 lm - pack. 20 Pc

Article	H x L mm
PLVOL 338AS	5,5 X 33



POLISHED BRASS with adhesive thermo packed
bar length 0,93 lm - pack. 20 Pc

Article	H x L mm
PLVOL 339AS	5,5 X 33



POLISHED BRASS with adhesive thermo packed
bar length 1,03 lm - pack. 20 Pc

Article	H x L mm
PLVOL 3310AS	5,5 X 33



POLISHED BRASS punched thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm
PLVOL 33F	5,5 X 33

POLISHED BRASS punched with screws and screw anchors thermo packed - bar length 0,83 lm - pack. 20 Pc

Article	H x L mm
PLVOL 338FS	5,5 X 33



POLISHED BRASS punched with screws and screw anchors thermo packed - bar length 0,93 lm - pack. 20 Pc

Article	H x L mm
PLVOL 339FS	5,5 X 33




POLISHED BRASS punched with screws and screw anchors thermo packed - bar length 1,03 lm - pack. 20 Pc


Article	H x L mm
PLVOL 3310FS	5,5 X 33



PLVOL 33A
PLVOL 338AS
PLVOL 339AS
PLVOL 3310AS




PLVOL 33F
PLVOL 338FS
PLVOL 339FS
PLVOL 3310FS



transition profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the suitable profile and cut it to the necessary length.


Adhesive version

2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

COLOURS



OL - Polished brass


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROLEVALL 305


POLISHED STAINLESS STEEL 1.4016
AND POLISHED BRASS
WITH SELF-ADHESIVE AND PUNCHED

PROLEVALL 305 is a transition/terminal profile for floors of medium thickness (from 3 to 7 mm), used to join and compensate two floors of differing height, material and thickness. Ideal as a finishing terminal, it covers flaws and chipping or splintering of tiles, wood and carpeting. Available in stainless steel 1.4016 and polished brass. A protective film protects the finish of the 2.70 m long bars with either self-adhesive backing or punched for fixing with screws and anchors. The 93 cm blister pack version (self pack) is shrink-wrapped with bar code.

transition profiles

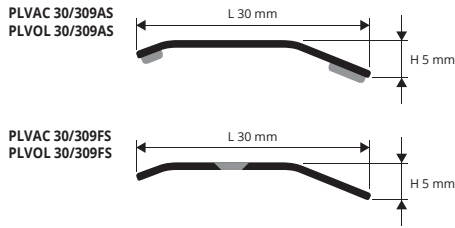

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

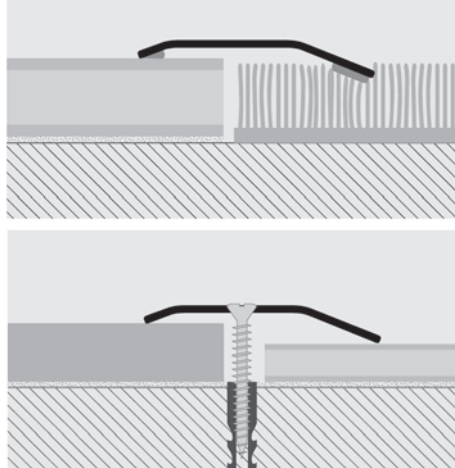

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.



POLISHED STAINLESS ST. 1.4016 with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H x L mm
PLVAC 30A	5 X 30

POLISHED STAINLESS ST. 1.4016 with adhesive thermo packed - bar length 0,93 lm - pack. 20 Pc 

Article	H x L mm
PLVAC 309AS	5 X 30


POLISHED BRASS with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm
PLVOL 30A	5 X 30

POLISHED BRASS with adhesive thermo packed - bar length 0,93 lm - pack. 20 Pc 

Article	H x L mm
PLVOL 309AS	5 X 30

COLOURS



POLISHED STAINLESS ST. 1.4016 punched with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm
PLVAC 30F	5 X 30

POL. STAINLESS ST. 1.4016 punched with screws and screw anchors thermo packed - bar length 0,93 lm - pack. 20 Pc 

Article	H x L mm
PLVAC 309FS	5 X 30

POLISHED BRASS punched with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm
PLVOL 30F	5 X 30

POL. BRASS punched with screws and screw anchors thermo packed - bar length 0,93 lm - pack. 20 Pc 

Article	H x L mm
PLVOL 309FS	5 X 30


ON DEMAND HAND-BRUSHED STAINLESS STEEL
(Price to be agreed. Production delay 4/5 weeks)

PROLEVALL 32


ANODIZED ALUMINIUM WITH
SELF-ADHESIVE AND PUNCHED

PROLEVALL 32 are transition profiles in anodized aluminium available in the self-adhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. They join and compensate a thickness between 7 and 9 mm. PROLEVALL 32 ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

transition profiles

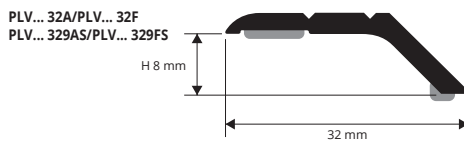

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

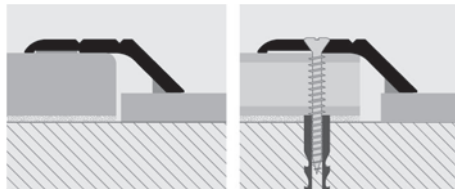

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.




ANODIZED SILVER and GOLD ALUMINIUM
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm
PLV... 32A (with adhesive)	32 X 8
PLV... 32F (punched)	32 X 8

Available in the colours: AA - AO (AB -AT, CH e SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLV... 32F (chosen colour Anodized gold alum.) PLVAO 32F.

COLOURS



ANODIZED SILVER and GOLD ALUMINIUM
thermo packed - bar length 0,93 lm - pack. 20 Pc 

Article	L x H mm
PLV... 329AS (with adhesive)	32 X 8
PLV... 329FS (punched)	32 X 8

AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



(Price to be agreed. Production delay 4/5 weeks)

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


PROLEVALL 358 are transition profiles in polished extruded brass, available in the self-adhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. They join and compensate a thickness between 7 and 9 mm. **PROLEVALL 358** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

PROLEVALL 358

POLISHED BRASS
WITH SELF-ADHESIVE AND PUNCHED



PLVOL 358A/PLVOL 3589AS
PLVOL 358F/PLVOL 3589FS



POLISHED BRASS thermo packed - bar length 2,7 lm
pack. 20 Pcs - 54 lm (PLVOL 358F: 15 Pcs - 40,5 lm)


Article	L x H mm		
PLVOL 358A (with adhesive)	35 X 8		
PLVOL 358F (punched)	35 X 8		*

POLISHED BRASS thermo packed
bar length 0,90 lm - pack. 20 Pcs

Article	L x H mm		
PLVOL 3589AS (with adhesive)	35 X 8		
PLVOL 3589FS (punched with screws and screw anchors)	35 X 8		



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

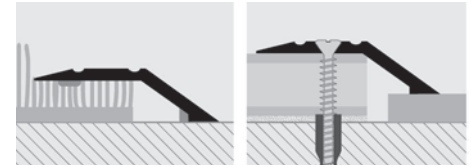


Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

COLOURS



OL - Polished brass


PROLEVALL 4413 are transition profiles in polished extruded brass and anodized aluminium available in the self-adhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. They join and compensate a thickness between 13 and 15 mm. **PROLEVALL 4413** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

PROLEVALL 4413


POLISHED BRASS AND
ANODIZED SILVER ALUMINIUM
WITH SELF-ADHESIVE AND PUNCHED



PLVOL 4413A / PLVOL 44139AS
PLVOL 4413F / PLVOL 44139FS

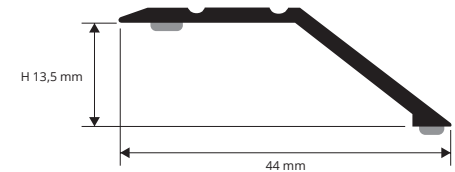

PLV... 4413A / PLV... 4413F

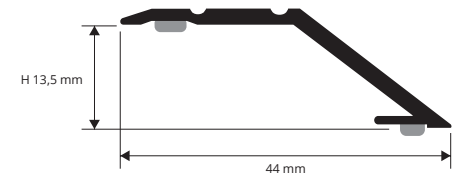

transition profiles

POLISHED BRASS thermo packed
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	L x H mm		
PLVOL 4413A (with adhesive)	44 X 13		*
PLVOL 4413F (punched)	44 X 13		*

POLISHED BRASS thermo packed
bar length 0,90 lm - pack. 20 Pcs

Article	L x H mm		
PLVOL 44139AS (with adhesive)	44 X 13		*
PLVOL 44139FS (punched with screws and screw anchors)	44 X 13		*




ANODIZED SILVER and GOLD ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm		
PLV... 4413A (with adhesive)	44 X 13		
PLV... 4413F (punched)	44 X 13		

Available in the colours: AA - AO (OL, AT, CH e SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLV... 4413F (chosen colour anodized gold alum.) PLVAO 4413F.

COLOURS



AA - Anodized silver alum.

AO - Anodized gold alum.

AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



OL - Polished brass


AT - Anodized titanium alum.

CH - Anod. champagne alum.

SB - Anodized sand alum.

(Price to be agreed. Production delay 4/5 weeks)

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

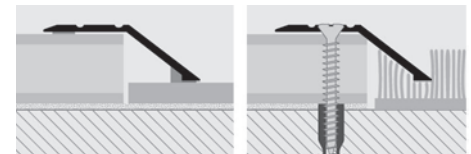

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


PRONIVO

ANODIZED ALUMINIUM


PRONIVO is a transition and edging profile with a rounded shape in anodized aluminium with tap-down edge. It is ideal to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet. With its rounded shape it compensates for differences in thickness between 7 and 13 mm where no profile was installed at the time of laying. **PRONIVO** ensures a perfect finish and is easy to lay with the self-adhesive backing guaranteeing perfect adherence to the floor.

transition profiles

PNV... 713A



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

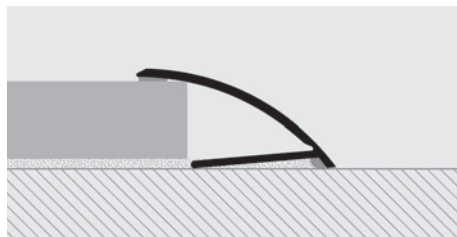

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.



ANODIZED ALUMINIUM self-adhesive thermo packed
bar length 2,7 lm - pack. 30 Pcs - 81 lm

Article	H mm
PNVAA 713A	7/13


Available in the colours: AA (AO available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code.
E.g.: PNV... 713 (chosen colour anodized gold alum.) PNVAA 713A.



COLOURS



AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



(Price to be agreed. Production delay 4/5 weeks)


PROTRANS

ANODIZED ALUMINIUM


PROTRANS is a transition and edging profile with a rounded shape in anodized aluminium. It is ideal to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet. With its rounded shape it compensates for differences in thickness between 6 and 13 mm where no profile was installed at the time of laying. **PROTRANS** ensures a perfect finish and is easy to lay with the self-adhesive backing guaranteeing perfect adherence to the floor.

transition profiles

PTS... 613A
PTS... 6139AS

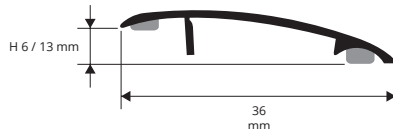

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

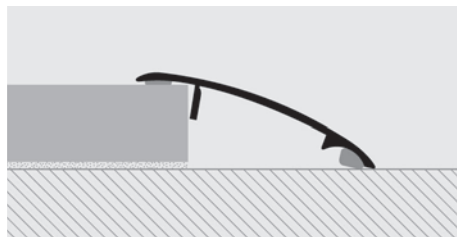

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.



ANODIZED ALUMINIUM self-adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PTSAA 613A	6 / 13

Available in the colours: AA (AO, AT, CH e SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PTS... 613A (chosen colour anodized gold alum.) PTSAA 613A.



ANODIZED ALUMINIUM self-adhesive thermo packed - bar length 0,90 lm - pack. 20 Pcs



Article	H mm
PTS... 6139AS	6 / 13

COLOURS



AVAILABLE MINIMUM QUANTITY 100 PCS by color and height




(Price to be agreed. Production delay 4/5 weeks)

PROFLOOR 712 is a self-adhesive sloping terminal transition profile in AISI 304/1.4301-V2A stainless steel with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.


PROFLOOR 712

POLISHED STAINLESS STEEL
AISI 304/1.4301-V2A WITH SELF-ADHESIVE



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs  SELF PACK

Article	L x H mm
PFRAC 7129AS	38 X 7/12

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 1,66 lm - pack. 20 Pcs  SELF PACK


Article	L x H mm
PFRAC 71216AS	38 X 7/12

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm
PFRAC 712A	38 X 7/12

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 0,83 lm - pack. 20 Pcs  SELF PACK

Article	L x H mm
PFRAC 7128AS	38 X 7/12

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 1,03 lm - pack. 20 Pcs  SELF PACK

Article	L x H mm
PFRAC 71210AS	38 X 7/12


COLOURS



On demand hand-brushed stainless steel (Price to be agreed. Production delay 4/5 weeks)


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PFRAC 712A/7128AS/7129AS/71210AS/71216AS

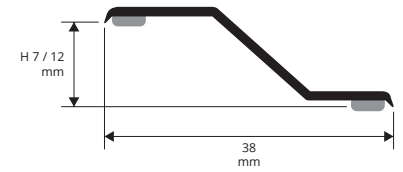

transition profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

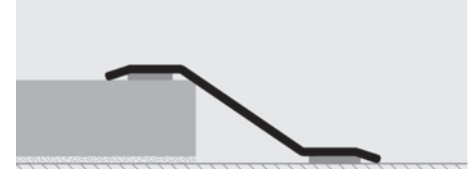

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

PROFLOOR 712 is a self-adhesive sloping terminal transition profile in polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

PROFLOOR 712

POLISHED BRASS
WITH SELF-ADHESIVE



POLISHED BRASS self-adhesive thermo packed bar length 0,93 lm - pack. 20 Pcs  SELF PACK

Article	L x H mm
PFROL 7129AS	38 X 7/12

POLISHED BRASS self-adhesive thermo packed bar length 1,66 lm - pack. 20 Pcs  SELF PACK


Article	L x H mm
PFROL 71216AS	38 X 7/12

POLISHED BRASS self-adhesive thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm
PFROL 712A	38 X 7/12


POLISHED BRASS self-adhesive thermo packed bar length 0,83 lm - pack. 20 Pcs  SELF PACK

Article	L x H mm
PFROL 7128AS	38 X 7/12

POLISHED BRASS self-adhesive thermo packed bar length 1,03 lm - pack. 20 Pcs  SELF PACK


Article	L x H mm
PFROL 71210AS	38 X 7/12

COLOURS




OL - Polished brass

PFROL 712A/7128AS/7129AS/71210AS/71216AS

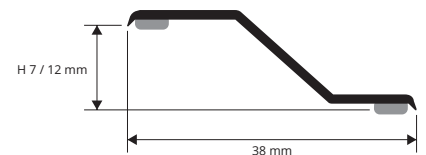

transition profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

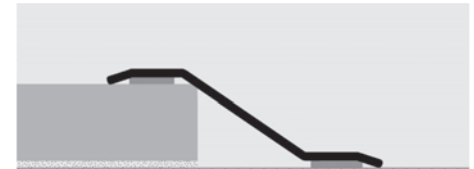

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

PROFLOOR 712 is a self-adhesive sloping terminal transition profile in anodized aluminium with silver-gold-bronze finish with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

PROFLOOR 712

ANODIZED GOLD, SILVER AND BRONZE
ALUMINIUM WITH SELF-ADHESIVE



Anodized ALUMINIUM self-adhesive thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	L x H mm
PFR... 712A	38 X 7/12



Anodized ALUMINIUM self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs  SELF PACK


Article	L x H mm
PFR... 7129AS	38 X 7/12

PFR... 712A/7129AS

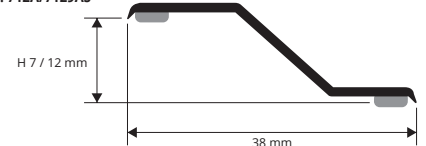

transition profiles

COLOURS



AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



(Price to be agreed. Production delay 4/5 weeks)

Available in the colours: AA - AO - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PFR... 712A (chosen colour anodized gold alum.) PFR... 712A.

PROGRESS 712


POLISHED STAINLESS STEEL AISI 304/1.4301 AND POLISHED BRASS WITH SELF-ADHESIVE

PROGRESS 712 is a self-adhesive sloping terminal transition profile in stainless steel 1.4301 and polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 7 and 12mm.


PROGRESS 712 ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

transition profiles

PR SAC 712A/7129AS
PR SOL 712A/7129AS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

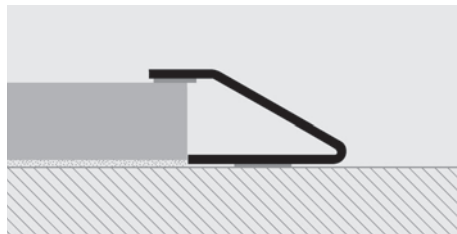

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm
PR SAC 712A	27 X 7/12

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 0,90 lm - pack. 20 Pcs

Article	L x H mm
PR SAC 7129AS	27 X 7/12

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A

OL - Polished brass



POLISHED BRASS self-adhesive thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm
PR SOL 712A	27 X 7/12

POLISHED BRASS self-adhesive thermo packed bar length 0,90 lm - pack. 20 Pcs

Article	L x H mm
PR SOL 7129AS	27 X 7/12

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

On demand hand-brushed stainless steel
(Price to be agreed. Production delay 4/5 weeks)


PROFLOOR 1216

POLISHED STAINLESS STEEL AISI 304/1.4301 AND POLISHED BRASS WITH SELF-ADHESIVE


PROFLOOR 1216 is a self-adhesive chamfered terminal transition profile in stainless steel AISI 304/1.4301-V2A and polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 12 and 16mm. **PROFLOOR 1216** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

transition profiles

PFRAC 1216A/12169AS
PFR OL 1216A/12169AS

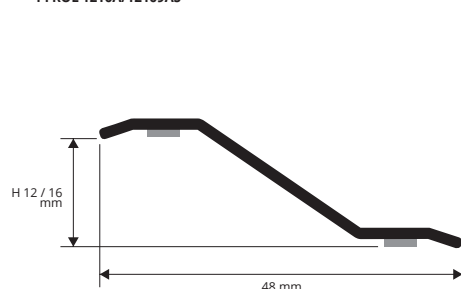

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

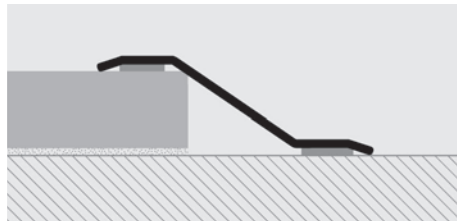

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm
PFRAC 1216A	48 X 12/16

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	L x H mm
PFRAC 12169AS	48 X 12/16

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

On demand hand-brushed stainless steel
(Price to be agreed. Production delay 4/5 weeks)



POLISHED BRASS self-adhesive thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm
PFR OL 1216A	48 X 12/16

POLISHED BRASS self-adhesive thermo packed bar length 0,93 lm - pack. 20 Pcs

Article	L x H mm
PFR OL 12169AS	48 X 12/16

COLOURS




AC - Polished stainless steel AISI 304/1.4301-V2A

OL - Polished brass


PROLINOLEUM is a self-adhesive transition profile in anodized aluminium with gold/silver finish. It is used to give a clean-cut, elegant finish to hardwearing surfaces in PVC or linoleum and other thin materials between 2-3 mm thick. **PROLINOLEUM** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

PROLINOLEUM

ANODIZED GOLD AND SILVER ALUMINIUM WITH AND WITHOUT SELF-ADHESIVE

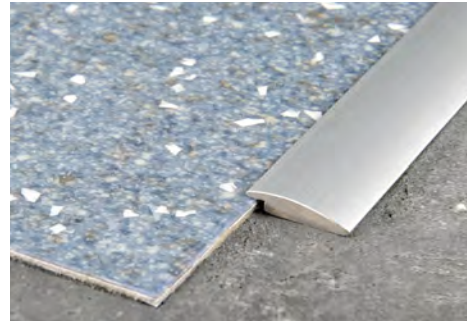

PLU ... 16
PLU ... 16A




profiles for low thicknesses

ANODIZED GOLD AND SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm
PLU ... 16 (without adhesive)	2,5 X 16
PLU ... 16A (with adhesive)	2,5 X 16

Available in the colours: AA (AO, AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLU ... 16 (chosen finish anod. gold) PLUAO 16.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

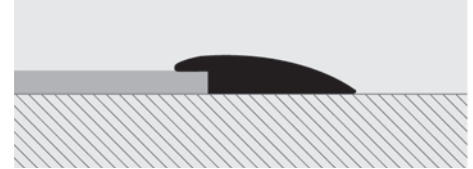

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

COLOURS



AA - Anodized silver alum.

AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



AO - Anodized gold alum.



AT - Anodized titanium alum.



CH - Anod. champagne alum.



SB - Anod. sand aluminium

(Price to be agreed. Production delay 4/5 weeks)


PROFLOOR 24 is a self-adhesive transition profile with chamfered edges in stainless steel 1.4016 and polished brass with protective film. It is used to give a clean-cut, elegant finish to hardwearing surfaces in PVC and linoleum - carpeting and other thin materials between 2 and 5mm thick. **PROFLOOR 24** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

PROFLOOR 24

POLISHED STAINLESS STEEL AISI 304/1.4301 AND POLISHED BRASS WITH SELF-ADHESIVE



PFRAC 24A/249A
PFROL 24A/249A



profiles for low thicknesses

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm
PFRAC 24A	2/4,5 X 30

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs



Article	H x L mm
PFRAC 249AS	2/4,5 X 30

POLISHED BRASS self-adhesive thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H x L mm
PFROL 24A	2/4,5 X 30

POLISHED BRASS self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs



Article	H x L mm
PFROL 249AS	2/4,5 X 30

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

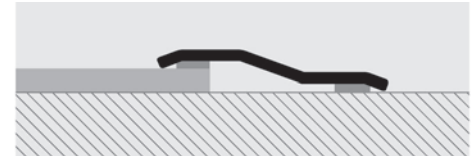

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

On demand hand-brushed stainless steel
(Price to be agreed. Production delay 4/5 weeks)

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A



OL - Polished brass


PROSLIDER KL ALL

ANODIZED SILVER ALUMINIUM

PROSLIDER KL ALL is a slide shape progressive transition terminal square suitable for connecting perfectly without steps two floor levels. The particular strength of the square allows to resist and bear heavy loads and frequent passages of manual trolleys and motor vehicles besides protecting the edge of the higher floor. The **PROSLIDER KL ALL** is especially used to connect LA Kerlite/Laminam and thin ceramic tiles to each other or else it is used with wood and/or a pre-existing floor. Available in anodized aluminium.

profiles for low thicknesses

PDKLAA 045

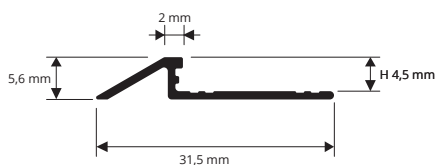

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the profile with the required finish.
2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application.
3. Lay the "PROSLIDER KL ALL".
4. Align it flush with the floor/covering.
5. Use the adhesive to seal any empty interstices.

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PDKLAA 045	4,5

COLOURS



AA - Anodized silver alum.


PROCOVER 1045 ALL

ANODIZED AND POLISHED
SILVER, CHROME AND GOLD ALUMINIUM

PROCOVER 1045 ALL is a joint cover profile in anodized aluminium. It is applied at the end of the laying process between two adjoining floors placed at the same level, with a gap of 3 to 6 mm between the two kerlite /laminam/ or thin ceramic tile floors laid with the adhesive. It protects the external edge of the floor/covering. It is easy to lay and aesthetically pleasing. The design of the profile with lower vertical arrowhead part allows excellent anchorage with silicone / adhesive.

profiles for low thicknesses

PCR...1045



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROCOVER 1045 ALL" in the desired finish considering a side lap of 2/3 mm.
2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor.
3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

IMPORTANT: Take care of the external edges of the aluminium "PROCOVER 1045 ALL". They must be protected from aggressive substances such as adhesives and sealants and from smoothing or scraping action.

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm
PCRAA 1045	4,5

POLISHED CHROME/GOLD ALUMINIUM thermo packed

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PCRBC 1045	4,5
PCRBO 1045	4,5

COLOURS



AA - Anodized silver alum. BC - Polished chrome alum. BO - Polished gold alum.







PROCOVER

POLISHED AND SATIN FINISH
STAINLESS STEEL AISI 304/1.4301-V2A

threshold - joint-cover profiles

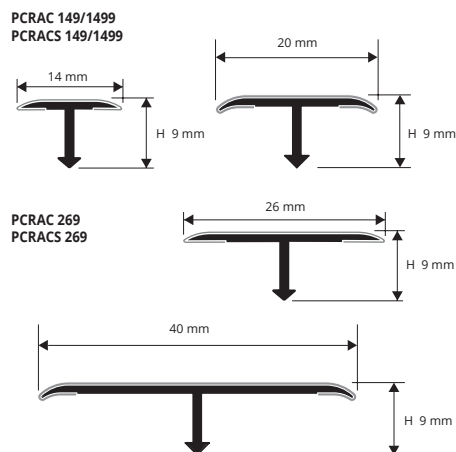

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

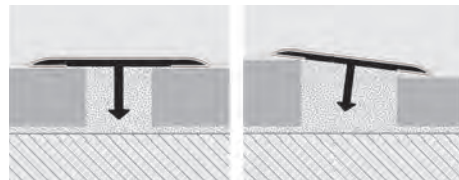

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

PROCOVER is a joint-cover profile in stainless steel (polished or satin finish) with aluminium supports. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive. The aluminium structure with the stainless steel lining provides it with a high level of resistance to cuts and deformation.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A
with protective film - bar length 2,7 lm
(PCRAC 1499 - bar length 0,90 lm)



Article	L x H mm		
PCRAC 149 (Pack. 108 lm)	14 X 9		
PCRAC 1499 (Pack. 20 Pcs)	14 X 9		
PCRAC 209 (Pack. 40 Pcs)	20 X 9		
PCRAC 269 (Pack. 81 lm)	26 X 9		
PCRAC 409 (Pack. 20 Pcs)	40 X 9		

COLOURS



SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A
with protective film - bar length 2,7 lm
(PCRAC 1499 - bar length 0,90 lm - pack. 20 Pcs)




Article	L x H mm		
PCRAC 149 (Pack. 108 lm)	14 X 9		
PCRAC 1499 (Pack. 20 Pcs)	14 X 9		
PCRAC 209 (Pack. 40 Pcs)	20 X 9		
PCRAC 269 (Pack. 81 lm)	26 X 9		
PCRAC 409 (Pack. 20 Pcs)	40 X 9		

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.


PROCOVER

POLISHED, CHROMED AND ANTIQUE BRASS

threshold - joint-cover profiles

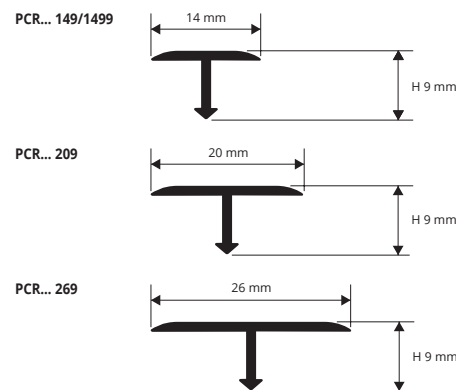

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

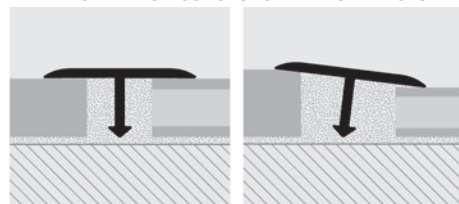

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined. Profiles in natural or polished brass may be subject to oxidation in environments with high degrees of humidity. Resulting marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

PROCOVER is a joint-cover profile in polished, chromed and antique brass. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.



POLISHED BRASS thermo packed - bar length 2,7 lm
(PCROL 1499 - bar length 0,90 lm - pack. 40 Pcs)



Article	L x H mm		
PCROL 149 (Pack. 20 Pcs)	14 X 9		
PCROL 1499 (Pack. 40 Pcs)	14 X 9		
PCROL 209 (Pack. 20 Pcs)	20 X 9		
PCROL 269 (Pack. 20 Pcs)	26 X 9		

COLOURS



CHROMED BRASS (polished stainless st. effect) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm		
PCROC 149	14 X 9		
PCROC 209	20 X 9		
PCROC 269	26 X 9		

ANTIQUÉ BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm		
PCROB 149	14 X 9		
PCROB 209	20 X 9		
PCROB 269	26 X 9		

PROCOVER is a joint-cover profile in anodized aluminium. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

PROCOVER

ANODIZED SILVER, DARK BRONZE ALUMINIUM




ANODIZED SILVER, DARK BRONZE ALUMINIUM thermo packed - bar length 2,7 lm (PCRAA 1499 - bar length 0,90 lm - pack. 40 Pcs)




Article	L x H mm		
PCRAA 149 (pack. 40 Pcs)	14 X 9		
PCRDB 149 (pack. 40 Pcs)	14 X 9		
PCRAA 1499 (pack. 40 Pcs)	14 X 9		
PCRAA 209 (pack. 40 Pcs)	20 X 9		
PCRDB 209 (pack. 40 Pcs)	20 X 9		
PCRAA 269 (pack. 40 Pcs)	26 X 9		
PCRDB 269 (pack. 40 Pcs)	26 X 9		
PCRAA 409 (pack. 40 Pcs)	40 X 9		
PCRDB 409 (pack. 40 Pcs)	40 X 9		

COLOURS




AVAILABLE MINIMUM QUANTITY 100 PCS by color and height




Available on demand PCRAT, PCRAA and PCRAO.

* PCRAA - DB 149 curvable. (See pag. 110)

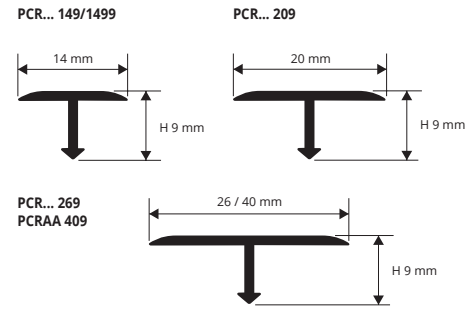

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

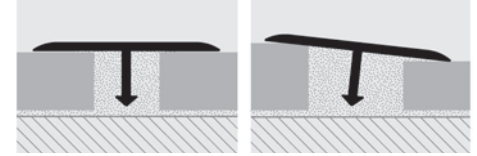

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

threshold - joint-cover profiles

PROCOVER WOOD is a joint-cover profile in aluminium covered with a very strong film available in 77 wooden finishes (72 on demand). It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.


ALUMINIUM COVERED WOODEN FINISHES thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm (L 26 mm - 54 lm)

Article	L x H mm		
PCRA... 149	14 X 9		
PCRA... 269	26 X 9		

Available in the wood finishes: 05W - 11W - 28W - 29W - 30W. The code of the selected colour must be added to the article code. Es.: PCRA... 149 (chosen finish light oak) PCRA04W 149.




COLOURS




PROCOVER WOOD

ALUMINIUM COVERED WITH PROTECTIVE FILM IN 77 WOODEN FINISHES (72 on demand)

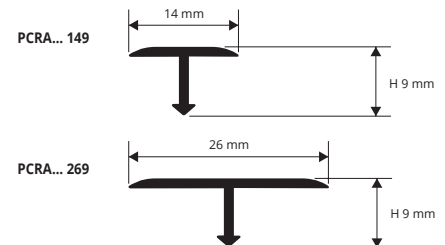

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

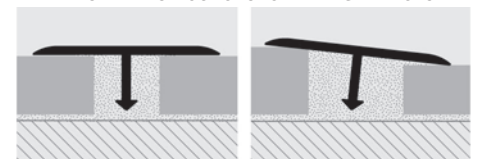

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

threshold - joint-cover profiles

PROCOVER INSERT for inserting Procover profiles

VINYL RESIN / BLACK RUBBER

Vinyl resin/rubber profile "U-form" for inserting PROCOVER with PINBFT 45 or PINBFT 40 Proinsert System base.

VINYL RESIN/RUBBER


length 2,7 lm and/or in rolls 100 lm

Article			
PCPCR 2,7ML			
PCPCR 100ML			


PROINSERT BASE 45 AND BASE 40 - alum. punched - perfored

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	Width. mm		
PINBFT 45	45		
PINBFT 40	40		

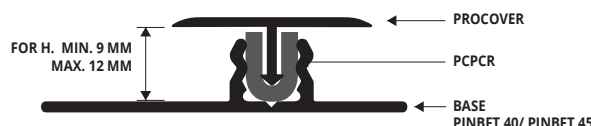


INSERT +BASE 45/40

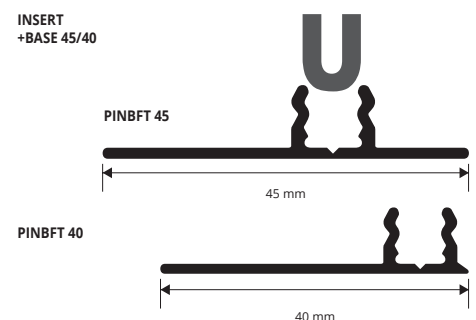

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROPLATE

POLISHED STAINLESS 1.4016 STEEL
SELF-ADHESIVE OR PUNCHED

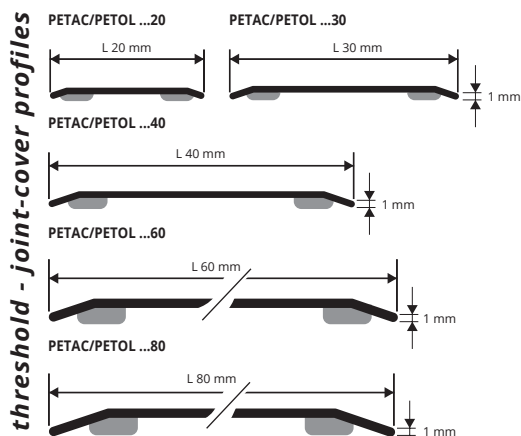


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROPLATE" in the required width and material and whether punched or with self-adhesive backing.
2. Cut the profile to the required length. When laying the self-adhesive Proplate, clean, degrease and dry the surface, checking that the temperature for application is at least 15°.
3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers.
4. When laying the punched version, align the profile and mark the position of the holes in the profile as reference.
5. Insert suitable screw anchors (usually Ø 3mm screws & 5x25mm screw anchors)
6. Align the profile and tighten the galvanised or brassed flathead screws.

PROPLATE is a flat joint-cover profile with special profiled edges for perfect adherence to flooring. Made in stainless steel 1.4016 with a protective film and available with or without adhesive or for certain widths also in the punched version. Available in widths of 20 - 30 - 40 - 60 - 80 mm with protective film.

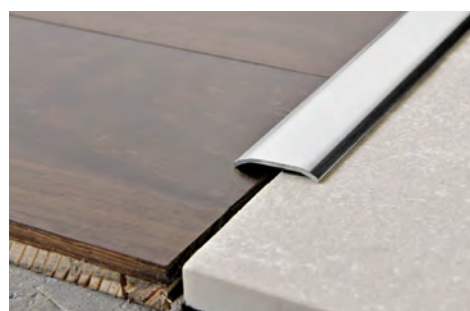

POLISHED STAINLESS 1.4016 ST. thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 20 - 30mm - 108 lm)

Article	Width - Thick.		
PETAC 20A (with adhesive)	20mm - 10/10		
PETAC 30A (with adhesive)	30mm - 10/10		
PETAC 40A (with adhesive)	40mm - 10/10		
PETAC 60A (with adhesive)	60mm - 10/10		
PETAC 80A (with adhesive)	80mm - 10/10		

POLISHED STAINLESS 1.4016 STEEL thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm

Article	Width - Thick.		
PETAC 60 (without holes)	60mm - 10/10		
PETAC 80 (without holes)	80mm - 10/10		

PETAC 60A/80A/60/80, with 12/10 thickness available on demand.

PUNCHED POLISHED STAINLESS 1.4016 ST. with protective film
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 30mm - 108 lm)

Article	Width - Thick.		
PETAC 30F (punched)	30mm - 10/10		
PETAC 40F (punched)	40mm - 10/10		



POLISHED STAINLESS 1.4016 ST. thermo packed
bar length 0,93 lm - pack. 20 Pcs  SELF PACK


Article	Width - Thick.		
PETAC 309AS (with adhesive)	30mm - 10/10		
PETAC 309FS (punched with screws and screw anchors)	30mm - 10/10		
PETAC 609AS (with adhesive)	60mm - 10/10		
PETAC 809AS (with adhesive)	80mm - 10/10		

COLOURS




PROPLATE

POLISHED BRASS
SELF-ADHESIVE OR PUNCHED

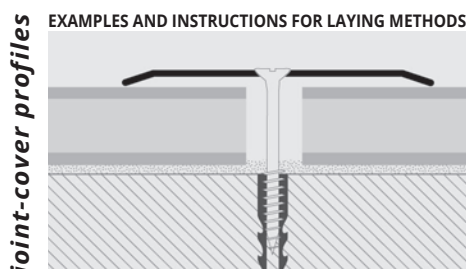

1. Choose "PROPLATE" in the required width and material and whether punched or with self-adhesive backing.
2. Cut the profile to the required length. When laying the self-adhesive Proplate, clean, degrease and dry the surface, checking that the temperature for application is at least 15°.
3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers.
4. When laying the punched version, align the profile and mark the position of the holes in the profile as reference.
5. Insert suitable screw anchors (usually Ø 3mm screws & 5x25mm screw anchors)
6. Align the profile and tighten the galvanised or brassed flathead screws.

COLOURS



PROPLATE is a flat joint-cover profile with special profiled edges for perfect adherence to flooring. Made in polished brass with a protective film and available with or without adhesive or for certain widths also in the punched version. Available in widths of 20 - 30 - 40 - 60 - 80 mm with protective film.



POLISHED BRASS thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 20/30mm - 108 lm)

Article	Width - Thick.		
PETOL 20A (with adhesive)	20mm - 10/10		
PETOL 30A (with adhesive)	30mm - 10/10		
PETOL 40A (with adhesive)	40mm - 10/10		
PETOL 60A (with adhesive)	60mm - 10/10		
PETOL 80A (with adhesive)	80mm - 10/10		


POLISHED BRASS thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 20 mm - 108 lm)

Article	Width - Thick.		
PETOL 20 (without holes)	20mm - 10/10		*
PETOL 60 (without holes)	60mm - 10/10		*
PETOL 80 (without holes)	80mm - 10/10		*

PETOL 60A/80A/60/80 with 13/10 thickness available on demand.

POLISHED BRASS with protective film
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 30 mm - 108 lm)

Article	Width - Thick.		
PETOL 30F (punched)	30mm - 10/10		*
PETOL 40F (punched)	40mm - 10/10		*

POLISHED BRASS thermo packed
bar length 0,83 lm - pack. 20 Pcs  SELF PACK

Article	Width - Thick.		
PETOL 308AS (with adhesive)	30mm - 10/10		*
PETOL 408AS (with adhesive)	40mm - 10/10		*

POLISHED BRASS thermo packed
bar length 0,93 lm - pack. 20 Pcs  SELF PACK

Article	Width - Thick.		
PETOL 309AS (with adhesive)	30mm - 10/10		
PETOL 309FS (punched with screws and screw anchors)	30mm - 10/10		
PETOL 409AS (with adhesive)	40mm - 10/10		
PETOL 409FS (punched with screws and screw anchors)	40mm - 10/10		*
PETOL 609AS (with adhesive)	60mm - 10/10		*
PETOL 809AS (with adhesive)	80mm - 10/10		*

POLISHED BRASS thermo packed
bar length 1,03 lm - pack. 20 Pcs  SELF PACK

Article	Width - Thick.		
PETOL 3010AS (with adhesive)	30mm - 10/10		
PETOL 4010AS (with adhesive)	40mm - 10/10		
PETOL 4010FS (punched with screws and screw anchors)	40mm - 10/10		*

POLISHED BRASS thermo packed
bar length 1,66 lm - pack. 20 Pcs  SELF PACK

Article	Width - Thick.		
PETOL 3016AS (with adhesive)	30mm - 10/10		*
PETOL 4016AS (with adhesive)	40mm - 10/10		*

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROPLATE 80 ALZ is a new aluminium joint cover, threshold cover. It is very resistant and suitable for covering the expanding joint of two different supporting structures, or to connect a floor with an adjoining one of the same or different kind. Particularly used in Industrial field, in the malls, sport facilities and gyms equipped with wood and/or resin floors.

PROPLATE 80 ALZ

KNURLED ANODIZED SILVER ALUMINIUM




Punched version available on demand.

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (PETAA 80Z - 40,5 lm)


Article	Width mm		
PETAA 80ZA (with adhesive)	80		
PETAA 80Z (without adhesive)	80		

COLOURS




AA - Anodized silver alum.

PETAA 80ZA
PETAA 80Z



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

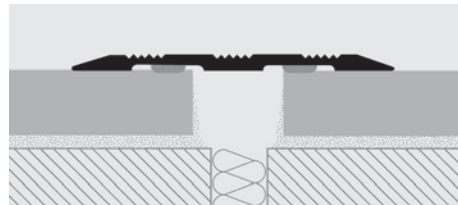

1. Choose "PROPLATE 80ALZ" model with or without sticker and cut it to the required length.

Adhesive version

2. Degrease, wash and clean accurately the solid floor. 3. Remove the protective label from the sticker (sticker model). 4. Rest the square pressing evenly without hammering.

Punched version

2. Perforate on one side and insert the nogs in the holes. 3. Fix and screw the square equipped with flared head screws suitable to the holes made.

threshold - joint-cover profiles

PROCOVER 14PT is a small aluminium joint cover / threshold cover square. It is used to finish technically floors laid at the same level in ceramic tiles/ ceramics ceramics / wood. It covers eventual laying flaws and guarantees that the floors which are underneath expand enough. In Gold-Silk anodized Aluminium and Bronze with sticker.

PROCOVER 14PT

ANODIZED SILVER, GOLD AND BRONZE ALUMINIUM



ANODIZED ALUMINIUM WITH ADHESIVE thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	Width mm		
PCRAA 14PTA	14		
PCRAO 14PTA	14		*
PCRAB 14PTA	14		*

COLOURS




AA - Anodized silver alum.

PCRAA 14PTA
PCRAO 14PTA
PCRAB 14PTA




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

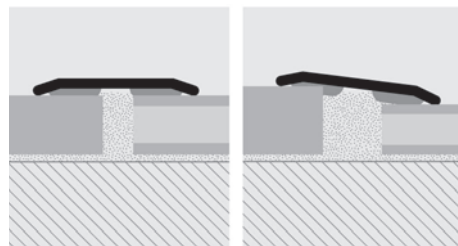

1. Choose the superficial finish of "PROCOVER 14PT" and cut it to the required length. 2. Degrease, wash and clean accurately the solid floor. 3. Remove the protective label from the sticker. 4. Lay the square pressing evenly without hammering.

threshold - joint-cover profiles

AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



AO - Anodized gold alum. AB - Anodized bronze alum.

(Price to be agreed. Production delay 4/5 weeks)

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed




PROSOL 18-30-35-40 in steel are self-adhesive joint - covers in stainless steel 1.4016 available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

PROSOL 18-30-35-40

STAINLESS STEEL 1.4016 WITH
SELF-ADHESIVE WITH PROTECTIVE FILM

threshold - joint-cover profiles

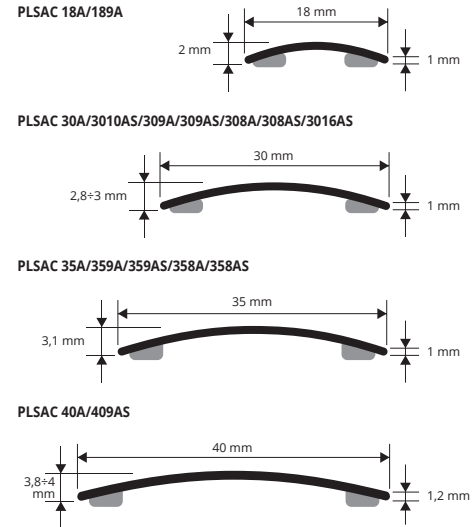

STAINLESS ST. 1.4016 with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm (L 35/40 mm - 54 lm)

Article	Width - Thick.
PLSAC 18A	18 mm - 10/10
PLSAC 30A	30 mm - 10/10
PLSAC 35A	35 mm - 10/10
PLSAC 40A	40 mm - 12/10

STAINLESS ST. 1.4016 with adhesive thermo packed - bar length 0,83 lm - pack. 20 Pcs

Article	Width - Thick.
PLSAC 308AS	30 mm - 10/10
PLSAC 358AS	35 mm - 10/10

On demand 0,73 or 0,63 lm bar length (quantity and prices to be agreed. Production delay 4/5 weeks).

STAINLESS ST. 1.4016 with adhesive thermo packed - bar length 0,83 lm - pack. 20 Pcs

Article	Width - Thick.
PLSAC 308A	30 mm - 10/10
PLSAC 358A	35 mm - 10/10

On demand 0,73 or 0,63 lm bar length (quantity and prices to be agreed. Production delay 4/5 weeks).

STAINLESS ST. 1.4016 with adhesive thermo packed - bar length 0,90 lm - pack. 20 Pcs

Article	Width - Thick.
PLSAC 189A	18 mm - 10/10

STAINLESS ST. 1.4016 with adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	Width - Thick.
PLSAC 309A	30 mm - 10/10
PLSAC 359A	35 mm - 10/10

STAINLESS ST. 1.4016 with adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	Width - Thick.
PLSAC 309AS	30 mm - 10/10
PLSAC 359AS	35 mm - 10/10
PLSAC 409AS	40 mm - 12/10


STAINLESS ST. 1.4016 with adhesive thermo packed - bar length 1,03 lm - pack. 20 Pcs

Article	Width - Thick.
PLSAC 3010AS	30 mm - 10/10

STAINLESS ST. 1.4016 with adhesive thermo packed - bar length 1,66 lm - pack. 20 Pcs

Article	Width - Thick.
PLSAC 3016AS	30 mm - 10/10
PLSAC 3516AS	35 mm - 10/10

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

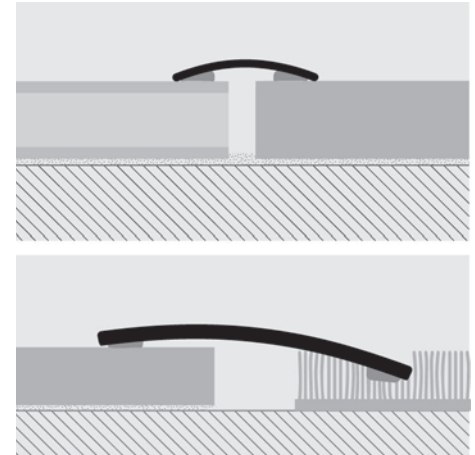


1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

COLOURS



AC - Polished stainless steel 1.4016

On demand hand-brushed stainless steel
(Prices to be agreed. Production delay 4/5 weeks)

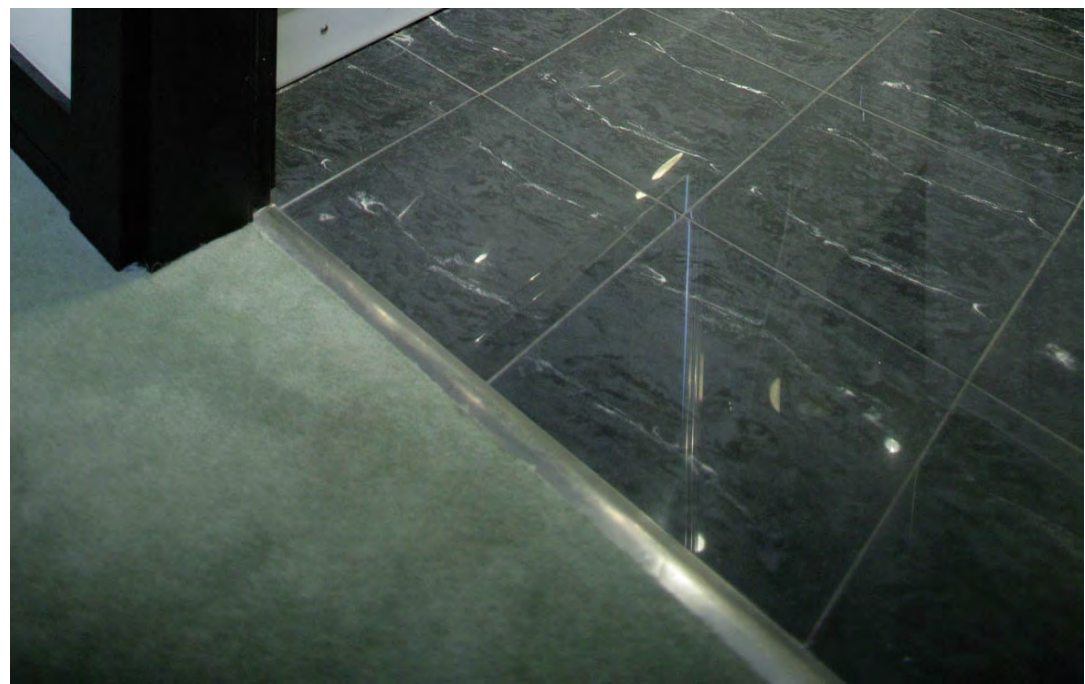


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROSOL 30-35-40


PUNCHED STAINLESS STEEL 1.4016
WITH PROTECTIVE FILM

PROSOL 30-35-40 in steel are punched joint - covers in stainless steel 1.4016 available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.


PLSAC 30F/308F/309F/308FS/309FS/3010FS/3016FS



PLSAC 35F/358F/359F/358FS/359FS/3516FS



PLSAC 40F/409FS



STAINLESS ST. 1.4016 punched - with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm (L 30 mm - 108 lm)

Article	Width - Thick.		
PLSAC 30F	30 mm - 10/10		
PLSAC 35F	35 mm - 10/10		
PLSAC 40F	40 mm - 12/10		

STAINLESS ST. 1.4016 punched with screws and screw anchors
thermo packed - bar length 0,83 lm - pack. 20 Pcs



Article	Width - Thick.		
PLSAC 308FS	30 mm - 10/10		
PLSAC 358FS	35 mm - 10/10		*

STAINLESS ST. 1.4016 punched with screws and screw anchors
thermo packed - bar length 0,93 lm - pack. 20 Pcs



Article	Width - Thick.		
PLSAC 309FS	30 mm - 10/10		
PLSAC 359FS	35 mm - 10/10		*
PLSAC 409FS	40 mm - 12/10		*

STAINLESS ST. 1.4016 punched thermo packed
bar length 0,83 lm - pack. 20 Pcs



Article	Width - Thick.		
PLSAC 308F	30 mm - 10/10		
PLSAC 358F	35 mm - 10/10		*

STAINLESS ST. 1.4016 punched thermo packed
bar length 0,93 lm - pack. 20 Pcs



Article	Width - Thick.		
PLSAC 309F	30 mm - 10/10		
PLSAC 359F	35 mm - 10/10		*

STAINLESS ST. 1.4016 punched with screws and screw anchors
thermo packed - bar length 1,03 lm - pack. 20 Pcs





Article	Width - Thick.		
PLSAC 3010FS	30 mm - 10/10		

STAINLESS ST. 1.4016 punched with screws and screw anchors
thermo packed - bar length 1,66 lm - pack. 20 Pcs



Article	Width - Thick.		
PLSAC 3016FS	30 mm - 10/10		
PLSAC 3516FS	35 mm - 10/10		*

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

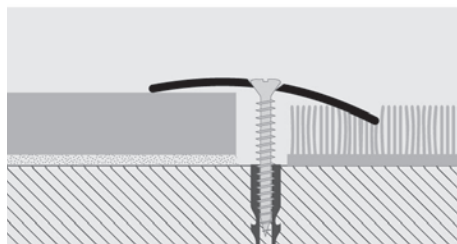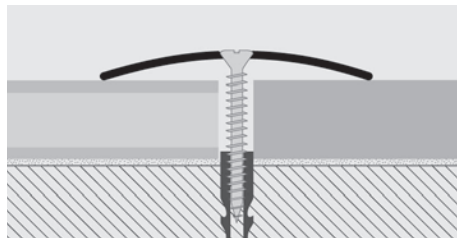

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

COLOURS



AC - Polished stainless
Steel 1.4016

On demand hand-brushed stainless steel (Prices to be agreed. Production delay 4/5 weeks)

PROSOL 18-30-35-40 in brass are self-adhesive joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

PROSOL 18-30-35-40


POLISHED BRASS WITH SELF-ADHESIVE
WITH PROTECTIVE FILM

threshold - joint-cover profiles








POLISHED BRASS with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm (L 35/40mm - 54 lm)

Article	Width - Thick.
PLSOL 18A	18 mm - 10/10
PLSOL 30A	30 mm - 10/10
PLSOL 35A	35 mm - 10/10
PLSOL 40A	40 mm - 18/10

POLISHED BRASS with adhesive thermo packed  bar length 0,83 lm - pack. 20 Pcs


Article	Width - Thick.
PLSOL 308AS	30 mm - 10/10
PLSOL 358AS	35 mm - 10/10

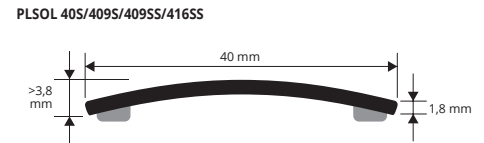


POLISHED BRASS with adhesive thermo packed  bar length 0,83 lm - pack. 20 Pcs

Article	Width - Thick.
PLSOL 308A	30 mm - 10/10

On demand 0,73 or 0,63 lm bar length (quantity and prices to be agreed. Production delay 4/5 weeks).

POLISHED BRASS with adhesive thermo packed  bar length 0,93 lm - pack. 20 Pcs


Article	Width - Thick.
PLSOL 309AS	30 mm - 10/10
PLSOL 359AS	35 mm - 10/10
PLSOL 409AS	40 mm - 18/10

POLISHED BRASS with adhesive thermo packed  bar length 0,90 lm - pack. 20 Pcs


Article	Width - Thick.
PLSOL 189A	18 mm - 10/10

POLISHED BRASS with adhesive thermo packed  bar length 1,03 lm - pack. 20 Pcs


Article	Width - Thick.
PLSOL 3010AS	30 mm - 10/10
PLSOL 3510AS	35 mm - 10/10

POLISHED BRASS with adhesive thermo packed  bar length 0,93 lm - pack. 20 Pcs


Article	Width - Thick.
PLSOL 309A	30 mm - 10/10
PLSOL 359A	35 mm - 10/10
PLSOL 409A	40 mm - 18/10

POLISHED BRASS with adhesive thermo packed  bar length 1,66 lm - pack. 20 Pcs

Article	Width - Thick.
PLSOL 3016AS	30 mm - 10/10
PLSOL 3516AS	35 mm - 10/10
PLSOL 4016AS	40 mm - 18/10

POLISHED BRASS with adhesive thermo packed  bar length 1,03 lm - pack. 20 Pcs

Article	Width - Thick.
PLSOL 3010A	30 mm - 10/10


POLISHED BRASS with adhesive thermo packed  bar length 1,66 lm - pack. 20 Pcs

Article	Width - Thick.
PLSOL 3016A	30 mm - 10/10

COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

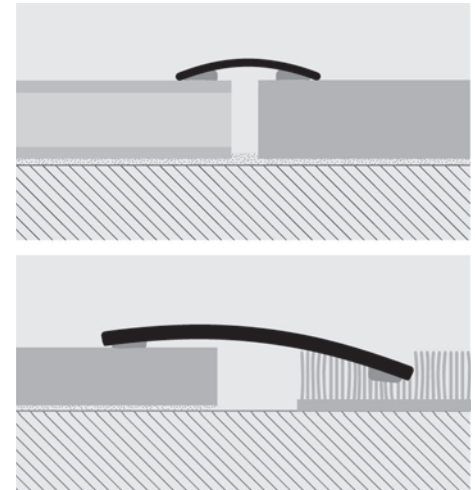


1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

PROSOL 30-35-40


PUNCHED POLISHED BRASS
WITH PROTECTIVE FILM

PROSOL 30-35-40 in brass are punched joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.


PLSOL 30F/308F/309F/3010F/3016F/308FS/309FS/3010FS/3016FS





PLSOL 35F/359F/358FS/359FS/3510FS/3516FS



PLSOL 40F/409F/409FS/4016FS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

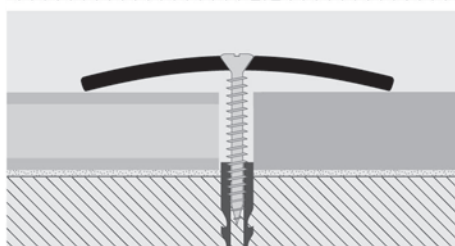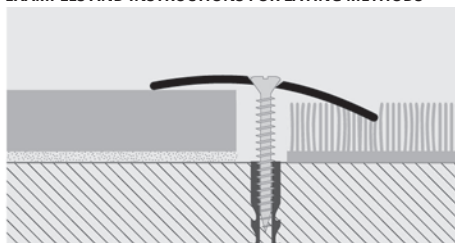

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.



POLISHED BRASS punched with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm (L 35/40mm - 54 lm)

Article	Width - Thick.		
PLSOL 30F	30 mm - 10/10		
PLSOL 35F	35 mm - 10/10		*
PLSOL 40F	40 mm - 18/10		*

POLISHED BRASS punched thermo packed
bar length 0,83 lm - pack. 20 Pcs



Article	Width - Thick.		
PLSOL 308F	30 mm - 10/10		*

POLISHED BRASS punched thermo packed
bar length 0,93 lm - pack. 20 Pcs



Article	Width - Thick.		
PLSOL 309F	30 mm - 10/10		*
PLSOL 359F	35 mm - 10/10		*
PLSOL 409F	40 mm - 18/10		*

POLISHED BRASS punched thermo packed
bar length 1,03 lm - pack. 20 Pcs




Article	Width - Thick.		
PLSOL 3010F	30 mm - 10/10		*

POLISHED BRASS punched thermo packed
bar length 1,66 lm - pack. 20 Pcs



Article	Width - Thick.		
PLSOL 3016F	30 mm - 10/10		*

COLOURS

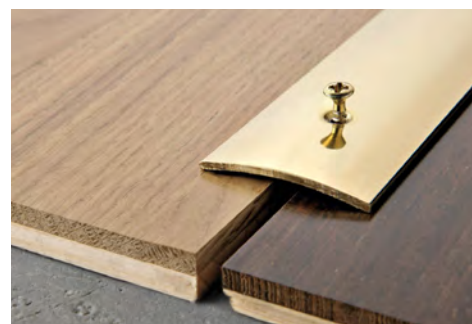

POLISHED BRASS punched with screws and screw anchors
thermo packed - bar length 0,83 lm - pack. 20 Pcs



Article	Width - Thick.		
PLSOL 308FS	30 mm - 10/10		*
PLSOL 358FS	35 mm - 10/10		*

On demand 0,73 or 0,63 lm bar length (quantity and prices to be agreed. Production delay 4/5 weeks).

POLISHED BRASS punched with screws and screw anchors
thermo packed - bar length 0,93 lm - pack. 20 Pcs



Article	Width - Thick.		
PLSOL 309FS	30 mm - 10/10		*
PLSOL 359FS	35 mm - 10/10		*
PLSOL 409FS	40 mm - 18/10		*

POLISHED BRASS punched with screws and screw anchors
thermo packed - bar length 1,03 lm - pack. 20 Pcs



Article	Width - Thick.		
PLSOL 3010FS	30 mm - 10/10		*
PLSOL 3510FS	35 mm - 10/10		*

POLISHED BRASS punched with screws and screw anchors
thermo packed - bar length 1,66 lm - pack. 20 Pcs



Article	Width - Thick.		
PLSOL 3016FS	30 mm - 10/10		*
PLSOL 3516FS	35 mm - 10/10		*
PLSOL 4016FS	40 mm - 18/10		*

PROSOL 30-35-40 are self-adhesive or punched joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold.

PROSOL is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

PROSOL 30-35-40

ANODIZED GOLD AND SILVER ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED



ANODIZED ALUMINIUM with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Width - Thick.
PLS... 30A	30 mm - 1,3
PLSAA 35A	35 mm - 1,5
PLSAA 40A	40 mm - 2

Available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLS... 30A (chosen finish anod. silver) PLSAA 30A.


ANODIZED ALUMINIUM punched thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Width - Thick.
PLS... 30F	30 mm - 1,3
PLSAA 35F	35 mm - 1,5
PLSAA 40F	40 mm - 2


PLS... 30A/309A/308AS/309AS/3010AS/3016AS




PLS... 35A




PLS... 40A




PLS... 30F/309F/308FS/309FS/3016FS



PLS... 35F



PLS... 40F



threshold - joint-cover profiles

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 0,83 lm - pack. 20 Pcs



Article	Width - Thick.
PLSAA 308AS	30 mm - 10/10

On demand 0,73 or 0,63 lm bar length (quantity and prices to be agreed. Production delay 4/5 weeks).

ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length 0,83 lm - pack. 20 Pcs



Article	Width - Thick.
PLS... 308FS	30 mm - 10/10



ANODIZED ALUMINIUM with adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs



Article	Width - Thick.
PLS... 309AS	30 mm - 10/10

ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length 0,93 lm - pack. 20 Pcs



Article	Width - Thick.
PLSAA 309FS	30 mm - 10/10



ANODIZED ALUMINIUM with adhesive thermo packed - bar length 1,03 lm - pack. 20 Pcs



Article	Width - Thick.
PLS... 3010AS	30 mm - 10/10

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 1,66 lm - pack. 20 Pcs



Article	Width - Thick.
PLSAA 3016AS	30 mm - 10/10

ANODIZED ALUMINIUM punched with screws and screw anchors thermo packed - bar length 1,66 lm - pack. 20 Pcs



Article	Width - Thick.
PLS... 3016FS	30 mm - 10/10



ANODIZED ALUMINIUM with adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs



Article	Width - Thick.
PLS... 309A	30 mm - 10/10

ANODIZED ALUMINIUM punched thermo packed - bar length 0,93 lm - pack. 20 Pcs






Article	Width - Thick.
PLSAA 309F	30 mm - 10/10




Available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLS... 309A (chosen finish anod. silver) PLSAA 309A.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

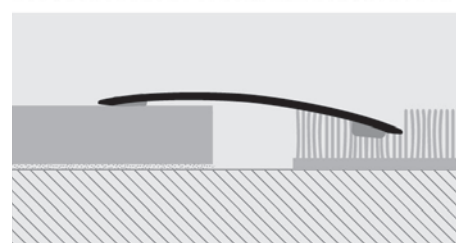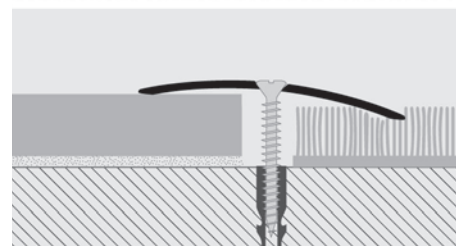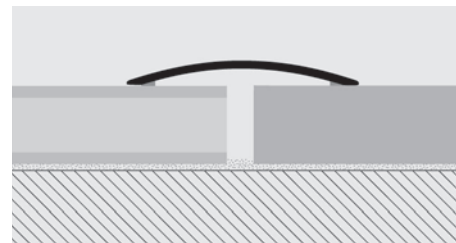


1. Choose the suitable profile and cut it to the necessary length.
 2. Degrease, wash and clean the solid surface thoroughly.
 3. Remove the protective paper from the adhesive.
 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.
- Adhesive version**
2. Mark the position of the holes using the existing holes in the profile as reference.
 3. Insert the screw anchors into the drilled holes.
 4. Fix the profile using flathead screws suitable for the relative slots in the profile.
- Punched version**

COLOURS



ON DEMAND MINIMUM 100 PCS by color and height



(Prices to be agreed. Production delay 4/5 weeks)

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed



PROLEVAL 25-35-38-50 are joint - covers in anodized aluminium with gold, silver and bronze finish in various widths with a more or less knurled flat surface, available with self-adhesive backing or punched in various lengths. They are used to join floors of the same or differing material e.g. ceramic tiles, wood, marble, parquet or laminated, mainly to cover flaws created during laying or expansion joints. The chamfered edges ensure perfect adhesion to the floor, while the flat top allows perfect door closure. Recommended for dwellings and public environments with intense pedestrian traffic. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

PROLEVAL 25-35-38-50

ANODIZED GOLD AND SILVER ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED



ANODIZED ALUMINIUM with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Width mm		
PLV... 25A	25		
PLV... 35A	35		
PLV... 38A	38		
PLV... 50A	50	7,00	18,90

Available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLV... 25A (chosen finish anod. silver) PLVAA 25A.

ANODIZED ALUMINIUM punched thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Width mm		
PLV... 25F	25		
PLV... 35F	35		
PLV... 38F	38		
PLV... 50F	50	6,00	16,20

Available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLV... 25F (chosen finish anod. silver) PLVAA 25F.

OFF-CENTRE HOLES ON DEMAND

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	Width mm		
PLVAA 259AS	25		
PLV... 359AS	35		
PLV... 389AS	38		
PLV... 509AS	50	7,50	

Available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLV... 259AS (chosen finish anod. silver) PLVAA 259AS.

ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	Width mm		
PLV... 259FS	25		
PLV... 359FS	35		
PLV... 389FS	38		
PLV... 509FS	50		

PLV... 259FS-359FS available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLV... 359FS (chosen finish anod. silver) PLVAA 359FS.

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 1,03 lm - pack. 20 Pcs

Article	Width mm		
PLV... 3510AS	35		

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 1,66 lm - pack. 20 Pcs

Article	Width mm		
PLV... 3516AS	35		

The code of the selected colour must be added to the article code. E.g.: PLV... 3510AS (chosen colour anodized gold alum.) PLVAO 3510AS.

ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length 1,03 lm - pack. 20 Pcs


Article	Width mm		
PLV... 3510FS	35		

ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length 1,66 lm - pack. 20 Pcs

Article	Width mm		
PLV... 3516FS	35		

ON DEMAND MINIMUM 100 PCS by color and height

COLOURS



(Prices to be agreed. Production delay 4/5 weeks)


1. Choose the suitable profile and cut it to the necessary length.

Adhesive version

2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.


Punched version

2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

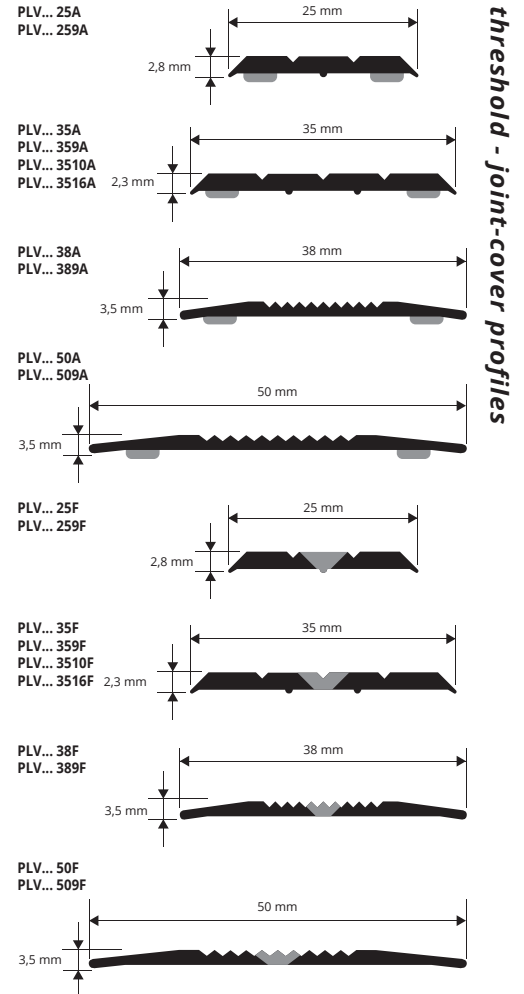

threshold - joint-cover profiles


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

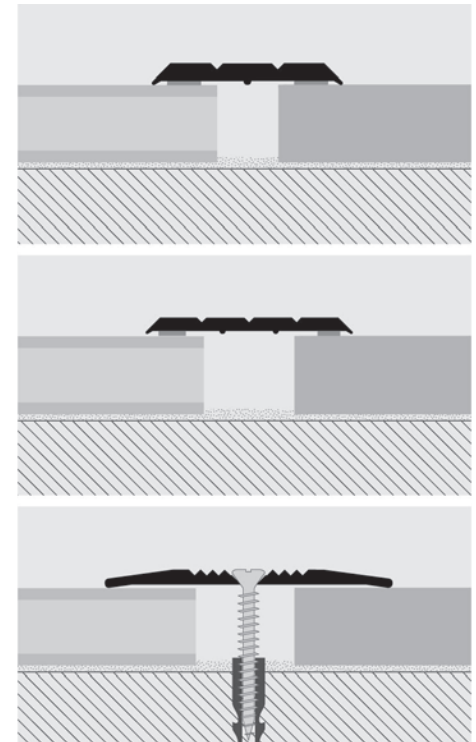


PROMOQUETTE

ANODIZED GOLD AND SILVER ALUMINIUM WITH OR WITHOUT SELF-ADHESIVE

carpet gripper profiles

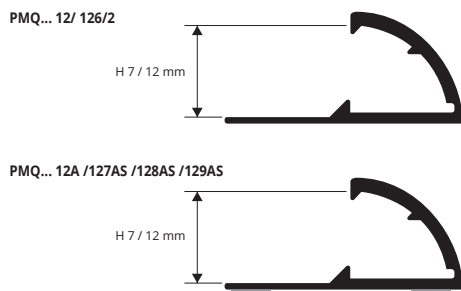


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

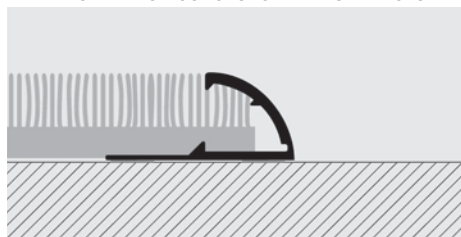

1. Cut the profile to the necessary length. 2. Fix the "PROMOQUETTE" to the floor using screws/nails or double-sided adhesive tape. 3. Insert the carpeting into the curved side with the necessary tension. 4. Apply pressure evenly over the edge of the profile until it closes over and secures the carpeting.

PROMOQUETTE is an anodized aluminium rounded edging profile with tap-down edge, which is ideal for the clean-cut, elegant finishing of carpeted floors. The carpeting is inserted inside the curved/rounded section, which is then pressed down until the carpeting is secured, thereby also protecting the edge. **PROMOQUETTE** ensures a perfect finish, covering any flaws created during laying and protecting the edge. Easy to lay with the self-adhesive backing ensuring perfect adherence to the floor.

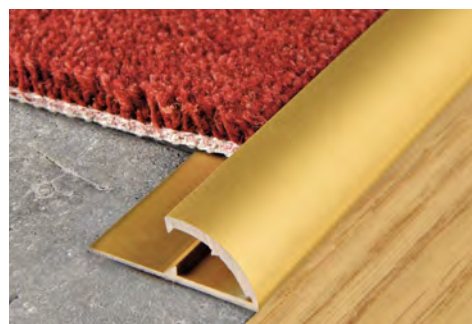

ANODIZED GOLD and SILVER ALUMINIUM
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm		
PMQ... 12A (with adhesive)	7/12		
PMQ... 12 (without adhesive)	7/12		

Available in the colours: AA - AO. (AB available on demand with a minimum quantity order of 100 pcs).
The code of the selected colour must be added to the article code. E.g.: PMQ... 12A (chosen colour Anodized gold alum.) PMQAO 12A.

ANODIZED GOLD and SILVER ALUMINIUM
thermo packed - bar length 0,67 lm - pack. 2 Pcs

Article	H mm		
PMQ... 126/2 (without adhesive)	7/12		

COLOURS



AA - Anodized silver alum. AO - Anodized gold alum.

ANODIZED SILVER ALUMINIUM
thermo packed - bar length 0,73 lm - pack. 20 Pcs

Article	H mm		
PMQAA 127AS (with adhesive)	7/12		*


ANODIZED GOLD, SILVER and BRONZE ALUM.
thermo packed - bar length 0,83 lm - pack. 20 Pcs

Article	H mm		
PMQ... 128AS (with adhesive)	7/12		*

ANODIZED GOLD, SILVER and BRONZE ALUM.
thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	H mm		
PMQ... 129AS (with adhesive)	7/12		*

ON DEMAND MINIMUM 100 PCS by color and height




AB - Anodized bronze alum.

(Prices to be agreed. Production delay 4/5 weeks)


PROMOQUETTE FIX

ANODIZED GOLD AND SILVER ALUMINIUM PUNCHED OR NOTCHED

carpet gripper profiles

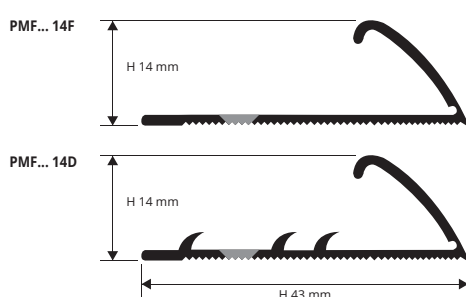

EXAMPLES OF LAYING

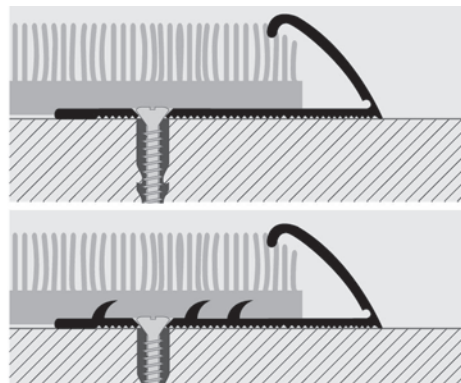

PROMOQUETTE FIX is a profile in anodized aluminium made as a terminal profile to edge carpeted floors held under tension or simply laid with double-sided adhesive tape. Two versions are available: notched or with holes/notches for laying under tension and then permanently fixed with screws/nails; or the punched version to edge without holding under tension. **PROMOQUETTE FIX** ensures an impeccable finish to the edge of carpeting that is not always perfectly cut. It speeds up laying time and the result is attractive.



ANODIZED GOLD and SILVER ALUMINIUM
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm		
PMF... 14F (punched)	14		
PMFAA 14D (notched)	14		*

Available in the colours: AO - AA. (AB available on demand with a minimum quantity order of 100 pcs).
The code of the selected colour must be added to the article code. E.g.: PMF... 14F (chosen colour anodized gold alum.) PMFAO 14F.

INSTRUCTIONS FOR LAYING


1. Cut the profile to the necessary length. 2. Fix the "PROMOQUETTE FIX" to the floor using screws/nails. 3. Insert the carpeting into the curved side with the necessary tension. 4. Apply pressure evenly over the edge of the profile until it closes over and secures the carpeting.

COLOURS



AA - Anodized silver alum. AO - Anodized gold alum.

ON DEMAND MINIMUM 100 PCS by color and height



AB - Anodized bronze alum.

(Prices to be agreed. Production delay 4/5 weeks)

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROMOQUETTE GIN is a profile in anodized aluminium with tap-down edge for edging or joining floors in carpeting, PVC, linoleum, ceramic tiles/wood, etc. Two versions are available: punched for laying under tension and then permanently fixed with screws/nails or the adhesive version for laying with glue and which can be taken up if required. **PROMOQUETTE GIN** guarantees an impeccable finish and offers the dual function of both joining and of covering any flawed edges of the floors. It speeds up laying time and the result is attractive.

PROMOQUETTE GIN

ANODIZED GOLD, SILVER AND BRONZE ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED




ANODIZED GOLD, SILVER AND BRONZE ALUMINIUM thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PMGAA 813F (punched)	8/13		
PMGAA 813A (with adhesive)	8/13		
PMGAO 813F (punched)	8/13		
PMGAO 813A (with adhesive)	8/13		
PMGAB 813F (punched)	8/13		
PMGAB 813A (with adhesive)	8/13		
PMGAT 813F (punched)	8/13		*
PMGAT 813A (with adhesive)	8/13		*
PMGCH 813F (punched)	8/13		*
PMGCH 813A (with adhesive)	8/13		*
PMGSB 813F (punched)	8/13		*
PMGSB 813A (with adhesive)	8/13		*

Available in the colours: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PMG... 813F (chosen colour anodized gold alum.) PMGAO 813F.


COLOURS



ON DEMAND MINIMUM 100 PCS by color and height




(Prices to be agreed. Production delay 4/5 weeks)

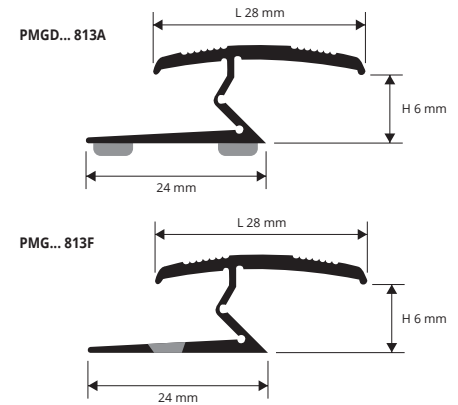

carpet gripper profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

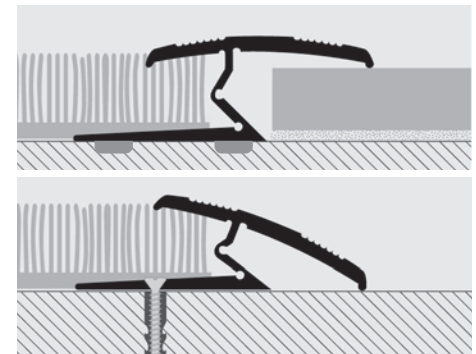

1. Cut the profile to the necessary length. 2. Fix the "PROMOQUETTE GIN" to the floor using screws/nails or two-sided adhesive tape. 3. Lay the required floor, inserting the carpeting, PVC, linoleum, ceramic tile or wood under the upper curved part. 4. Apply pressure evenly on the edges of the profile until they close and secure the flooring on both sides.

PROMOQUETTE CLIP is an aluminum profile, which allows to combine two carpet in practical and fast way. The profile is composed by a base and a TOP serrated, thanks to its particular section, allows to cover and fix the edges of the carpet with the connection of the top to the base. **PROMOQUETTE CLIP** in anodized aluminium is suitable for closed environment is required where a good resistance to mechanical and chemical stresses.

PROMOQUETTE CLIP


ANODIZED SILVER ALUMINIUM TOP AND NOTCHED BASE



COLOURS



AA - Anodized silver alum.

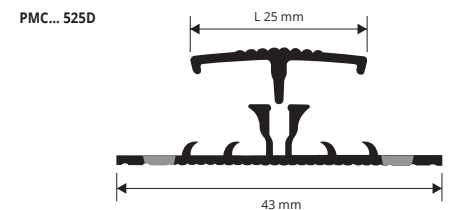

carpet gripper profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




1. Cut the profile to the necessary length. 2. Fix the punched/notched base to the floor using screws/nails or two-sided adhesive tape. 3. Lay the carpeting by gluing or holding under tension. 4. With the help of a wooden tapping block and a hammer, apply pressure evenly over the whole of the top profile until it clicks into the base, thereby securing the carpeting on both sides.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed



GUGGENHEIM MUSEUM, NY, 1943
Frank L.I. Wright

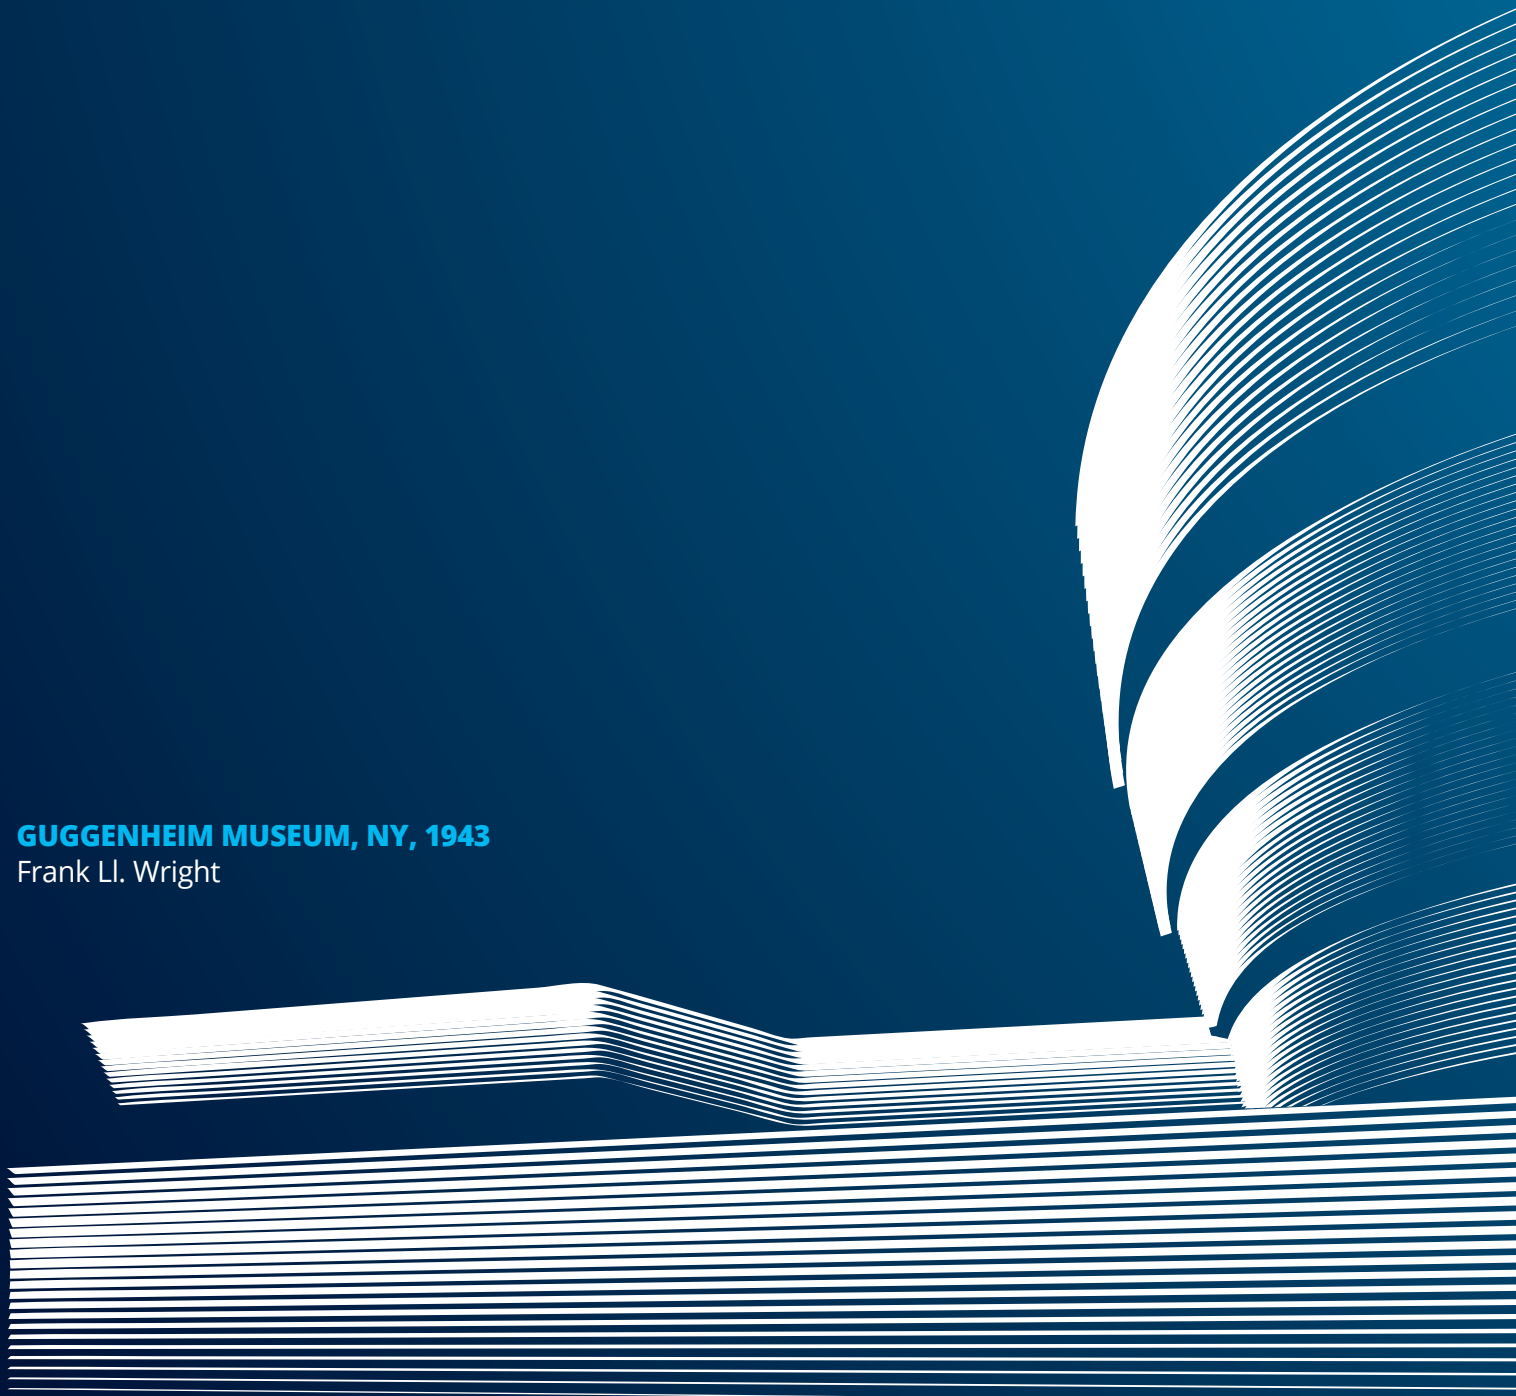


CURVE AND BENDABLE PROFILES



PRO...CURVE LINE



PRO CURVE LINE are a range of profiles that may be curved/shaped, with a special system of perforations allowing them to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. The profiles in the PRO CURVE LINE may be used as transition or edging profiles or to create joining and expansion joints on any type of ceramic, parquet, wood, laminate/melamine coated wood, marble, carpeted, Palladian, Venetian floor, etc. The profiles are made in AISI 304/1.4301-V2A stainless steel, aluminium and brass and may be easily shaped by using the PROCURVE MACHINE to bend the profiles mechanically.

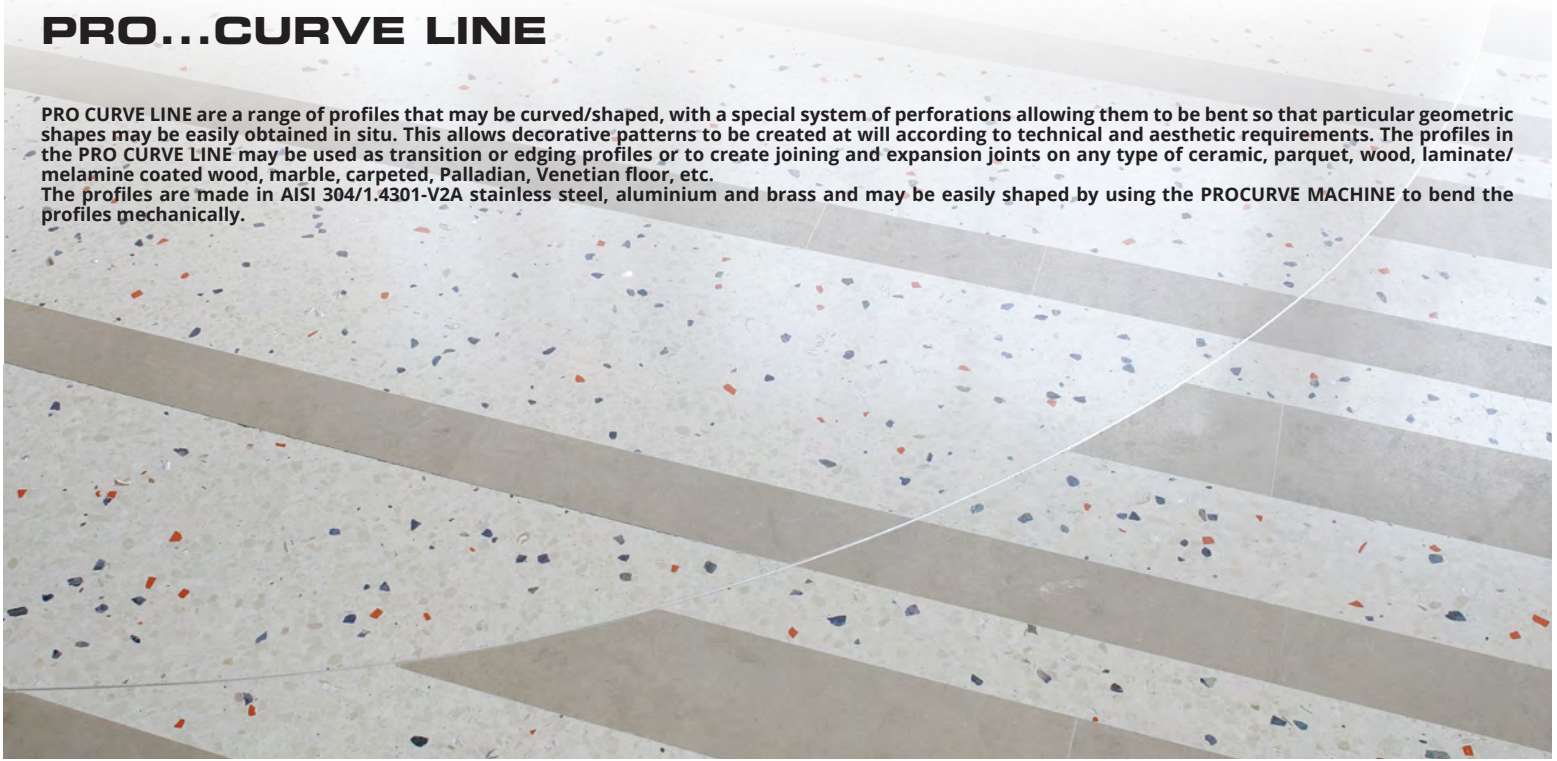

PROTERMINAL CURVE


STAINLESS STEEL AISI 304/1.4301-V2A CURVABLE

PROTERMINAL CURVE are a range of edging and joining profiles that may be curved/shaped, with a special system of perforations allowing them to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 3 mm. The product is made in stainless steel AISI 304/1.4301-V2A in various heights (6, 8, 10, 12,5, 15 and 20 mm) in 2.7 m bars.

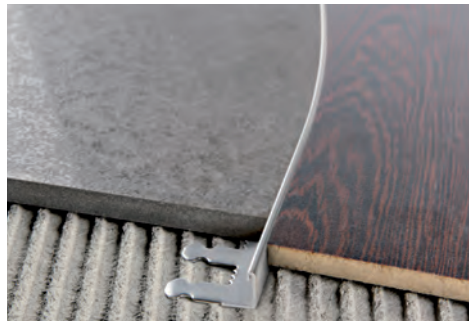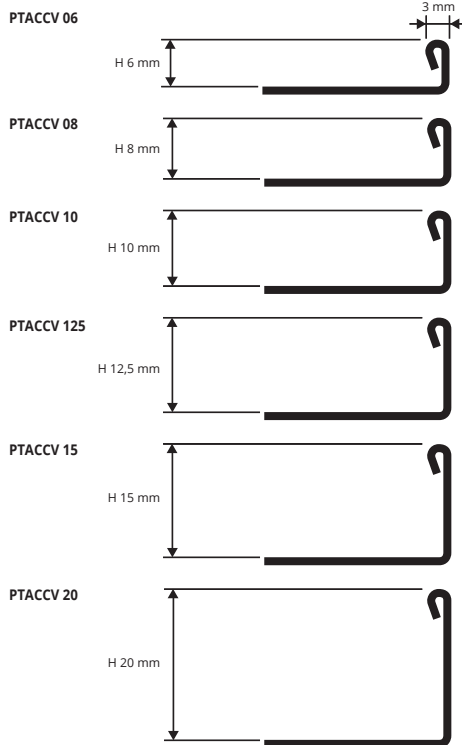

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack 20 Pcs - 54 lm - 10/10 mm


Article	H mm		
PTACCV 06	6		
PTACCV 08	8		
PTACCV 10	10		
PTACCV 125	12,5		
PTACCV 15	15		
PTACCV 20	20		

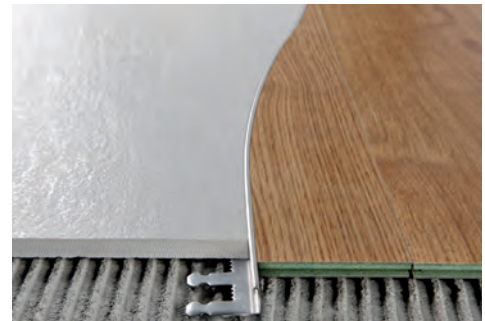

COLOURS



EXAMPLES OF LAYING

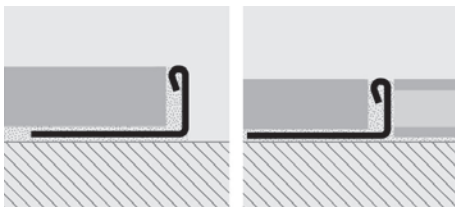

LAYING INSTRUCTIONS

1. Choose the "PROTERMINAL CURVE" with the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. If it is used as a joining profile, bring each floor to the edge of the profile.





SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

PROTERMINAL CURVE are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 3 mm of sandable profile. The product is made in natural brass in 2.7 m bars and heights of 6, 8, 10, 12.5, 15 and 20 mm.

PROTERMINAL CURVE

NATURAL BRASS CURVABLE

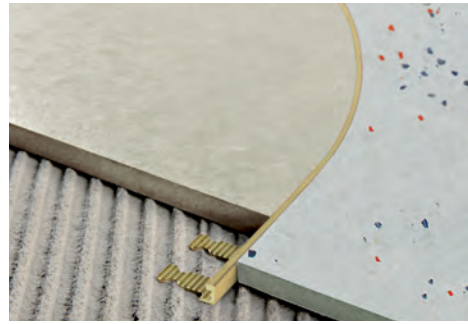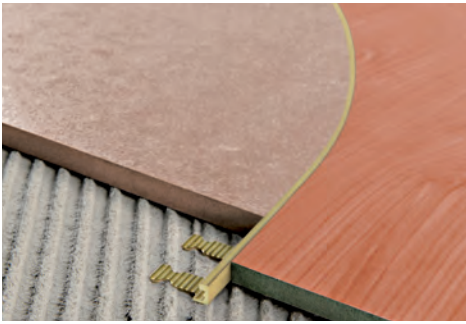


NATURAL BRASS CURVABLE thermo packed 10pcs
bar length 2,7 lm - pack. 40 Pcs - 108 lm (H:15; 20 mm - 54 lm)

Article	H mm		
PTONCV 06	6		*
PTONCV 08	8		*
PTONCV 10	10		
PTONCV 125	12,5		
PTONCV 15	15		
PTONCV 20	20		


COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

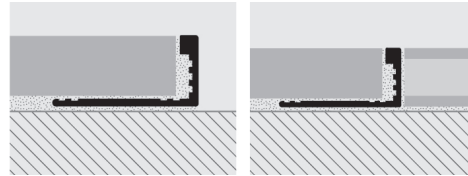



1. Choose the "PROTERMINAL CURVE" in the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sidol-Smac, etc.). If it is used as a joining profile, bring each floor to the edge of the profile.

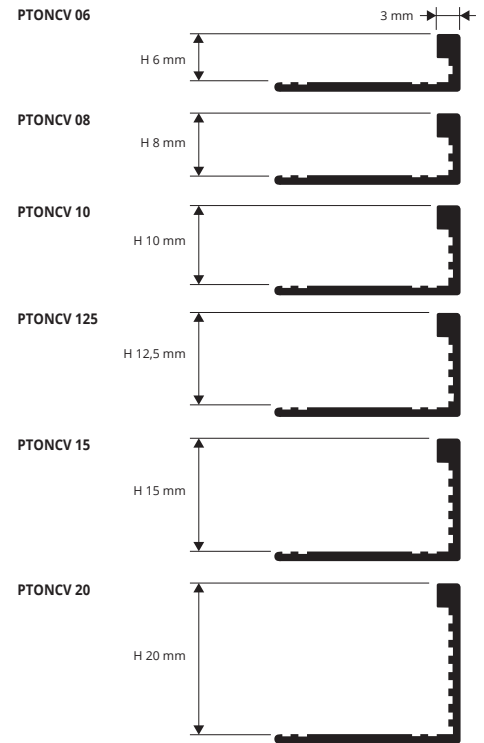

PROTERMINAL CURVE are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 3 mm of sandable profile. The product is made in natural aluminium in 2.7 m bars and heights of 6, 8, 10, 12.5, 15 and 20 mm.

PROTERMINAL CURVE


NATURAL ALUMINIUM CURVABLE

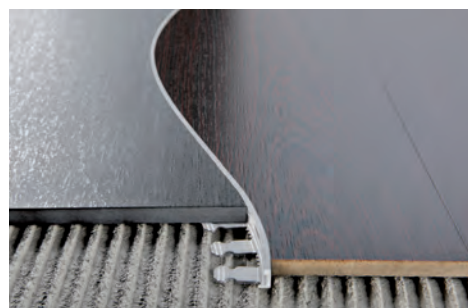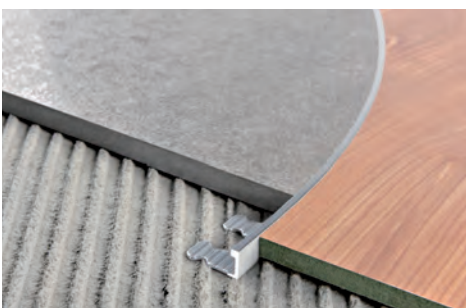



NATURAL ALUMINIUM CURVABLE thermo packed 10 Pcs
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PTANCV 06	6		
PTANCV 08	8		
PTANCV 10	10		
PTANCV 125	12,5		
PTANCV 15	15		
PTANCV 20	20		

EXAMPLES OF LAYING (for laying instructions, see above)

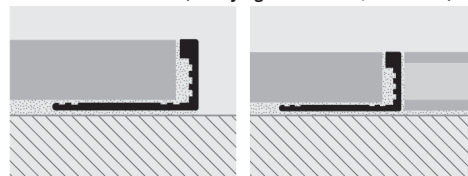

COLOURS

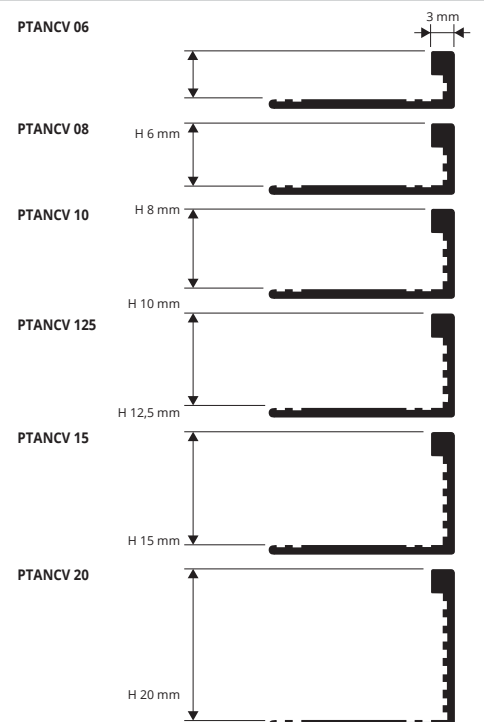



* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed



PROELEGANT CURVE are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 6 mm of sandable profile. The product is made in natural brass in 2.7 m bars and heights of 8-10-12.5 and 14 mm.

PROELEGANT CURVE



NATURAL BRASS CURVABLE

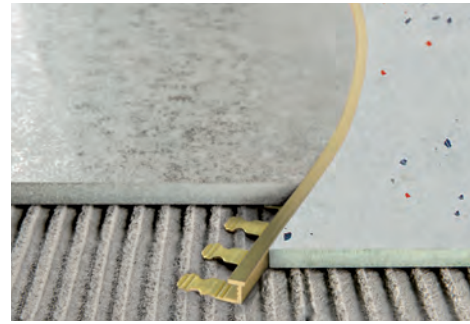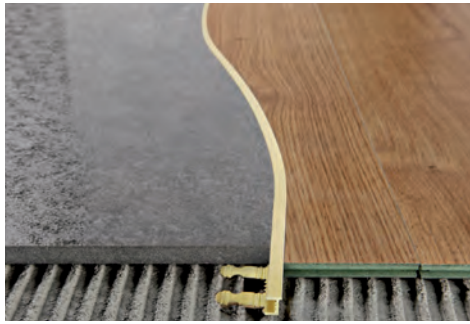


NATURAL BRASS CURVABLE thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PELONCV 08	8		*
PELONCV 10	10		
PELONCV 125	12,5		
PELONCV 14	14		*

COLOURS

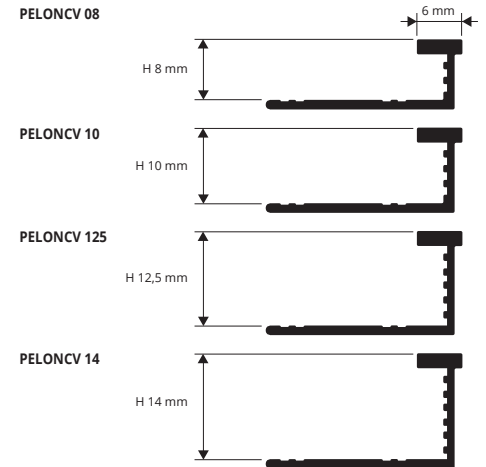

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

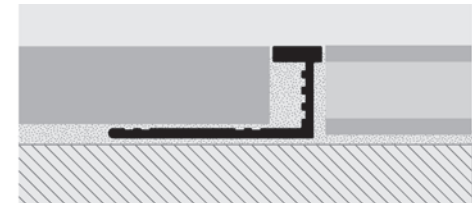


1. Choose the "PROELEGANT CURVE" in the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sidol-Smac, etc.).



PROELEGANT CURVE are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 6 mm of sandable profile. The product is made in silver anodized aluminium in 2.7 m bars and heights of 8-10-12.5 mm.

PROELEGANT CURVE


ANODIZED SILVER ALUMINIUM CURVABLE

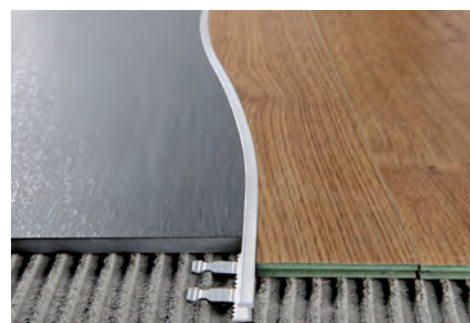


ANODIZED SILVER ALUMINIUM CURVABLE thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PELAACV 08	8		
PELAACV 10	10		
PELAACV 125	12,5		

COLOURS

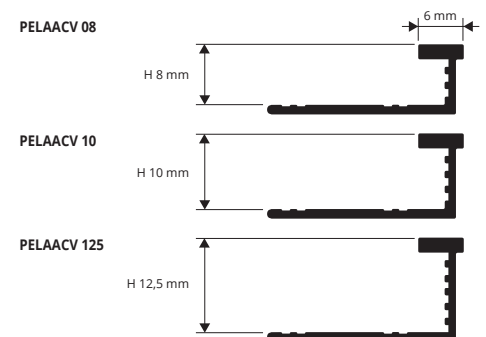

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

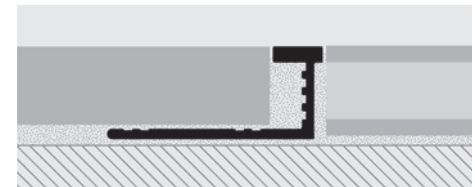

1. Choose the "PROELEGANT CURVE" in the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sidol-Smac, etc.).





* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROFINAL CURVE

NATURAL BRASS
CURVABLE


PROFINAL CURVE are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 8 mm of sandable profile. The product is made in natural brass in 2.7 m bars and heights of 8, 10 and 12.5 mm.

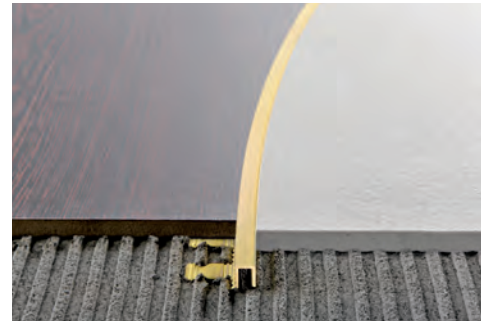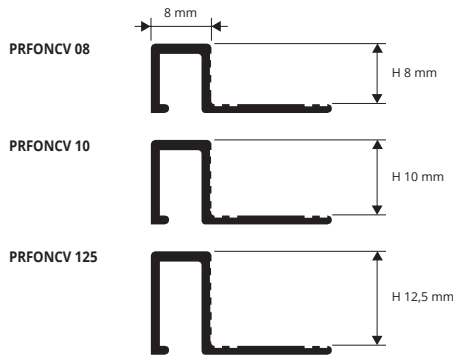


NATURAL BRASS CURVABLE thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PRFONCV 08	8		*
PRFONCV 10	10		
PRFONCV 125	12,5		

COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

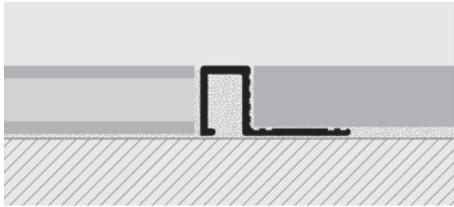




1. Choose the "PROFINAL CURVE" in the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sidel-Smac, etc.). If it is used as a joining profile, bring each floor to the edge of the profile.



PROFINAL CURVE

ANODIZED SILVER ALUMINIUM
CURVABLE


PROFINAL CURVE are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 8 mm of sandable profile. The product is made in silver anodized aluminium in 2.7 m bars and heights of 8, 10 and 12.5 mm.

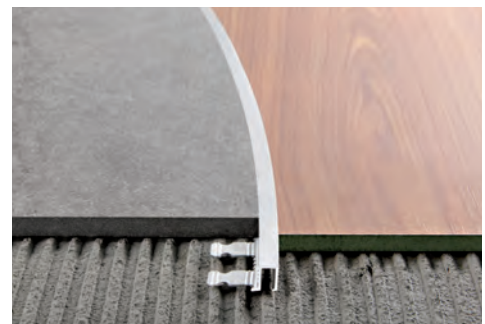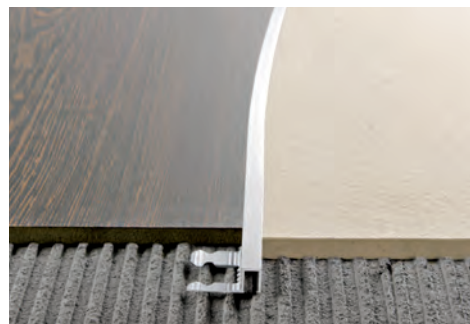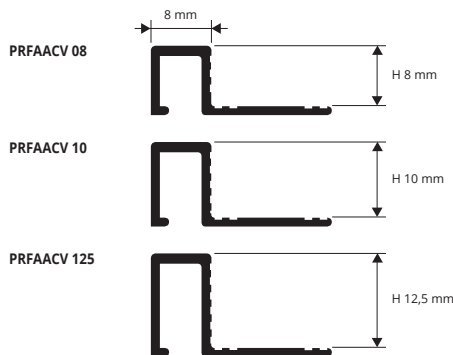


ANODIZED SILVER ALUMINIUM CURVABLE thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PRFAACV 08	8		*
PRFAACV 10	10		
PRFAACV 125	12,5		

COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

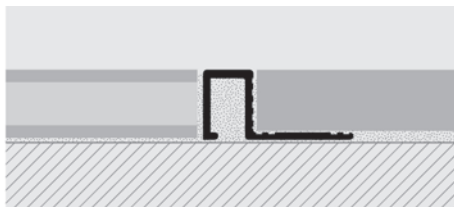


1. Choose the "PROFINAL CURVE" in the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sidel-Smac, etc.). If it is used as a joining profile, bring each floor to the edge of the profile.



PROJOLLY CURVE is a range of terminal transition profiles that may be curved/shaped, with a special system of perforations allowing it to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. It is made in natural brass, height H 8 - H 10mm, length 2.7 lm.

PROJOLLY CURVE

NATURAL BRASS CURVABLE

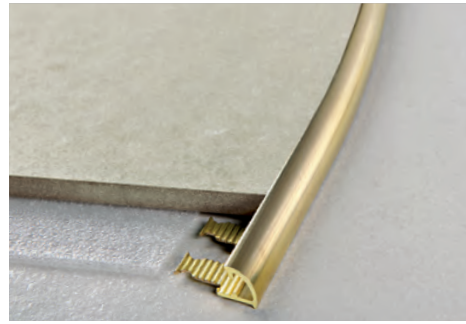

PJONCV 08



PJONCV 10




NATURAL BRASS CURVABLE thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PJONCV 08	8		*
PJONCV 10	10		

COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

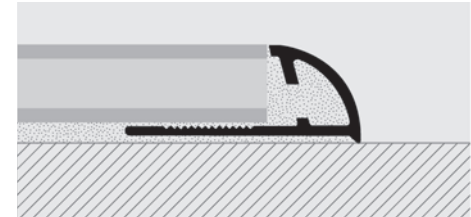

1. Choose the "PROJOLLY CURVE" in the required height and material.
2. Cut the profile to the necessary length, calculating the total length.
3. Bend the profile mechanically with the PROCURVE MACHINE.
4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive.

PROJOLLY CURVE is a range of terminal transition profiles that may be curved/shaped, with a special system of perforations allowing it to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. It is made in anodized aluminium, height H 8 - H 10mm, length 2.7 lm.

PROJOLLY CURVE

ANODIZED SILVER ALUMINIUM CURVABLE



PJAACV 08




PJAACV 10




ANODIZED SILVER ALUMINIUM CURVABLE thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PJAACV 08	8		*
PJAACV 10	10		

COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

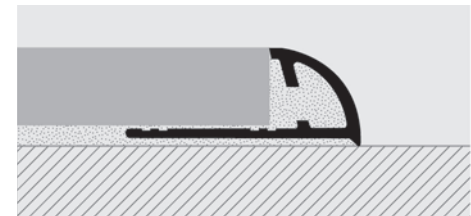


1. Choose the "PROJOLLY CURVE" in the required height and material.
2. Cut the profile to the necessary length, calculating the total length.
3. Bend the profile mechanically with the PROCURVE MACHINE.
4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

TERMINAL CURVE

ANODIZED SILVER ALUMINIUM
AND 10 WOOD FINISHES - CURVABLE

TERMINAL CURVE is a range of edging and joining profiles that may be curved/shaped, with a special system of perforations allowing it to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. Recommended for edging and/or joining floating floors in wood & melamine-laminated wood. It is made in anodized aluminium and in 10 wood effect finishes; it comes in various heights, length 2.7m.

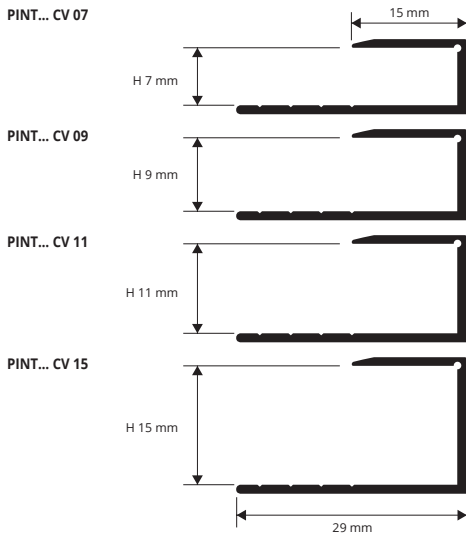

ANODIZED SILVER ALUMINIUM CURVABLE thermo packed
bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	H mm		
PINTAACV 07	7		
PINTAACV 09	9		
PINTAACV 11	11		
PINTAACV 15	15		*



ALUMINIUM 10 WOOD FINISHES thermo packed
bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	H mm		
PINT... CV 09	9		*
PINT... CV 15	15		*

Available in the wood finishes: 04W-05W-07W-08W-09W-10W-11W-28W-29W-30W.
The code of the selected colour must be added to the article code.
E.g.: PINT... CV 09 (chosen finish Dark beech) PINT04W CV 09.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "TERMINAL CURVE" in the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive.

COLOURS

AA - Anodized silver alum.	04W - Dark beech	05W - Light oak (strip)	07W - Light cherry (strip)	08W - Dark cherry (board)	09W - Red walnut (merbau-apple-walnut)
10W - Wengé (panga-panga-wengé)	11W - Bleached decapè	28W - Aspen oak	29W - White oak	30W - Grey oak	


ON DEMAND MINIMUM QUANTITY 100 PCS

AO - Anodized gold alum.


PROCOVER PROCOVER WOOD

ANODIZED ALUMINIUM
AND WOOD FINISHES - CURVABLE

PROCOVER is a joint-cover profile in anodized aluminium and aluminium covered with a very strong film available in wood finishes. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

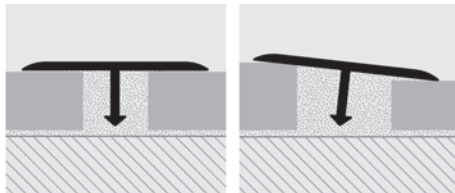

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.



ANODIZED SILVER ALUMINIUM CURVABLE thermo packed
bar length 2,7 lm - pack 40 Pcs - 108 lm

Article	H mm		
PCRAA 149	14 x 9		
PCRDB 149	14 x 9		



ALUMINIUM WOOD FINISHES thermo packed
bar length 2,7 lm - pack 40 Pcs - 108 lm

Article	L x H mm		
PCRA... 149	14 x 9		

Available in the wood finishes: 05W-11W-28W-29W-30W.
The code of the selected colour must be added to the article code.
E.g.: PCRA... 149 (chosen finish Dark beech) PCRA 04W 149.

THE WHOLE PROCOVER RANGE ON PAGES 84-85.

COLOURS


AA - Anodized silver alum.	DB - Anodized dark bronze			
05W - Light oak (strip)	11W - Decapè bleached	28W - Aspen oak	29W - White oak	30W - Grey oak

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROSLIDER CURVE is a range of transition profiles that may be curved/shaped, with a special system of perforations allowing it to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. Recommended for joining floating floors in wood, melamine laminated wood and ceramics. It is made in natural brass in various heights, length 2.7 lm.

PROSLIDER CURVE

NATURAL BRASS CURVABLE

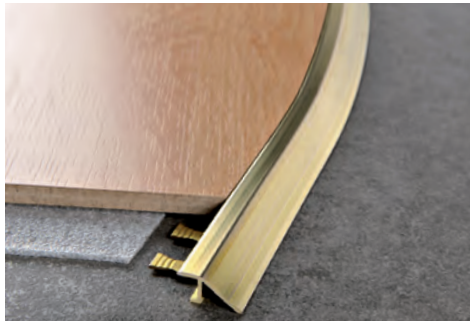

NATURAL BRASS CURVABLE thermo packed
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	H mm		
PDONCV 08	8		*
PDONCV 10	10		*

COLOURS



PDONCV 08




PDONCV 10



LAYING INSTRUCTIONS

1. Choose the "PROSLIDER CURVE" in the required height and material.
2. Cut the profile to the necessary length, calculating the total length.
3. Bend the profile mechanically with the PROCURVE MACHINE.
4. If necessary fix with screws and screw anchors, if used for floating floors in melamine/laminated wood, or simply insert the punched base under the floor laid with the same adhesive.

EXAMPLES OF LAYING

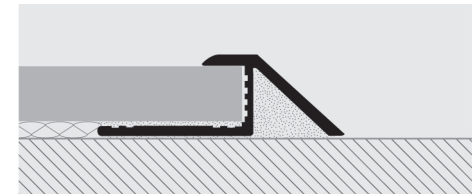

PROSLIDER CURVE is a range of transition profiles that may be curved/shaped, with a special system of perforations allowing it to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. Recommended for joining floating floors in wood, melamine laminated wood and ceramics. It is made in anodized aluminium in various heights, length 2.7 lm.

PROSLIDER CURVE

ANODIZED SILVER ALUMINIUM CURVABLE



ANODIZED SILVER ALUMINIUM CURVABLE thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PDAACV 08	8		
PDAACV 10	10		

COLOURS



PDAACV 08



PDAACV 10



PROCURVE MACHINE is a manual profile bending machine for profiles of the CURVE SERIES.

PROCURVE MACHINE

Article	
PCM 08	PROCURVE MACHINE - complete with wheels for all profiles




Page	Items / series available for	MINIMUM INSIDE RADIUS	MINIMUM OUTSIDE RADIUS
100	PTACCV	30 cm	30 cm
101	PTONCV	30 cm	30 cm
101	PTANCV	30 cm	30 cm
103	PELONCV	150 cm	300 cm
103	PELAACV	200 cm	300 cm
104	PRFONCV	200 cm	
104	PRFAACV	200 cm	
105	PJONCV	200 cm	300 cm
105	PJAACV	200 cm	300 cm
106	PINTAACV	300 cm	
106	PCRAA 149	80 cm	80 cm
106	PCRA... 149	100 cm	100 cm
107	PDONCV	300 cm	
107	PDAACV	300 cm	

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed




STAIR NOSINGS PROFILES

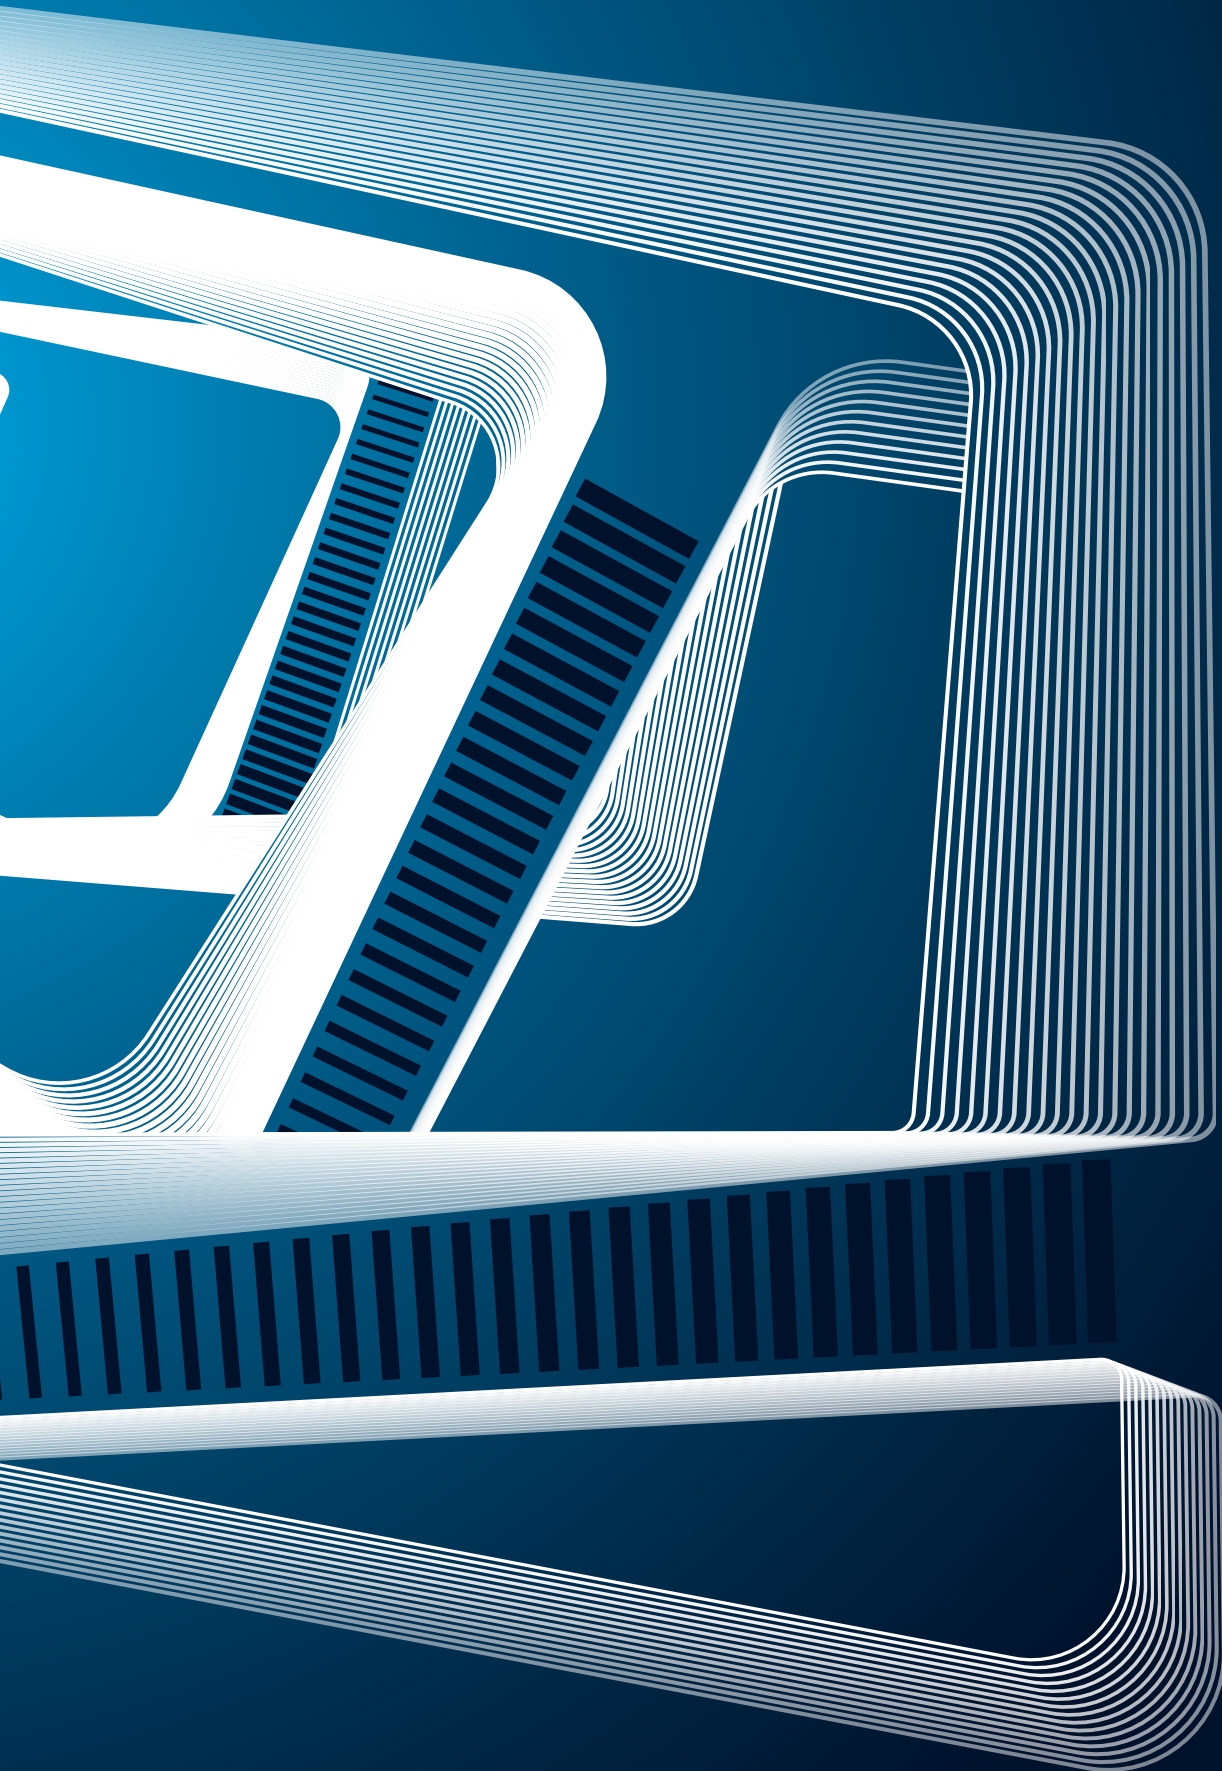


PROSTAR ACC

SATINED STAINLESS STEEL AISI 304/1.4301-V2A

PROSTAR ACC is steps protecting technical profile, designed and conceived to make the step scales made of ceramic, porcelain stoneware and others nonskid and non-slip ones ; it's to be applied before the step laying process. Manufactured in aisi 304/1.4301-V2A glazed stainless steel, with the superior side level crimped in order to increase its adhesion. It replaces special ceramic elements in refined, resistant and economic way. It is compulsory in public places for the accident prevention. It is recommended for elegant, refined industrial, commercial and private environments: available in H 4,5-6-8-10-12,5-15 mm versions. Combining with the entire series of steel profiles recommended.

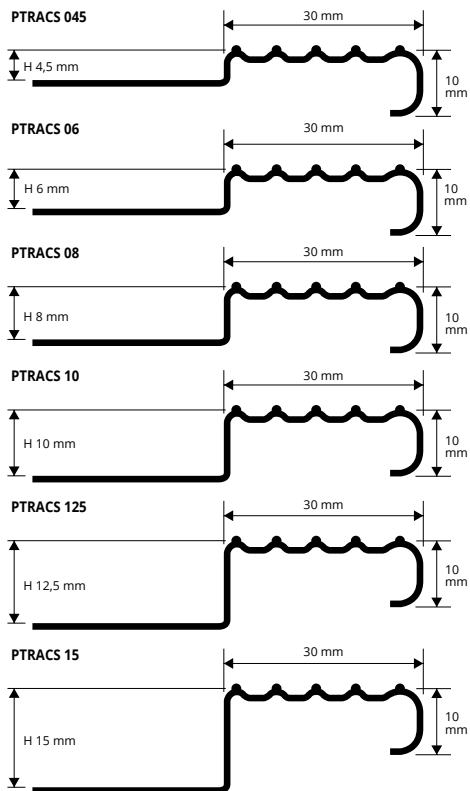

EXAMPLES OF LAYING

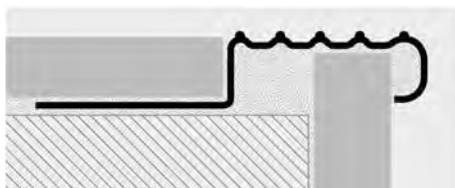

SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm - 10/10 mm

Article	H mm		
PTRACS 045	4,5		
PTRACS 06	6		
PTRACS 08	8		
PTRACS 10	10		
PTRACS 125	12,5		
PTRACS 15	15		

Available in SATINED STAINLESS STEEL AISI 316L/1.440-V4A (minimum quantity order 100 pcs - price to be agreed. Production delay 4/5 weeks).

LAYING INSTRUCTIONS


1. Choose the PROSTAR ACC of the desired height and material on the basis of the tile (steps) thickness.
2. Fix the first rising part laying it down at its appropriate and definitive level.
3. Fill completely the empty spaces under the profile with the tile adhesive.
4. Spread out the adhesive on the tread, lay down the profile with its cut base immersed completely in adhesive and align it so that the profile covers the riser tile edge.
5. Lay down the tread tiles and align them with the superior grazing part of the profile by drawing its back close and filling the inner space with the adhesive.



END CAP IN VARNISHED PLASTIC SATINED STAINLESS STEEL EFFECT
pack. 2 Pcs (1 right and 1 left)

Article	H mm		
TPTRACS/1	4,5 ÷ 15		

Articles not for sale singly

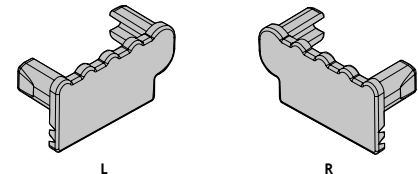

COLOURS




ACS - Satin finish stainless st.
AISI 304/1.4301-V2A

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS


PROSTYLE 2610

SATINED STAINLESS STEEL AISI 304/1.4301-V2A
SELF ADHESIVE OR PUNCHED

PROSTYLE 2610 is steps protecting technical profile, designed and conceived to keep the step scales made of ceramic, porcelain stoneware, wood, marble and others nonskid and non-slip ones ; it's to be applied after the step laying process or in the already present rooms. Manufactured in aisi 304/1.4301-V2A glazed stainless steel, with the superior side level crimped in order to increase its adhesion. It replaces special ceramic elements in refined, resistant and economic way. It's ideal for the edges protection and screening as well as of the corner between the rising and the tread which is the point of the greatest strain. It is compulsory in public places for the accident prevention. It is recommended for elegant, refined industrial, commercial and private environments. Available in drilled version or in with adhesive one.



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

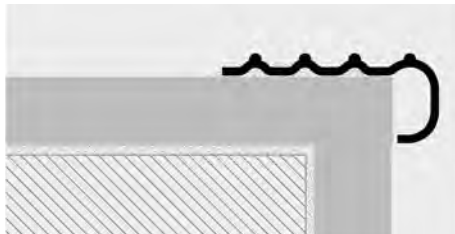


Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

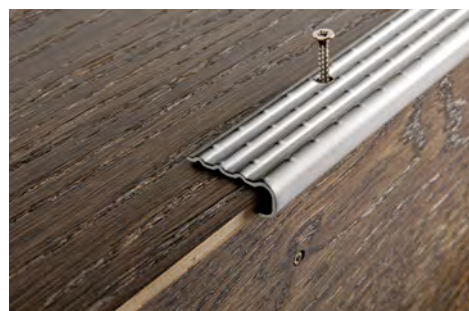

SATIN FINISH STAINLESS STEEL AISI 304/1.4301-V2A with protective film - bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10mm

Article	H mm		
PSYACS 2610F (punched)	10		*
PSYACS 2610A (with adhesive)	10		*

Available in SATINED STAINLESS STEEL AISI 316L/1.440-V4A (minimum quantity order 100 pcs - price to be agreed. Production delay 4/5 weeks).



COLOURS




ACS - Satin finish stainless st.
AISI 304/1.4301-V2A

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed





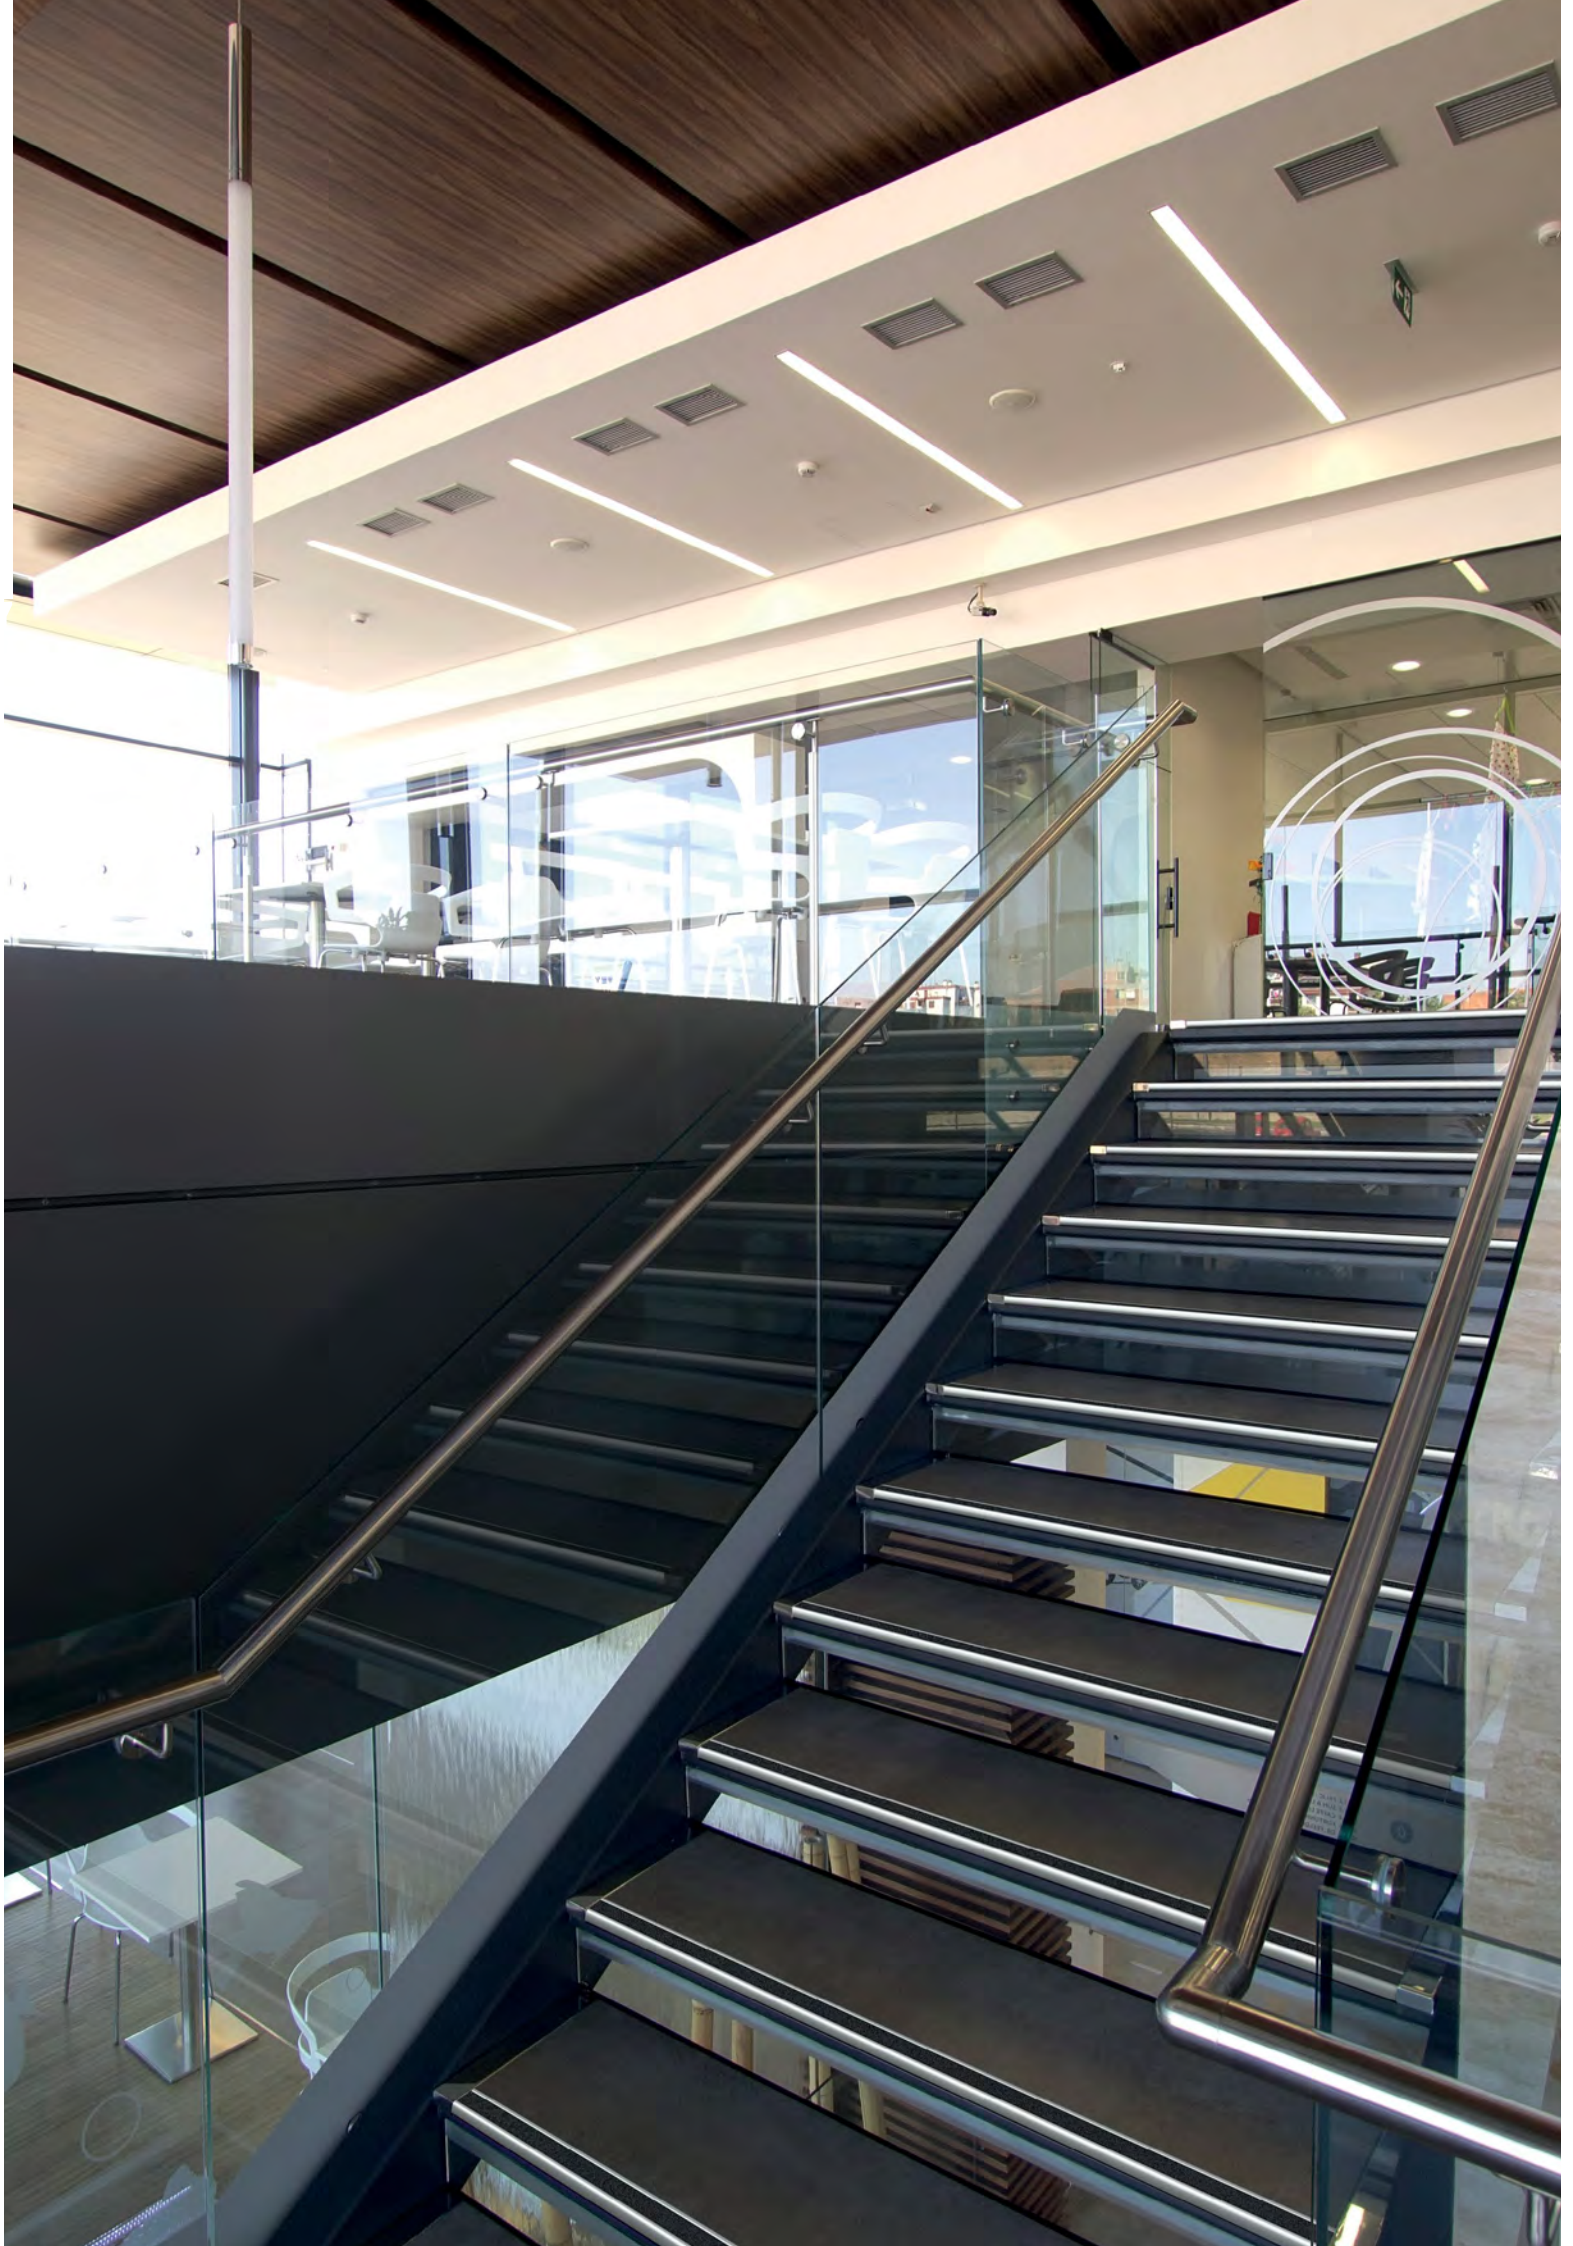

PROSTAIR GRIP ACC is an AISI 304/1.4301-V2A satined stainless steel profile, consisting of a punched flange, ensuring perfect anchorage to the substrate, a 36,5 and 56,5mm horizontal visually exposed surface with the carborundum stripe insert and a 20mm vertical visually exposed flat surface. The profile is available in the heights 4,5/6/8/10/12,5/15/20 mm and is equipped with end caps made of varnished plastic in satined steel-effect finish. The design of this profile together with the completing elements make it an elegant and appreciated solution also for modern stairs.

PROSTAIR GRIP ACC

SATIN FINISH STAINLESS STEEL AISI 304/1.4301-V2A

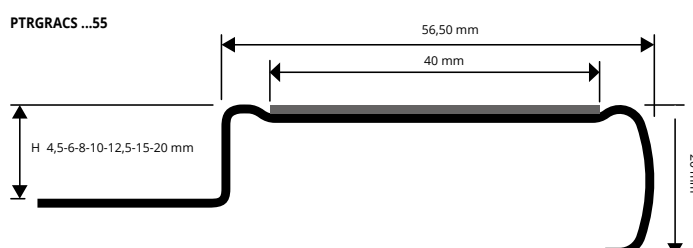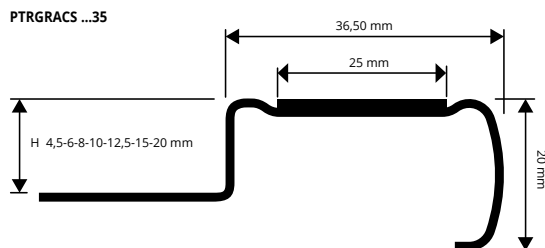


SATIN FINISH STAINLESS STEEL AISI 304/1.4301-V2A with protective film - bar length 2,7 lm - width 36,50 mm

Article	H mm	Pcs/Pack
PTRGRACS 04535	4,5	20
PTRGRACS 0635	6	20
PTRGRACS 0835	8	20
PTRGRACS 1035	10	10
PTRGRACS 12535	12,5	10
PTRGRACS 1535	15	7
PTRGRACS 2035	20	7

SATIN FINISH STAINLESS STEEL AISI 304/1.4301-V2A with protective film - bar length 2,7 lm - width 56,50 mm

Article	H mm	Pcs/Pack
PTRGRACS 04555	4,5	20
PTRGRACS 0655	6	20
PTRGRACS 0855	8	20
PTRGRACS 1055	10	10
PTRGRACS 12555	12,5	10
PTRGRACS 1555	15	7
PTRGRACS 2055	20	7

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

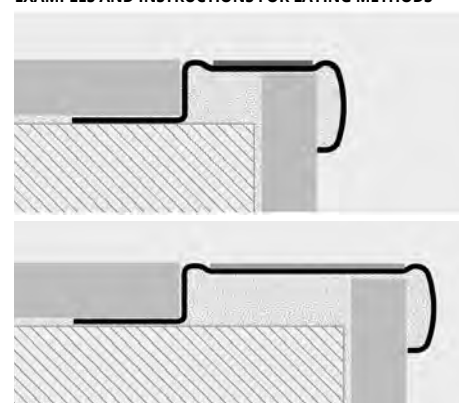

1. Choose the PROSTAIR GRIP ACC in the required height, according to the thickness of the floor covering and the desired profile width;
2. Lay the floor covering on the stair riser and apply the adhesive on the of stair tread, where the profile will be installed;
3. Fill the empty spaces under the profile with the adhesive for tiles. Lay the profile on the step tread, making sure that it is aligned with the stair riser;
4. Lay the floor covering on the stair tread and align;
5. Plaster the joints between the profile and the tiles.

THE ADHESIVE CARBORUNDUM STRIP (PROGRIP) IS NOT INCLUDED WITH THE PROFILE.

FOR PTRGRACS ...35 ORDER PGR... 25 (SPECIFY THE CHOSEN COLOUR).

FOR PTRGRACS ...55 ORDER PGR... 40 (SPECIFY THE CHOSEN COLOUR).

COLOURS



END CAPS - R/L - pack. 2 Pcs (1 R and 1 L)

Article	H mm	L mm
TPTGRACS 55/1	4,5+20	56,5
TPTGRACS 35/1	4,5+20	36,5

Articles not for sale singly



SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

PROGRIP is a carborundum adhesive stripe, consisting of an elastic film coated with high wear resistant abrasive grains. It is usually employed in public as well as in domestic environments to make stair steps non-slip. The stripe is available in different colors and widths to meet any technical and aesthetic requirement. If **PROGRIP** is applied directly on the step covering, it is advisable to apply two stripes on each step, rounding their ends.

PROGRIP

ADHESIVE CARBORUNDUM - 7 COLOURS

COLOURS

N - Black	B - White	T - Transparent
G - Gray	Y - Yellow	M - Brown
GN - Yellow/Black	The PGR (transparent) are not suitable for outside use.	

ADHESIVE NON-SLIP STRIP for STEPS - rolls length 18,3 lm

Article	Width mm
PGRGN 20 (yellow/black)	20
PGRGN 25 (yellow/black)	25
PGRGN 50 (yellow/black)	50

ADHESIVE NON-SLIP STRIP for STEPS - rolls length 18,2 lm

Article	Width mm
PGRN 25 (black colour)	25
PGRB 25 (white colour)	25
PGRG 25 (grey colour)	25
PGRY 25 (yellow colour)	25
PGRM 25 (brown colour)	25
PGRN 40 (black colour)	40
PGRB 40 (white colour)	40
PGRG 40 (grey colour)	40
PGRY 40 (yellow colour)	40
PGRM 40 (brown colour)	40




* = Production on demand with minimum quantity of 10 rolls. Production delay 4/5 weeks. Price to be agreed

PROSTYLE GRIP ACC

SATIN FINISH STAINLESS STEEL
AISI 304/1.4301-V2A


PROSTYLE GRIP ACC is a non-slip profile in AISI 304/1.4301-V2A satin stainless steel, consisting of a 40 or 60 mm horizontal top with a groove for the insertion of a non-slip carborundum stripe and a 20mm vertical flat side. The profile can be fixed with adhesive film or with screws. The particular design of this profile makes it an elegant and appreciated solution also for modern stairs.

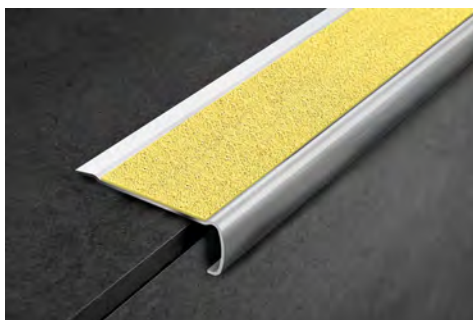

PSYGRACS 6020

PSYGRACS 4020

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS


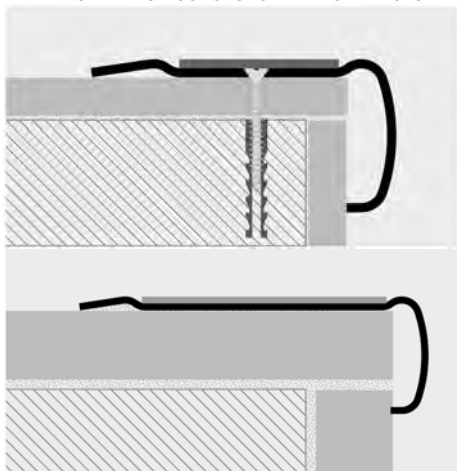


Version with adhesive

1. Choose the profile according to the desired width and cut it to the necessary length; 2. Clean the surface on which the profile is to be laid, ensuring that it is dry. Remove the protective film and place the profile, applying adequate pressure on it; 3. Apply the adhesive non-slip carborundum insert of the desired color.

Punched version

1. Choose the profile according to the desired width and cut it to the necessary length; 2. Mark the position of the holes using the existing holes on the profile as reference; 3. Drill the step using a drill with 5mm diameter and insert the 5x25mm screws; 4. Screw the profile to the step; 5. Apply the adhesive non-slip carborundum insert of the desired color.

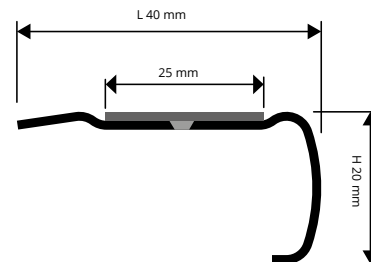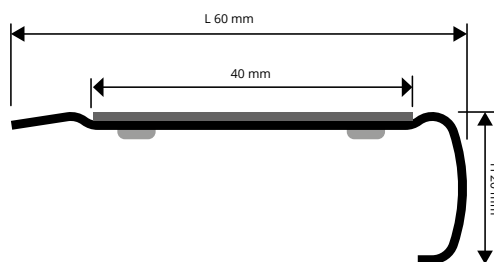

SATIN FINISH STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm		
PSYGRACS 6020A	60		*
PSYGRACS 6020F	60		*

SATIN FINISH STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm		
PSYGRACS 4020A	40		
PSYGRACS 4020F	40		

The adhesive carborundum strip (PROGRIP) is not included with the profile.

For PSYGRACS 6020A/F order PGR... 40 (Specify the chosen colour).

For PSYGRACS 4020A/F order PGR... 25 (Specify the chosen colour).

COLOURS



ACS - Satin finish stainless steel
AISI 304/1.4301-V2A

END CAPS STAINLESS STEEL - R/L - pack. 2 Pcs - (1 R and 1 L)

Article	L mm		
TPSYGRACS 6020/1	60		
TPSYGRACS 4020/1	40		

Articles not for sale singly

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROGRIP

ADHESIVE CARBORUNDUM - 7 COLOURS

PROGRIP is a carborundum adhesive stripe, consisting of an elastic film coated with high wear resistant abrasive grains. It is usually employed in public as well as in domestic environments to make stair steps non-slip. The stripe is available in different colors and widths to meet any technical and aesthetic requirement. If **PROGRIP** is applied directly on the step covering, it is advisable to apply two stripes on each step, rounding their ends.



ADHESIVE CARBORUNDUM NON-SLIP STRIP for STEPS

rolls length 18,2 lm

Article	Width mm		
PGRN 25 (black colour)	25		
PGRB 25 (white colour)	25		
PGRT 25 (transparent)	25		
PGRG 25 (grey colour)	25		
PGRY 25 (yellow colour)	25		
PGRM 25 (brown colour)	25		
PGRN 40 (black colour)	40		
PGRB 40 (white colour)	40		
PGRT 40 (transparent)	40		*
PGRG 40 (grey colour)	40		*
PGRY 40 (yellow colour)	40		*
PGRM 40 (brown colour)	40		

COLOURS

N - Black	B - White	T - Transparent
G - Gray	Y - Yellow	M - Brown
GN - Yellow/Black	The PGRT (transparent) are not suitable for outside use.	

ADHESIVE NON-SLIP STRIP for STEPS - rolls length 18,3 lm





Article	Width mm		
PGRGN 20 (yellow/black)	20		
PGRGN 25 (yellow/black)	25		
PGRGN 50 (yellow/black)	50		

* = Production on demand with minimum quantity of 10 rolls. Production delay 4/5 weeks. Price to be agreed

PROSTAIR 50 is a technical square used to make the step nonskid and non-slip, protects the ceramic stairs steps preventing from accidents. It is made up of a rigid aluminium base equipped with a particular toothing on the vertical stem which strengthens the anchorage of the adhesive/tile to the square. The aluminium base varies according to the thickness of the tile used in the step, and to a lined insert in vinyl rubber available in several colors. The insert is already applied to the aluminium base. It is compulsory in public places in compliance with EEC norms and prevents from accidents.

PROSTAIR 50

NATURAL ALUMINIUM
+ VINYL RESIN / RUBBER INSERT

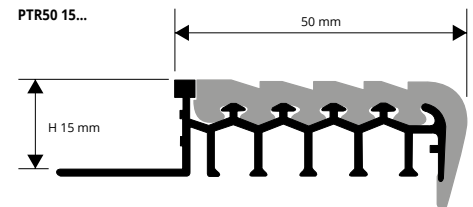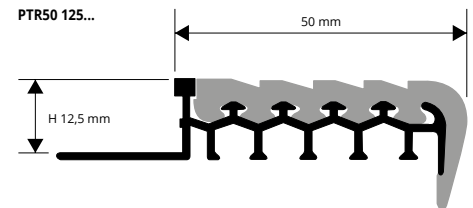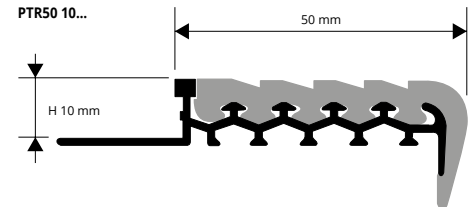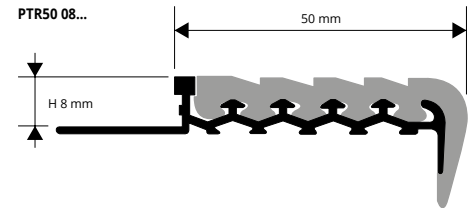





NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PTR50 08...	8		
PTR50 10...	10		
PTR50 125...	12,5		
PTR50 15...	15		

Available in the colours: G - N - B - A.
The code of the selected colour must be added to the article code.
E.g.: PTR50 08... (chosen colour grey) PTR50 08G.


COLOURS

		
G - Gray (E83)	N - Black (E85)	B - Beige (E84)
		
A - Ivory (E81)		

END CAP IN PVC - pack. 2 Pcs (1 R and 1 L)

Article	H mm
TPTR50 .../1	8-10-12,5-15

Available in the colours: G - N - B - A.
The code of the selected colour must be added to the article code.
E.g.: TPTR50 ... (chosen colour grey) TPTR50 G.
Articles not for sale singly



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose a PROSTAIR 50 height and color corresponding to the thickness of the tile. 2. Fix the riser laying it at the appropriate and definitive height. 3. Fill the empty spaces under the square completely with adhesive. 4. Rest the adhesive on the tread, lay the square with the base cut in the adhesive and line it up so that the square covers the tile edge of the riser. 5. Lay the tiles of the tread lining them up with upper part of the square so that it meets with the edge.


INTERCHANGEABLE INSERT for Prostairs 50

VINYL RESIN / RUBBER

INTERCHANGEABLE VINYL RESIN / RUBBER INSERT
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PTG50...	8-10-12,5-15		


Universal insert suitable for four profile heights.
Available in the colours: G - N - B - A.
The code of the selected colour must be added to the article code.
E.g.: PTG50... (chosen colour grey) PTG50 G.



PROSTAIR

NATURAL ALUMINIUM
+ VINYL RESIN / RUBBER INSERT

PROSTAIR is a step nosing profile used to improve slip and slide resistance on the step, to protect ceramic steps and to prevent accidents. It consists of a rigid aluminium base and a changeable vinyl rubber insert available in various colours and widths. Compulsory in public environments to comply with EEC accident-prevention standards.

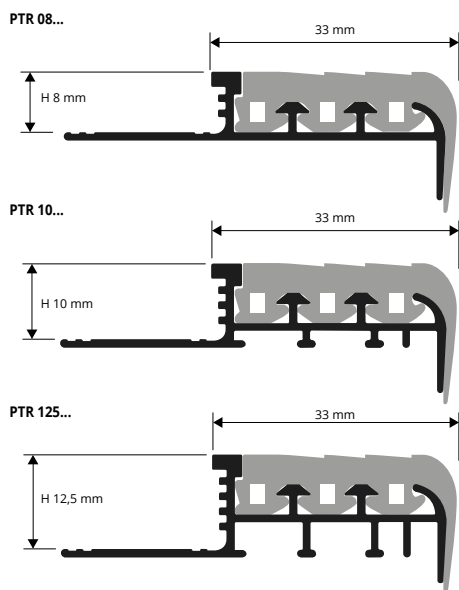

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the PROSTAIR in the required width and colour according to the thickness of the tile.
2. First fix the riser part, placing it at the correct and final height.
3. Fill the empty spaces under the profile with the tile adhesive.
4. Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its lip covers the edge of the riser tile.
5. Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile.







INTERCHANGEABLE VINYL RESIN / RUBBER INSERT

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article		
PTGRA		
PTGRB		
PTGRN		
PTGRG		



COLOURS

		
G - Gray (E83)	N - Black (E85)	B - Beige (E84)
		
A - Ivory (E81)		

NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT

bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm		
PTR 08...	8		
PTR 10...	10		
PTR 125...	12,5		

Available in the colours: G - N - B - A. The code of the selected colour must be added to the article code.
E.g.: PTR 08... (chosen colour grey) PTR 08G.

END CAP IN PVC - pack. 2 Pcs (1 R and 1 L)

Article	H mm		
TPT 08.../1	8		
TPT 10.../1	10		
TPT 125.../1	12,5		


Available in the colours: G - N - B - A.
The code of the selected colour must be added to the article code.
E.g.: TPT 08... (chosen colour grey) TPT 08G.
Articles not for sale singly



PROSTEP

RIGID VINYL RESIN
+ VINYL RESIN / RUBBER INSERT

PROSTEP is a step nosing profile used to improve slip and slide resistance on the step, to protect ceramic steps and to prevent accidents. It consists of a rigid base in high-strength vinyl resin and a changeable vinyl rubber insert available in various colours and widths. Compulsory in public environments to comply with EEC accident-prevention standards.

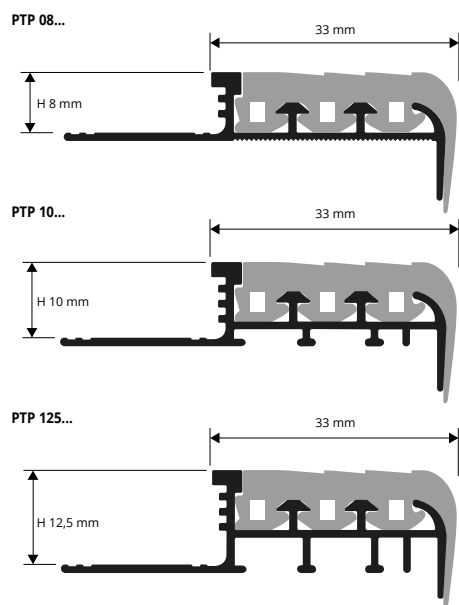

For instructions see the product above







INTERCHANGEABLE VINYL RESIN / RUBBER INSERT

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article		
PTGRA		
PTGRB		
PTGRN		
PTGRG		



COLOURS

			
G - Gray (E83)	N - Black (E85)	B - Beige (E84)	A - Ivory (E81)

IMPACT PROOF VINYL RESIN + VINYL RESIN / RUBBER INSERT

bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm		
PTP 08...	8		
PTP 10...	10		
PTP 125...	12,5		

Available in the colours: G - N - B - A. The code of the selected colour must be added to the article code.
E.g.: PTP 08... (chosen colour grey) PTP 08G.

END CAP IN PVC - pack. 2 Pcs (1 R and 1 L)

Article	H mm		
TPT 08.../1	8		
TPT 10.../1	10		
TPT 125.../1	12,5		

Available in the colours: G - N - B - A.
The code of the selected colour must be added to the article code.
E.g.: TPT 08... (chosen colour grey) TPT 08G.
Articles not for sale singly



PROBRASTE is a very elegant step nosing profile used to improve slip and slide resistance on the step. Made in natural and polished brass or natural and anodized silver aluminium, the upper part is knurled to increase adherence. Compulsory in public buildings to comply with accident-prevention regulations. Recommended for elegant, refined surroundings and for steps in wood, tiles, melamine-coated/laminated wood, marble or natural stones. Width: 8, 10, 12.5 mm.

PROBRASTE

KNURLED NATURAL AND POLISHED BRASS
NATURAL AND ANODIZED SILVER ALUMINIUM



NATURAL BRASS thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PBPON 10	10		*
PBPON 125	12,5		*

POLISHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm		
PBPOL 10	10		*
PBPOL 125	12,5		*

NATURAL ALUMINIUM thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm		
PBPAN 08	8		
PBPAN 10	10		
PBPAN 125	12,5		

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PBPAA 08	8		
PBPAA 10	10		
PBPAA 125	12,5		

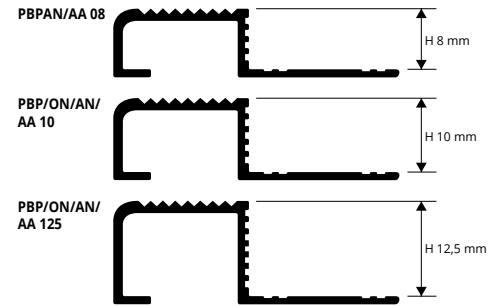


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

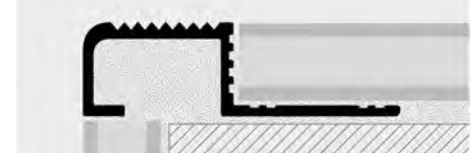

1. Choose the PROBRASTE in the required width and colour according to the thickness of the tile (stairs). 2. First fix the riser part, placing it at the correct and final height. 3. Fill the empty spaces under the profile with the tile adhesive. 4. Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its lip covers the edge of the riser tile. 5. Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile and filling the internal part with adhesive. Oxidation marks in the polished/natural brass range may be easily removed with specific chemical products (Sidel-Smac).

COLOURS



PROSTAIR BOTTON / STRIP are a tactile anti-slip botton/strip made in stainless steel AISI 316/1.4401-V4A. **PROSTAIR BOTTON / STRIP** has the function to realize the signaling lanes to the floor, and warning stairs, able to guide the blind and visually impaired. It is available with a length of 28.5 cm, a width of 3.5 cm and a thickness of 5mm and is provided with 3 stems, 2 cm high, for its fastening.

PROSTAIR BOTTON / STRIP

POLISHED, SATIN FINISH STAINLESS STEEL AISI 316/1.4404-V4A



PROSTAIR BOTTON
POLISHED STAINLESS STEEL AISI 316/1.4404-V4A - pack. 20 Pcs

Article	Ø mm		
PTRB 3520	35		

PROSTAIR BOTTON STRIP
SATIN FINISH STAINLESS STEEL AISI 316/1.4404-V4A - pack. 10 Pcs

Article	L x H mm		
PTRB 28035	280 X 35		


INSTRUCTIONS FOR LAYING METHODS

1. Put PROSTAIR BOTTON TEMPLATE on the desired zone. 2. Score on the support the position of the necessary holes. 3. Remove the template and drill the substrate with a tip 4 mm for a depth of approximately 2.5 cm. 4. Open the holes already made with a 8mm drill bit. 5. Remove dust residues. 6. Fill the hole with PROBAND FIX. 7. Put in the hole PROSTAIR BOTTON.


INSTRUCTIONS FOR LAYING METHODS

1. Put PROSTAIR BOTTON STRIP on the desired zone. 2. Scoring on the support in correspondence of the stems the points at which pierce. 3. Drill the substrate with a tip 4 mm for a depth of approximately 2.5 cm. 4. Open the holes already made with a 8mm drill bit. 5. Remove dust residues. 6. Fill the hole with PROBAND FIX. 7. Put in the hole PROSTAIR BOTTON STRIP.

PTRB 3520



PTRB 28035

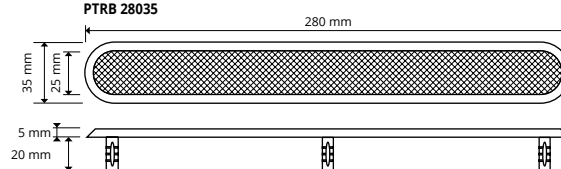

PROSTAIR BOTTON TEMPLATE for PROSTAIR BOTTON


ZINC-PLATED STEEL

PROSTAIR BOTTON TEMPLATE is a mold, made in zinc-plated steel, which allows to score the points where to drilling for the mounting of PROSTAIR BOTTON. **PROSTAIR BOTTON TEMPLATE** has A Size of 30 x 44.5 cm and is Equipped with 48 holes of a diameter 4 mm. Provided with circular joints which can be connected to other molds.

ZINC-PLATED STEEL
pack. 4 Pcs

Article	L x H mm		
PTRTEM	445 x 300		

PTRTEM





* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROTERMSTEP ACC

POLISHED, SATIN FINISH STAINLESS STEEL AISI 304/1.4301-V2A

PROTERMSTEP ACC is the new step cover profile made of stainless steel. Designed to protect the edge of the step and to hide the joint between the tread and the step rise. The special notched shape in the upright stem provides it with excellent anchorage between floor/glue/profile. Reversible profile.

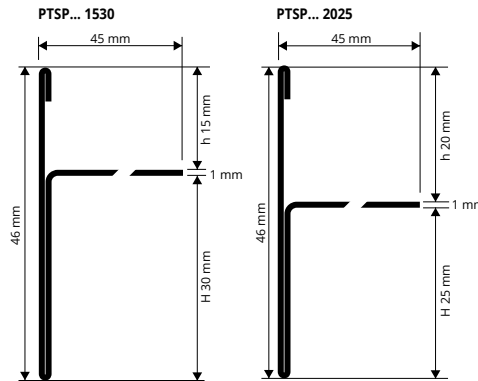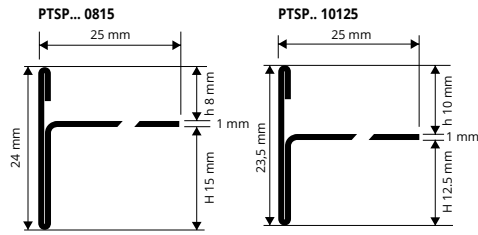

EXAMPLES OF LAYING for instructions see the product below



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	h / H mm		
PTSPAC 0815	08 / 15		
PTSPAC 10125	10 / 12,5		
PTSPAC 1530	15 / 30		
PTSPAC 2025	20 / 25		

EXTERNAL CORNERS - pack. 10 Pcs

Article	h / H mm		
REPTSAC 0815	08 / 15		
REPTSAC 10125	10 / 12,5		
REPTSAC 1530	15 / 30		
REPTSAC 2025	20 / 25		

JUNCTION H 10 - 12,5 - 15 - 20 mm - pack. 10 Pcs

Article	h / H mm		
GIPTSAC 0815	08 / 15		
GIPTSAC 10125	10 / 12,5		
GIPTSAC 1530	15 / 30		
GIPTSAC 2025	20 / 25		


SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	h / H mm		
PTSPACS 0815	08 / 15		*
PTSPACS 10125	10 / 12,5		*
PTSPACS 1530	15 / 30		*
PTSPACS 2025	20 / 25		*


COLOURS

	ON DEMAND
AC - Polished stainless st. AISI 304/1.4301-V2A	ACS - Satin finish stainless st. AISI 304/1.4301-V2A

JOINT GIPTSAC ..



EXTERNAL CORNER (WELDED) REPTSAC ..





SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

PROTERMSTEP ALL

NATURAL AND ANODIZED SILVER ALUMINIUM

PROTERMSTEP ALL is the new step cover profile made of natural and anodized aluminium. Designed to protect the edge of the step and to hide the joint between the tread and the step rise. The special notched shape in the upright stem provides it with excellent anchorage between floor/glue/profile.

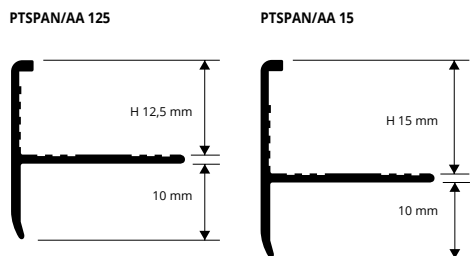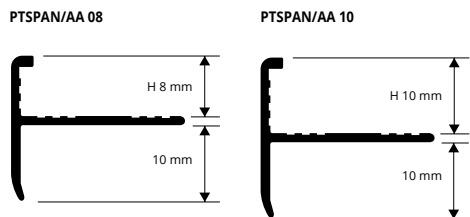

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



NATURAL ALUMINIUM
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PTSPAN 08	8		
PTSPAN 10	10		
PTSPAN 125	12,5		
PTSPAN 15	15		

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PTSPAA 08	8		
PTSPAA 10	10		
PTSPAA 125	12,5		
PTSPAA 15	15		

COLOURS

AN - Natural aluminium	AA - Anodized silver aluminium

1. Choose the PROTERMSTEP in the required width and colour according to the thickness of the tile (stairs).
2. First fix the riser part, placing it at the correct and final height.
3. Fill the empty spaces under the profile with the tile adhesive.
4. Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its lip covers the edge of the riser tile.
5. Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile and filling the internal part with adhesive.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROSIDE WALK is a perimeter profile in aluminium conveniently designed to protect the edges of tiles with a thickness of 10, 12.5, 15 and 20 mm laid on the sidewalks and to protect the screed. The profile is provided with a punched flange that ensures its fixing to the support. The punched flange is also provided with small holes that guarantee the temporary fixing of the profile with nails.

PROSIDE WALK

VARNISHED / COATED ALUMINIUM




PSDWK 10AL / 125AL / 15AL

h 10 mm /
h 12,5 mm /
h 15 mm /
h 20 mm

H 45 mm

L 80 mm

56,5 /
59 /
61,5 /
66,5 mm




VARNISHED EMBOSSED ALUMINIUM


bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	h mm	H mm	L
PSDWK 10AL...	10	45	80
PSDWK 125AL...	12,5	45	80
PSDWK 15AL...	15	45	80
PSDWK 20AL...	20	45	80

EMBOSSED COLOURS



* EMBOSSED COLOURS ON DEMAND

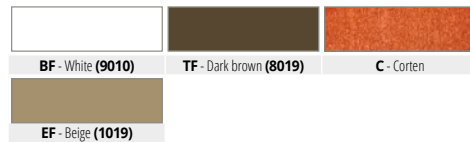


EXTERNAL CORNERS - pack. 10 Pcs

Article	h mm	H mm	L
AEPSDWK 10AL...	10	45	80
AEPSDWK 125AL...	12,5	45	80
AEPSDWK 15AL...	15	45	80
AEPSDWK 20AL...	20	45	80

JOINTS - pack. 10 Pcs

Article
GINSDWK 10AL...
GINSDWK 125AL...
GINSDWK 15AL...
GINSDWK 20AL...


AEPSDWK external corner (welded)



GINSDWK joint



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

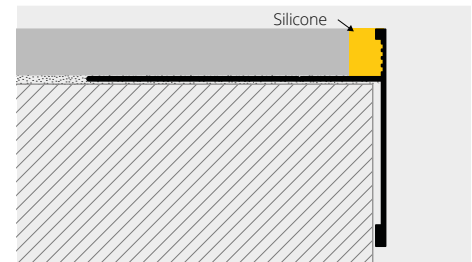

1. Choose "PROSIDE WALK" according to the tile thickness and desired colour.
2. Cut "PROSIDE WALK" to the desired length and fix to the screed with nails.
3. Lay the tiles, leaving about 5 mm between tiles and profile.
4. Seal the space between tiles and profile with PROBAND FIX.




News 2020

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROSTAIR LED

ANODIZED SILVER ALUMINIUM
- FLAT - LED

PROSTAIR LED is an aluminium profile available in the silver anodized finishes, that can be fixed with adhesive or dowels to the step tread. It has a grooved non-slip 52,5mm wide horizontal surface and an integrated LED lighting system, placed on its 43,5mm high vertical side. The integrated LED system generates cold or warm light and is protected by a matt or transparent polycarbonate plate, provided with a special fixing system, that allows it to be removed any time maintenance on the lighting system should be required. Its design and to the range of finishes available, together with its easy installation make **PROSTAIR LED** an appreciated solution both in public and in residential spaces.

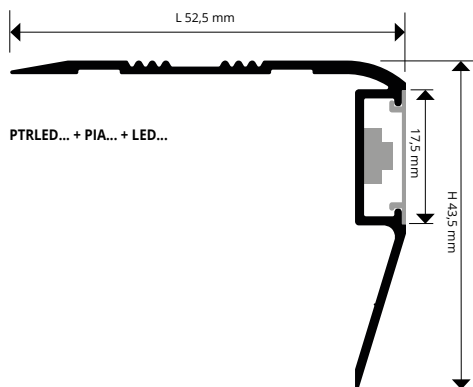

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose PROSTAIR LED depending on the desired finish, light effect and polycarbonate plate;
2. If you are using the version with adhesive, clean first the surface where the profile will be installed. Once the surface has dried, remove the protective film and install the profile, applying adequate pressure on it;
3. If you are using the punched version, place the profile on the step tread and mark the position of the profile holes on the step tread;
4. Drill the step tread and fasten the profile using plugs;
5. Connect the LED to the low tension power supply and install the polycarbonate plate.

ANODIZED SILVER ALUMINIUM
bar length 2,7 lm - pack. 20 Pcs - 54 lm
ADAPTOR LED, LED & FLAT NOT INCLUDED

Article	H x L mm
PTRLEDAA 5040	43,5 X 52,5
PTRLEDAA 5040A (adhesive)	43,5 X 52,5
PTRLEDAA 5040F (punched)	43,5 X 52,5

ADHESIVE FLEXIBLE LED COIL
length 5 lm - pack. 1 ROLL

Article
LEDN (neutral light)
LEDF (cold light)
LEDC (hot light)

COLOURS



POLYCARBONATE'S FLAT
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	Finish
PIAL 17	transp.
PIAO 17	

ENDCAPS- R / L - pack. 6 Pcs (3 R and 3 L)

Article	H x L mm
TPTRLEDAA 5040/3	43,5 X 52,5




LED ADAPTOR AC/DC 75W - 12V (15 lm)

Article
ALL 7512 (supplies 15 lm)

LED ADAPTOR AC/DC 25W - 12V (5 lm)

Article
ALL 2512 (supplies 5 lm)

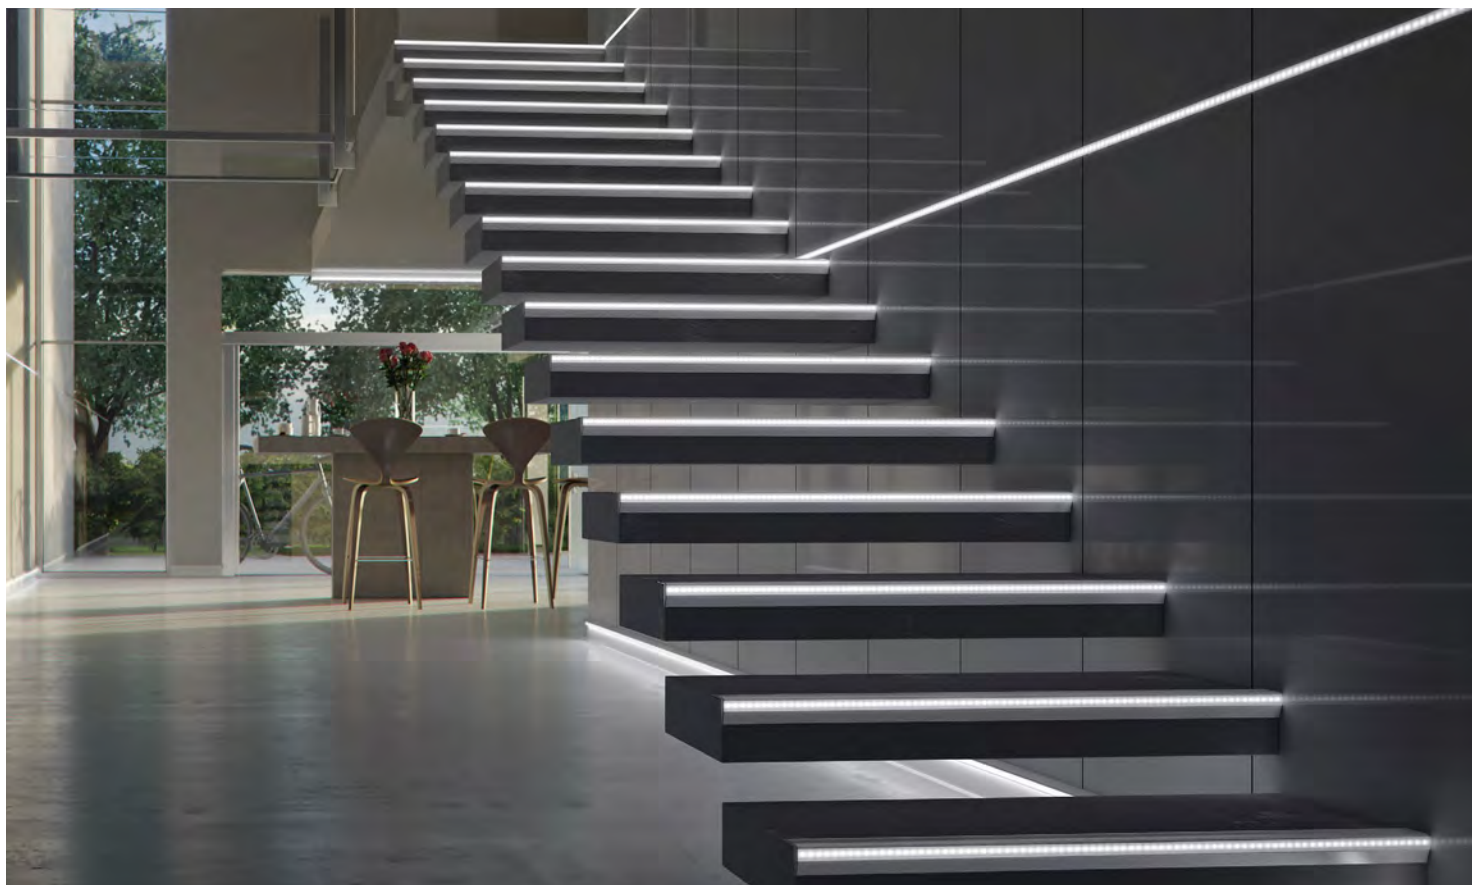


© 2020 All rights reserved by Progress Profiles. Printed in Italy



PROSTYLE

ROUNDED STEP NOSING
STAINLESS STEEL AISI 304/1.4301-V2A


PROSTYLE is a technical/decorative profile in stainless steel AISI 304/1.4301-V2A for ceramic tile/wood steps. Its particular rounded shape has been conceived to create the "torus" of the step, which is normally created with special pieces. Elegant profile for all public/private environments. In order to perfect placing and to look after details, external angles and closing caps are available.

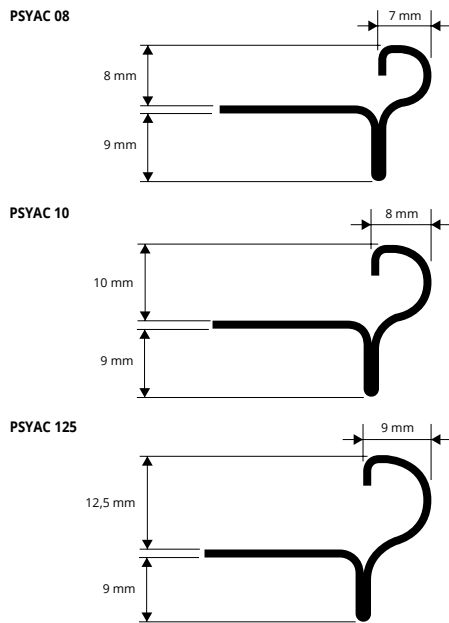

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10mm

Article	H mm
PSYAC 08	8
PSYAC 10	10
PSYAC 125	12,5

COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




1. Choose the PROSTYLE with suitable height for the thickness of the floor (stairs). 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

JOINTS and END CAPS for Prostyle stainless steel

VARNISHED PLASTIC STEEL EFFECT AND STAINLESS STEEL



RPSYAC 08/10/125



TPSYAC 08/10/125

VARNISHED PLASTIC STEEL EFFECT JOINT - pack. 20 Pcs

Article	H mm
RPSYAC 08	8
RPSYAC 10	10
RPSYAC 125	12,5


STAINLESS ST. END CAPS H 8 - 10 - 12,5 mm - pack. 20 Pcs

Article	H mm
TPSYAC 08	8
TPSYAC 10	10
TPSYAC 125	12,5

PROSTYLE

KNURLED, ROUNDED STEP NOSING
NATURAL, POLISHED AND CHROMED BRASS



PROSTYLE is a technical/decorative profile in natural brass, as well as with polished or chromed finish, for ceramic tile/wood steps. Its particular rounded shape has been conceived to create the "torus" of the step, which is normally created with special pieces. It is knurled on the top to make the profile non-slip. Elegant profile for all public/private environments. Shrink-wrapped profile with bar code.

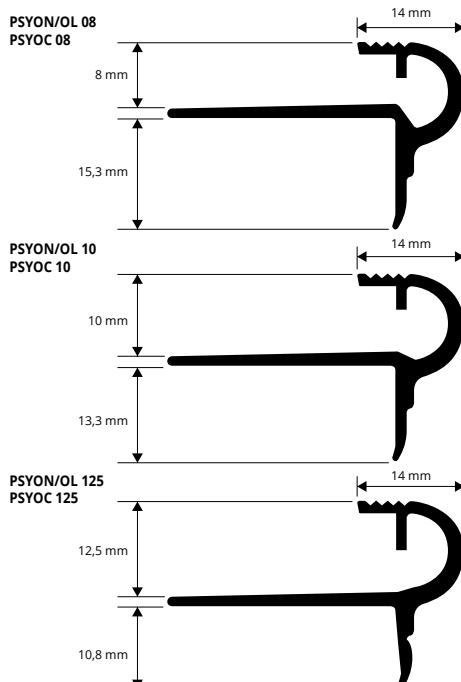

CHROMED BRASS thermo packed
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm
PSYOC 08	8
PSYOC 10	10
PSYOC 125	12,5

COLOURS

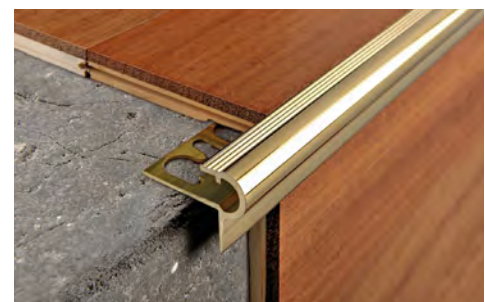

POLISHED BRASS thermo packed
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm
PSYOL 08	8
PSYOL 10	10
PSYOL 125	12,5

NATURAL BRASS thermo packed
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm
PSYON 08	8
PSYON 10	10
PSYON 125	12,5

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROSTYLE is a technical/decorative profile for ceramic tile/wood steps made in gold-silver anodized aluminium. Its particular rounded shape has been conceived to create the "torus" of the step, which is normally created with special pieces. It is knurled on the top to make the profile non-slip. Elegant profile for all public/private environments. Shrink-wrapped profile with bar code.

PROSTYLE

KNURLED, ROUNDED STEP NOSING
GOLD AND SILVER ANODIZED ALUMINIUM

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the PROSTYLE in the required width and colour according to the thickness of the tile.
2. First fix the riser part, placing it at the correct and final height.
3. Fill the empty spaces under the profile with the tile adhesive.
4. Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its vertical part covers the edge of the riser tile.
5. Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile and filling the internal part with adhesive. Oxidation marks in the polished/natural brass range may be easily removed with specific chemical products (Sidol-Smac).




ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm
PSYAA 08	8
PSYAA 10	10
PSYAA 125	12,5

ANODIZED GOLD ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
PSYAO 08	8
PSYAO 10	10
PSYAO 125	12,5

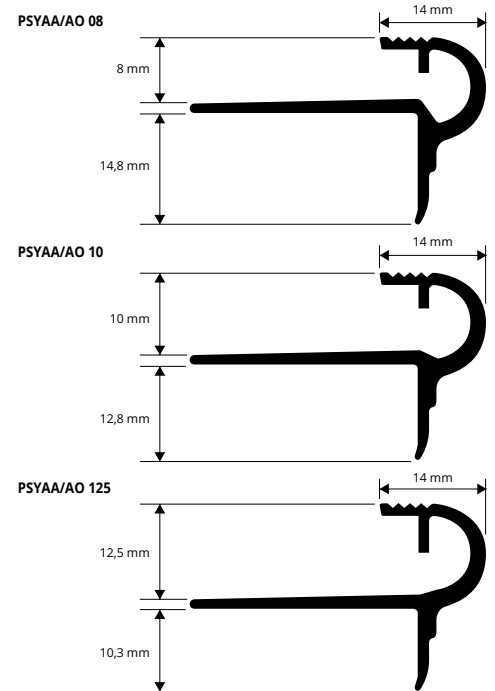

COLOURS



JOINTS and CAPS for Prostyle brass and aluminium

POLISHED, CHROMED AND NATURAL BRASS (see page 122) - GOLD AND SILVER ANODIZED ALUMINIUM

VARNISHED PLASTIC JOINT - pack. 20 Pcs


Article
RPSY... 08-10-125

Universal, suitable for three profile heights
Available: OL - OC - ON - AA - AO.
The code of the selected colour must be added to the article code.
E.g.: RPSY... 08 (chosen colour polished brass) RPSYOL 08

BRASS - ALUM. CAPS H 8 - 10 - 12,5 mm - pack. 20 Pcs

Article
TPSY... 08
TPSY... 10
TPSY... 125

Available: OL - OC - AA - AO.
The code of the selected colour must be added to the article code.
E.g.: TPSY... 08 (chosen colour polished brass) TPSYOL 08.

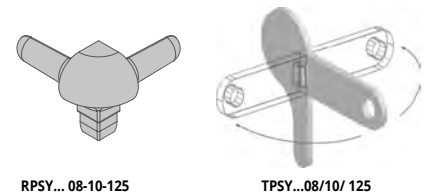

PROSTEP INS is a non-slip profile in aluminium that allows to connect the rise and the tread in case of stairs covered with wooden or laminate flooring. The profile has to be laid together with rise and tread. It is equipped with a punched flange that guarantees its fixing. **PROSTEP INS** in anodized aluminium is suitable for any stair covered with wooden flooring.

PROSTEP INS


ANODIZED SILVER ALUMINIUM



ANODIZED SILVER ALUMINIUM
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PTSAA 105	10,5
PTSAA 16	16


COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROSTEP INS" according to the thickness of the tile.
2. Cut "PROSTEP INS" to the desired length.
3. Lay the wood or laminate on the step rise and apply adhesive on the area of the step tread, where the profile will be laid.
4. Lay the profile on the step tread, aligning it with the edge of the rise covering.
5. Lay the wood or laminate on the tread of the step taking care to insert it into the cavity.

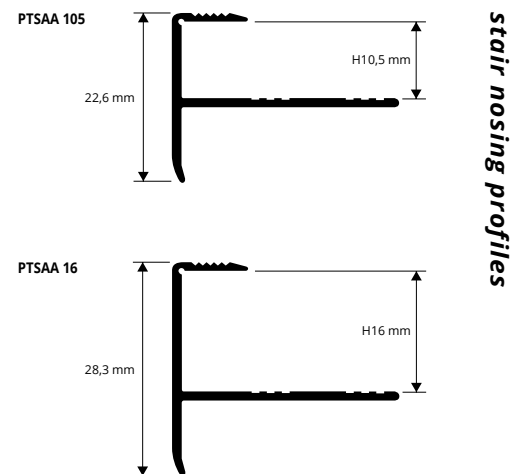

stair nosing profiles


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROSTAIR WOOD

NATURAL OAK
+ ALUMINIUM BASE

PROSTAIR WOOD is a step nosing profile in real oak with aluminium base. Its rounded "torus/convex" shape makes a perfect and elegant nosing for stairs and steps in ceramic-tile-terracotta-wood for indoor and outdoor environments. Attractive.

PROSTAIR WOOD may be treated and painted subsequently at the time of laying, according to the finishes chosen for the staircase.

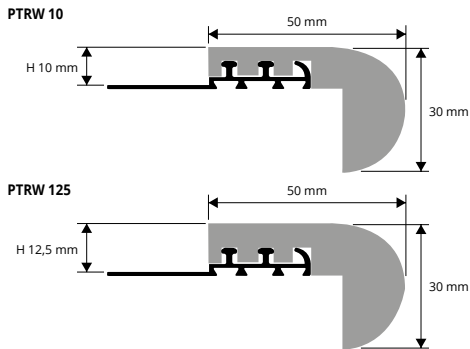

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the PROSTAIR WOOD with suitable height for the thickness of the covering of the step or staircase.
2. Apply the adhesive onto the area of application of the profile.
3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive.
4. Lay the step covering, aligning it so that the top edge of the profile is flush with the covering.
5. Fill the profile/covering area of contact with adhesive to prevent any infiltration.




NATURAL OAK + ALUMINIUM BASE
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm		
PTRW 10	10		*
PTRW 125	12,5		*

H 15 mm on demand

COLOURS



NATURAL OAK + ALUMINIUM BASE
bar length 1,20 lm - pack. 10 Pcs - 12 lm

Article	H mm		
PTRW 1020 (bar length 1,20 lm)	10		*
PTRW 12520 (bar length 1,20 lm)	12,5		*

NATURAL OAK + ALUMINIUM BASE
bar length 1,80 lm - pack. 10 Pcs - 18 lm

Article	H mm		
PTRW 1080 (bar length 1,80 lm)	10		*
PTRW 12580 (bar length 1,80 lm)	12,5		*


ITEMS SUPPLIED ALREADY ASSEMBLED

Treat the wood appropriately with paint or oil.


PROSTAIR WOOD Z

KNURLED NATURAL OAK
+ ALUMINIUM BASE

PROSTAIR WOOD Z is a step nosing profile in real oak with aluminium base. The rounded shape of the "knurled convex" torus with non-slip surface makes a perfect and elegant nosing for stairs and steps in ceramic-tile-terracotta-wood for indoor and outdoor environments. Attractive. **PROSTAIR WOOD Z** may be treated and painted subsequently at the time of laying, according to the finishes chosen for the staircase.

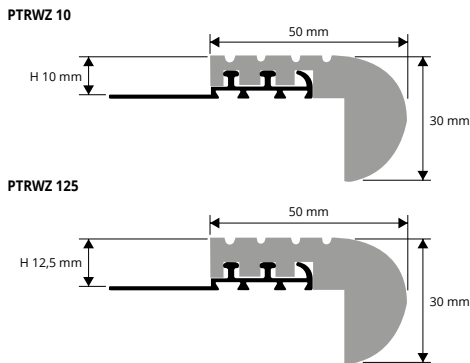

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

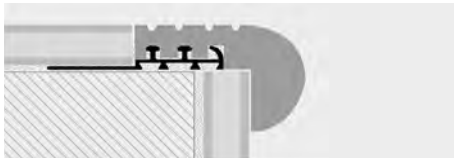

1. Choose the PROSTAIR WOOD Z with suitable height for the thickness of the covering of the step or staircase.
2. Apply the adhesive onto the area of application of the profile.
3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive.
4. Lay the step covering, aligning it so that the top edge of the profile is flush with the covering.
5. Fill the profile/covering area of contact with adhesive to prevent any infiltration.




NATURAL OAK + ALUMINIUM BASE
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm		
PTRWZ 10	10		*
PTRWZ 125	12,5		*

H 15 mm on demand

COLOURS



NATURAL OAK + ALUMINIUM BASE
bar length 1,20 lm - pack. 10 Pcs - 12 lm

Article	H mm		
PTRWZ 1020 (bar length 1,20 lm)	10		*
PTRWZ 12520 (bar length 1,20 lm)	12,5		*

NATURAL OAK + ALUMINIUM BASE
bar length 1,80 lm - pack. 10 Pcs - 18 lm

Article	H mm		
PTRWZ 1080 (bar length 1,80 lm)	10		*
PTRWZ 12580 (bar length 1,80 lm)	12,5		*

ITEMS SUPPLIED ALREADY ASSEMBLED

Treat the wood appropriately with paint or oil.


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROSTEP WOOD is a step nosing profile in real oak with aluminium base. Its 90° shape makes a perfect and elegant nosing for modern stairs and steps in ceramic-tile-terracotta-wood for indoor and outdoor environments. Attractive.

PROSTEP WOOD may be treated and painted subsequently at the time of laying, according to the finishes chosen for the staircase.

PROSTEP WOOD

NATURAL OAK
+ ALUMINIUM BASE

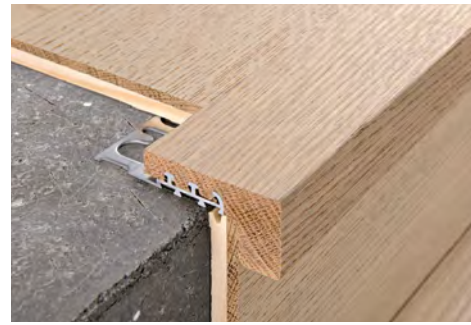


NATURAL OAK + ALUMINIUM BASE
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm		
PTPW 10	10		*
PTPW 125	12,5		*

NATURAL OAK + ALUMINIUM BASE
bar length 1,20 lm - pack. 10 Pcs - 12 lm

Article	H mm		
PTPW 1020 (bar length 1,20 lm)	10		*
PTPW 12520 (bar length 1,20 lm)	12,5		*

COLOURS




Natural oak


NATURAL OAK + ALUMINIUM BASE
bar length 1,80 lm - pack. 10 Pcs - 18 lm

Article	H mm		
PTPW 1080 (bar length 1,80 lm)	10		*
PTPW 12580 (bar length 1,80 lm)	12,5		*

ITEMS SUPPLIED ALREADY ASSEMBLED
Treat the wood appropriately with paint or oil.

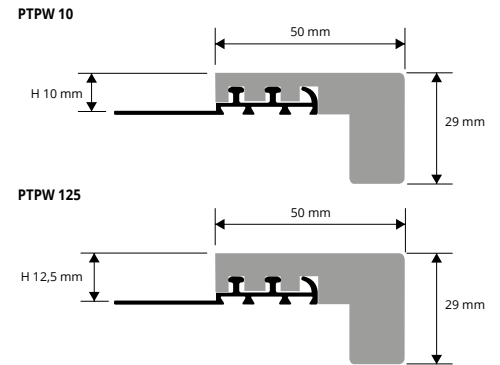

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

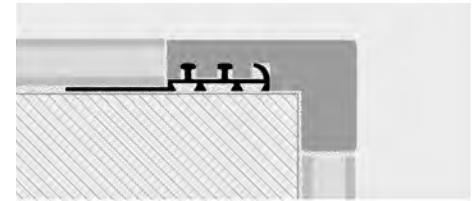


1. Choose the PROSTEP WOOD with suitable height for the thickness of the covering of the step or staircase. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the step covering, aligning it so that the top edge of the profile is "flush" with the covering. 5. Fill the profile/covering area of contact with adhesive to prevent any infiltration.

PROSTYLE WOOD is a step nosing profile in real oak with aluminium base. Its rounded "torus/fret" shape makes a perfect and elegant nosing for stairs and steps in ceramic-tile-terracotta-wood for indoor and outdoor environments. Attractive.

PROSTYLE WOOD may be treated and painted subsequently at the time of laying, according to the finishes chosen for the staircase.

PROSTYLE WOOD

NATURAL OAK
+ ALUMINIUM BASE

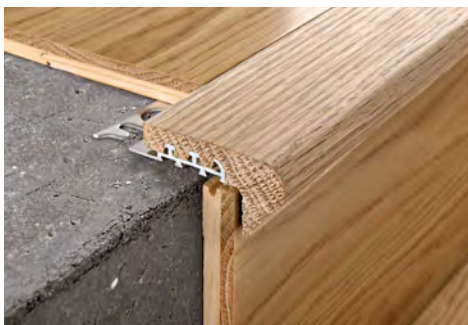


NATURAL OAK + ALUMINIUM BASE
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm		
PSYW 10	10		*
PSYW 125	12,5		*

NATURAL OAK + ALUMINIUM BASE
bar length 1,20 lm - pack. 10 Pcs - 12 lm

Article	H mm		
PSYW 1020 (bar length 1,20 lm)	10		*
PSYW 12520 (bar length 1,20 lm)	12,5		*

COLOURS




Natural oak


NATURAL OAK + ALUMINIUM BASE
bar length 1,80 lm - pack. 10 Pcs - 18 lm

Article	H mm		
PSYW 1080 (bar length 1,80 lm)	10		*
PSYW 12580 (bar length 1,80 lm)	12,5		*

ITEMS SUPPLIED ALREADY ASSEMBLED
Treat the wood appropriately with paint or oil.

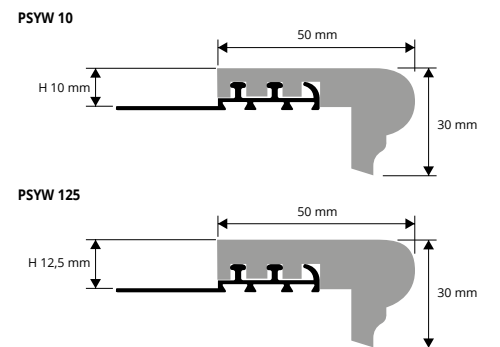

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

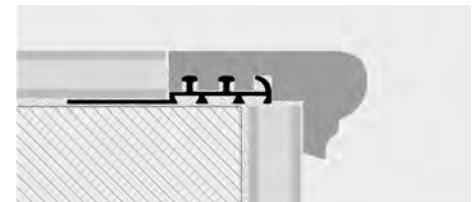

1. Choose the PROSTYLE WOOD with suitable height for the thickness of the covering of the step or staircase. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the step covering, aligning it so that the top edge of the profile is "flush" with the covering. 5. Fill the profile/covering area of contact with adhesive to prevent any infiltration.



* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed



TUBE and **ACCESSORIES** for runners and stair-carpet guides, available in the finishes in polished painted brass, polished gold aluminium and polished chrome aluminium.

TUBES and ACCESSORIES


GOLD AND CHROME POLISHED ALUMINIUM
POLISHED VARNISHED BRASS

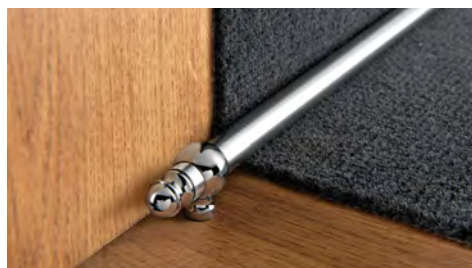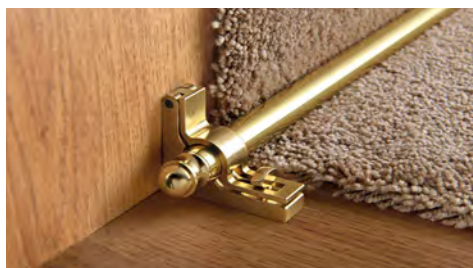

TCTOL 11/13S

TCTBO 12S

TCTBC 12S

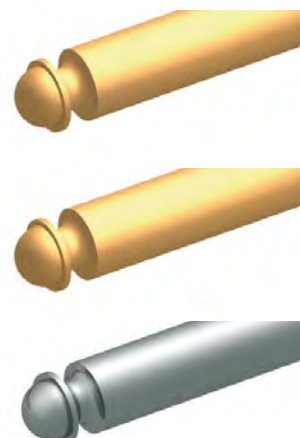

tube and accessories for stairs

BLISTER KIT - 2 TUBES AND 4 TUBE PLUGS - POLISHED BRASS COATED  length tube **0,8 lm** - pack. **60 Pcs**

Article	Ø mm		
TCTOL 118S	11		
TCTOL 138S	13		

BLISTER KIT - 2 TUBES and 4 TUBE PLUGS - POLISHED ALUM.  length tube **0,8 lm** - pack. **60 Pcs**

Article	Ø mm		
TCTBO 128S (polished gold)	12		
TCTBC 128S (polished chrome)	12		

BLISTER KIT - 2 TUBES AND 4 TUBE PLUGS - POLISHED BRASS COATED  length tube **0,9 lm** - pack. **60 Pcs**

Article	Ø mm		
TCTOL 119S	11		
TCTOL 139S	13		

BLISTER KIT - 2 TUBES and 4 TUBE PLUGS - POLISHED ALUM.  length tube **0,9 lm** - pack. **60 Pcs**

Article	Ø mm		
TCTBO 129S (polished gold)	12		
TCTBC 129S (polished chrome)	12		

BLISTER KIT - 2 TUBES AND 4 TUBE PLUGS - POLISHED BRASS COATED  length tube **1 lm** - pack. **60 Pcs**



Article	Ø mm		
TCTOL 1110S	11		
TCTOL 1310S	13		

BLISTER KIT - 2 TUBES and 4 TUBE PLUGS - POLISHED ALUM.  length tube **1 lm** - pack. **60 Pcs**

Article	Ø mm		
TCTBO 1210S (polished gold)	12		
TCTBC 1210S (polished chrome)	12		

Varnished polished brass is not suitable for places subject to heavy foot-traffic and / or abrasion.

COLOURS

		
BO - Polished gold alum.	BC - Polished chrome alum.	OL - Polished brass coated

TUBE for runners and stair-carpet guides

GOLD AND CHROME POLISHED ALUMINIUM, POLISHED VARNISHED BRASS

POLISHED BRASS COATED
bar length **2 / 4 lm** - pack. **40 / 20 Pcs - 80 lm**

Article	Ø mm		
TGSOL 112 (2 lm)	11		
* TGSOL 114 (4 lm)	11		
* TGSOL 132 (2 lm)	13		
* TGSOL 134 (4 lm)	13		

POLISHED ALUMINIUM
bar length **2 / 4 lm** - pack. **40 / 20 Pcs - 80 lm**

Article	Ø mm		
TGSBO 122 (2 lm)	12		
* TGSBO 124 (4 lm)	12		
* TGSBC 122 (2 lm)	12		
* TGSBC 124 (4 lm)	12		

TGSOL 11/13

TGSBO 12

TGSBC 12



TUBE PLUGS/END CAPS for tube

POLISHED BRASS AND CHROMED BRASS

POLISHED BRASS AND CHROMED BRASS - pack. 60 Pcs

Article	Ø mm		
TETOL 11 (polished)	11		
TETOC 12 (chromed)	12		
TETOL 12 (polished)	12		
TETOL 13 (polished)	13		

TETOL 11
TETOL 12
TETOL 13

TETOC 12



SUPPORT / EYELET for tube with screw

POLISHED BRASS AND CHROMED BRASS

POLISHED BRASS AND CHROMED BRASS - pack. 20 Pcs

Article	Ø mm		
SOOL 12 (polished)	12		
SOOC 12 (chromed)	12		
SOOL 14 (polished)	14		

SOOL 12
SOOL 14

SOOC 12



HINGE SUPPORT for tube

POLISHED BRASS

POLISHED BRASS - pack. 20 Pcs

Article	Ø mm		
SCOL 11	11		
SCOL 13	13		

Articles without bar code.
For bar code add the letter "C" after the article code. E.g.: SCOL 11C

SCOL 11
SCOL 13




* = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed

PROWALK ACC

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
PUNCHED OR SELF ADHESIVE

PROWALK ACC is steps protecting steel profile for existing scales. Its superior side level is crimped in order to increase its adhesion. Available in version or with holes either with adhesive. Available sizes: 30 x 10, 30 x 20, and 30 x 30 mm. All profiles are protected with protective film. It's ideal for the edges protection and screening as well as of the corner between the rising and the tread which is the point of the greatest strain.

stair nosing for existing steps

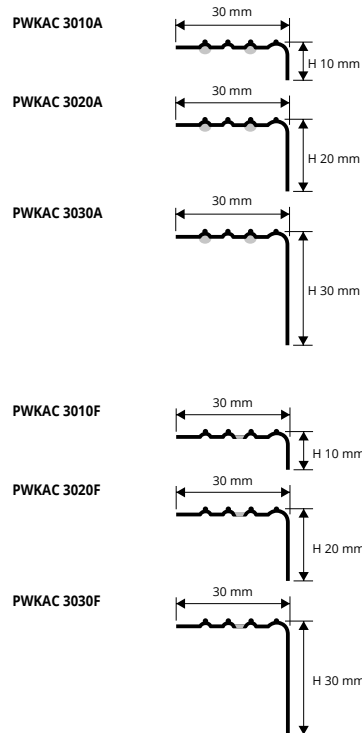

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10mm

Article	L x H mm
PWKAC 3010A	30 X 10
PWKAC 3020A	30 X 20
PWKAC 3030A	30 X 30

INSTRUCTIONS FOR LAYING METHODS

Adhesive version

1. Choose the suitable profile and cut it to the necessary length. 2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length. 2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A punched - with protective film - bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10mm

Article	L x H mm
PWKAC 3010F	30 X 10
PWKAC 3020F	30 X 20
PWKAC 3030F	30 X 30

COLOURS



AC - Polished stainless st.
AISI 304/1.4301-V2A

ON DEMAND HAND-BRUSHED STAINLESS STEEL
(Price to be agreed.
Production delay 4/5 weeks)

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS


PROEND

GOLD, SILVER AND BRONZE ANOD. ALUMINIUM
WITH/ WITHOUT ADHESIVE AND PUNCHED


PROEND is a step nosing profile in anodized aluminium with silver-gold-bronze finish, available with self-adhesive backing or punched. Ideal for protecting existing steps and with knurled flat surface, it guarantees excellent safety features to prevent accidents in public and private environments.

PROEND ensures a perfect finish, covering laying defects and protecting the edge. Easy to lay with the self-adhesive backing ensuring perfect adherence to the step or using screws and screw anchors in the punched version.

stair nosing for existing steps

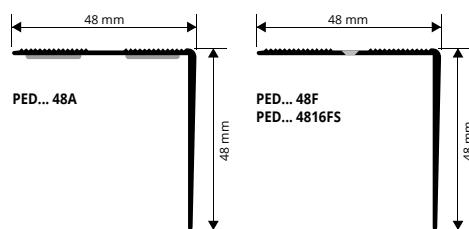

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

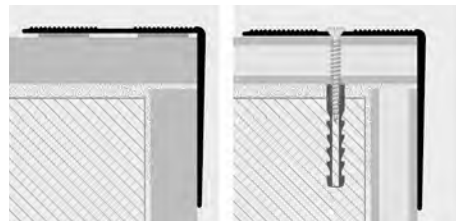

Adhesive version

1. Choose the suitable profile and cut it to the necessary length. 2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length. 2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.



ANOD. ALUMINIUM with and without adhesive thermo packed
bar length 2,7 lm - pack. 10 Pcs - 27 lm


Article	H x L mm
PED... 48A (with adhesive)	48 X 48
PED... 48 (without adhesive)	48 X 48

On demand bar length 3 lm with minimum quantity of 200 pcs.
Production delay 4/5 weeks. Price to be agreed.

COLOURS



AA - Anodized silver alum., AO - Anodized gold alum., AB - Anodized bronze alum.

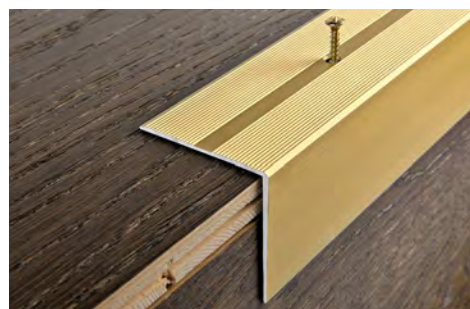

ANODIZED ALUMINIUM punched thermo packed
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H x L mm
PED... 48F	48 X 48

ANOD. ALU. punched with screws and screw anchors thermo packed - bar length 1,65 lm - pack. 20 Pcs



Article	H x L mm
PED... 4816FS	48 X 48

Available in the colours: AA - AO - AB. The code of the selected colour must be added to the article code.
E.g.: PED... 48A (chosen colour anodized gold) PEDAO 48A.

PROWALK is a step nosing profile in polished brass and anodized aluminium for existing steps. The upper part is knurled to increase slip and slide resistance and is applied after laying. Available with holes or with adhesive. Available in the widths 22 x 22 and 30 x 30 mm. All the profiles are shrink-wrapped. Ideal for protecting and shielding the edges and corner between riser and tread, which are the areas subjected to most stress.

PROWALK

POLISHED BRASS and ANODIZED ALUMINIUM
ADHESIVE and PUNCHED



KNURLED POLISHED BRASS with adhesive thermo packed
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	H x L mm		
PWKOL 22A	22 X 22		
PWKOL 30A	30 X 30		*



KNURLED POLISHED BRASS punched thermo packed
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	H x L mm		
PWKOL 22F	22 X 22		*
PWKOL 30F	30 X 30		*

KNURLED POLISHED BRASS without holes thermo packed
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	H x L mm		
PWKOL 22	22 X 22		
PWKOL 30	30 X 30		*

KNURLED POLISHED BRASS with adhesive thermo packed - bar length 0,90 lm - pack. 20 Pcs



SELF PACK

Article	H x L mm		
PWKOL 229AS	22 X 22		
PWKOL 309AS	30 X 30		*


KNURLED POLI. BRASS punched with screws and screw anchors thermo packed - bar length 0,90 lm - pack. 20 Pcs



SELF PACK

Article	H x L mm		
PWKOL 309FS	30 X 30		*

COLOURS



OL - Polished brass

KNURLED ANODIZED ALUMINIUM with adhesive thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm		
PWK... 22A	22 X 22		
PWK... 30A	30 X 30		

KNURLED ANODIZED ALUMINIUM punched thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm		
PWK... 22F	22 X 22		
PWK... 30F	30 X 30		

KNURLED ANODIZED ALUM. WITHOUT HOLES thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm		
PWK... 22	22 X 22		
PWK... 30	30 X 30		

KNURLED ANODIZED ALUMINIUM with adhesive thermo packed - bar length 0,90 lm - pack. 20 Pcs



SELF PACK

Article	H x L mm		
PWK... 229AS	22 X 22		
PWK... 309AS	30 X 30		*

KNURLED ANOD. ALU. punched with screws and screw anchors thermo packed - bar length 0,90 lm - pack. 20 Pcs



SELF PACK

Article	H x L mm		
PWK... 229FS	22 X 22		
PWK... 309FS	30 X 30		*

Available in the colours: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PWK... 22A (chosen colour anodized gold) PWKAO 22A.


COLOURS



AO - Anodized gold alum.




AA - Anodized silver alum.




AB - Anodized bronze alum.

ON DEMAND MINIMUM QUANTITY 100 PCS for color and height



AT - Anodized titanium alum.




CH - Anod. champagne alum.




SB - Anodized sand aluminium


PWK... 22A
PWK... 229AS




PWK... 30A
PWK... 309AS



PWK... 22F
PWK... 229FS




PWK... 30F
PWK... 309FS



stair nosing for existing steps

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

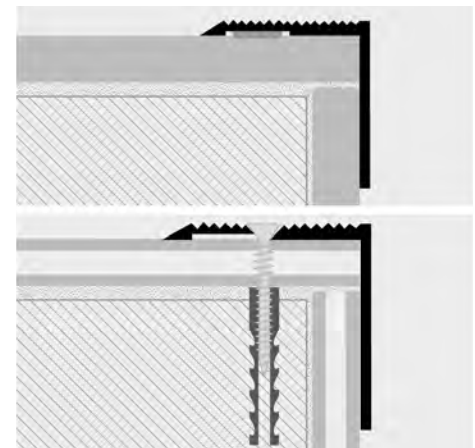

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROWALK 2510 PROWALK 2520


ALUMINIUM 30 WOOD FINISHES AND 6 ANODIZED FINISHES PUNCHED OR SELF ADHESIVE

PROWALK 2510 e 2520 are new stair-nosing profiles for existing stairways. Designed to protect and restore stair steps made of wood, laminate, ceramic, etc. Made with anodized aluminium with silver, gold and bronze finish and available in self-adhesive or perforated versions. Sizes available: 2.7 m lengths and 0.9 m & 1.35 m Self-Pack.

stair nosing for existing steps

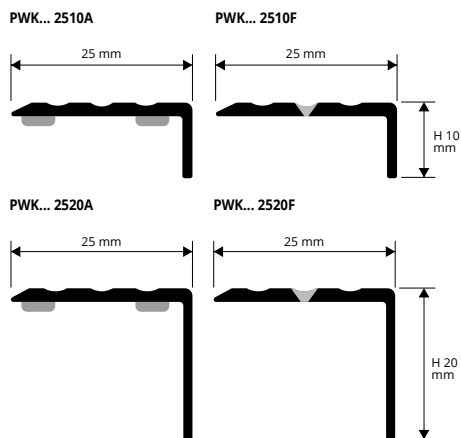

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

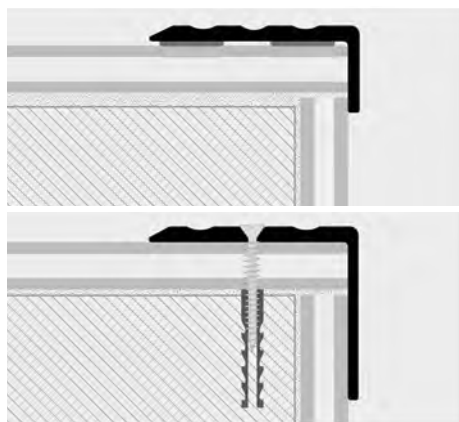

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

ANODIZED ALUMINIUM with adhesive thermo packed

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm		
PWK... 2510A	25 X 10		
PWK... 2520A	25 X 20		

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 0,90 lm - pack. 20 Pcs



SELF PACK

Article	L x H mm		
PWK... 25109AS	25 X 10		

ANODIZED ALUMINIUM punched thermo packed

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm		
PWK... 2510F	25 X 10		
PWK... 2520F	25 X 20		

ANODIZED ALUM. punched, screws and screw anchors thermo packed - bar length 0,90 lm - pack. 20 Pcs



SELF PACK

Article	L x H mm		
PWK... 25109FS	25 X 10		

ANODIZED ALUM. punched, screws and screw anchors thermo packed - bar length 1,35 lm - pack. 20 Pcs



SELF PACK

Article	L x H mm		
PWK... 251013FS	25 X 10		

Available in the finishes: AO - AA - AB (AT, CH e SB on demand with a minimum order of 100 pcs).

The code of the selected finish must be added to the article code. E.g.:PWK... 2510A (chosen finish anodized silver) PWKAA 2510A.

ALUMINIUM WOODEN FINISHES with adhesive thermo packed

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm		
PWK... 2510A	25 X 10		*
PWK... 2520A	25 X 20		*

Available on demand in the colours: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W with a minimum quantity order of 100 pcs.


The code of the selected colour must be added to the article code. E.g.: PWK... 2510A (chosen finish dark beech) PWK04 2510A.

COLOURS



ON DEMAND MINIMUM QUANTITY 100 PCS for color and height

(For a precise assessment of colours request the wooden finishes sample range)

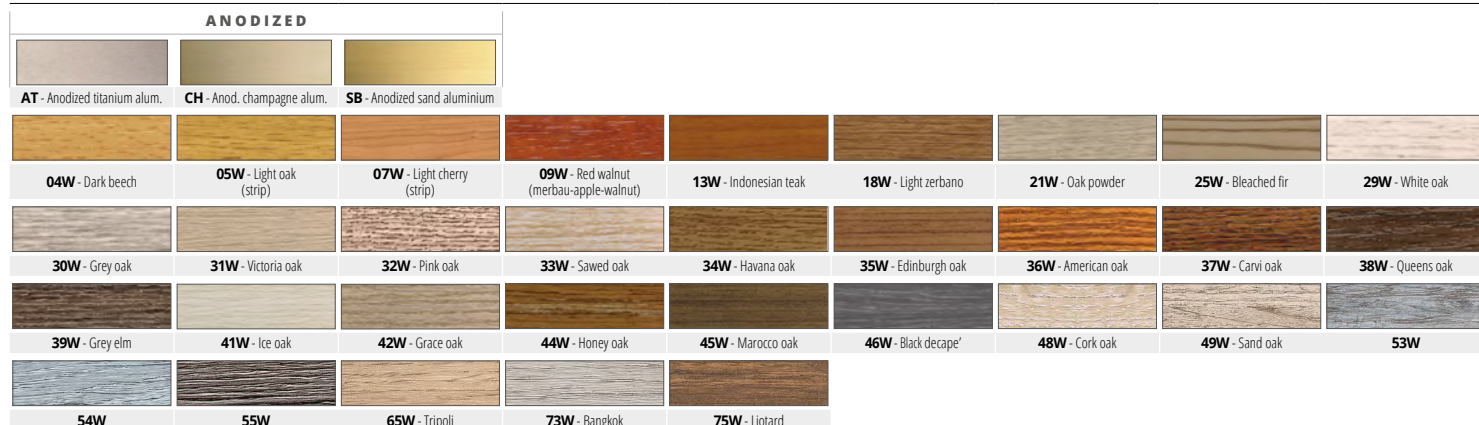

On demand it is possible to produce samples of wood finishes. Contact the office for negotiation, small amounts, timing and costs.


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROEND INS 75 is a step nosing profile in anodized aluminium with interchangeable rubber insert: the upper part is knurled to increase slip and slide resistance and is applied after laying. Available anodized with gold, bronze or silver finish and with adhesive or punched.

PROEND INS 75 ensures a perfect finish, covering laying defects and protecting the edge. Easy to lay with the self-adhesive backing ensuring perfect adherence to the step or with screws and screw anchors in the punched version.

PROEND INS 75

GOLD, SILVER AND BRONZE ANOD. ALUMINIUM
ADHESIVE AND PUNCHED

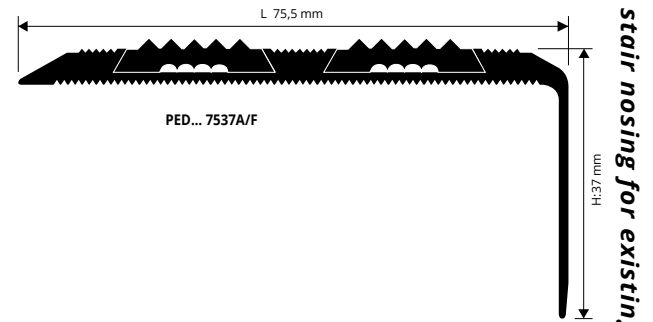

ANODIZED ALUMINIUM with DOUBLE INSERT
thermo packed - with adhesive
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H x L mm
PED... 7537A	37 X 75,5

ANODIZED ALUMINIUM with DOUBLE INSERT
thermo packed - punched
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H x L mm
PED... 7537F	37 X 75,5

On demand bar length 3 lm with minimum quantity of 200 pcs.
Production delay 4/5 weeks. Price to be agreed.

Available in the finishes: AA - AO - AB.
The code of the selected finish must be added to the article code.
E.g.: PED... 7537A (chosen finish anodized gold) PEDAO 7537A.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

COLOURS

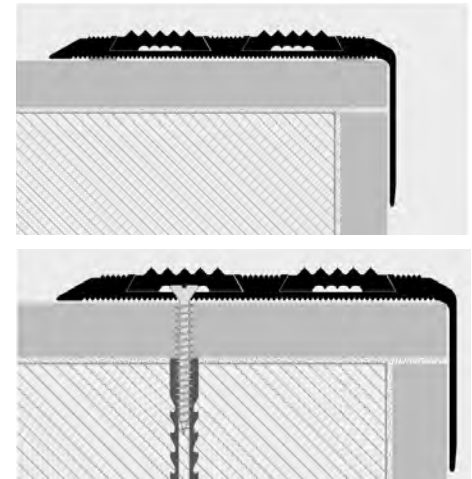



PROEND INS is a step nosing profile in anodized aluminium with interchangeable rubber insert: the upper part is knurled to increase slip and slide resistance and is applied after laying. Available anodized with gold, bronze or silver finish and with adhesive or punched.

PROEND INS ensures a perfect finish, covering laying defects and protecting the edge. Easy to lay with the self-adhesive backing ensuring perfect adherence to the step or with screws and screw anchors in the punched version.

PROEND INS

GOLD, SILVER AND BRONZE ANOD. ALUMINIUM
ADHESIVE AND PUNCHED

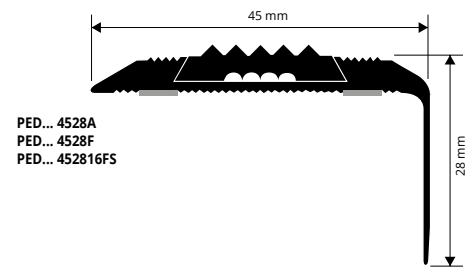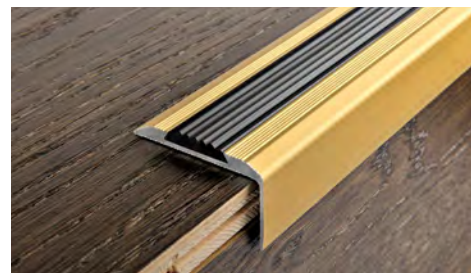

ANODIZED ALUM. with adhesive WITH INSERT thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm
PED... 4528A	28 X 45

ANODIZED ALUM. punched WITH INSERT thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm
PED... 4528F	28 X 45

On demand bar length 3 lm with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed.

AN. ALUM. punched WITH INSERT, screws and screw anchors
thermo packed - bar length 1,65 lm - pack. 20 Pcs




Article	H x L mm
PED... 452816FS	28 X 45

COLOURS



Available in the finishes: AA - AO - AB.
The code of the selected colour must be added to the article code.
E.g.: PED... 4528A (chosen finish anodized gold) PEDAO 4528A.

EXAMPLES OF LAYING

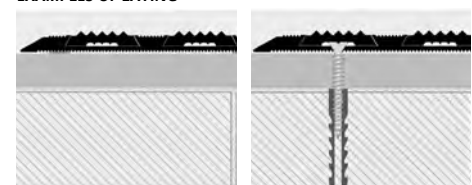

For instructions see the product above



BLACK INTERCHANGEABLE INSERT

VINYL RESIN / RUBBER

VINYL RESIN / RUBBER

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article
IIN 12




* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROEND GRIP 70

SILVER, GOLD AND BRONZE ANOD. ALUMINIUM
+ NON-SLIP INSERT ADHESIVE AND PUNCHED

PROEND GRIP 70 is a non-slip step nosing profile in anodized aluminium with adhesive non-slip 50mm thick insert in black carborundum to be fitted in the relative groove in the top of the profile upon completion of laying. The profile may be laid with fixing screws hidden afterwards by the adhesive carborundum, or with silicone and/or adhesive to be applied on the bottom of the profile, which is designed to ensure an excellent grip. It is made in anodized aluminium with silver, gold or bronze finish with anodizing coat of approx. 15/20 micron.

stair nosing for existing steps

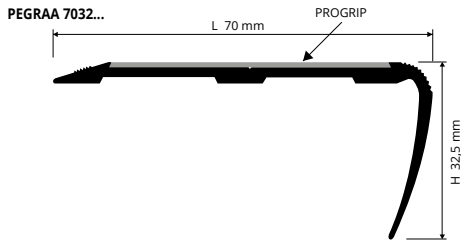

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.



SILVER, GOLD AND BRONZE ANODIZED ALUM. with adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm
PEGR... 7032A	32,5 X 70

SILVER, GOLD AND BRONZE ANODIZED ALUM. punched thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm
PEGR... 7032F	32,5 X 70


Available in the finishes: AA - AO - AB.
The code of the selected finish must be added to the article code.
E.g.: PEGR... 7032A (chosen finish anodized gold) PEGRAO. 7032A.

On demand bar length 3 lm with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed.

The adhesive carborundum strip (PROGRIP) is not included with the profile.
For PEGR... 7032... order PGR... 50 (Specify the chosen colour).




COLOURS



PROEND 5050


ANODIZED SILVER ALUMINIUM
+ NON-SLIP INSERT ADHESIVE AND PUNCHED

PROEND 5050 is a non-slip profile for stairs in anodized silver aluminium, with a visible surface of 50x50 mm. The profile, available in the adhesive or punched version, is characterized of a horizontal surface partially milled, equipped with a specific groove where the non-slip adhesive Progrid in carborundum could be applied. The profile has also a vertical inclined of 83-degrees surface completely smooth. The ease of application and the availability of the carborundum in different colours, make it a much-sought profile.

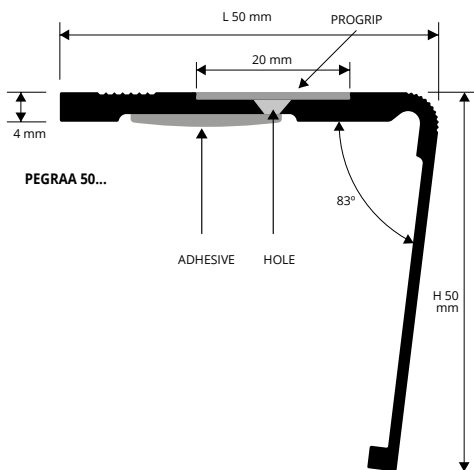

ANODIZED SILVER ALUMINIUM punched / with adhesive
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	HxL mm
PEGRAA 50F	50 X 50
PEGRAA 50A	50 X 50

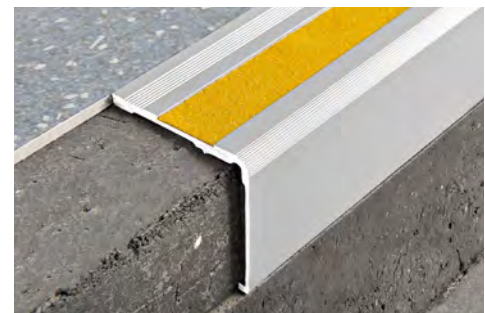

COLOURS



On demand bar length 3 lm with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed.

The adhesive carborundum strip (PROGRIP) is not included with the profile.
For PEGRAA 50... order PGR... 20 (Specify the chosen colour).

INSTRUCTIONS FOR LAYING METHODS

Adhesive version

1. Cut PROEND 5050 to the desired length;
2. Remove all the remains of oil, grease and dirt from the surface where the profile will be laid;
3. When the surface is perfectly dry, remove the protective film and press the profile exerting the appropriate pressure;
4. Apply the non-slip strip in carborundum in the desired colour.

Punched version

1. Cut PROEND 5050 to the correct size;
2. Mark on the support the position of the holes present on the profile;
3. Drill holes in the bracket with a 5 mm diameter bit and insert the 5 x 25 mm rawplugs;
4. Align the profiles over the holes and screw it to support;
5. Apply the non-slip carborundum adhesive insert in the desired color.

EXAMPLES OF LAYING



* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROEND GRIP is a non-slip step nosing profile in anodized aluminium with adhesive non-slip 20mm thick insert in black carborundum to be fitted in the relative groove in the top of the profile upon completion of laying. The profile may be laid with fixing screws hidden afterwards by the adhesive carborundum, or with silicone and/or adhesive to be applied on the bottom of the profile, which is designed to ensure an excellent grip. It is made in anodized aluminium with silver, gold or bronze finish with anodizing coat of approx. 15/20 micron.

PROEND GRIP

SILVER, GOLD AND BRONZE ANOD. ALUMINIUM
+ NON-SLIP INSERT ADHESIVE AND PUNCHED



ANODIZED SILVER, GOLD AND BRONZE ALUM. with adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm
PEGR... 5230A	30 X 52

On demand bar length 3 lm with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed.

ANODIZED SILVER, GOLD AND BRONZE ALUM. with adhesive - thermo packed bar length 1,66 lm - pack. 20 Pcs



Article	H x L mm
PEGR... 523016AS	30 X 52



ANODIZED SILVER, GOLD AND BRONZE ALUM. punched thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm
PEGR... 5230F	30 X 52

ANODIZED SILVER, GOLD AND BRONZE ALUM. punched, screws and screw anchors - thermo packed bar length 1,66 lm - Pack 20 Pcs




Article	H x L mm
PEGR... 523016FS	30 X 52

Available in the finishes: AA - AO - AB -

The code of the selected finish must be added to the article code. E.g.: PEGR... 523016AS (chosen finish anodized silver) PEGRAA 523016AS.

The adhesive carborundum strip (PROGRIP) is not included with the profile.
For PEGR... 5230... order PGR... 20 (Specify the chosen colour).

COLOURS



* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROGRIP is a self-adhesive product in carborundum consisting of a plastic film plus abrasive granules with high resistance to wear. It is normally used to guarantee safety on steps in public and private environments, as required by accident-prevention laws. Available in various colours and widths to meet all technical and aesthetic requirements. It is advisable to apply 2 strips on each step, rounding off the ends.

PROGRIP

ADHESIVE CARBORUNDUM - 6 COLOURS




ADHESIVE CARBORUNDUM NON-SLIP STRIP for STEPS

rolls length 18,2 lm

Article	Width mm
PGRN 20 (black)	20
PGRB 20 (white)	20
PGRT 20 (transparent)	20
PGRG 20 (grey)	20
PGRY 20 (yellow)	20
PGRM 20 (brown)	20
PGRN 25 (black)	25
PGRB 25 (white)	25
PGRT 25 (transparent)	25
PGRG 25 (grey)	25
PGRY 25 (yellow)	25
PGRM 25 (brown)	25
PGRN 50 (black)	50
PGRB 50 (white)	50
PGRT 50 (transparent)	50
PGRG 50 (grey)	50
PGRY 50 (yellow)	50
PGRM 50 (brown)	50


COLOURS

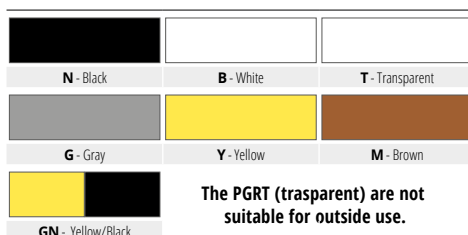


The PGRT (transparent) are not suitable for outside use.

ADHESIVE NON-SLIP STRIP for STEPS - rolls length 18,3 lm

Article	Width mm
PGRGN 20 (yellow/black)	20
PGRGN 25 (yellow/black)	25
PGRGN 50 (yellow/black)	50

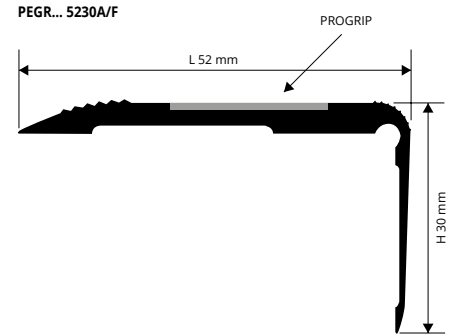


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

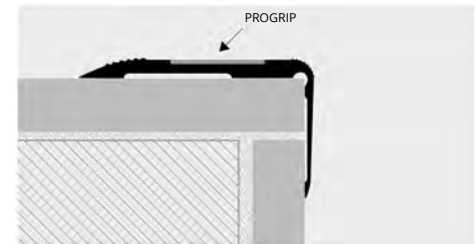

1. Choose the suitable profile for covering the edge of the step.
 2. Clean the surface on which the profile is to be laid, ensuring that it is grease-free and dry. Do not apply the strips at temperatures below 15°.
 3. Remove the protective paper from the adhesive and lay correctly by applying pressure evenly over the whole profile without using a hammer.
- If the punched PROEND GRIP has been chosen, screw the profile to the step and apply the adhesive carborundum to hide the screws.

stair nosing for existing steps

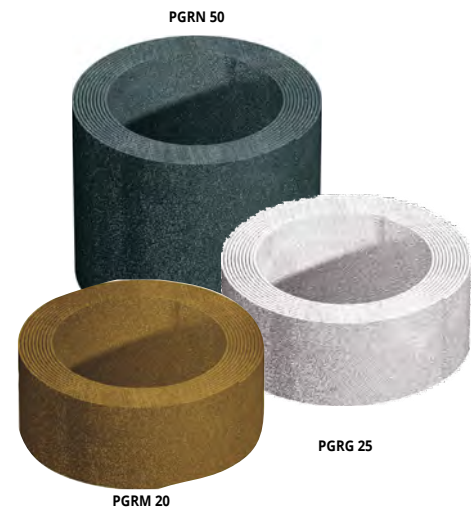


non-slip strip for steps

LAYING INSTRUCTIONS

1. Thoroughly clean and degrease the surface of application.
2. Round the ends of the strips.
3. Remove the protective paper from the adhesive and lay the PROGRIP using a roller.
4. Do not apply the strips at temperatures below 15°, otherwise heat the strips and the step.
5. When necessary clean away impurities with a brush and preserve the PROGRIP.
6. When laying on tiles, cut and round the corners of the strips on the inner part of the tile.
7. Carefully seal the outer edges of the strips to prevent water infiltration.


* = Production on demand with minimum quantity of 10 rolls. Production delay 4/5 weeks. Price to be agreed

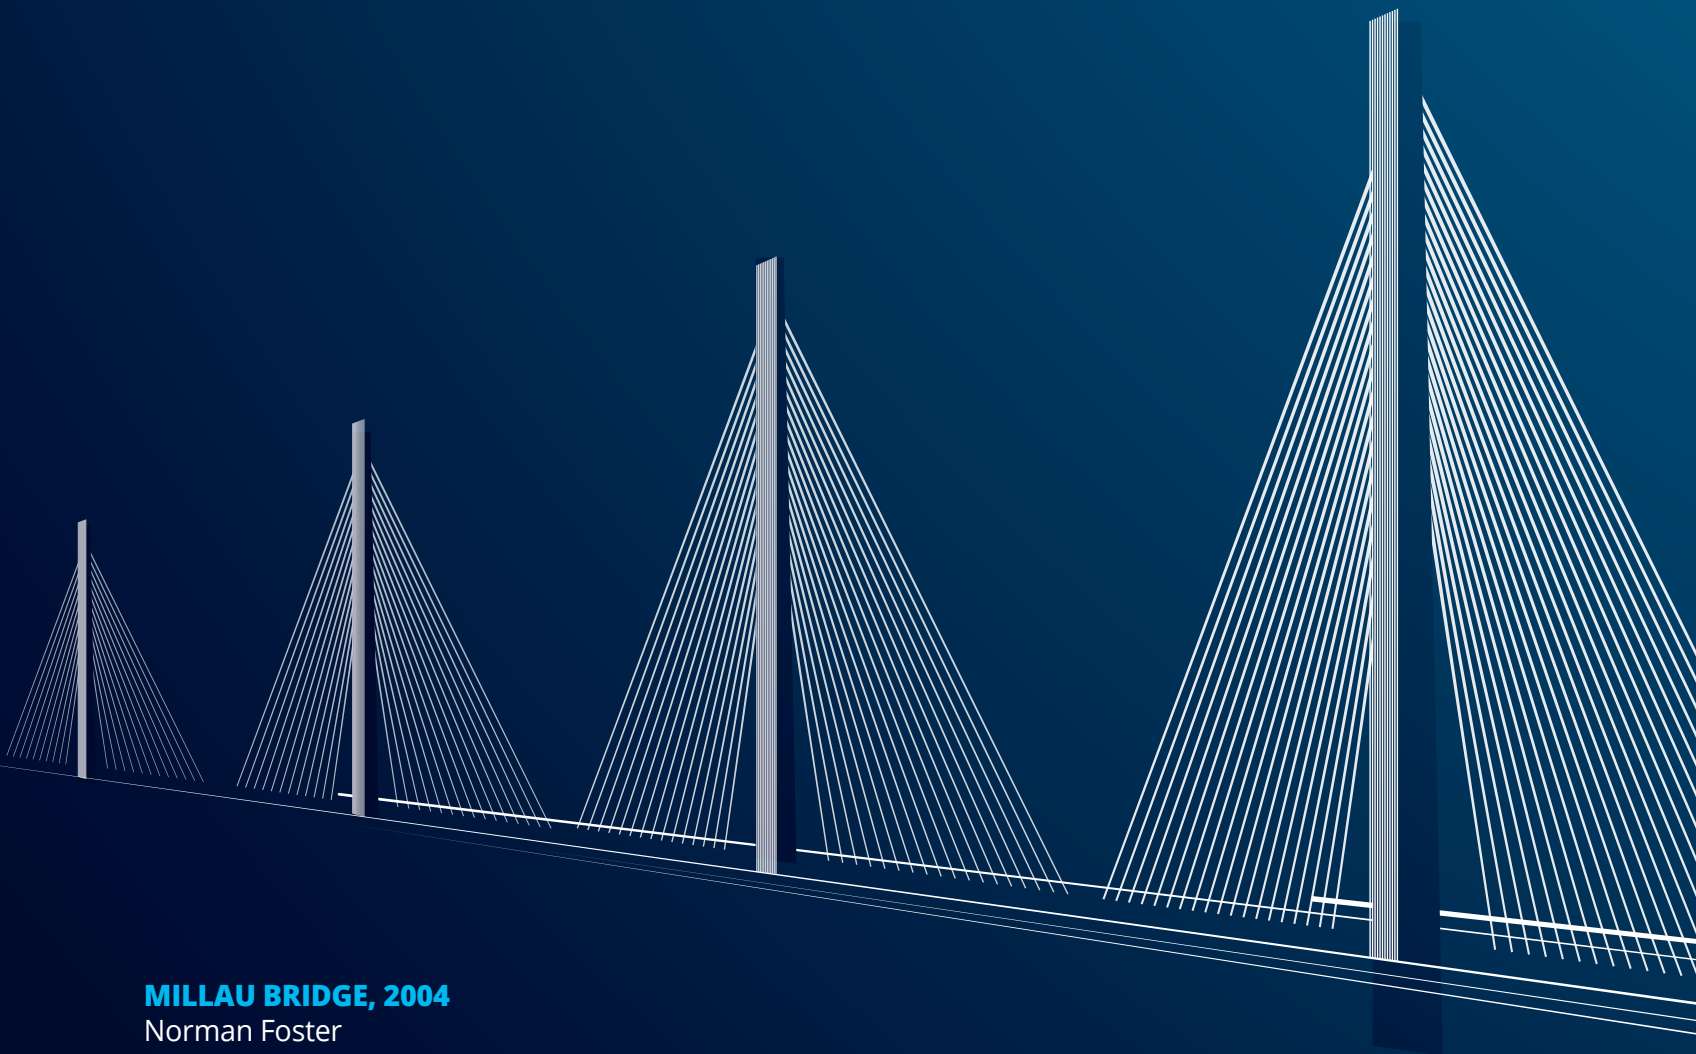

MILLAU BRIDGE, 2004
Norman Foster




MOVEMENT AND EXPANSION JOINTS

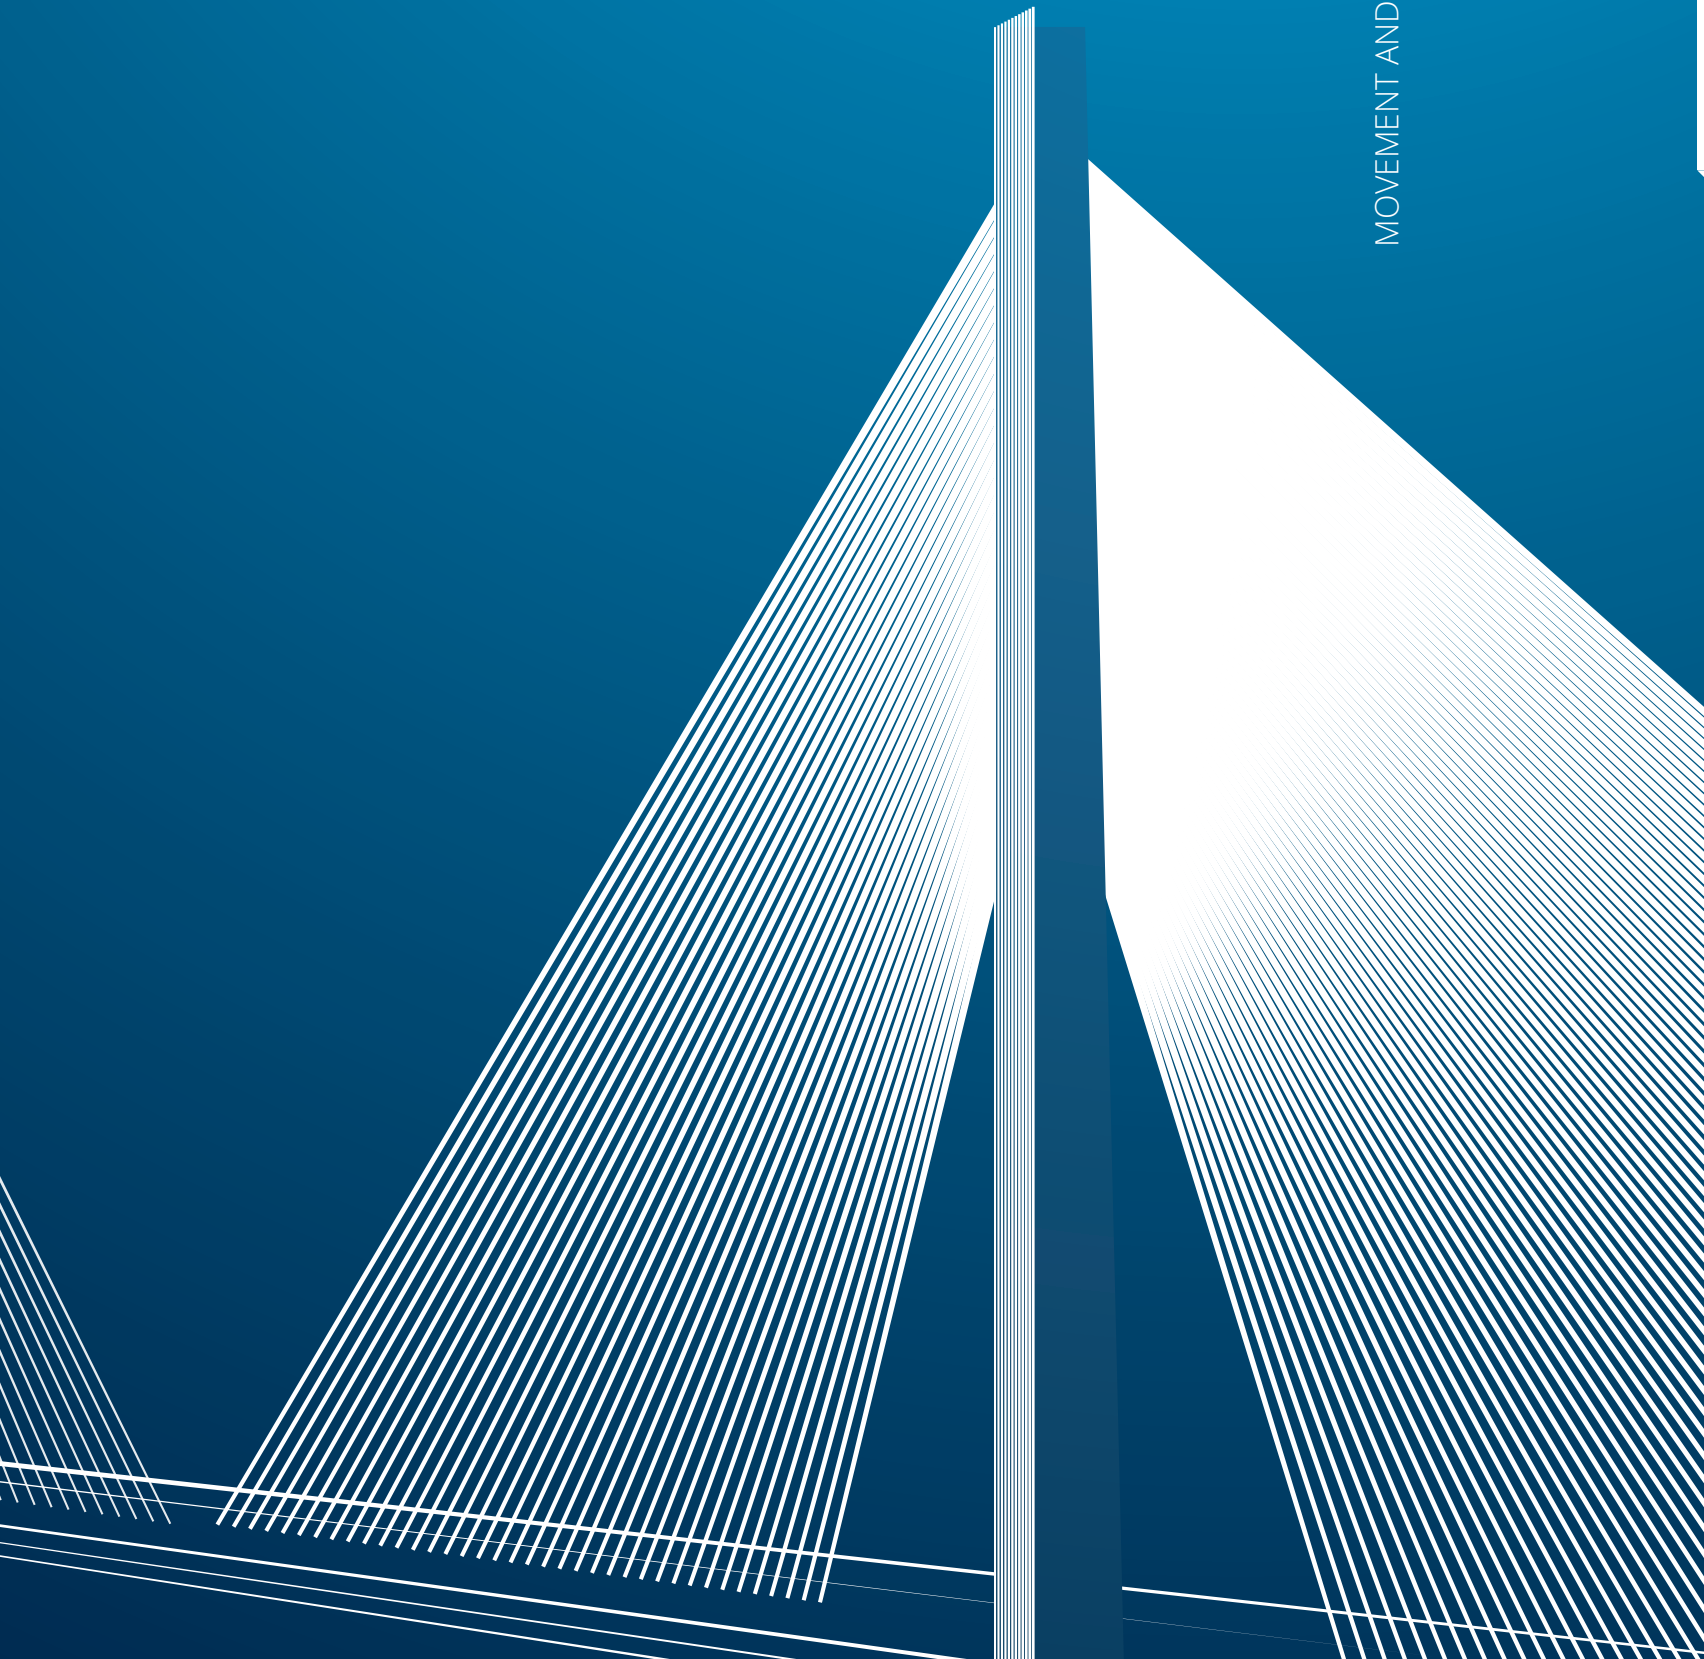


PROFLEX ACC

STAINLESS STEEL AISI 304/1.4301-V2A
+ VINYL RESIN / RUBBER INSERT

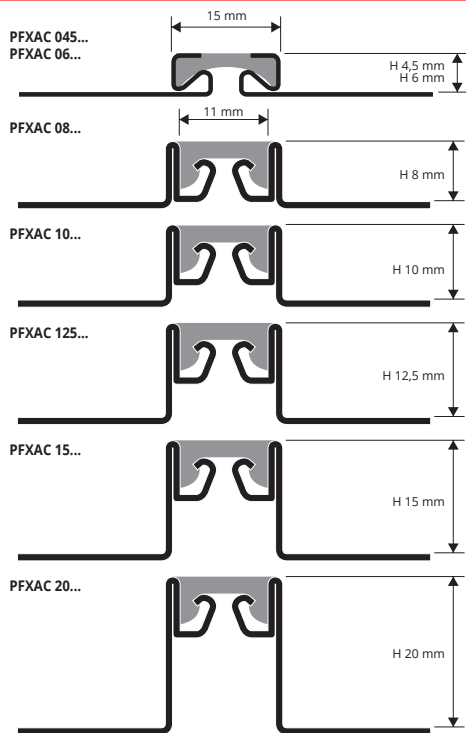

EXAMPLES OF LAYING

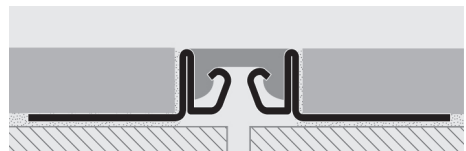

PROFLEX ACC is a new, stainless steel expansion joint with interchangeable (H. 4,5 e 6 mm excluded) vinyl resin/rubber insert, available in black, grey, beige or ivory. **PROFLEX ACC** provides elastic expansion joints for various kinds of flooring, such as ceramic, marble, granite, Kerilite/Laminam or any other flooring material laid with glue/adhesive and having a thickness of 4.5 to 20 mm. The joint is specially designed to protect the edges of the tiles, and its exceptional strength makes it capable of supporting frequent traffic, both pedestrian and vehicular (forklifts, pallet trucks, automobiles). The joint must be installed at the same level of the floor or 0.5-1 mm lower (never above). Lay the joints according with the standards in force. **HIGH RESISTANCE TO LOADS AND TO FREQUENT TRAFFIC OF PALLET TRUCKS AND FORKLIFTS.**



**POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
+ VINYL RESIN / RUBBER INSERT**
bar length 2,5 lm - pack. 20 Pcs - 50 lm

Article	H mm
PFXAC 045...	4,5
PFXAC 06...	6
PFXAC 08...	8
PFXAC 10...	10
PFXAC 125...	12,5
PFXAC 15...	15
PFXAC 20...	20

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

LAYING INSTRUCTIONS

1. Choose the PROFLEX ACC with the same height as the thickness of the floor (tile) also choosing the colour of the insert. 2. Using a notched spreader apply the adhesive in the point where the joint will be laid. 3. Lay the PROFLEX ACC with the punched flanges in the adhesive (we recommend the expansion joint being laid in line with the joint in the screed/floor rough). 4. Lay the tiles, aligning them with and adjoining the upper edge of the profile (the joint must always be 0.5-1mm lower than the tile, never above). Always place the uncut side of the tile against the profile. 5. Use sealant to fill any spaces between the tile and the PROFLEX ACC joint.




VINYL RESIN/RUBBER INSERT

VINYL RESIN/RUBBER INSERT


Article	H mm
ISPFXAC 045...	4,5
ISPFXAC 06...	6

Insert available in the colours: G - N (Beige and ivory available on demand with a minimum quantity order of 200 pcs). The code of the selected finish must be added to the article code. E.g.: PFXAC 045... (chosen insert colour grey) PFXAC 045G.

COLOURS



ON DEMAND MINIMUM QUANTITY 200 PCS for colour and height




(Price to be agreed. Production delay 4/5 weeks)

PROFLEX ACC PR

STAINLESS STEEL AISI 304/1.4301-V2A
+ VINYL RESIN / RUBBER INSERT

soundproof perimeter joints

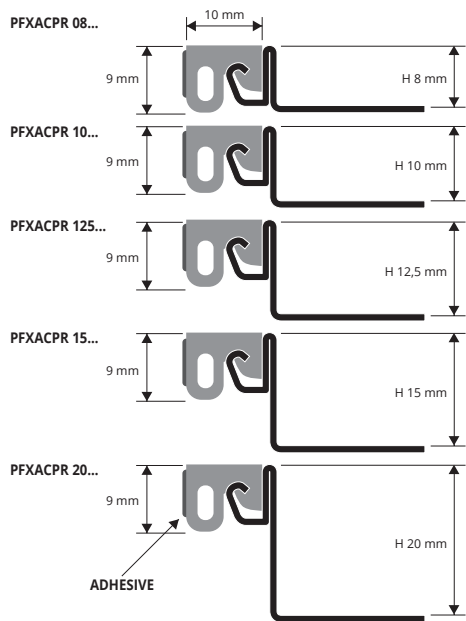

**POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
+ VINYL RESIN / RUBBER INSERT**
bar length 2,5 lm - pack. 20 Pcs - 50 lm

Article	H mm
PFXACPR 08...	8
PFXACPR 10...	10
PFXACPR 125...	12,5
PFXACPR 15...	15
PFXACPR 20...	20

COLOURS



SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS




VINYL RESIN / RUBBER INTERCHANGEABLE INSERT


Article	H mm
ISPFXACPR 820...	8-10-12,5-15-20

Insert available in the colours: G - N (Beige and ivory available on demand with a minimum quantity order of 200 pcs). The code of the selected finish must be added to the article code. E.g.: ISPFXACPR 820... (chosen insert colour grey) ISPFXACPR 820G.

COLOURS



ON DEMAND MINIMUM QUANTITY 200 pcs for colour and height




(Price to be agreed. Production delay 4/5 weeks)

PROFLEX OT is an expansion joint in natural brass with the interchangeable PVC/rubber insert. It is available in black, grey, beige or ivory and serves to fabricate expansion joints for ceramic tile, marble or granite floors and any floor laid with glue/adhesive between 8 and 20 mm thick. The special structure of the joint is designed to protect the corners of the tiles and its high strength withstands frequent pedestrian and vehicular (lift trucks, pallet trucks, cars) traffic. The joint must be placed level with or 0.5-1 mm below the floor level, never above. Lay the joints according with the standards in force. **HIGH RESISTANCE TO HEAVY LOADS AND TO FREQUENT PALLET TRUCK AND LIFT TRUCK TRAFFIC.**

PROFLEX OT

NATURAL BRASS
+ VINYL RESIN / RUBBER INSERT

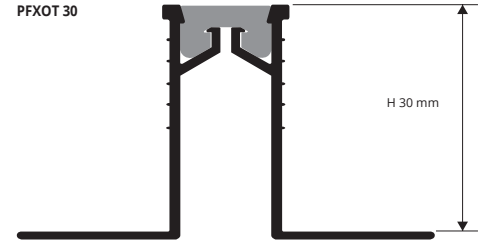

NATURAL BRASS + VINYL RESIN / RUBBER INSERT
bar length 2,5 lm - pack. 10 Pcs - 25 lm

Article	H mm		
PFXOT 08...	8		
PFXOT 10...	10		
PFXOT 125...	12,5		
PFXOT 15...	15		
PFXOT 20...	20		
PFXOT 30...	30		

Insert available in the colours: G - N (Beige and ivory available on demand with a minimum quantity order of 200 pcs). The code of the selected finish must be added to the article code. E.g.: PFXOT 08... (chosen insert colour grey) PFXOT 08G.

COLOURS




VINYL RESIN/RUBBER INSERT

bar length 2,5 lm - pack. 40 Pcs - 100 lm


Article	L x H mm		
IGCN (black)	14 X 6		
IGCG (gray)	14 X 6		
IGCB (beige)	14 X 6		
IGCA (ivory)	14 X 6		

ON DEMAND MINIMUM QUANTITY 200 pcs for colour and height



(Price to be agreed. Production delay 4/5 weeks)

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

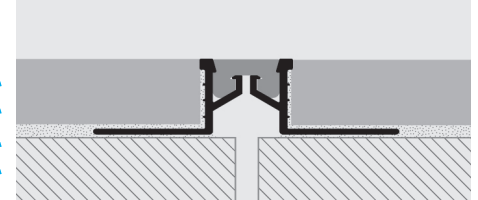

1. Choose the PROFLEX OT with the same height as the thickness of the floor (tile) also choosing the colour of the insert. 2. Using a notched spreader apply the adhesive in the point where the joint will be laid. 3. Lay the PROFLEX OT with the punched flanges in the adhesive (we recommend the expansion joint being laid in line with the joint in the screed/floor rough). 4. Lay the tiles, aligning them with and adjoining the upper edge of the profile (the joint must always be 0.5-1mm lower than the tile, never above). Always place the uncut side of the tile against the profile. 5. Use sealant to fill any spaces between the tile and the PROFLEX OT joint.

PROFLEX AL is an expansion joint in natural aluminium with the PVC/rubber insert. It is available in black, grey, beige or ivory and serves to fabricate expansion joints for ceramic tile, marble or granite floors and any floor laid with glue/adhesive between 8 and 20 mm thick. The special structure of the joint is designed to protect the corners of the tiles and its high strength withstands frequent pedestrian and vehicular (lift trucks, pallet trucks, cars) traffic. The joint must be placed level with or 0.5-1 mm below the floor level, never above. Lay the joints according with the standards in force. **HIGH RESISTANCE TO HEAVY LOADS AND TO FREQUENT PALLET TRUCK AND LIFT TRUCK TRAFFIC.**

PROFLEX AL

NATURAL ALUMINIUM
+ VINYL RESIN / RUBBER INSERT




NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT
bar length 2,5 lm - pack. 20 Pcs - 50 lm

Article	H mm		
PFXAL 08...	8		
PFXAL 10...	10		
PFXAL 125...	12,5		
PFXAL 15...	15		
PFXAL 20...	20		

Insert available in the colours: G - N (Beige and ivory available on demand with a minimum quantity order of 200 pcs). The code of the selected finish must be added to the article code. E.g.: PFXAL 08... (chosen insert colour grey) PFXAL 08G.

COLOURS




VINYL RESIN/RUBBER INSERT

bar length 2,5 lm - pack. 40 Pcs - 100 lm


Article	L x H mm		
IGCN (black)	14 X 6		
IGCG (gray)	14 X 6		
IGCB (beige)	14 X 6		
IGCA (ivory)	14 X 6		

ON DEMAND MINIMUM QUANTITY 200 pcs for colour and height



(Price to be agreed. Production delay 4/5 weeks)

PFXAL/OT 08

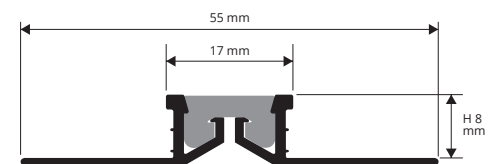

PFXAL/OT 10



PFXAL/OT 125



PFXAL/OT 15



PFXAL/OT 20



LAYING INSTRUCTIONS


1. Choose "PROFLEX AL" according to the tile thickness and desired colour. 2. Cut "PROFLEX AL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Place the joint exactly over the screed joint and press the anchoring flange into the adhesive. 4. Lay the tiles aligning them with the profile leaving a 2 mm joint. After laying the joint should be 0,5 mm below the floor covering surface. Remove immediately all the remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

* = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed

PROFLEX ACN

STAINLESS STEEL AISI 304/1.4301-V2A

PROFLEX ACN is a movement joint suitable for vehicular traffic composed by two interlocked sliding stainless steel profiles. The two stainless steel profiles have punched flanges which guarantee a perfect fixing to the support and a correct movement. **PROFLEX ACN** stainless steel is suitable for all areas with heavy chemical and mechanical stress. Lay the joints according to UNI 11493-1.

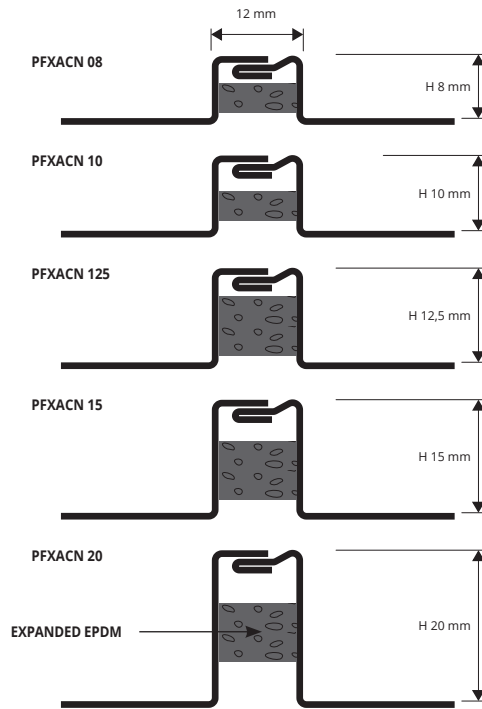

AVAILABLE
H 11mm - PFXACN 11, H 25mm - PFXACN 25, H 30mm - PFXACN 30




POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
bar length 2,5 lm - pack. 20 Pcs - 50 lm

Article	H mm		
PFXACN 08	8		
PFXACN 10	10		
PFXACN 11	11		
PFXACN 125	12,5		
PFXACN 15	15		
PFXACN 20	20		
PFXACN 25	25		
PFXACN 30	30		

COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

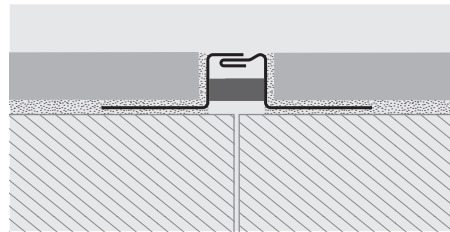


1. Choose the PROFLEX ACN with the same height as the thickness of the floor (tile). 2. Using a notched spreader apply the adhesive in the point where the joint will be laid. 3. Lay the PROFLEX ACN with the punched flanges in the adhesive (we recommend the expansion joint being laid in line with the joint in the screed/floor rough). 4. Lay the tiles, aligning them with and adjoining the upper edge of the profile (the joint must always be 0.5-1mm lower than the tile, never above). Always place the uncut side of the tile against the profile. 5. Use sealant to fill any spaces between the tile and the PROFLEX ACN joint.

PROFLEX ALN

NATURAL ALUMINIUM

PROFLEX ALN is a new, natural aluminium expansion joint consisting of two interlocked sliding profiles designed for glued floors. **PROFLEX ALN** provides elastic expansion joints for various kinds of flooring, such as ceramic, marble, granite, Kerilite or any other flooring material laid with glue/adhesive and having a thickness of 8 to 20 mm. The joint is specially designed to protect the edges of the tiles, and its exceptional strength makes it capable of supporting frequent traffic, both pedestrian and vehicular (forklifts, pallet trucks, automobiles). The joint must be installed at the same level of the floor or 0.5-1 mm lower (never above). Lay the joints according with the standards in force. HIGH RESISTANCE TO LOADS AND TO FREQUENT TRAFFIC OF PALLET TRUCKS AND FORKLIFTS.

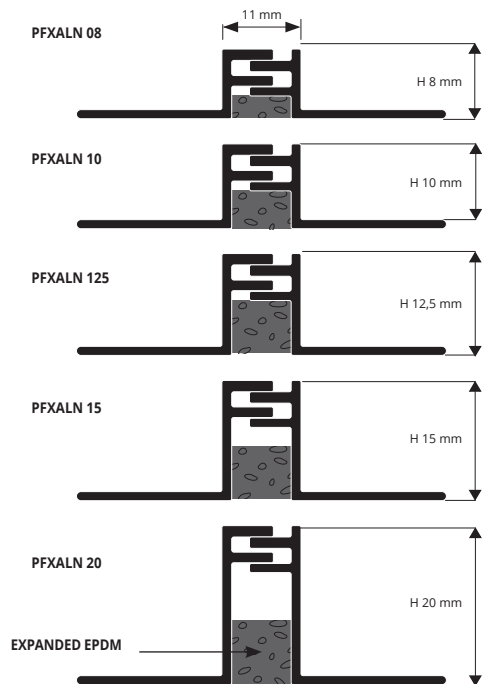


NATURAL ALUMINIUM
bar length 2,5 lm - pack. 20 Pcs - 50 lm

Article	H mm		
PFXALN 08	8		*
PFXALN 10	10		
PFXALN 125	12,5		
PFXALN 15	15		
PFXALN 20	20		

COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

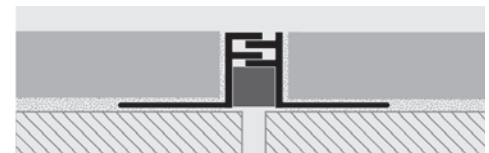

1. Choose the PROFLEX ALN with the same height as the thickness of the floor (tile). 2. Using a notched spreader apply the adhesive in the point where the joint will be laid. 3. Lay the PROFLEX ALN with the punched flanges in the adhesive (we recommend the expansion joint being laid in line with the joint in the screed/floor rough). 4. Lay the tiles, aligning them with and adjoining the upper edge of the profile (the joint must always be 0.5-1mm lower than the tile, never above). Always place the uncut side of the tile against the profile. 5. Use sealant to fill any spaces between the tile and the PROFLEX ALN joint.

© 2020 All rights reserved by Progress Profiles. Printed in Italy

PRODILAT is an expansion joint in stainless steel inox AISI 304 / 1.4301 - V2A composed of two counterposed profiles in "L" shape, joined with a vulcanized EPDM which can be polished, available in black and grey colour. The counterposed profile in "L" shape have perforated wings for a perfect bond to the substrate and a correct movement of the joint. The expanding EPDM has a high resistance to mechanical & chemical stress, UV rays, to fungi and bacteria. **PRODILAT** in stainless steel is suitable to be used in all environments with high mechanical and chemical stress. Lay the joints according to UNI 11493-1 regulation.

PRODILAT

STAINLESS STEEL AISI 304/1.4301-V2A
WITH SANDABLE VULCANIZED EPDM




STAINLESS STEEL AISI 304/1.4301-V2A WITH SANDABLE VULCANIZED EPDM - bar length 2,7 lm - pack. 20 Pcs - 54 lm (GCAC 20 - 27 lm)

Article	H mm
GCAC 08... (8x10)	8
GCAC 10... (10x10)	10
GCAC 125... (12,5x10)	12,5
GCAC 15... (15x10)	15
GCAC 20... (20x10)	20

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

Insert available in the colours: N - G.
The code of the selected finish must be added to the article code.
E.g.: GCAC 08... (chosen insert colour grey) GCAC 08G.
H 25 / H 30 on demand.


COLOURS




COLOURS (EPDM)



Possible specks on the surface of the vulcanised rubber are due to the nature of the product itself, they disappear once the laid profile is polished or cleaned. Claims due to these specks will not be taken into consideration.

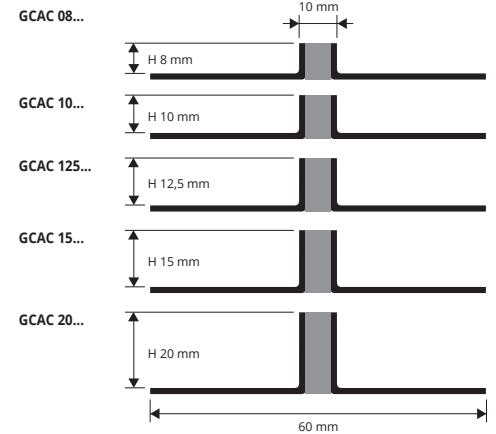

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




1. Choose the PRODILAT with the same height as the thickness of the floor (tile) also choosing the colour of the insert.
2. Using a notched spreader apply the adhesive in the point where the joint will be laid.
3. Lay the PRODILAT with the punched flanges in the adhesive (we recommend the expansion joint being laid in line with the joint in the screed/floor rough).
4. Lay the tiles, aligning them with and adjoining the upper edge of the profile (the joint must always be 0.5-1mm lower than the tile, never above). Always place the uncut side of the tile against the profile.
5. Use sealant to fill any spaces between the tile and the PRODILAT.

PRODILAT is an expansion joint in natural aluminium composed of two counterposed profiles in "L" shape, joined with a vulcanized EPDM which can be polished, available in black and grey colour. The counterposed profile in "L" shape have perforated wings for a perfect bond to the substrate and a correct movement of the joint. The expanding EPDM has a high resistance to mechanical & chemical stress, UV rays, to fungi and bacteria. **PRODILAT** in aluminium is suitable to be used in all environments with high mechanical and chemical stress. Lay the joints according to UNI 11493-1 regulation.

PRODILAT

ALUMINIUM WITH
SANDABLE VULCANIZED EPDM

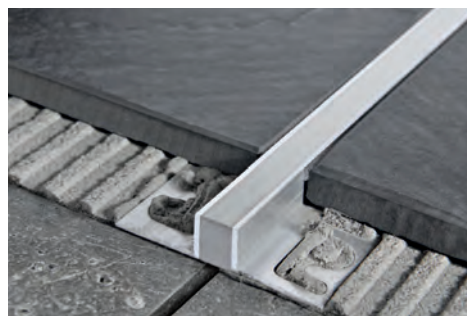

ALUMINIUM WITH SANDABLE VULCANIZED EPDM
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
GCAN 08... (8x10)	8
GCAN 10... (10x10)	10
GCAN 125... (12,5x10)	12,5
GCAN 15... (15x10)	15
GCAN 20... (20x10)	20

COLOURS




COLOURS (EPDM)




Insert available in the colours: N - G.
The code of the selected finish must be added to the article code.
E.g.: GCAN 08... (chosen insert colour grey) GCAN 08G.
H 25 / H 30 on demand.

EXAMPLES OF LAYING

1. Choose "PRODILAT" according to the desired finish, tile thickness and desired colour.
2. Cut "PRODILAT" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Place the joint exactly over the screed joint and press the anchoring flange into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm. joint. After laying the joint should be 0,5 mm below the floor covering surface. Remove immediately all the remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

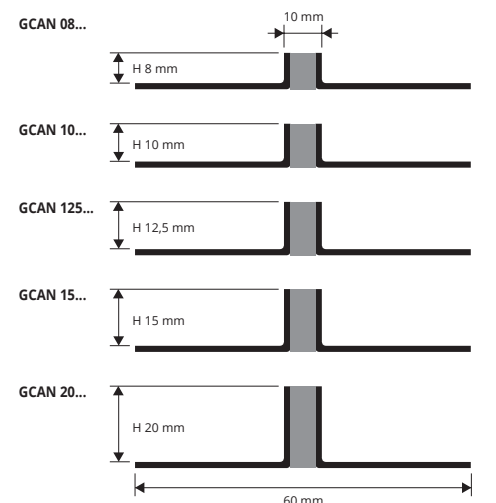

LAYING INSTRUCTIONS

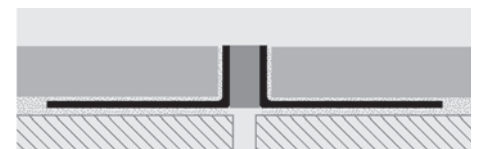


Possible specks on the surface of the vulcanised rubber are due to the nature of the product itself, they disappear once the laid profile is polished or cleaned. Claims due to these specks will not be taken into consideration.

PROFLEX

NON-TOXIC IMPACT-RESISTANT
CO-EXTRUDED VINYL RESIN (PVC)

PROFLEX is an expansion joint in PVC with PVC/rubber insert. Available in 3 standard colours, **PROFLEX** serves to fabricate expansion joints for ceramic tile, marble or granite floors and any floor laid with glue/adhesive between 8 and 20 mm thick. The special structure of the joint is designed to protect the corners of the tiles and its high strength withstands frequent pedestrian and vehicular (lift trucks - pallet trucks - cars) traffic. The joint must be placed level with or 0.5-1 mm below the floor level, never above. Lay the joints according with the standards in force.

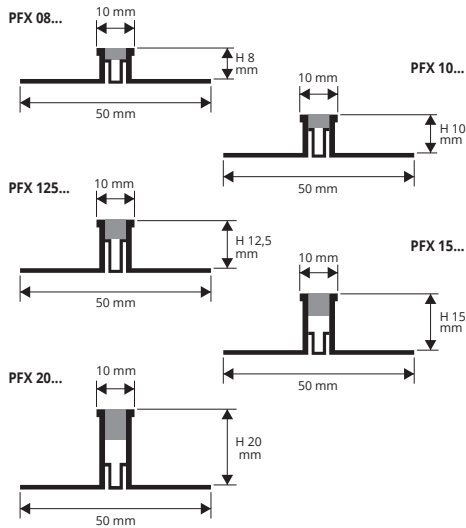

NON - TOXIC CO-EXTRUDED VINYL RESIN - bar length 2,5 lm
pack. 40 Pcs - 100 lm (PFX 15 and PFX 20 - pack. 20 Pcs)

Article	H mm
PFX 08...	8
PFX 10...	10
PFX 125...	12,5
PFX 15...	15
PFX 20...	20

Available in the colours: GS-GT-GL (Beige and ivory available on demand). The code of the selected finish must be added to the article code. E.g.: PFX 08... (chosen colour dark grey) PFX 08GS.

COLOURS

GS - Dark grey for rigid and flexible part	GT - Dark grey for rigid part / Transparent for flexible part	GL - Light grey for rigid and flexible part
---	--	--


ON DEMAND MINIMUM QUANTITY 200 pcs

B - Beige (E84)	A - Ivory (E81)
------------------------	------------------------

(Price to be agreed. Production delay 4/5 weeks)

1. Choose the PROFLEX with suitable height for the thickness of the floor.
2. Apply the adhesive onto the area of application of the profile.
3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive.
4. Lay the tiles, aligning them so that the top edge of the profile is flush with the tile.
5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

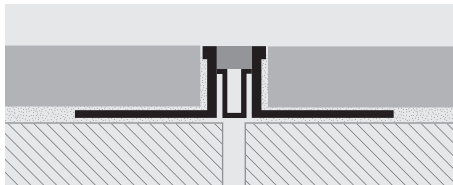

PROFLEX 5

NON-TOXIC IMPACT-RESISTANT
CO-EXTRUDED VINYL RESIN (PVC)

PROFLEX 5 is a range of technical expansion joint profiles for floors laid with glue/adhesive. They are made in non-toxic, impact-resistant, co-extruded PVC with perforated horizontal lateral flanges in rigid PVC while the elastic central part is made in flexible vinyl resin 5 mm in width. They are able to absorb moderate tensile and compressive stress, while being resistant to most chemical agents, to wear and to UV rays. They may be used indoors and outdoors. Thanks to the limited widths, **PROFLEX 5** may be considered a "gap cover" because it blends in with the gaps between tiles. The joint profile must never be placed over a tiled floor and should preferably always be 0.5-1 mm lower. Lay the joints according with the standards in force.

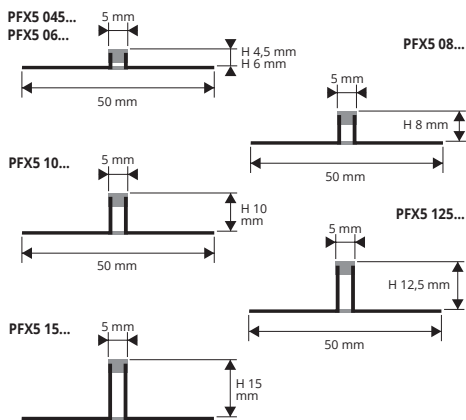

NON - TOXIC CO-EXTRUDED VINYL RESIN - bar length 2,5 lm
pack. 40 Pcs - 100 lm (PFX5 15 - pack. 20 Pcs - 50 lm)

Article	H mm
PFX5 045...	4,5
PFX5 06...	6
PFX5 08...	8
PFX5 10...	10
PFX5 125...	12,5
PFX5 15...	15

Available in the colours: GS-GL (Beige and ivory available on demand with a minimum quantity order of 200 pcs). The code of the selected finish must be added to the article code. E.g.: PFX5 08... (chosen colour dark grey) PFX5 08GS.

COLOURS

GS - Dark grey for rigid and flexible part	GL - Light grey for rigid and flexible part
---	--

ON DEMAND MINIMUM QUANTITY 200 pcs for colour and height

B - Beige (E84)	A - Ivory (E81)
------------------------	------------------------

(Price to be agreed. Production delay 4/5 weeks)

1. Choose the PROFLEX 5 with suitable height for the thickness of the floor.
2. Apply the adhesive onto the area of application of the profile.
3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive.
4. Lay the tiles, aligning them so that the top edge of the profile is flush with the tile.
5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




PROFLEX 5 PR is a perimeter joint made of coextruded vinyl resin that can be used to connect the floor to the wall lining or the wall lining to doors and windows and/or to any other kind of lining. The 5 mm elastic part (exposed) allows the floor/lining to expand as necessary. **PROFLEX 5 PR** prevents and dampens the propagation of sound waves and the forming of sound bridges. Available in dark grey, light grey, Beige and ivory, in various heights H 4,5-6-8-10-12,5 mm. Lay the joints according with the standards in force.

PROFLEX 5 PR


NON-TOXIC IMPACT-RESISTANT CO-EXTRUDED VINYL RESIN (PVC)



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

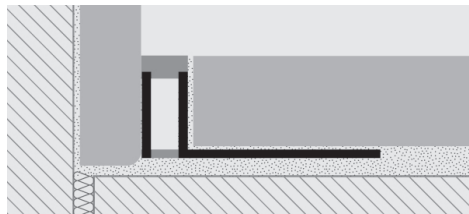

1. Choose the PROFLEX PR with suitable height for the thickness of the floor.
2. Apply the adhesive onto the area of application of the profile.
3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive.
4. Lay the tiles, aligning them so that the top edge of the profile is flush with the tile.
5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.

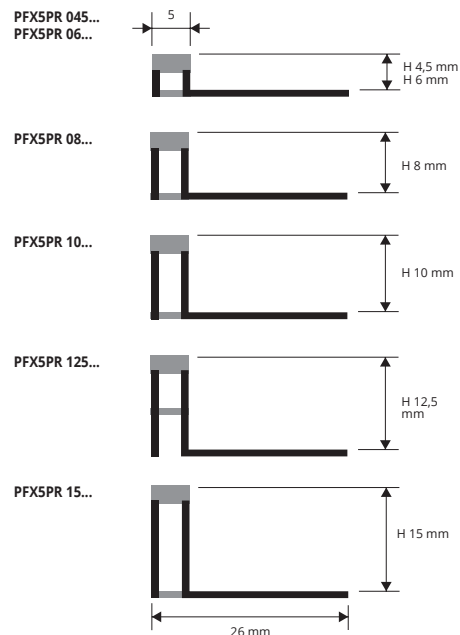

soundproof perimeter joints

VINYL RESIN - bar length 2,5 lm - pack. 40 Pcs - 100 lm



Article	H mm		
PFX5PR 045...	4,5		*
PFX5PR 06...	6		*
PFX5PR 08...	8		
PFX5PR 10...	10		
PFX5PR 125...	12,5		
PFX5PR 15...	15		

Available in the colours: GS-GL (Beige and ivory available on demand with a minimum quantity order of 200 pcs). The code of the selected finish must be added to the article code. E.g.: PFX5PR 045... (chosen insert colour dark grey) PFX5PR 045GS.

COLOURS

	
GS - Dark grey for rigid and flexible part	GL - Light grey for rigid and flexible part

ON DEMAND MINIMUM QUANTITY 200 pcs for colour and height

	
B - Beige (E84)	A - Ivory (E81)

(Price to be agreed. Production delay 4/5 weeks)


© 2020 All rights reserved by Progress Profiles. Printed in Italy



* = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed

ADHESIVE-LAID JOINTS

CO-EXTRUDED VINYL RESIN

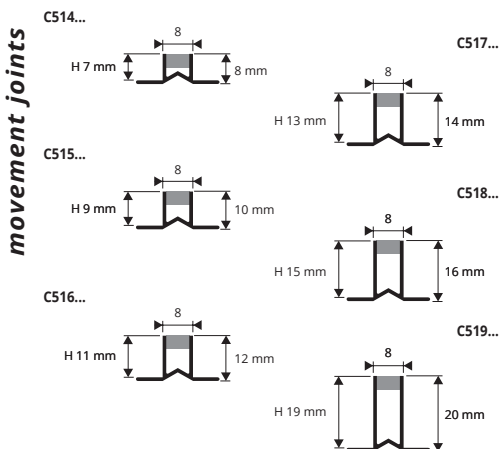

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the joint in accordance with the colour and thickness of the floor, calculating 0.5-1 mm less for laying the joint, which under no circumstances must protrude.
2. Place the joint over the cut/joint in the screed; if there is none, make a cut of 2/3 the thickness of the screed.
3. Apply the adhesive and lay the joint, pressing it into the glue.
4. Lay the tiles, aligning them with the rigid vertical part of the joint.
5. Using the special glue, fill the gap between the tiles and the profile.

ADHESIVE-LAID MOVEMENT JOINTS are a range of joints in co-extruded vinyl resin with the flanges and vertical supports made in rigid synthetic vinyl resin and the elastic central part in flexible synthetic vinyl resin. The glue-laid joints must be placed at least 0.5-1 mm below the level of the flooring (usually tiles) and never above. Suitable for pedestrian traffic, they absorb compressive and slip stress. Laying modules between 16 and 30 m³ inclusive are recommended and the joint laid in line with the joints in the underlying screed. Available in various colours and heights. Lay the joints according with the standards in force.



CO-EXTRUDED VINYL RESIN

bar length 2,5 lm - pack. 40 Pcs - 100 lm

Article	H mm
C514... (8x8)	7
C515... (10x8)	9
C516... (12x8)	11
C517... (14x8)	13
C518... (16x8)	15
C519... (20x8)	19


ARTICLES NOT FOR SALE SINGLY

Available combinations: GS-GT-GL (RT-MT-BIBI-B-A and N available on demand with a minimum quantity order of 400 pcs).

The code of the selected colour must be added to the article code.

E.g.: C514... (combination chosen colour Dark Grey / Transparent)

C514 GT



On demand (at same price) also available **WITHOUT FLAP** with a minimum order of 200 pcs.
N.B.: specify "WITHOUT FLAP" in order.



COLOURS

GS - Dark grey for rigid and flexible part	GT - Dark grey for rigid part / Transparent for flexible part	GL - Light grey for rigid and flexible part
--	---	---


ON DEMAND - MINIMUM QUANTITY 400 PCS for colour and height

RT - Red for rigid part / Transparent for flexible part	MT - Brown for rigid part / Transparent for flexible part	BIBI - White for rigid and flexible part
B - Beige (E84)	A - Ivory (E81)	N - Black for rigid and flexible part


(Price to be agreed. Production delay 4/5 weeks)

MORTAR-LAID JOINTS

POLISHED BRASS - STAINLESS STEEL AISI304/1.4301-V2A
NATURAL ALUMINIUM WITH SANDABLE VULCANIZED EPDM

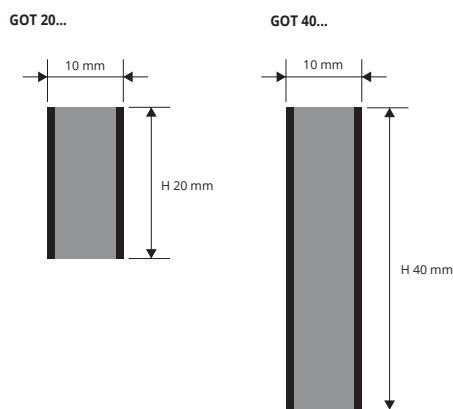

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

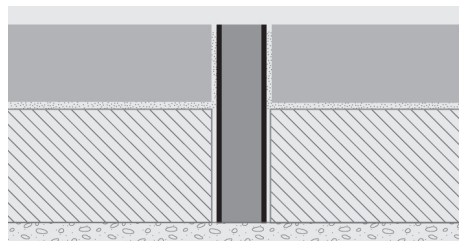

1. Choose the colour and the necessary height of the joint, calculating the thickness of the finished floor and the thickness of the screed.
2. Insert the joint into the screed letting it protrude slightly.
3. Proceed with laying the floor, aligning it with the rigid vertical part of the joint.
4. Complete laying by levelling the joint with the floor.
5. Using the mortar, grout the gap between the tiles and the profile.



POLISHED BRASS WITH SANDABLE VULCANIZED EPDM

bar length 2 lm - pack. 25 Pcs - 50 lm (GOT 40... - 20 lm)

Article	L x H mm
GOT 20...	10 X 20
GOT 40...	10 X 40

On demand. Production delay 4/5 weeks

COLOURS

OL - Polished Brass	AC - Polished Stainless Steel AISI 304/1.4301-V2A	AN - Natural aluminium
---------------------	---	------------------------

COLOURS (EPDM)

N - Black	G - Grey
-----------	----------



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

WITH SANDABLE VULCANIZED EPDM

bar length 2 lm - pack. 25 Pcs - 50 lm (GAC 40... - 20 lm)

Article	L x H mm
GAC 20...	10 X 20
GAC 40...	10 X 40

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

NATURAL ALUMINIUM WITH SANDABLE VULCANIZED EPDM

bar length 2 lm - pack. 25 Pcs - 50 lm (GAL 40... - 40 lm)

Article	L x H mm
GAL 20...	10 X 20
GAL 40...	10 X 40

Insert available in the colours: G - N.

The code of the selected finish must be added to the article code.

E.g.: GAC 20... (chosen insert colour grey) GAC 20G.

MORTAR-LAID MOVEMENT JOINTS are a range of joints in co-extruded vinyl resin with the flanges and vertical supports made in rigid synthetic vinyl resin and the elastic central part in flexible synthetic vinyl resin. The mortar-laid joints must be placed at least 0.5-1mm below the level of the ceramic tile-marble-granite floor and never above. Suitable for pedestrian traffic, they absorb compressive and slip stress. Laying modules between 16 and 30 m² inclusive are recommended and the joint laid in line with the joints in the underlying screed. Available in various colours and heights. Lay the joints according with the standards in force.

MORTAR-LAID JOINTS

CO-EXTRUDED VINYL RESIN




CO-EXTRUDED VINYL RESIN

bar length 2,5 lm - pack. 40 Pcs - 100 lm (C513 - pack. 50 lm)

Article	L x H mm
C511...	8 X 25
C512...	8 X 35
C513...	8 X 45

ARTICLES NOT FOR SALE SINGLY

Available combinations: GS-GT-GL (RT-MT-BIBI-B-A and N available on demand with a minimum quantity order of 400 pcs). The code of the selected colour must be added to the article code. E.g.: C511... (combination chosen colour dark grey/transparent) C511 GT.

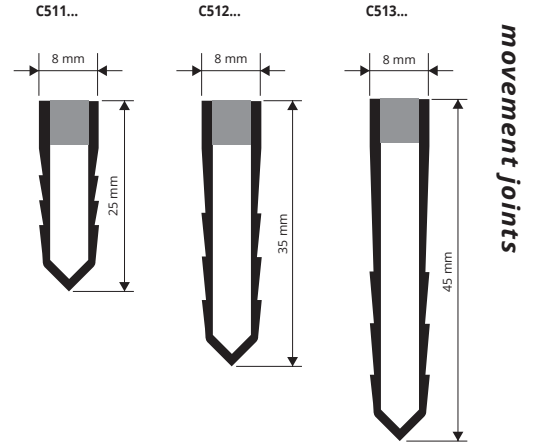

movement joints

COLOURS



GS - Dark grey for rigid and flexible part	GT - Dark grey for rigid part / Transparent for flexible part	GL - Light grey for rigid and flexible part

ON DEMAND MINIMUM QUANTITY 400 PCS for colour and height.

RT - Red for rigid part / Transparent for flexible part	MT - Brown for rigid part / Transparent for flexible part	BIBI - White for rigid and flexible part
B - Beige (E84)	A - Ivory (E81)	N - Black for rigid and flexible part

(Price to be agreed. Production delay 4/5 weeks)

EXAMPLES OF LAYING

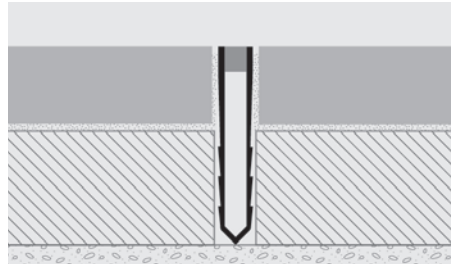

1. Choose the colour and the necessary height of the joint, calculating the thickness of the finished floor and the thickness of the screed. 2. Insert the joint into the screed letting it protrude slightly (stage 1-2-3). 3. Proceed with laying the floor, aligning it with the rigid vertical part of the joint. 4. Complete laying by levelling the joint with the floor. 5. Using the mortar, grout the gap between the tiles and the profile.

This **DOUBLE SILICONE JOINT** is a co-extruded profile in hard and soft PVC. The double internal silicone provides a high degree of resistance to any type of compressive stress, heavy loads and foot traffic. The extension is designed to lengthen the joint, extending it to the total depth of auxiliary or insulation castings as required. Lay the joints according with the standards in force.

MORTAR-LAID DOUBLE JOINT

VINYL RESIN CO-EXTRUSION (PVC)



CO-EXTRUDED VINYL RESIN (PVC) WITH DOUBLE SILICONE

bar length 2,5 lm - pack. 40 Pcs - 100 lm (GDSP 43 - CONF. 50 lm)

Article	L x H mm
GDSP 43...	10 X 43
GDS 23...	10 X 25
GP 20...	8 X 20


ARTICLES NOT FOR SALE SINGLY

Available combinations: GS - GT - GL. The code of the selected colour must be added to the article code. E.g.: GDSP 43... (combination chosen colour dark grey/transparent) GDSP 43GT.


COLOURS

GS - Dark grey for rigid and flexible part	GT - Dark grey for rigid part / Transparent for flexible part	GL - Light grey for rigid and flexible part

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

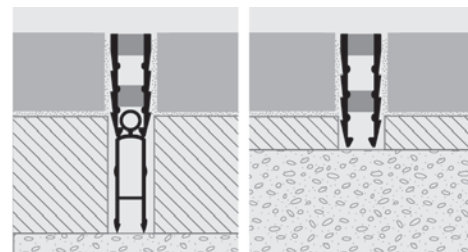

GDSP 43...

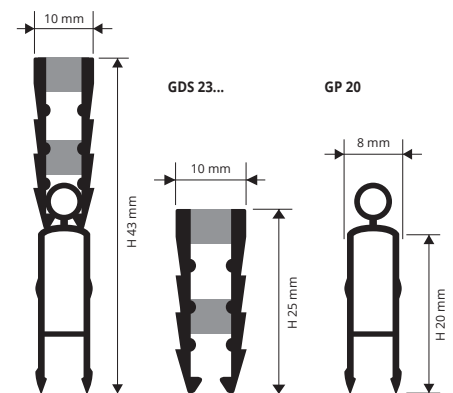


movement joints

1. Choose the colour and the necessary height of the joint, calculating the thickness of the finished floor and the thickness of the screed. 2. Insert the joint into the screed letting it protrude slightly. 3. Proceed with laying the floor, aligning it with the rigid vertical part of the joint. 4. Complete laying by levelling the joint with the floor. 5. Using the mortar, grout the gap between the tiles and the profile.

MORTAR LAYING FULL JOINT

CO-EXTRUDED VINYL RESIN (PVC)
WITH FULL SILICONE

FULL SILICONE JOINT is a co-extruded profile in hard and soft PVC. The double internal silicone provides a high degree of resistance to any type of compressive stress, heavy loads and foot traffic. The extension is designed to lengthen the joint, extending it to the total depth of auxiliary or insulation castings as required. Lay the joints according with the standards in force.

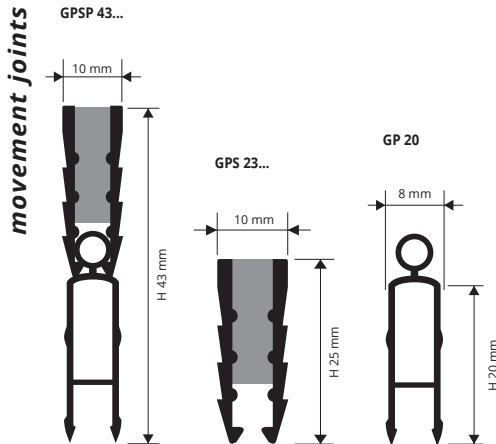


CO-EXTRUDED VINYL RESIN (PVC) WITH FULL SILICONE
bar length 2,5 lm - pack. 40 Pcs - 100 lm

Article	L x H mm		
GPSP 43...	10 x 43		*
GPS 23...	10 x 25		
GP 20	8 x 20		

COLOURS

GS	GT	GL
Dark grey for rigid and flexible part	Dark grey for rigid part / Transparent for flexible part	Light grey for rigid and flexible part

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

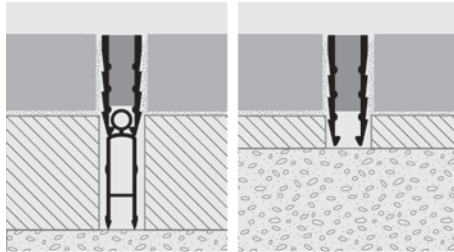

ARTICLES NOT FOR SALE SINGLY


The code of the selected colour must be added to the article code.
E.g.: GPSP 43... (combination chosen colour dark grey/transparent)
GPSP 43GT.

1. Choose the colour and the necessary height of the joint, calculating the thickness of the finished floor and the thickness of the screed.
2. Insert the joint into the screed letting it protrude slightly.
3. Proceed with laying the floor, aligning it with the rigid vertical part of the joint.
4. Complete laying by levelling the joint with the floor.
5. Using the mortar, grout the gap between the tiles and the profile.

PROFLEX 25

NON-TOXIC IMPACT-RESISTANT
CO-EXTRUDED VINYL RESIN

PROFLEX 25 H 25 mm is a new expansion joint made of coextruded vinyl resin available in two standard colours - dark grey (GS) and light grey (GL). **PROFLEX 25 H 25 mm** provides elastic expansion joints for various kinds of flooring, such as marble or granite, and especially floors made with Sasso Italia. The new decorative indoor and outdoor flooring also known as SASSO ITALIA is approx. 25 mm thick and laid over a 10-20 mm base of cement/concrete. This kind of floor needs an expansion/control joint every 16-30 m³ of material to avoid cracking caused by the floor's expansion. PROFLEX H 25 mm lets you place a GP 20 EXTENSION JOINT at the bottom in order to apply/lay the joint inside the concrete base. It can withstand the frequent passage of pedestrians and vehicles (forklifts, pallet trucks, automobiles). The joint must be installed at the same level of the floor or 0.5-1 mm lower (never above). Lay the joints according with the standards in force. HIGH RESISTANCE TO LOADS AND TO FREQUENT TRAFFIC OF PALLET TRUCKS AND FORKLIFTS.

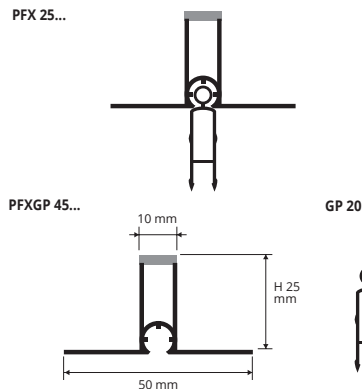


CO-EXTRUDED VINYL RESIN
bar length 2,5 lm - pack. 20 Pcs - 50 lm

Article	H mm		
PFXGP 45... (Assembled item)	45		*
PFX 25...	25		
GP 20	20		

COLOURS

GS	GL
Dark grey for rigid and flexible part	Light grey for rigid and flexible part

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

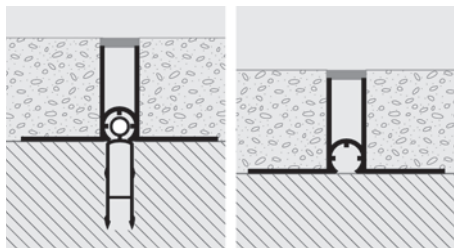

1. Choose the colour of the joint. **1a:** For the version with the extension, insert it onto the fresh cement base leaving the cylindrical part out, for subsequent fitting with PROFLEX 25. **2.** Place and fix with screws/nails to the cement floor and snap the PROFLEX 25 into protruding extension. **3.** Begin laying the floor from the inside, near the joint aligning it with the edges. **4.** Finish laying the floor by levelling the joint with the floor. **5.** Plaster the gap between floor and joint with specific mortar.

The code of the selected colour must be added to the article code.
E.g.: PFX 25 ... (chosen colour dark grey) PFX 25GS.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROEXPAN 115-130-190-210 is a range of structural expansion joints in natural aluminium with knurled flat surface and a black or grey synthetic rubber insert.

Made to withstand vertical, horizontal and transversal structural movements due to compressive and tensile stress in large buildings or complexes. The joint is laid on existing surfaces, also vertically, over the void between the two semi-detached surfaces of the same building or between two bays. It withstands frequent pedestrian traffic and also vehicles with rubber tyres that can load to 700 kgs. (PENF 190-210)

PROEXPAN 115-130-190-210

NATURAL ALUMINIUM
+ VINYL RESIN / RUBBER INSERT




NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	LxHxLa mm
PENF 115...	21 x 12 x 115
PENF 130...	38 x 12 x 128

NATURAL ALUMINIUM + NEOPRENE INSERT
bar length 3 lm - pack. 10 Pcs - 30 lm

Article	LxHxLa mm
PENF 190N (black)	65 x 19 x 185
PENF 210... (black or gray)	90 x 19 x 210

Movement mm: -10/+16 (PENF 190N) -15/+10 (PENF 210...).
Available in the colours: G - N (PENF 190N excluded).
The code of the selected finish must be added to the article code.
E.g.: PENF 130... (chosen insert colour grey) PENF 130G.

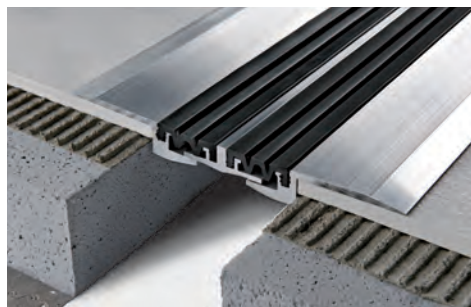

INTERCHANGEABLE INSERT IN VINYL RESIN/RUBBER INSERT
BLACK OR GREY - bar length 2,7 lm - pack. 10 Pcs - 27 lm


Article	L mm
IPEN 20...	20
IPEN 40...	35

INTERCHANGEABLE NEOPRENE INSERT BLACK OR GREY
bar length 4 lm - pack. 10 Pcs - 40 lm


Article	L mm
IPEN 65N (black)	65
IPEN 452... (black or gray)	45 x 2 Pcs

Insert available in the colours: G - N (IPEN 65N excluded).
The code of the selected finish must be added to the article code.
E.g.: IPEN 20... (chosen insert colour grey) IPEN 20G.


PENF 115...

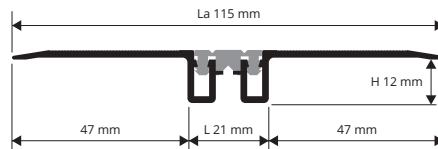

PENF 130...

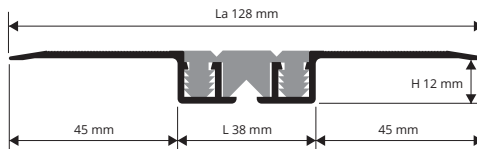


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

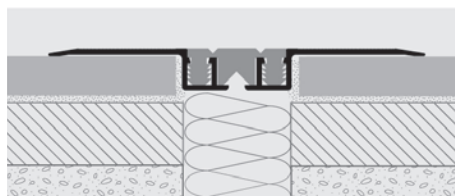


Fix the side wings/flanges in aluminium with:
1. Screws and screw anchors at 20 cm intervals along both sides of the whole joint
2. Two-pack epoxy adhesive or with strong fast-setting silicone.

Due to the nature of the product itself, natural aluminium, and its specific use on the floor as technical joint with no decorative role, light scratches on its surface will not be accepted for claims.


INSERT COLOURS



ON DEMAND - MINIMUM QUANTITY 100 lm
ONLY FOR: PENF 115, PENF 130



(Price to be agreed. Production delay 4/5 weeks)

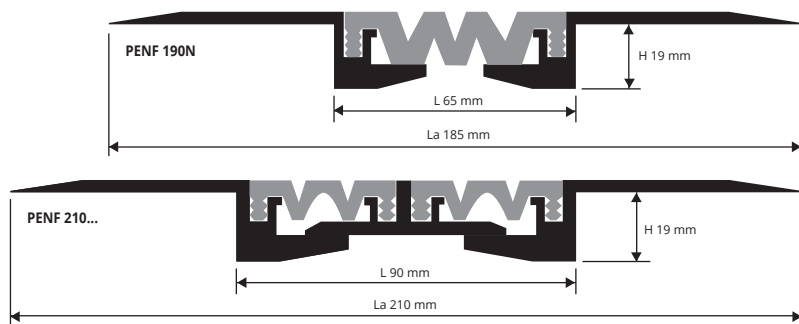

ANGLES BAR / WALL

NATURAL ALUMINIUM + NEOPRENE INSERT

ANGLE BAR NATURAL ALUMINIUM + NEOPRENE INSERT
bar length 3 lm - pack. 10 Pcs - 30 lm

Article	LxHxLa mm
PENFP 190N (black)	65 x 19 x 125
PENFP 210... (black or gray)	90 x 19 x 150


INTERCHANGEABLE BLACK OR GREY VINYL RESIN/RUBBER INSERT
bar length 3 lm - pack. 10 Pcs - 30 lm

Article	L mm
IPEN 65N (black)	65
IPEN 452... (black or gray)	45 x 2 Pcs

Available in the colours: G - N.
The code of the selected finish must be added to the article code.
E.g.: PENFP 210... (chosen insert colour grey) PENFP 210G.

PRODUCT SUPPLIED NOT ASSEMBLED

Due to the nature of the product itself, natural aluminium, and its specific use on the floor as technical joint with no decorative role, light scratches on its surface will not be accepted for claims.

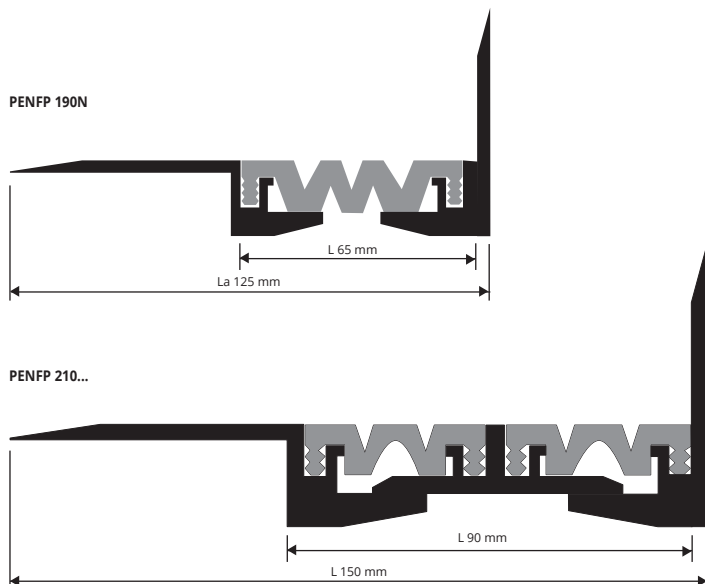


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


PROEXPAN H20 PROEXPAN H40

NATURAL ALUMINIUM
+ VINYL RESIN / RUBBER INSERT

PROEXPAN H20 - H40 is a range of professional structural joints for floors laid on mortar bed (PEN H20) and (PEN H 40). They are made with a punched aluminium base and a vinyl rubber insert available in black or grey. **PROEXPAN H20 - H40** profiles for laying with mortar must have the flanges fixed to the substrate by screws and screw anchors (approx. every 30 cm).

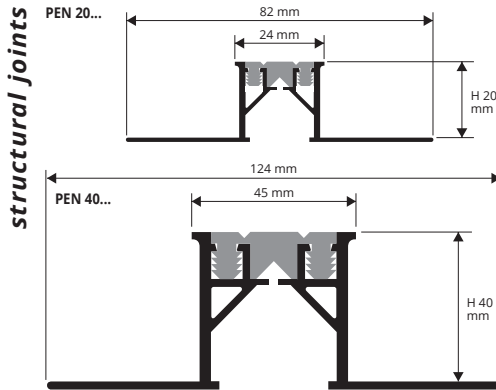

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

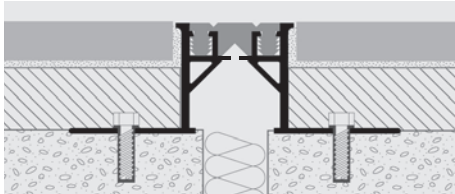


1. Choose the expansion joint with suitable height for the thickness of the floor and the screed/floor rough and choose the colour of the insert. 2. Fix the punched flanges to the substrate using screws and screw anchors, calculating the fixing points at 30cm intervals on both sides. 3. Make the screed over the punched flanges of the structural or expansion joint, calculating the thickness of the final floor, and then lay the floor as normal.



INSERT COLOURS



ON DEMAND - MINIMUM QUANTITY 100 PCS
(Price to be agreed. Production delay 4/5 weeks)



NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT
bar length 2,7 lm - pack. 5 Pcs - 13,5 lm

Article	HxL mm
PEN 20...	20 x 24
PEN 40...	40 x 45

NATURAL ALUMINIUM ANGLE BAR / WALL + VINYL RESIN / RUBBER INSERT - bar length 3 lm - pack. 5 Pcs - 15 lm



Article	HxL mm
PENP 20...	20 x 24
PENP 40...	40 x 45

Available in the colours: G - N (Beige and Ivory available on demand with a minimum quantity order of 300 lm).
The code of the selected finish must be added to the article code.
E.g.: PEN 20... (chosen insert colour grey) PEN 20G.

GDA 25 GDA 35


NATURAL ALUMINIUM
+ NEOPRENE INSERT

GDA 25 - GDA 35 is a range of professional structural joints for floors laid on mortar bed. They are made with a punched aluminium base and a vinyl rubber insert available in black or grey. It withstands traffic of vehicles with tyreload to 700 kgs and also trucks with maximum tyreload to 1000 kgs.

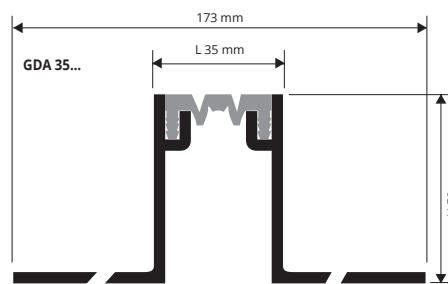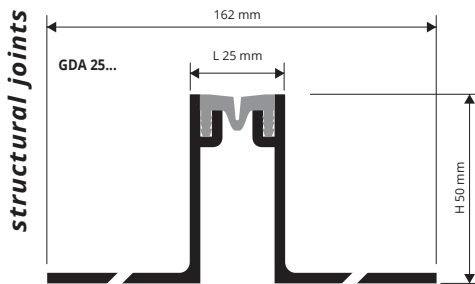


1. Choose the colour of the joint. 2. Fix the punched flanges to the substrate using screws and screw anchors, calculating the fixing points at 30cm intervals on both sides. 3. Make the screed over the punched flanges of the structural or expansion joint, calculating the thickness of the final floor, and then lay the floor as normal. 4. Using the special glue, fill the gap between the tiles and the profile.

INSERT COLOURS



ON DEMAND



NATURAL ALUMINIUM + NEOPRENE INSERT
bar length 3 lm

Article	HxL mm
GDA 25...	50 x 25
GDA 35...	50 x 35



Movement mm: +/- 5.
Insert in smooth neoprene on demand.

NATURAL ALUMINIUM ANGLE BAR / WALL + NEOPRENE INSERT
bar length 3 lm

Article	HxL mm
GDAP 25...	50 x 25
GDAP 35...	50 x 35

Available in the colours: G - N (Ivory on demand).
The code of the selected finish must be added to the article code.
E.g.: GDA 25... (chosen insert colour grey) GDA 25G.

Insert in smooth neoprene on demand.

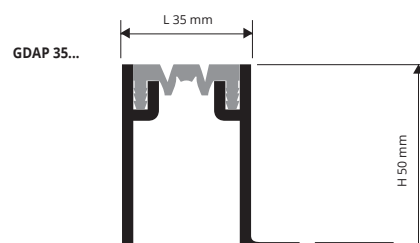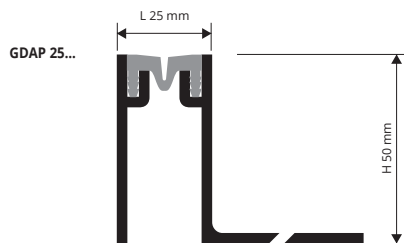


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

GDA 55

ALUMINIUM
+ NEOPRENE INSERT

GDA 55 is a structural joint for floors, 35, 50 and 80 mm, in good quality natural aluminium with the interchangeable neoprene insert allowing the joint to expand and contract. Visible thickness 55 mm (**GDA 55**), bar length 3 lm. Black or Grey insert. Bear weights of cars, with the wheel loads up to 650 kg and trucks with a maximum load of 1000 kg on the wheel.

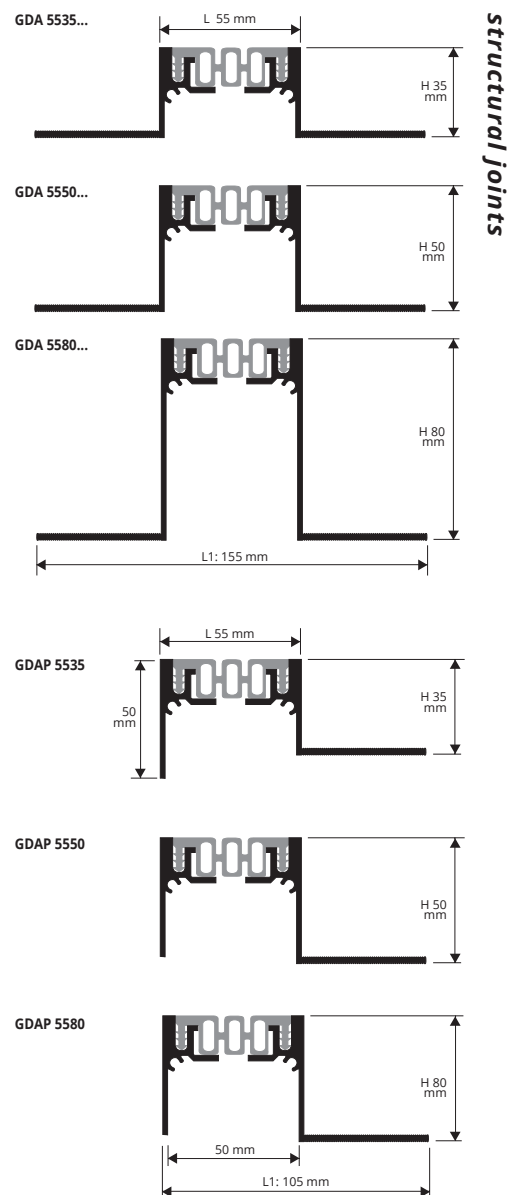

ALUMINIUM + BLACK / GREY NEOPRENE INSERT

bar length 3 lm

Article	L x H x L1 mm
GDA 5535...	55 x 35 x 155
GDA 5550...	55 x 50 x 155
GDA 5580...	55 x 80 x 155

Movement mm: +/- 10

Available in the colours: N - G.

The code of the selected finish must be added to the article code.

E.g.: GDA 5535...(chosen insert colour black) GDA 5535N

Insert in smooth neoprene on demand.

ANGLES BAR ALUMINIUM + BLACK NEOPRENE INSERT

bar length 3 lm


Article	L x H x L1 mm
GDAP 5535	55 x 35 x 105
GDAP 5550	55 x 50 x 105
GDAP 5580	55 x 80 x 105

Insert in smooth neoprene on demand.

COLOURS

	
N - Black (RAL 9005)	G - Grey (7038)

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

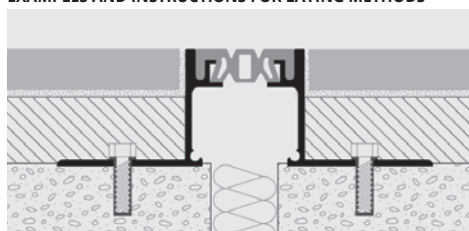

1. Choose the expansion joint with suitable height for the thickness of the floor and the screed/floor rough and choose the colour of the insert. 2. Fix the punched flanges to the substrate using screws and screw anchors, calculating the fixing points at 30 cm intervals on both sides. 3. Make the screed over the punched flanges of the structural or expansion joint, calculating the thickness of the final floor, and then lay the floor as normal.

FIREPROOF CORD

MINERAL WOOL AND FIBREGLASS

FIREPROOF GLUE FOR CORD FIXING

Article	Pack. Kg
CIC 014	1,4
CIC 7	7

The delivery of the test certificate depends on the use of silicate glue for the fixing of the same.

The cord is certified in accordance with the new European Standard EN 13501-2.

Consumption of sealant is of about 50 g per linear metre of cord.

FIREPROOF CORD - Diameter 20 - 60 mm


Article	Ø mm	lm Roll
CDT 20	20	30
CDT 30	30	30
CDT 40	40	30
CDT 50	50	25
CDT 60	60	25



GNS 20 GNS 50

NATURAL ALUMINIUM

Structural joint **GNS 20 - GNS 50** is in good quality natural aluminium with neoprene in the lower central part and another aluminium profile in the upper visible part. It withstands heavy loads and frequent traffic of vehicles with a total truckload of 8 kgs/mm². Bar length 3 m, visible head width 30 mm.

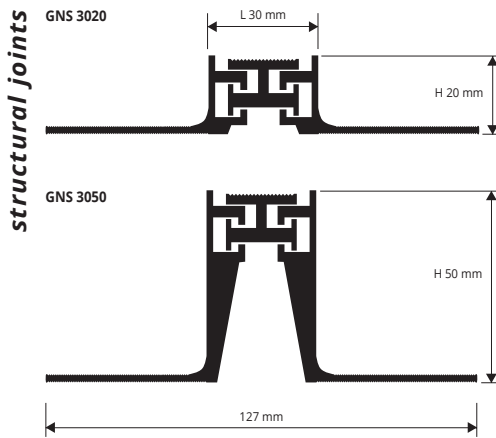


NATURAL ALUMINIUM
bar length 3 lm

Article	L x H mm		
GNS 3020	30 x 20		*
GNS 3050	30 x 50		

Movement mm: +/- 3


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

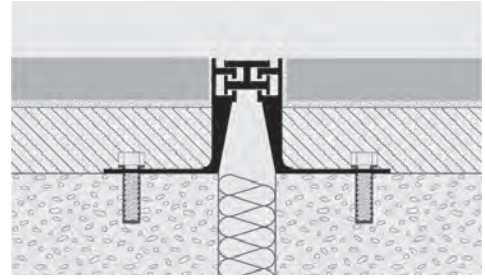

1. Choose the expansion joint with suitable height for the thickness of the floor and the screed/floor rough and choose the colour of the insert. 2. Fix the punched flanges to the substrate using screws and screw anchors, calculating the fixing points at 30cm intervals on both sides. 3. Make the screed over the punched flanges of the structural or expansion joint, calculating the thickness of the final floor, and then lay the floor as normal.

ANGLES BAR / WALL

NATURAL ALUMINIUM

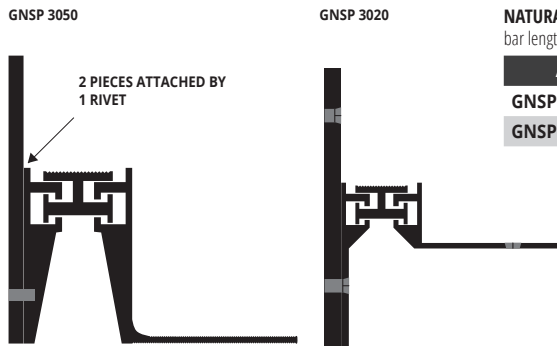

NATURAL ALUMINIUM ANGLES BAR
bar length 3 lm - pack. 10 Pcs - 30 lm

Article	L x H mm		
GNSP 3020	30 x 20		*
GNSP 3050	30 x 50		*


COLOURS



GNS 75... 18/50/80

NATURAL ALUMINIUM

Structural joint **GNS 75** is in good quality natural aluminium with neoprene in the lower central part and another aluminium profile in the upper visible part. It withstands heavy loads and frequent pedestrian traffic. Bar length 3 m, visible head width 75 mm. It withstands forklift trucks with rubber tyre and transpallets to a maximum total load of 6,5 kgs/mm².

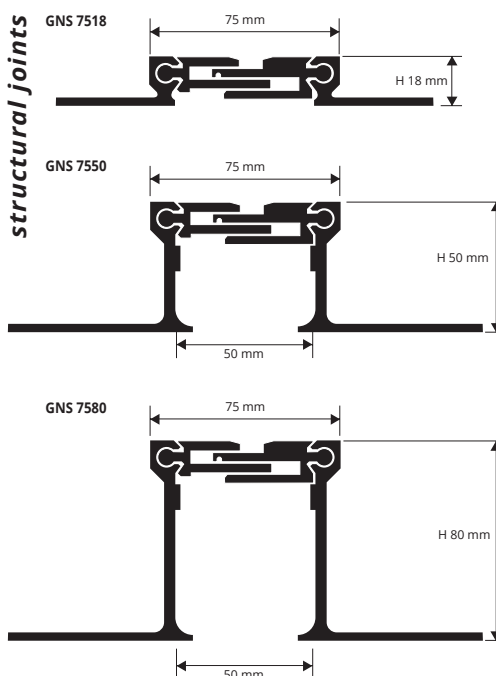


NATURAL ALUMINIUM
bar length 3 lm

Article	H mm		
GNS 7518	18		*
GNS 7550	50		*
GNS 7580	80		*

Movement mm: +10/-5 Horiz. +/-5 Vert.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

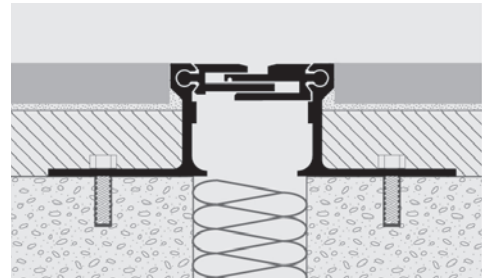

1. Choose the expansion joint with suitable height for the thickness of the floor and the screed/floor rough and choose the colour of the insert. 2. Fix the punched flanges to the substrate using screws and screw anchors, calculating the fixing points at 30cm intervals on both sides. 3. Make the screed over the punched flanges of the structural or expansion joint, calculating the thickness of the final floor, and then lay the floor as normal.

COLOURS



PROPLATE FIX is a range of flat joint-cover profiles to cover structural movements (contraction due to flexural or compressive stress) of two different load-bearing structures.

PROPLATE FIX made in silver anodized aluminium is recommended for environments with intense pedestrian and vehicular traffic. Available upon request with stainless steel fixing clips (5 Pcs. for vertical/façade use 10 Pcs. for horizontal/floor use); corner profiles are also available.

PROPLATE FIX

FLAT AND ANGLE PROFILE
IN ALUMINIUM



FLAT PROFILE - SILVER ANOD. ALUMINIUM
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm
PETFXPAA 50	50
PETFXPAA 70	70




ANGLE PROFILE - SILVER ANOD. ALUMINIUM
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm
PETFXAA 50	22 x 50
PETFXAA 70	24 x 70

PRODUCT SUPPLIED NOT ASSEMBLED

Article	H mm
CPFAC 40	40



COLOURS



AA - Anodized silver alum.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose the profile in the required width and material. 2. Insert the fixing clips into the relative groove, one every 50/75 cm (5 Pcs. for wall applications - 10 Pcs. for floor applications). 3. Insert/Lay the PROPLATE FIX in the existing void, applying uniform pressure or using a plastic hammer, thereby creating a perfect joint cover. The same method is used for laying the corner profile.

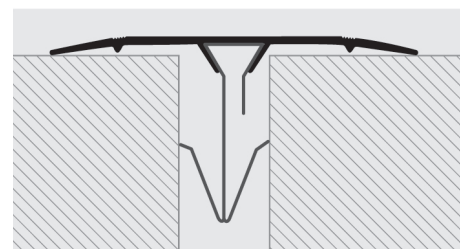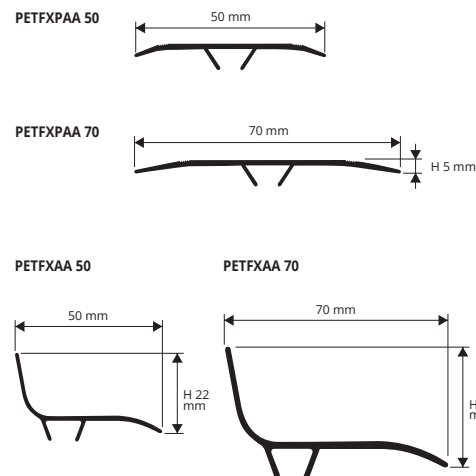

PROPLATE FIX is a range of flat joint-cover profiles to cover structural movements (contraction due to flexural or compressive stress) of two different load-bearing structures.

PROPLATE FIX made in rigid PVC is recommended for walls and facades and for ceilings. Available upon request with stainless steel fixing clips (5 Pcs. for vertical/façade use 10 Pcs. for horizontal/floor use); corner profiles are also available.

PROPLATE FIX

FLAT AND ANGLE PROFILE
IN VINYL RESIN (PVC)



FLAT PROFILE - VINYL RESIN (PVC)
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm
PETFXP 50-01	50



ANGLE PROFILE - VINYL RESIN (PVC)
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H x L mm
PETFX 50-01	22 x 50

PRODUCT SUPPLIED NOT ASSEMBLED

FIXING CLIPS BETWEEN 20 TO 45 mm - STAINLESS STEEL - pack. 10 Pcs



Article	H mm
CPFAC 40	40

COLOURS




01 - White

CPFAC 40

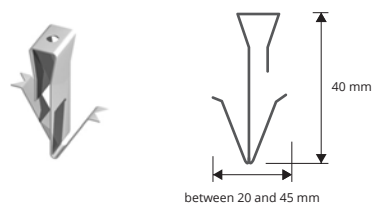


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

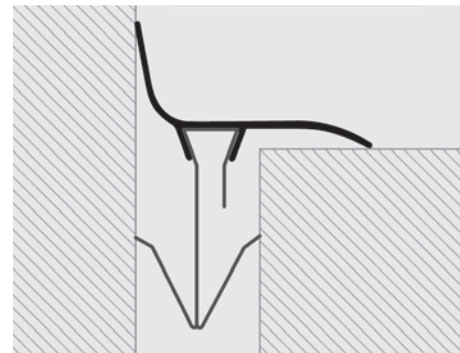


1. Choose the profile in the required width and material. 2. Insert the fixing clips into the relative groove (5 Pcs. for wall applications - 10 Pcs. for floor applications). 3. Insert/Lay the PROPLATE FIX in the existing void, applying uniform pressure or using a plastic hammer, thereby creating a perfect joint cover. The same method is used for laying the corner profile.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

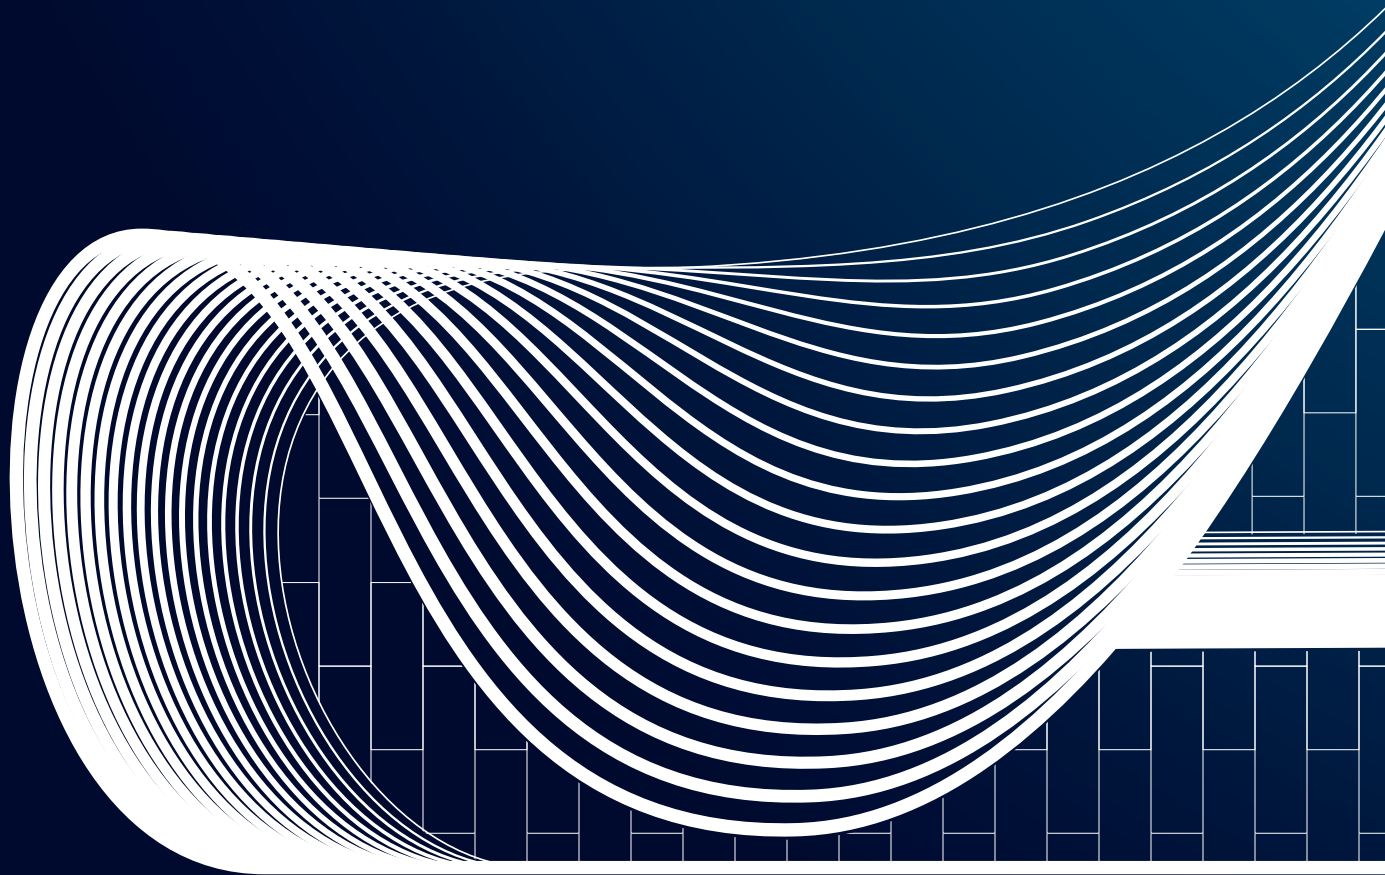

**HEYDAR ALIYEV CULTURAL CENTER,
BAKU, AZERBAIJAN, 2012**
Zaha Hadid

LOW THICKNESS

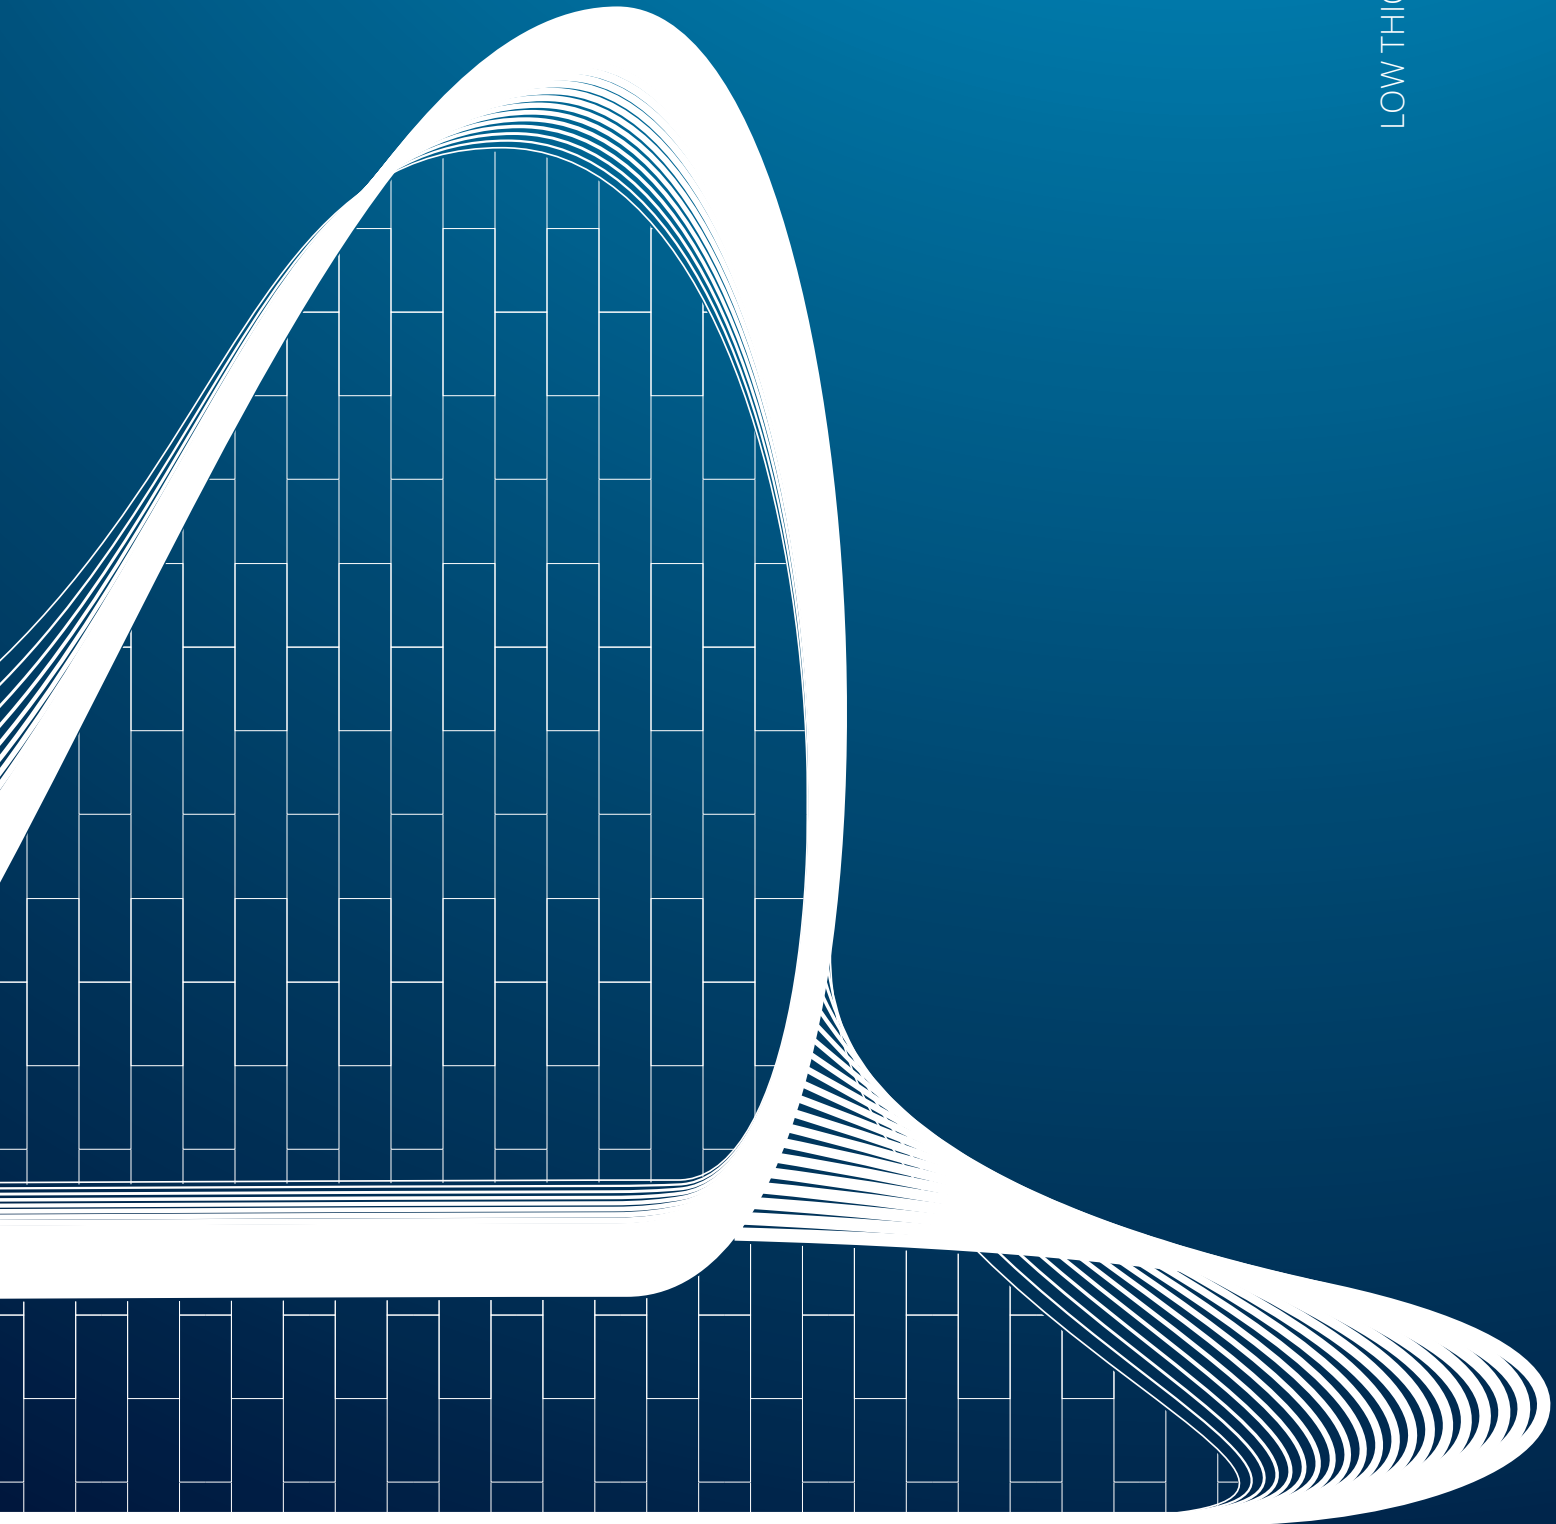


PROKERLAM SQUARE

ANODIZED SILVER, POLISHED CHROME AND GOLD ALUMINIUM

PROKERLAM SQUARE is a square corner bead profile in anodized and polished aluminium suitable to protect the external corners of coverings with low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different finishes make **PROKERLAM SQUARE** a much sought-after profile that allows a workmanlike application even with low thickness coverings.

PKLQ... 045



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



ANODIZED SILVER ALUMINIUM thermo packed

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PKLQAA 045	4,5

POLISHED CHROME/GOLD ALUMINIUM thermo packed


bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PKLQBC 045	4,5
PKLQBO 045	4,5

1. Choose "PROKERLAM SQUARE" according to the desired finish.
2. Cut "PROKERLAM SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROKERLAM SQUARE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



COLOURS




PROKERLAM JOLLY

ANODIZED AND POLISHED ALUMINIUM SILVER, CHROME AND GOLD

PROKERLAM JOLLY is a quarter-circle rounded bead profile in anodized and polished aluminium suitable to protect the external corners of coverings with low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different finishes make **PROKERLAM JOLLY** a much sought-after profile that allows a workmanlike application even with low thickness coverings.

PKLJ... 045



EXAMPLE FOR LAYING



ANODIZED SILVER ALUMINIUM thermo packed

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PKLJAA 045	4,5

POLISHED CHROME/GOLD ALUMINIUM thermo packed

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PKLJBC 045	4,5
PKLJBO 045	4,5



COLOURS



PROKERLAM LINE

ANODIZED AND POLISHED ALUMINIUM SILVER, CHROME AND GOLD

PROKERLAM LINE is a Y-shaped profile in anodized and polished aluminium suitable to protect the external corners of coverings in low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different heights and finishes and special pieces such as internal and external corners, end caps and joints make **PROKERLAM LINE** a much sought-after profile that allows a workmanlike application even with low thickness coverings.

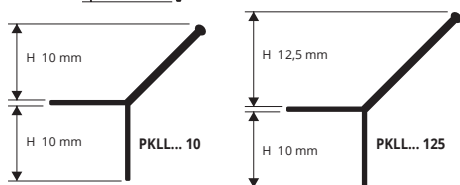

EXAMPLE FOR LAYING



ANODIZED SILVER ALUMINIUM thermo packed

bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm
PKLLAA 045	4,5
PKLLAA 10	10
PKLLAA 125	12,5

POLISHED CHROME/GOLD ALUMINIUM thermo packed

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PKLLBO 045	4,5
PKLLBC 045	4,5
PKLLBC 10	10
PKLLBC 125	12,5

COLOURS



PROSHELL D ALL is a profile in anodized and polished aluminum with a visible 45° sloping surface. The profile allows to connect the floor and wall coverings in ceramic and mosaic with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section and availability in three different finishes, make **PROSHELL D ALL** a much sought after profile.

PROSHELL D ALL

ANODIZED SILVER, POLISHED CHROME AND GOLD ALUMINIUM




ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PSHDA 045	4,5




POLISHED CHROME/GOLD ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PSHDBC 045	4,5
PSHDBO 045	4,5

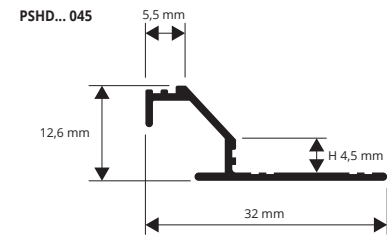

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

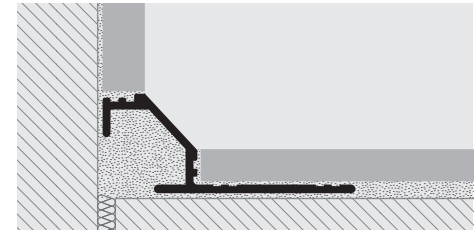

1. Choose "PROSHELL D ALL" according to the desired finish.
2. Cut "PROSHELL D ALL" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROSHELL D ALL" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS



PROSHELL R ALL is a cove-shaped profile in anodized and polished aluminum. The profile allows to connect the floor and wall coverings in ceramic and mosaic with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section and availability in three different finishes, make **PROSHELL R ALL** a much sought after profile.

PROSHELL R ALL

ANODIZED SILVER, POLISHED CHROME AND GOLD ALUMINIUM




ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PSHRA 045	4,5


POLISHED CHROME/GOLD ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PSHRBC 045	4,5
PSHRBO 045	4,5

COLOURS

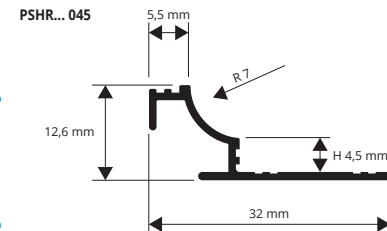

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

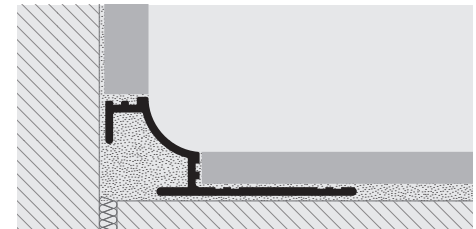


1. Choose "PROSHELL R ALL" according to the desired finish.
2. Cut "PROSHELL R ALL" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROSHELL R ALL" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

* - Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


PROINTER KL ACC

STAINLESS STEEL AISI 304/1.4301-V2A


PROINTER KL ACC is a cove-shaped profile in stainless steel AISI 304/1.4301-V2A. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section makes **PROSHELL KL ALL** a much sought after profile.



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

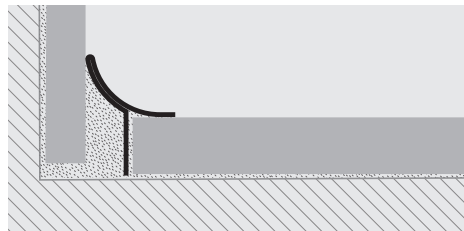

1. Choose "PROINTER KL ACC" according to the desired finish. 2. Cut "PROINTER KL ACC" to the desired length. 3. Apply the silicone along the floor-wall connection. 4. Press the arrowhead of "PROINTER KL ACC" into the silicone evenly until it is completely adherent to the floor and wall.

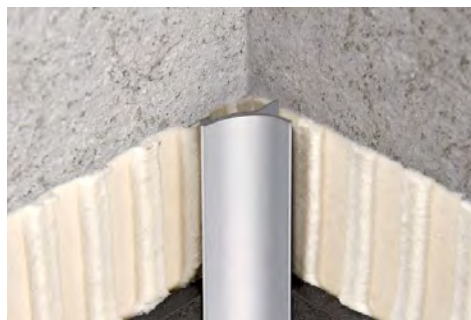


POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	H mm
PIKLAC 15	15

SATINED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack.. 40 Pcs - 108 lm - 8/10mm

Article	H mm
PIKLACS 15	15

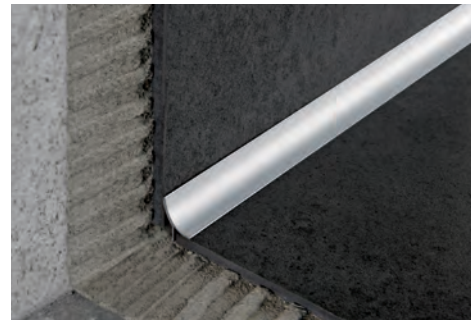

SANDED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	H mm
PIKLACSB 15	15

SUPER POLISHED ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack.. 40 Pcs - 108 lm - 8/10mm

Article	H mm
PIKLACML 15	15

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

COLOURS




AVAILABLE MINIMUM QUANTITY 100 PCS




PROINTER KL ALL

POLISHED AND CHROMED BRASS AND ANODIZED AND POLISHED ALUMINIUM

PROSHELL KL ALL is a cove-shaped profile in polished and chromed brass and anodized and polished aluminium. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section and availability in five different finishes, make **PROSHELL KL ALL** a much sought after profile.

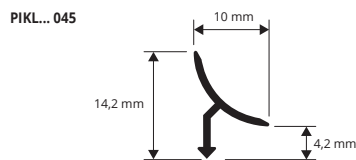

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

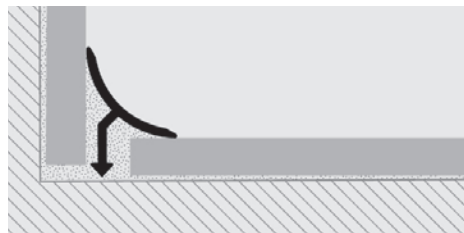

1. Choose "PROINTER KL ALL" according to the desired finish. 2. Cut "PROINTER KL ALL" to the desired length. 3. Apply the silicone along the floor-wall connection. 4. Press the arrowhead of "PROINTER KL ALL" into the silicone evenly until it is completely adherent to the floor and wall.



POLISHED / CHROMED BRASS thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PIKLLOL 045 (polished)	4,5
PIKLOC 045 (chromed)	4,5

CAPS - VARNISHED PLASTIC

Article	Pack. 2 Pcs	Pack. 10 Pcs
TPIKL ...		



COLOURS



POLISHED CHROME ALUMINIUM / GOLD thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PIKLBC 045	4,5
PIKLBO 045	4,5

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PIKLAA 045	4,5

CAPS - VARNISHED PLASTIC

Article	Pack. 2 Pcs	Pack. 10 Pcs
TPIKL ...		



COLOURS



= News 2020

= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROSTYLE KL 10 is a step protecting profile, technical and very elegant, used to keep the step made of thin ceramic tiles and kerlite/laminam non-skid and non-slip. Product in anodized aluminium with the angle portion crimped in order to increase its adhesion. Internal height 4.5 mm. It is compulsory in public buildings to comply with accident-prevention regulations.

PROSTYLE KL 10


ANODIZED SILVER ALUMINIUM



ANODIZED SILVER ALUMINIUM
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PSYKLA 1045	4,5

COLOURS




AA - Anodized silver aluminium

CAPS - pack. 2 Pcs (1 R and 1 L)

Article	H mm
TPSYKLA 1045/1	4,5


Articles not for sale singly

PSYKLA 1045



1. Cut "PROSTYLE KL 10" to the desired length.
2. Lay the tiles on the step rise and apply the adhesive on the step tread where the profile will be laid.
3. Lay the profile on the step tread aligning it with the tiles of the step rise.
4. Apply the adhesive on the step tread and lay the tiles, aligning them with the profile. Remove immediately all the remains of adhesive from the surface of the profile.
5. Grout the joints between the tile and the profile, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

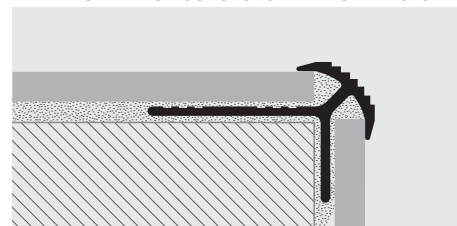

PROSTAIR KL 20 is a step protecting profile, technical and very elegant, used to keep the step made of thin ceramic tiles and kerlite/laminam non-skid and non-slip. Product in anodized aluminium with the upper portion crimped in order to increase its adhesion and a lower vertical tab created to cover the riser of the step. It is compulsory in public buildings to comply with accident-prevention regulations. Available height H 4.5 mm.

PROSTAIR KL 20

ANODIZED SILVER ALUMINIUM

ANODIZED SILVER ALUMINIUM
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PTRKLA 2045	4,5


COLOURS



AA - Anodized silver aluminium





PTRKLA 2045

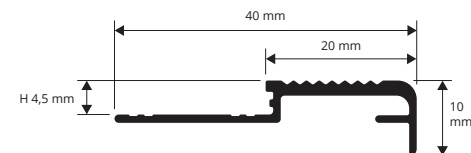

1. Cut "PROSTAIR KL 20" to the desired length.
2. Lay the tiles on the step rise and apply the adhesive on the step tread where the profile will be laid.
3. Fill the cavities on back of the profile with adhesive and lay it on the step tread aligning it with the tiles of the step rise.
4. Apply the adhesive on the step tread and lay the tiles, aligning them with the profile. Remove immediately all the remains of adhesive from the surface of the profile.
5. Grout the joints between the tile and the profile, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

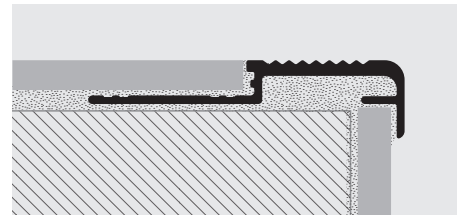

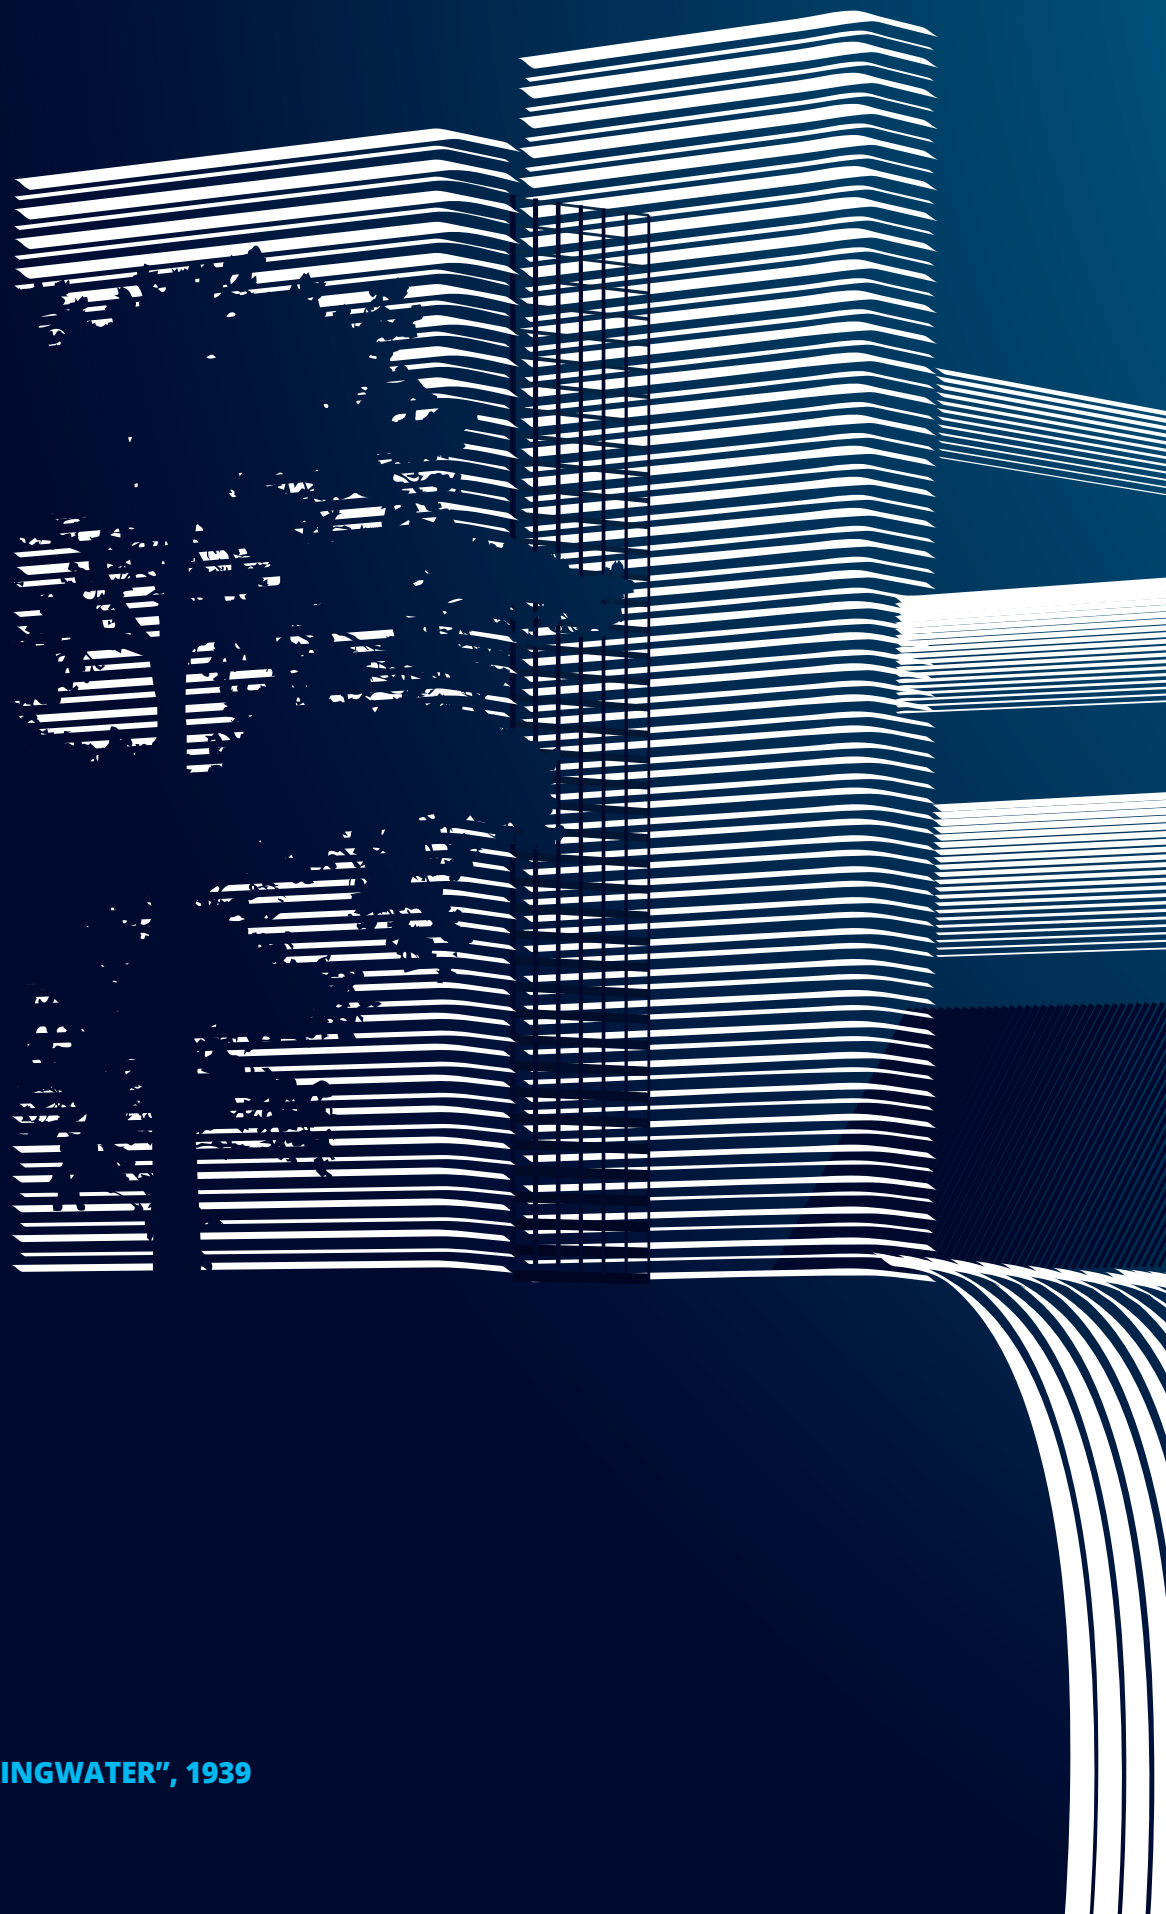

KAUFMANN HOUSE, "FALLINGWATER", 1939
Frank L. Wright

PROFILES FOR TERRACES

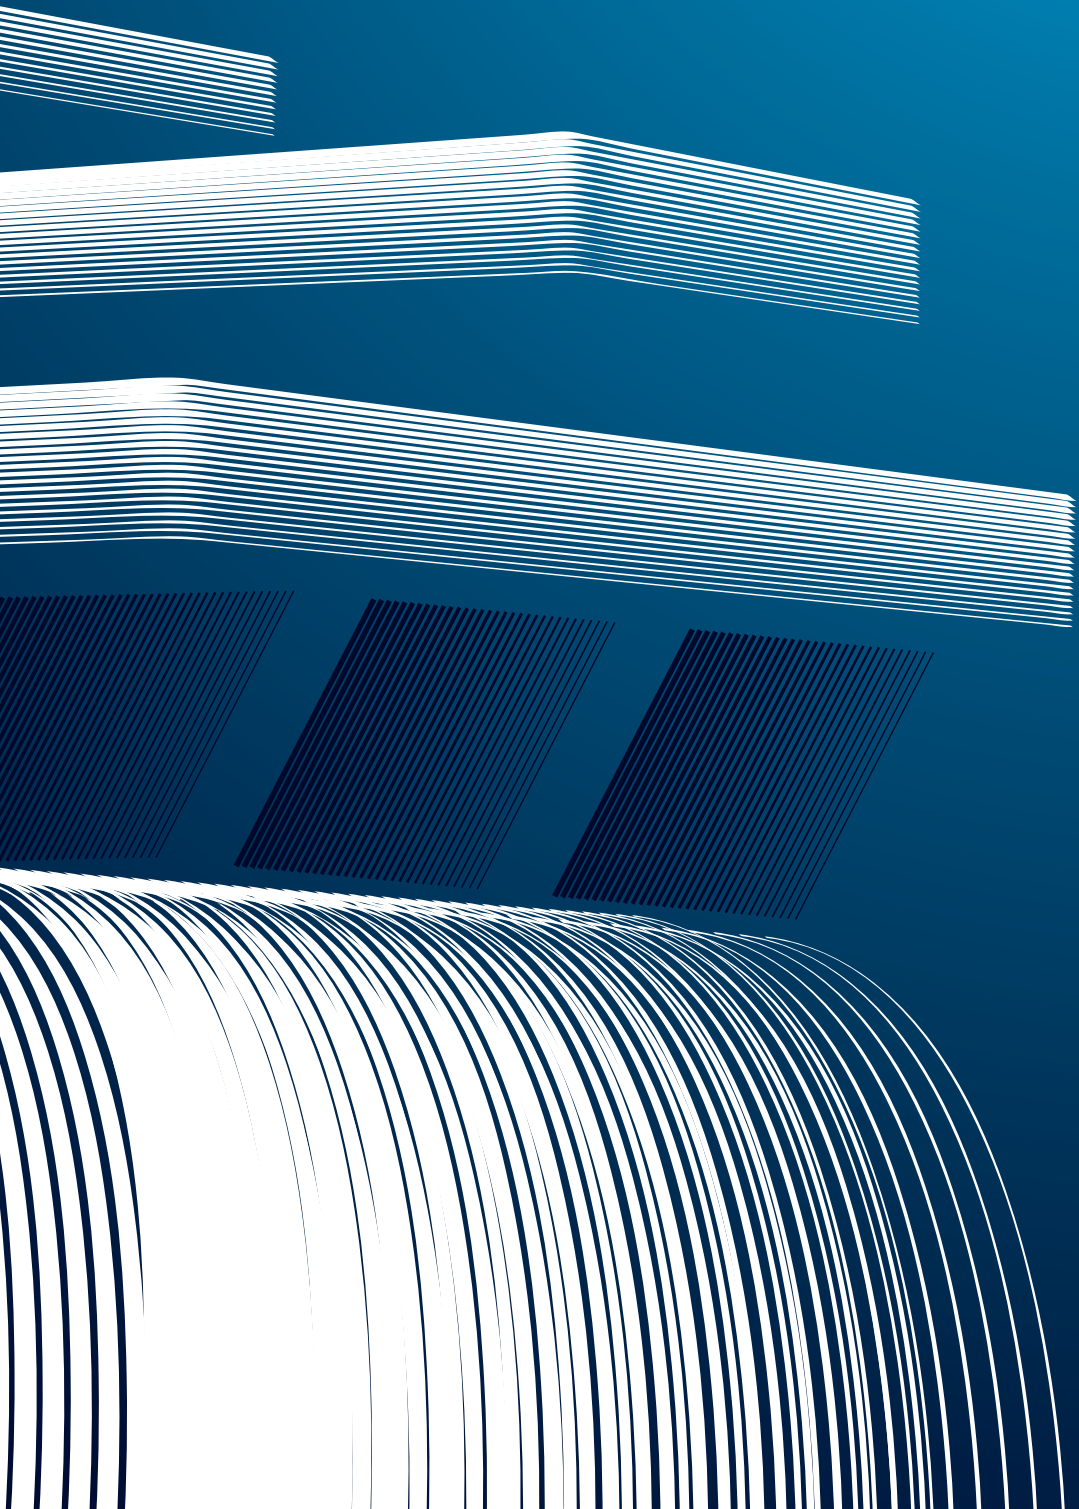


PROTERRACE DRAIN DRIP


VARNISHED/COATED ALUMINIUM

PROTERRACE DRAIN DRIP is an edging profile in varnished aluminium, designed to protect the edges of the tiles on terraces and balconies and to allow the downflow of water. The profile is provided with a flange that ensures the right fixing and an adhesive stripe in open cells polyurethane, which protect the outflow holes to be closed by silicone.

PFDDP ... AL...

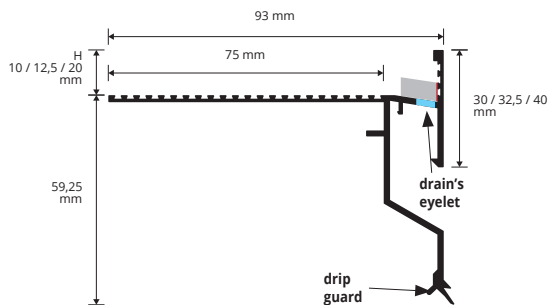

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

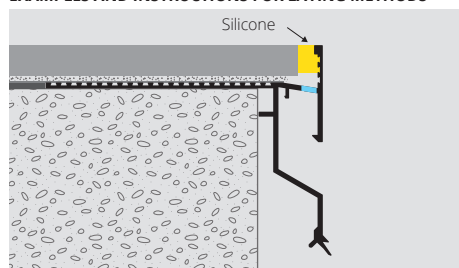

1. Choose PROTERRACE DRAIN DRIP according to the tile thickness and desired colour.
2. Fix the external corners to the screed (at least 1 cm from it) with nails.
3. Fix the draining adhesive stripe in polyurethane on the vertical side of the profile.
4. Cut the PROTERRACE DRAIN FDP at desired length joining it to the corners using the linking elements and fix it with nails to the substrate.
5. Lay the desired waterproofing system.
6. Lay the tiles leaving at 5 mm between the tile and the profile.
7. Seal the space between tile and profile with PROBAND FIX.

VARNISHED/COATED ALUMINIUM

bar length 2,7 lm - pack. 5 Pcs - 13,5 lm

Article	H mm
PFDDP 10AL...	10
PFDDP 125AL...	12,5
PFDDP 20AL...	20

Available in the colours: BF - GF - A (EF - C - TF on demand). The code of the selected colour must be added to the article code. E.g.: PFDDP 10 AL... (white) PFDDP 10 ALBF.

EMBOSSED COLOURS

BF - White (9010)	GF - Gray (7038)	A - Anthracite grey (no RAL)
-------------------	------------------	------------------------------


* COLOURS ON DEMAND

EMBOSSED		
EF - Beige (1019)	C - Corten	TF - Dark brown (8019)

DRAIN EYELET



AEPFDPP 10/125/20AL...



AIPFDPP 10/125/20AL...




GINFDPP 10/125/20AL .../1

PROTERRACE ECO DRIP


VARNISHED/COATED ALUMINIUM

PROTERRACE ECO DRIP is an edging profile in aluminium designed to protect the front of the screed from water penetration and the edges of the tiles laid on terraces and balconies. The profile is equipped with a punched flange that ensures its fixing to the support. The front the profile is equipped with a double drip to improve the push away of water from the wall.

PTEDP ...

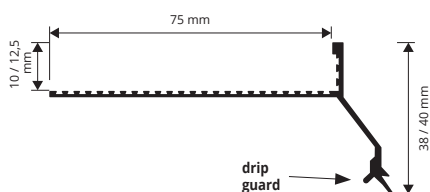

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

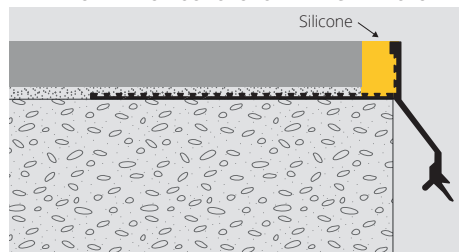

1. Choose "PROTERRACE ECO DRIP" according to the tile thickness.
2. Cut "PROTERRACE ECO DRIP" to the desired length and fix it to the support with nails.
3. Apply the desired waterproofing system, sealing the joint between profile and waterproofing.
4. Lay the tiles, leaving about 5 mm between tiles and profile.
5. Seal the space between tiles and profile using PROBAND FIX.



VARNISHED/COATED ALUMINIUM

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
PTEDP 10AL...	10
PTEDP 125AL...	12,5

Available in the colours: GF - A. The code of the selected colour must be added to the article code. E.g.: PTEDP 10AL... (gray) PTEDP 10GFAL.

EXTERNAL CORNER - pack 10 Pc

Articolo	pz	conf.
AEDP 10AL...		
AEDP 125AL...		

JOINTS - pack. 2 / 10 Pcs

Article	pack. 2Pcs	pack. 10Pcs
GINEDP 10AL... / ...		
GINEDP 125AL... / ...		

EMBOSSED COLOURS

GF - Gray (7038)	A - Anthracite grey (no RAL)
------------------	------------------------------



AEDP 10/125ALGF



GINEDP 10/125ALGF



AEDP 10/125ALA



GINEDP 10/125ALA




= News 2020

= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROTERRACE DRAIN FDP is an edging profile in varnished aluminium designed to protect the edges of the tiles laid on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. The profile is also provided with holes that allow the discharge of the water filtered between the profile and tiles. The availability of special pieces such as external corners and junctions make **PROTERRACE DRAIN FDP** a much sought after and easy to lay profile.

PROTERRACE DRAIN FDP

VARNISHED/COATED ALUMINIUM

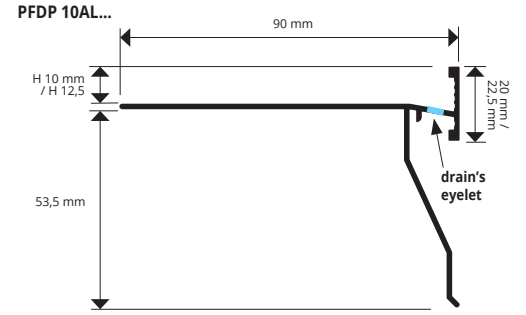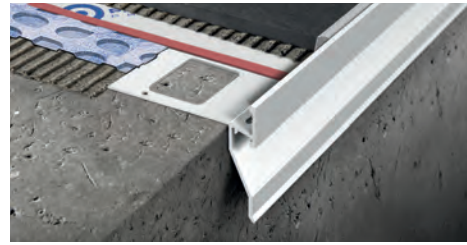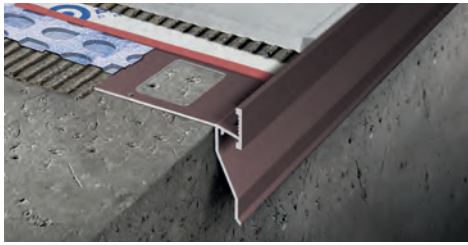

VARNISHED/COATED ALUMINIUM

bar length 2,7 lm - pack. 5 Pcs - 13,5 lm

Article	H mm
PFDP 10AL...	10
PFDP 125AL...	12,5

Available in the colours: BF - GF - A (EF - C - TF - B - G - T - E on demand)
The code of the selected colour must be added to the article code.
E.g.: PFDP 10 AL... (white) PFDP 10 ALB.

EMBOSSED COLOURS

BF - White (9010)	GF - Gray (7038)	A - Anthracite grey (no RAL)
-------------------	------------------	------------------------------

* COLOURS ON DEMAND

EMBOSSED		
EF - Beige (1019)	C - Corten	TF - Dark brown (8019)
SEMIGLOSSY		
B - White (9010)	G - Gray (7038)	T - Dark brown (8019)
E - Beige (1019)		

EXTERNAL CORNERS - pack. 10 Pcs




Article
AEPFDP 10AL...
AEPFDP 125AL...

INTERNAL CORNERS - pack. 10 Pcs

Article
AIPFDP 10AL...
AIPFDP 125AL...

JOINTS - pack. 1 Pc upper + 1 Pc lower


Article
GINFDP 10AL .../1
GINFDP 125AL .../1



AEPFDP 10/125AL...

AIPFDP 10/125AL...

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

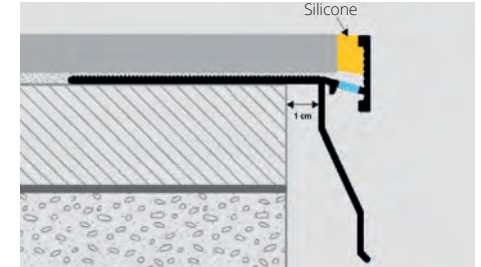


1. Choose PROTERRACE DRAIN FDP according to the tile thickness and desired colour.
2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it.
3. Cut "PROTERRACE DRAIN FDP" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions.
4. Apply the desired waterproofing system.
5. Lay the tiles, leaving about 5 mm between tiles and profile.
6. Seal the space between tiles and profile with PROBAND FIX.

PROSIDE WALK is a perimeter profile in varnished aluminium, available in grey and anthracite colour. It is designed to protect the edges of the tiles and the screed on pavements. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make **PROSIDE WALK** a much sought after and easy to lay profile.

PROSIDE WALK

VARNISHED/COATED ALUMINIUM

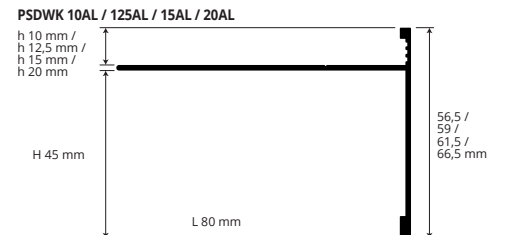

VARNISHED EMBOSSED ALUMINIUM

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	h mm	H mm	L
PSDWK 10AL...	10	45	80
PSDWK 125AL...	12,5	45	80
PSDWK 15AL...	15	45	80
PSDWK 20AL...	20	45	80

EMBOSSED COLOURS

A - Anthracite grey (no RAL)	GF - Gray (7038)
------------------------------	------------------

* EMBOSSED COLOURS ON DEMAND

BF - White (9010)	TF - Dark brown (8019)	C - Corten
EF - Beige (1019)		


EXTERNAL CORNERS - pack. 10 Pcs

Article	h mm	H mm	L
AEPSDWK 10AL...	10	45	80
AEPSDWK 125AL...	12,5	45	80
AEPSDWK 15AL...	15	45	80
AEPSDWK 20AL...	20	45	80

JOINTS - pack. 10 Pcs

Article
GINSDWK 10AL...
GINSDWK 125AL...
GINSDWK 15AL...
GINSDWK 20AL...


AEPSDWK external corner (welded)



GINSDWK joint



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

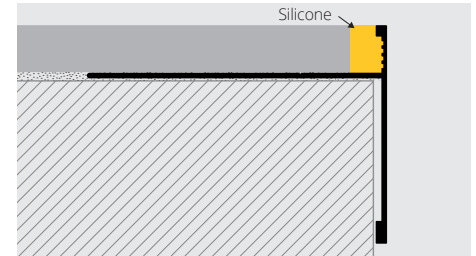

1. Choose PROSIDE WALK according to the tile thickness and desired colour.
2. Waterproof with PROBAND 150 and PROBAND KOLL the front of the screed.
3. Fix the external corners with nails.
4. Cut PROSIDE WALK to the desired length and fix it with nails; connect it with the corners using the junction element.
5. Lay the tiles, leaving about 5 mm between tiles and profile.
6. Seal the space between tiles and profile with PROBAND FIX.


News 2020

* Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROTERRACE PCG

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A


PROTERRACE PCG is an edging profile in polished stainless steel INOX AISI 304/1.4301-V2A designed to protect the edges of the tiles laid on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make **PROTERRACE PCG** a much sought after and easy to lay profile.

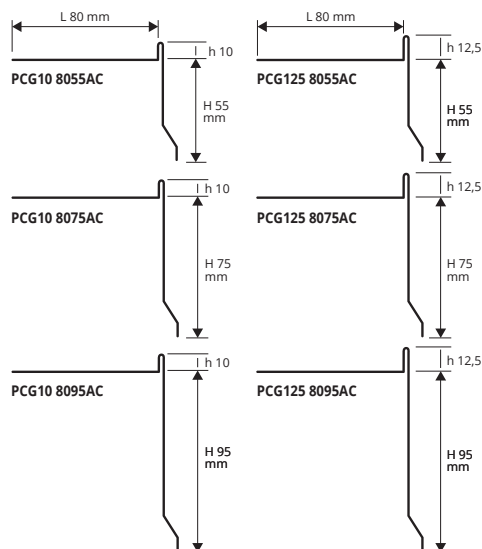

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack 5 Pcs - 13,5 lm (H 55 mm - 18,9 lm)

Article	h x H x L mm		
PCG10 8055AC	10 x 55 x 80		
PCG10 8075AC	10 x 75 x 80		
PCG10 8095AC	10 x 95 x 80		
PCG125 8055AC	12,5 x 55 x 80		
PCG125 8075AC	12,5 x 75 x 80		*
PCG125 8095AC	12,5 x 95 x 80		*

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

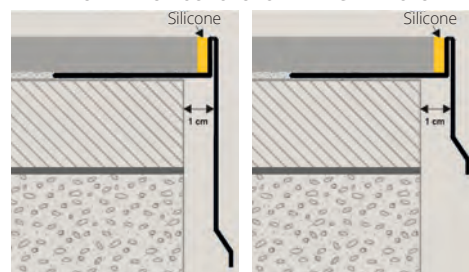


1. Choose "PROTERRACE PCG" according to the tile thickness. 2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it. 3. Cut "PROTERRACE PCG" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions. 4. Apply the desired waterproofing system. 5. Lay the tiles, leaving about 5 mm between tiles and profile. 6. Seal the space between tiles and profile with PROBAND FIX.

EXTERNAL CORNERS and JOINTS

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

AEPG external corner (welded)



GING joints



EXTERNAL CORNERS - pack 10 Pcs

Article			
AEPG10 55AC/75AC/95AC			
AEPG125 55AC/75AC/95AC			


JOINTS - pack 10 Pcs

Article			
GING10 55AC/75AC/95AC			
GING125 55AC/75AC/95AC			

PROTERRACE PCG

VARNISHED/COATED ALUMINIUM

PROTERRACE PCG is an edging profile in varnished aluminium designed to protect the edges of the tiles laid on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make **PROTERRACE PCG** a much sought after and easy to lay profile.

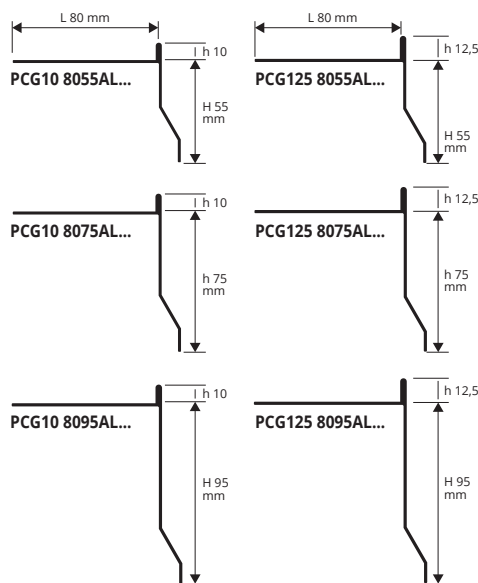


VARNISHED/COATED ALUMINIUM
bar length 2,7 lm - pack 5 Pcs - 13,5 lm (H 55 mm - 18,9 lm)

Article	h x H x L mm		
PCG10 8055AL...	10 x 55 x 80		
PCG10 8075AL...	10 x 75 x 80		
PCG10 8095AL...	10 x 95 x 80		
PCG125 8055AL...	12,5 x 55 x 80		
PCG125 8075AL...	12,5 x 75 x 80		
PCG125 8095AL...	12,5 x 95 x 80		

Available in the colours: BF - GF - A (EF - C - TF - B - G - T - E on demand). The code of the selected colour must be added to the article code. E.g.: PCG10 8055AL... (white) PCG10 8055ALB.

EXEMPLES OF LAYING (for laying instructions, see above)

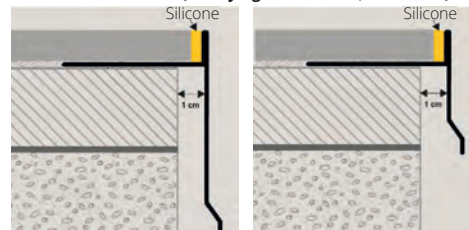

EMBOSSED COLOURS

BF - White (9010)	GF - Gray (7038)	A - Anthracite grey (no RAL)
-------------------	------------------	------------------------------


* COLOURS ON DEMAND

EMBOSSÉ		
EF - Beige (1019)	C - Corten	TF - Dark brown (8019)
SEMIGLOSSY		
B - White (9010)	G - Gray (7038)	T - Dark brown (8019)
E - Beige (1019)		

EXTERNAL CORNERS and JOINTS

VARNISHED/COATED ALUMINIUM

AEPG external corner (welded)



GING joints



EXTERNAL CORNERS - pack 10 Pcs

Article			
AEPG10 55AL.../75AL.../95AL...			
AEPG125 55AL.../75AL.../95AL...			

The code of the selected colour must be added to the article code. E.g.: AEPG10 55AL... (white) AEPG10 55ALB.

JOINTS - pack 10 Pcs

Article			
GING10 55AL.../75AL.../95AL...			
GING125 55AL.../75AL.../95AL...			

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROTERRACE PCJ is an edging profile in varnished aluminium designed to protect the screed and the edges of the tiles laid on terraces and balconies. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes with a diameter of 2.5 mm that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make **PROTERRACE PCJ** a much sought after and easy to lay profile.

PROTERRACE PCJ

VARNISHED/COATED ALUMINIUM



VARNISHED/COATED ALUMINIUM - bar length 2,7 lm
pack. 7 Pcs 18,9 lm (H 75 mm - 13,5 lm - H 95 mm - 5,4 lm)


Article	h x H x L mm		
PCJ10 8055AL...	10 x 55 x 80		
PCJ10 8075AL...	10 x 75 x 80		
PCJ10 8095AL...	10 x 95 x 80		*
PCJ125 8055AL...	12,5 x 55 x 80		*
PCJ125 8075AL...	12,5 x 75 x 80		*
PCJ125 8095AL...	12,5 x 95 x 80		*

Available in the colours: BF - GF - A (EF - C - TF - B - G - T - E on demand).
The code of the selected colour must be added to the article code. E.g.:
PCJ10 8055AL... (white) PCJ10 8055ALB.

EMBOSSED COLOURS

BF - White (9010)	GF - Gray (7038)	A - Anthracite grey (no RAL)
-------------------	------------------	------------------------------


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

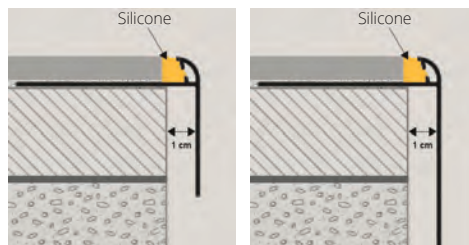

1. Choose "PROTERRACE PCJ" according to the tile thickness and desired colour. 2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it. 3. Cut "PROTERRACE PCJ" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions. 4. Apply the desired waterproofing system. 5. Lay the tiles, leaving about 5 mm between tiles and profile. 6. Seal the space between tiles and profile with PROBAND FIX.

COLOURS ON DEMAND

EMBOSSED		
EF - Beige (1019)	C - Corten	TF - Dark brown (8019)
SEMIGLOSSY		
B - White (9010)	G - Gray (7038)	T - Dark brown (8019)
E - Beige (1019)		

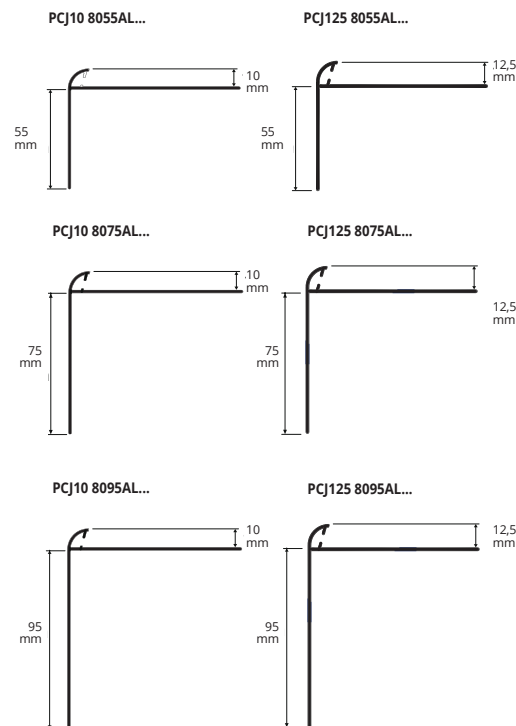

EXTERNAL CORNERS and JOINTS

VARNISHED/COATED ALUMINIUM


EXTERNAL CORNERS - pack. 10 Pcs

Article			
AEPJ10 55AL..			
AEPJ10 75AL..			
AEPJ10 95AL..			
AEPJ125 55AL..			
AEPJ125 75AL..			
AEPJ125 95AL..			

JOINTS - pack. 10 Pcs

Article			
GINJ10 55AL..			
GINJ10 75AL....			
GINJ10 95AL..			
GINJ125 55AL..			
GINJ125 75AL..			
GINJ125 95AL..			

AEPJ external corner (welded)



GINJ joints



Available in the colours: BF - GF - A (EF - C - TF - B - G - T - E on demand). The code of the selected colour must be added to the article code.
E.g.: AEPJ10 55AL... (white) AEPJ10 55ALB.

PROTERRACE ECO is a natural aluminium edging profile designed to protect the edges of the tiles laid on terraces and balconies. The profile is provided with a punched flange that ensures its fixing to the support. The front side of the profile protects the tile edges and is equipped with grooves that facilitate the grout grip. Thanks to its ease of application **PROTERRACE ECO** is a much sought after profile.

PROTERRACE ECO

ALUMINIUM



NATURAL ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm		
PTEE 08AN	8		
PTEE 10AN	10		
PTEE 125AN	12,5		

SILVER ANODIZED ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PTEE 08AA	8		
PTEE 10AA	10		
PTEE 125AA	12,5		

ARTICLES NOT FOR SALE SINGLY


1. Choose "PROTERRACE ECO" according to the tile thickness. 2. Cut "PROTERRACE ECO" to the desired length and fix it to the support with nails. 3. Apply the desired waterproofing system, sealing the joint between profile and waterproofing. 4. Lay the tiles, leaving about 5 mm between tiles and profile. 5. Seal the space between tiles and profile using PROBAND FIX.

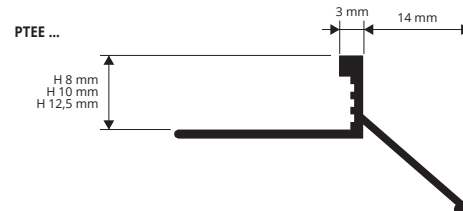

COLOURS

AN - Natural aluminium	AA - Anodized silver alum.
------------------------	----------------------------

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

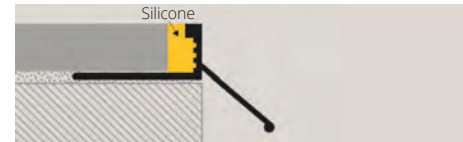


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


PROTERRACE PC

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

PROTERRACE PC is a perimeter profile in polished stainless steel inox aisi 304/1.4301-V2A designed to protect the screed on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make **PROTERRACE PC** a much sought after and easy to lay profile.

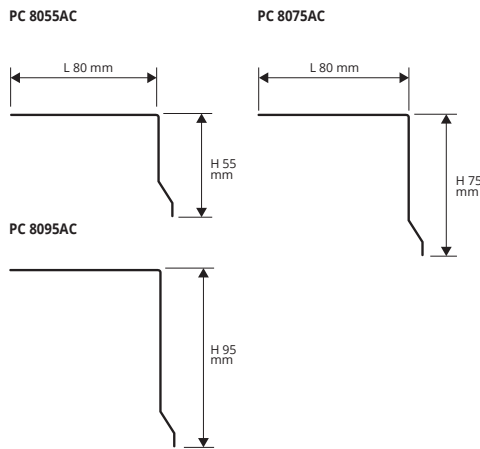

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

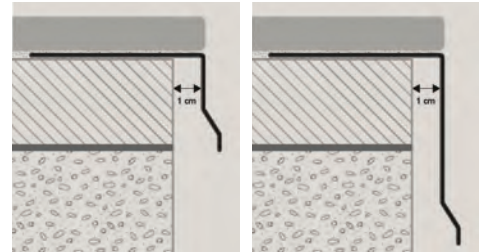


POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 7 Pcs - 18,9 lm (H 75 mm - 13,5 lm - H 95 mm - 5,4 lm)

Article	L x H mm		
PC 8055AC	80 x 55		
PC 8075AC	80 x 75		*
PC 8095AC	80 x 95		*

1. Choose "PROTERRACE PC" according to the desired height.
2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it.
3. Cut "PROTERRACE PC" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions.
4. Apply the desired waterproofing system.
5. Lay the tiles.

EXTERNAL CORNERS and JOINTS

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

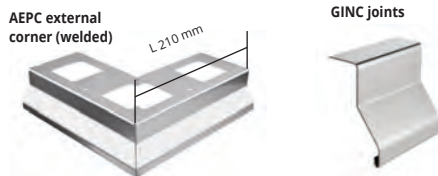

EXTERNAL CORNERS - pack. 10 Pcs

Article			
AEPC 55AC			
AEPC 75AC			
AEPC 95AC			



JOINTS - pack. 10 Pcs

Article			
GINC 55AC			
GINC 75AC			
GINC 95AC			


PROTERRACE PC

VARNISHED/COATED ALUMINIUM

PROTERRACE PC is a perimeter profile in varnished aluminium designed to protect the screed on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make **PROTERRACE PC** a much sought after and easy to lay profile.

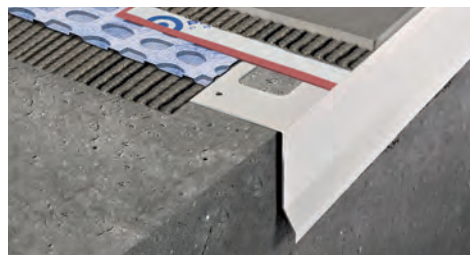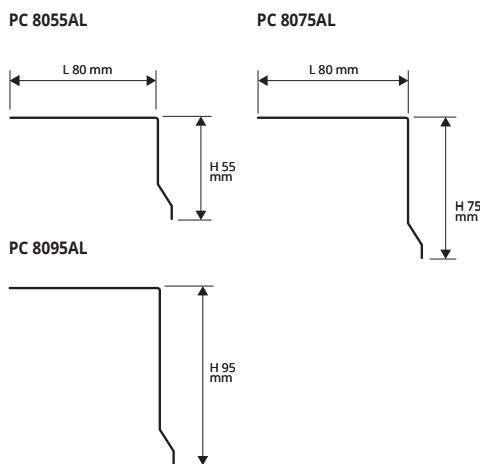

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

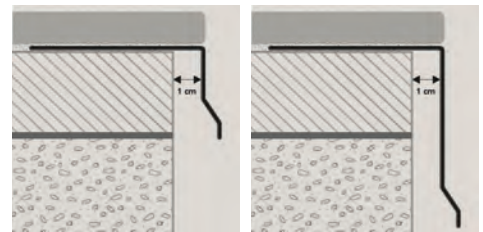

VARNISHED/COATED ALUMINIUM - bar length 2,7 lm
pack. 7 Pcs - 18,9 lm (H 75 mm - 13,5 lm - H 95 mm - 5,4 lm)

Article	L x H mm		
PC 8055AL...	80 x 55		*
PC 8075AL...	80 x 75		*
PC 8095AL...	80 x 95		*

Available in the colours: BF - GF - A (EF - C - TF - B - G - T - E on demand). The code of the selected colour must be added to the article code. E.g.: PC 8055AL... (white) PC 8055ALB.

* SEMIGLOSSY COLOURS ON DEMAND


B - White (9010)	G - Gray (7038)	T - Dark brown (8019)
E - Beige (1019)		

* EMBOSSED COLOURS ON DEMAND

BF - White (9010)	GF - Gray (7038)	A - Anthracite grey (no RAL)
EF - Beige (1019)	C - Corten	TF - Dark brown (8019)

EXTERNAL CORNERS and JOINTS

VARNISHED/COATED ALUMINIUM

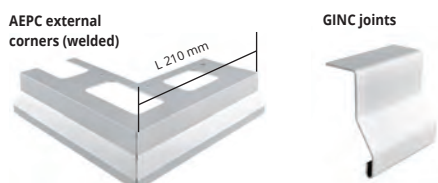

EXTERNAL CORNERS - pack. 10 Pcs

Article			
AEPC 55AL...			*
AEPC 75AL...			*
AEPC 95AL...			*

JOINTS - pack. 10 Pcs

Article			
GINC 55AL...			*
GINC 75AL...			*
GINC 95AL...			*

The code of the selected colour must be added to the article code. E.g.: AEPC 55AL... (white) AEPC 55ALB.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROTERRACE PTER is a perimeter profile in polished stainless steel inox aisi 304/1.4301-V2A designed to protect the screed on terraces and balconies. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make **PROTERRACE PTER** a much sought after and easy to lay profile.

PROTERRACE PTER

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




1. Choose "PROTERRACE PTER" according to the desired height.
2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it.
3. Cut "PROTERRACE PTER" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions.
4. Apply the desired waterproofing system.
5. Lay the tiles.


PTER 8042AC




PTER 8055AC



PTER 8075AC



PTER 8095AC



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	L x H mm
PTER 8042AC	80 x 42
PTER 8055AC	80 x 55
PTER 8075AC	80 x 75
PTER 8095AC	80 x 95

EXTERNAL CORNERS and JOINTS

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A


EXTERNAL CORNERS - pack. 10 Pcs

Article
AEPR 42AC
AEPR 55AC
AEPR 75AC
AEPR 95AC

JOINTS - pack. 10 Pcs

Article
GIN 42AC
GIN 55AC
GIN 75AC
GIN 95AC

AEPR external corner (welded)



GIN joints



PROTERRACE PTER is a perimeter profile in varnished aluminium designed to protect the screed on terraces and balconies. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make **PROTERRACE PTER** a much sought after and easy to lay profile.

PROTERRACE PTER


VARNISHED/COATED ALUMINIUM




EXAMPLES OF LAYING (for laying instructions, see above)



PTER 8042AL...




PTER 8055AL...



PTER 8075AL...



PTER 8095AL...



VARNISHED/COATED ALUMINIUM - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm
PTER 8042AL...	80 x 42
PTER 8055AL...	80 x 55
PTER 8075AL...	80 x 75
PTER 8095AL...	80 x 95

Available in the colours: BF - GF - A (EF - C - TF - B - G - T - E on demand). The code of the selected colour must be added to the article code. E.g.: PTER 8042AL... (white) PTER 8042ALB.

* EMBOSSED COLOURS ON DEMAND

BF - White (9010)	GF - Gray (7038)	A - Anthracite grey (no RAL)
EF - Beige (1019)	C - Corten	TF - Dark brown (8019)

* SEMIGLOSSY COLOURS ON DEMAND

B - White (9010)	G - Gray (7038)	T - Dark brown (8019)
E - Beige (1019)		

EXTERNAL CORNERS and JOINTS

VARNISHED/COATED ALUMINIUM


EXTERNAL CORNERS - pack. 10 Pcs

Article
AEPR 42AL...
AEPR 55AL...
AEPR 75AL...
AEPR 95AL...

JOINTS - pack. 10 Pcs

Article
GIN 42AL...
GIN 55AL...
GIN 75AL...
GIN 95AL...

AEPR external corners (welded)




GIN joints




The code of the selected colour must be added to the article code. E.g.: AEPR 55AL... (white) AEPR 55ALB.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

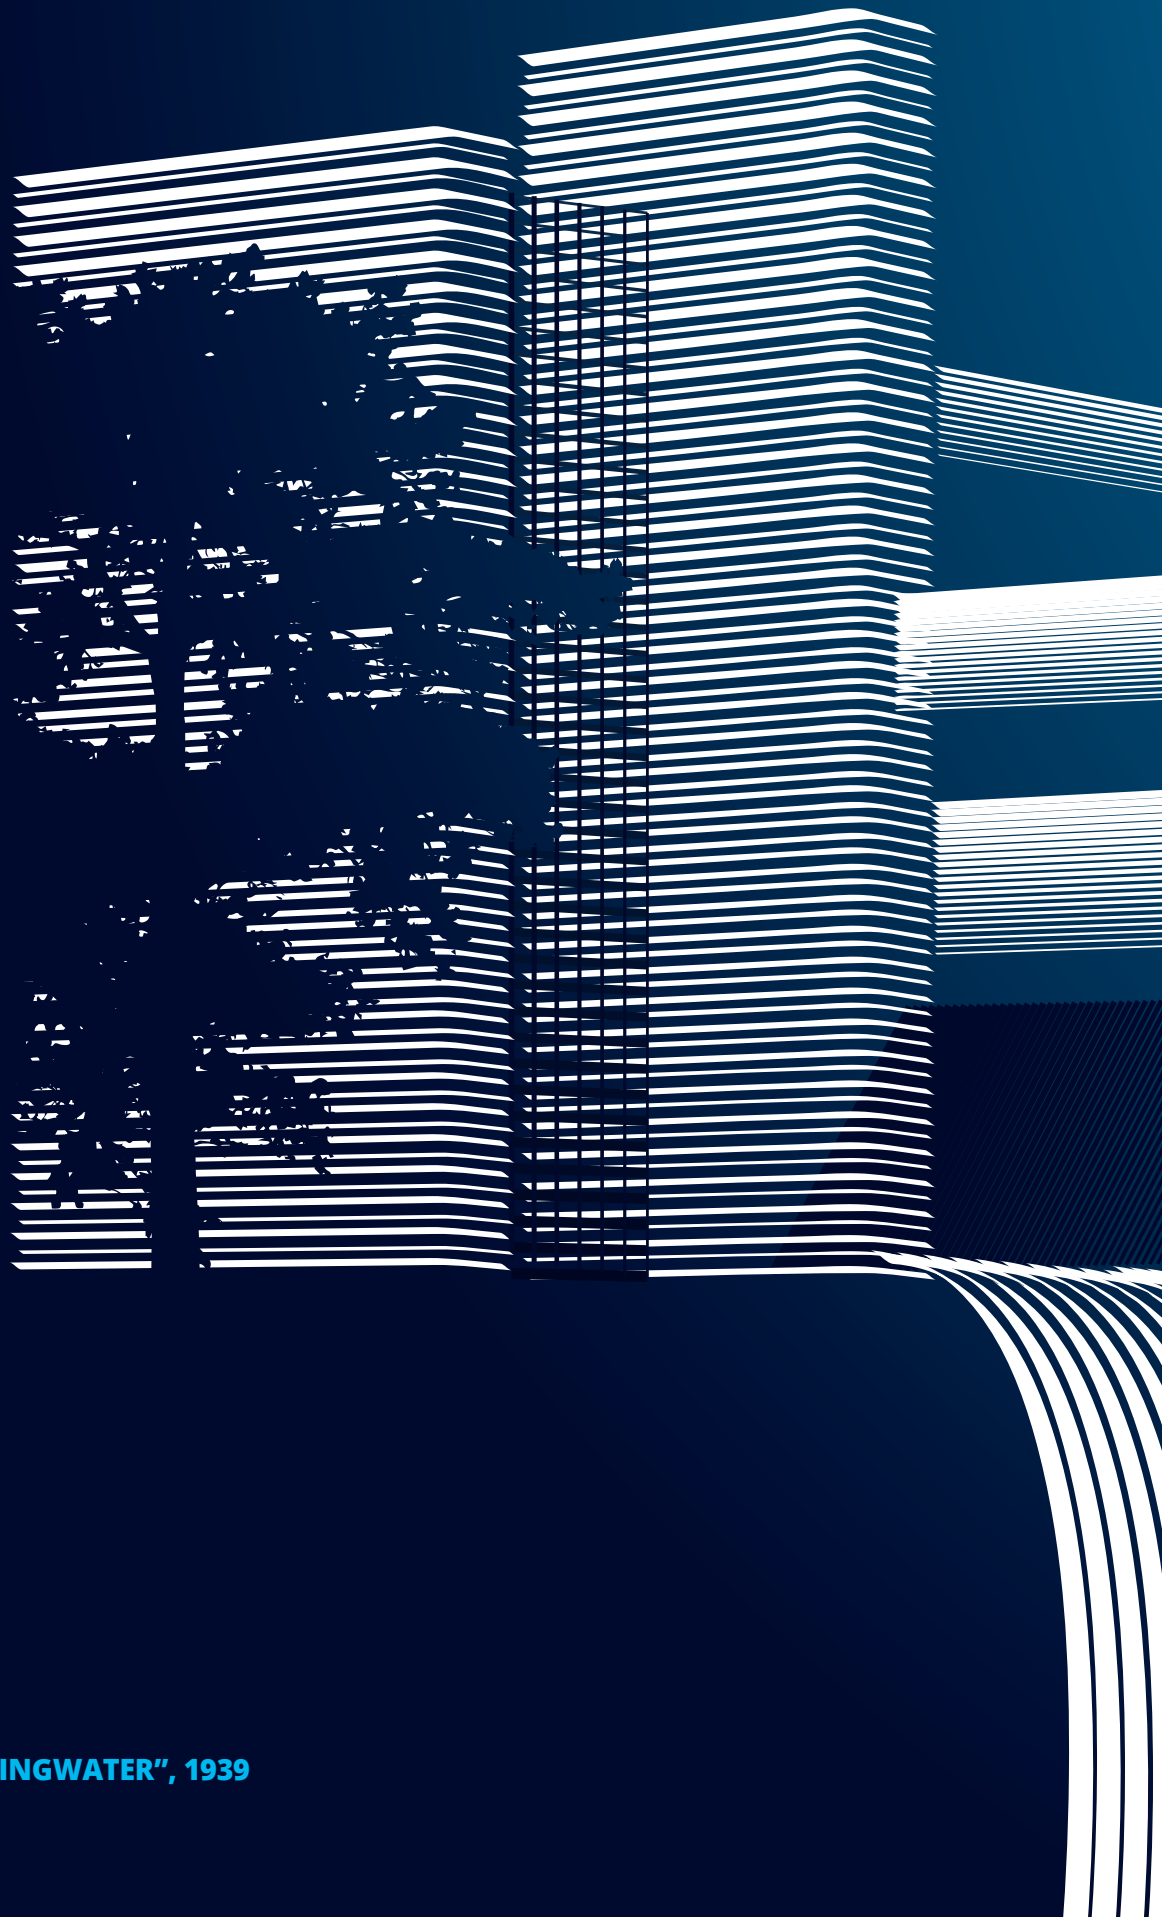

KAUFMANN HOUSE, "FALLINGWATER", 1939
Frank L. Wright

MEMBRANE AND PANELS

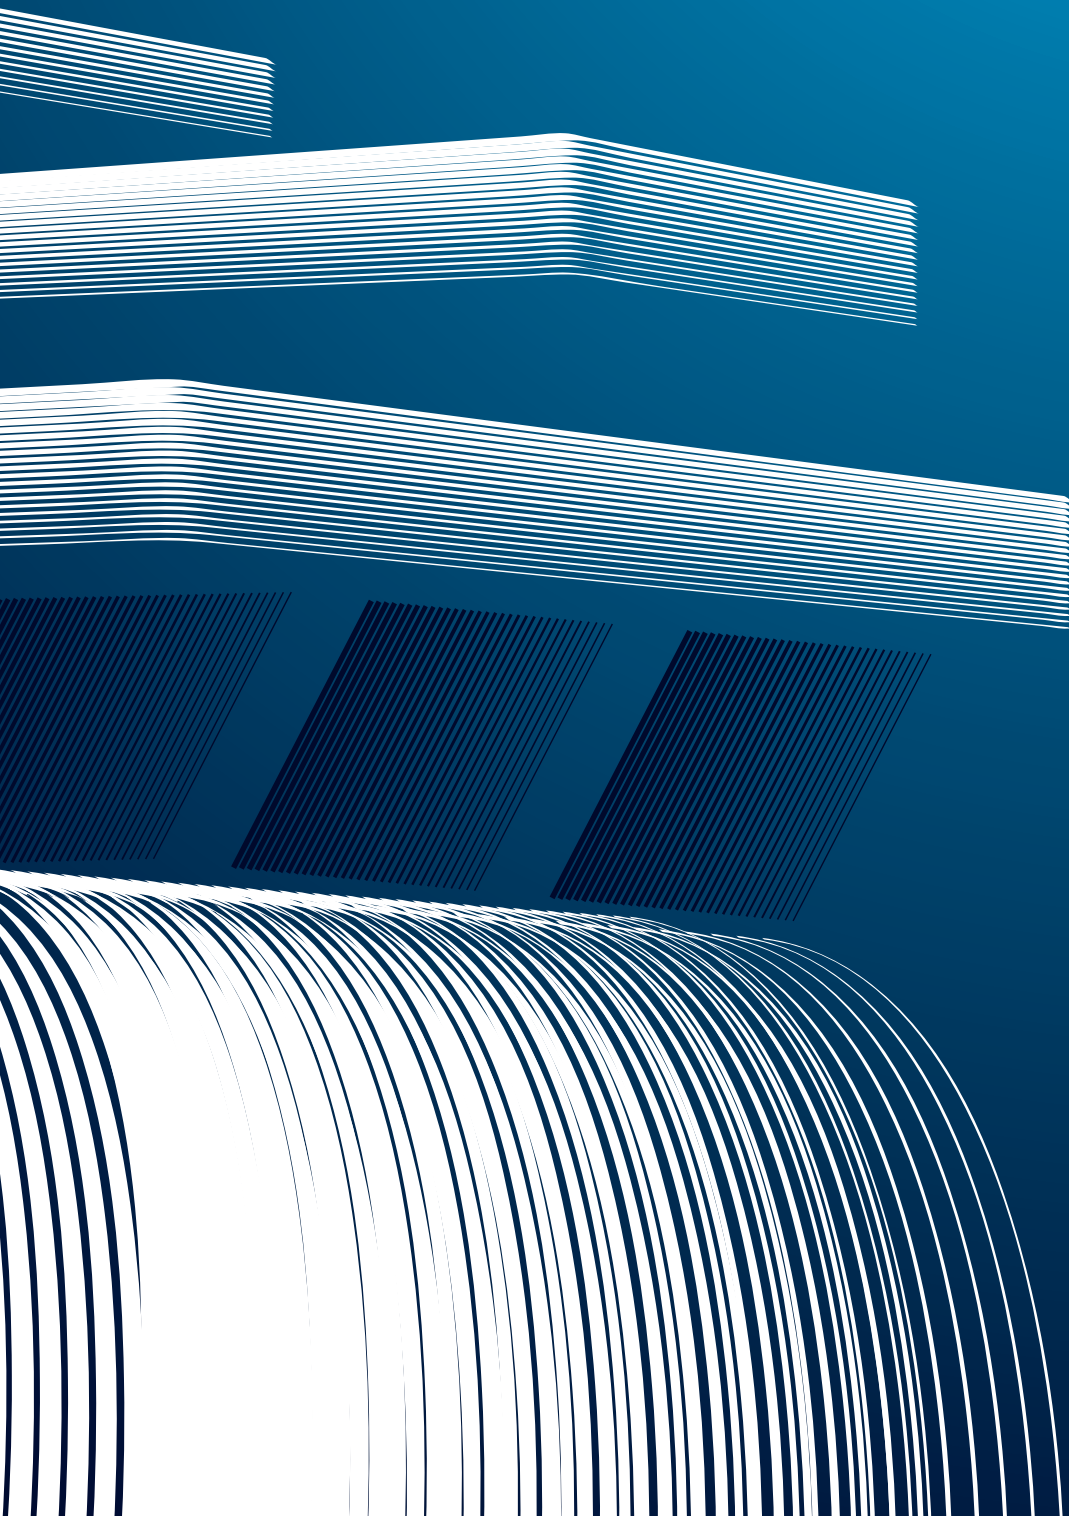



PRODESO® HEAT GRIP SYSTEM

PATENTED



PATENTED

UA2016A002209
EP3225763 A1
2696795
CN 107268933 A
US D818,615S
US D818,616S
US D818,617S
US D832,467 S
US D841,837S
US 9,726,383 B1
US 10,502,434 B2
CA 2,935,062
DESIGN PATENT
Patent pending

© 2020 All rights reserved by Progress Profiles, Printed in Italy

A New evolution

with the goal of flexibility, innovation and energy efficiency

The system is composed of three elements: PRODESO® HEAT GRIP MEMBRANE, PRODESO® HEAT GRIP CABLE e PRODESO® HEAT GRIP THERMOSTAT KIT. The polyethylene membrane with uncoupling, waterproofing and vapour management features has a 8,5 mm thickness and a thermowelded non-woven fabric on the back side, which guarantees the adhesion to the substrate. The new membrane structure allows a perfect fixing of the


heating cable and a crack-bridging ability 5 times more than the PRODESO HEAT. The cables of last generation are composed of many resistances, each one 60 cm long, in a parallel circuit. If the cable is damaged, only the broken resistance stops working but not the whole cable. The thermostat of last generation interfaces with Android and Apple devices, that is why it is possible to adjust all settings and time schedule using an application with internet connection as remote control.

Advantages

- Only 8.5 mm thickness
- Higher crack-bridging ability
- Uncoupling
- Waterproofing
- Vapour management ducts
- Load distribution
- New constant power cable
- Remote controlled thermostat




UNCOUPLING



WATERPROOFING



VAPOR AND MOISTURE MANAGEMENT

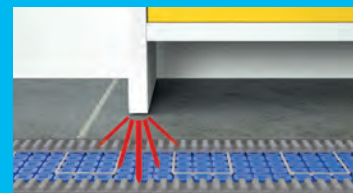

LOAD DISTRIBUTION

PRODESO® HEAT GRIP MEMBRANE

It is a polyethylene uncoupling and waterproofing membrane, which allows the vapour management, with reliefs to embed and hold the electric heating cable. It has on the lower side a polypropylene non-woven fabric for a better bond to the substrate. The unique design of **PRODESO® HEAT GRIP MEMBRANE** allows:

- Flexible heating zone selection
- Cost and time saving installation
- Uncoupling crack isolation
- Vapor management
- Waterproofing
- Support load distribution
- Small height increase 8,5 mm




PRODESO® HEAT GRIP CABLE

It is a constant power electric heating cable to be embedded between the reliefs of **PRODESO® HEAT GRIP MEMBRANE**. The cable distance can be 6.2 or 9.3 cm


PRODESO® HEAT GRIP THERMOSTAT KIT

It is composed of a Wi-Fi digital thermostat, a flush-mounting box, corrugated pipe, two floor temperature sensors and clips to fix the cable.

LAYING'S SECTION

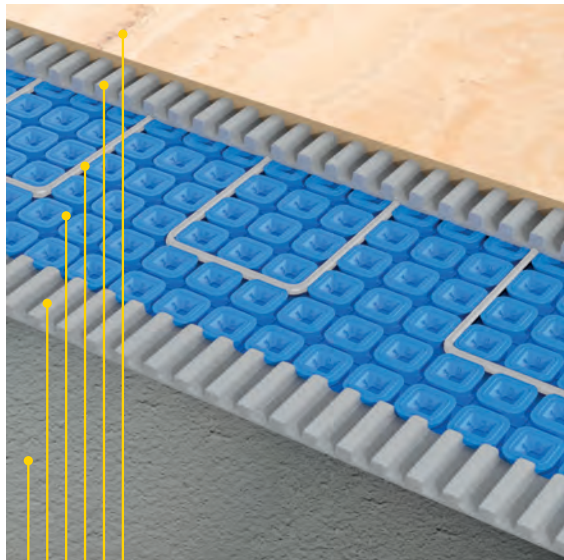

- 1 CERAMIC OR PORCELAIN TILES
- 2 THIN-SET / ADHESIVE
- 3 PRODESO® HEAT GRIP CABLE
- 4 PRODESO® HEAT GRIP MEMBRANE
- 5 THIN-SET / ADHESIVE
- 6 SCREED / PLYWOOD / OSB



PRODESO® HEAT GRIP MEMBRANE UNCOUPLING WATERPROOFING MEMBRANE FOR ELECTRIC HEATING - 13/4,5 M²

Article	Width roll H x L lm	Tot. m ²
PDESHG 131/E Prodeso Heat Grip Membrane	(1 lm x 13 lm = 13 m ²)	13
PDESHG 451/E Prodeso Heat Grip Membrane	(1 lm x 4,5 lm = 4,5 m ²)	4,5

PRODESO® HEAT GRIP CABLE

Article	Cable length lm	Heated surface with a cable distance of 6,2 cm	Heated surface with a cable distance of 9,3 cm	Total Power W
PDHGCB 20	19,80	1,19	2,00	250
PDHGCB 26	25,80	1,55	2,50	325
PDHGCB 31	30,80	1,83	3,00	385
PDHGCB 36	36,00	2,14	3,50	450
PDHGCB 40	40,20	2,38	4,00	500
PDHGCB 46	46,20	2,74	4,50	575
PDHGCB 52	52,20	3,10	5,00	650
PDHGCB 62	61,80	3,69	6,00	775
PDHGCB 72	72,00	4,29	7,00	900
PDHGCB 82	82,20	4,88	8,00	1025
PDHGCB 94	94,20	5,60	9,00	1175
PDHGCB 104	103,80	6,19	10,00	1300
PDHGCB 132	132,00	7,86	12,50	1650
PDHGCB 158	157,80	9,40	15,00	1875

PRODESO® HEAT GRIP POWER CABLE

Article	Cable length lm
PDHGCBF	35,00 / 14,00



PRODESO® HEAT GRIP THERMOSTAT KIT - TOUCH SCREEN - WI-FI KIT DIGITAL THERMOSTAT

Article	Description
PDHTSMWTK	Kit complete with Wi-Fi digital thermostat
PDHTSMWT 230	Wi-Fi digital thermostat



PRODESO® HEAT GRIP THERMOSTAT KIT - TOUCH SCREEN - WI-FI PDHTSKT 230V

Article	Description
PDHTSMWT 230	Touch screen Wi-Fi digital thermostat
PDSOT	Floor temperature sensors
PDSHI	Flush-mounting box
PDHCF 202	Flexible corrugated pipe
PCBLF	Plastic Clip to hold heating cable

PRODESO® HEAT CABLE CLIP

Plastic Clip to hold heating cable on PRODESO® HEAT MEMBRANE (40 mm x 5 mm)

Article	Pcs/Pack.
PCBLF	200



PROCOFON

Roll of closed-cell polyethylene with adhesive used as edging between the wall and screed or where there are expansion joints.

Article	Thick. x H mm	lm/roll
PEF 550A	5 X 50	25



ROLLER FOR CABLE INSTALLATION

Aluminum roller 15 cm long, fixed to a metal structure and equipped with an ergonomic plastic handle, facilitates and speeds up the insertion of the heating cables between the reliefs of the membranes PRODESO® HEAT e PRODESO® HEAT GRIP.

Article	L cm	Pcs/pack
PSC	15	1





PRODESO® HEAT SYSTEM

PATENTED



PATENTED

002748822
EP 3,183,505 B1
US 8,176,694 B2
US 9,188,348 B2
US 9,416,979 B2
US 9,518,746 B2
US 9,625,163 B2
US 9,719,265 B2
US 9,777,931 B2
US 10,107,505 B2
US 10,006,644 B2
US 10,215,423 B2
US 10,408,469 B2
Patents Pending

© 2020 All rights reserved by Progress Profiles, Printed in Italy

A World of warmth and comfort in respect with the nature.


Progress Profiles innovative and patented PRODESO® HEAT SYSTEM for electrical walls and floors heating ensures pleasant warm and comfortable environment with short laying times and at low cost. The system can be used on all kinds of substrate thanks to the membrane uncoupling and waterproofing properties. Temperature and operating times can be controlled from a latest generation thermostat that also guarantees significant savings in energy costs. The system

is quick and easy to install in all conditions and has an overall thickness of only 5.5 mm, far thinner than any alternative system. It is also maintenance free over time. This smart, responsible technology supports the growing demand for sustainable solutions and energy saving while also satisfying the needs of contemporary architecture and evolved home automation. A world of natural, warm wellbeing.

Advantages




UNCOUPLING



WATERPROOFING



VAPOR AND MOISTURE MANAGEMENT

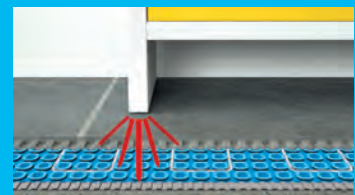

LOAD DISTRIBUTION

PRODESO® HEAT MEMBRANE

Is a polypropylene uncoupling and waterproofing membrane, with rounded square shaped reliefs. These reliefs form a channel specially designed to embed and hold the **PRODESO® HEAT CABLE**. Product with a new design improvement over the previous version and with many advantageous plus. **PRODESO® HEAT MEMBRANE** unique design allows for:

- Flexible heating zone selection
- Cost and time saving installation
- Uncoupling crack isolation
- Vapor management
- Waterproofing
- Support load distribution
- Small height increase 5,5 mm




PRODESO® HEAT CABLE

Is a heating cable designed to work in conjunction with **PRODESO® HEAT MEMBRANE**. Cable separation could be 6,2 cm on wall and 9,3 cm on floor.

PRODESO® HEAT THERMOSTAT KIT

It is composed by a digital or analogic programmable thermostat, flush-mounting box, corrugated pipe and two floor temperature sensors.

LAYING'S SECTION

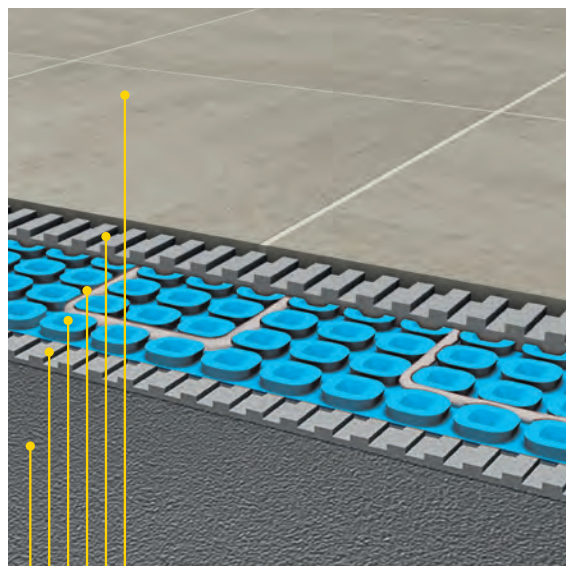

- 1 CERAMIC OR PORCELAIN TILES
- 2 THIN-SET / ADHESIVE
- 3 PRODESO® HEAT CABLE
- 4 PRODESO® HEAT MEMBRANE
- 5 THIN-SET / ADHESIVE
- 6 SCREED / PLYWOOD / OSB



PRODESO® HEAT UNCOUPLING WATERPROOFING MEMBRANE FOR ELECTRIC HEATING - 15/5 M²

Article		Width roll H x L lm	Tot. m ²
PDESH 151/E	Prodeso Heat Membrane	(1 lm x 15 lm = 15 m ²)	15
PDESH 051/E	Prodeso Heat Membrane	(1 lm x 5 lm = 5 m ²)	5

PRODESO® HEAT CABLE

Article	Cable length lm	Heated surface with a cable distance of 6,2 cm	Heated surface with a cable distance of 9,3 cm	Total Power W	Total electric resistance Ω	Current intensity I
230 VOLTS						
PDHCB 12	12,07 lm	0,70 m ²	1,1 m ²	150	352,67	0,65
PDHCB 17	17,66 lm	1,00 m ²	1,6 m ²	225	235,11	0,98
PDHCB 23	23,77 lm	1,40 m ²	2,2 m ²	300	176,33	1,30
PDHCB 29	29,87 lm	1,80 m ²	2,7 m ²	375	141,07	1,63
PDHCB 35	35,97 lm	2,20 m ²	3,3 m ²	450	117,56	1,96
PDHCB 41	41,56 lm	2,50 m ²	3,8 m ²	525	100,76	2,28
PDHCB 47	47,67 lm	2,90 m ²	4,4 m ²	600	88,17	2,61
PDHCB 53	53,77 lm	3,30 m ²	5,0 m ²	675	78,37	2,93
PDHCB 59	59,87 lm	3,70 m ²	5,5 m ²	750	70,53	3,26
PDHCB 71	71,57 lm	4,40 m ²	6,6 m ²	900	58,78	3,91
PDHCB 83	83,77 lm	5,10 m ²	7,7 m ²	1050	50,38	4,57
PDHCB 95	95,47 lm	5,90 m ²	8,8 m ²	1200	44,08	5,22
PDHCB 107	107,67 lm	6,60 m ²	10,0 m ²	1350	39,19	5,87
PDHCB 119	119,37 lm	7,40 m ²	11,1 m ²	1500	35,27	6,52
PDHCB 143	143,27 lm	8,80 m ²	13,3 m ²	1800	29,39	7,83
PDHCB 179	179,37 lm	11,1 m ²	16,6 m ²	2250	23,51	9,78

PRODESO® HEAT GRIP POWER CABLE

Article	Cable length lm	
PDHGCBF	35,00	14,00



PRODESO® HEAT THERMOSTAT KIT - ANALOGIC THERMOSTAT KIT WITH ANALOGIC THERMOSTAT

Article	
PDHTSK 230V	Kit complete with analogic thermostat
PDHTSM 230	Analogic thermostat



PRODESO® HEAT THERMOSTAT KIT - TOUCH SCREEN THERMOSTAT KIT WITH DIGITAL THERMOSTAT

Article	
PDHTSKT 230V	Kit complete with digital thermostat
PDHTSMT 230	Digital thermostat



PRODESO® HEAT CABLE CLIP

Plastic Clip to hold heating cable on PRODESO® HEAT MEMBRANE (40 mm x 5 mm)

Article		Pcs/Pack.
PCBLF		200



PROCOFON

Roll of closed-cell polyethylene used as edging between the wall and screed or where there are expansion joints.

Article	Thick. x H mm	lm/roll
PEF 550A	5 X 50	25



ROLLER FOR CABLE INSTALLATION

Aluminum roller 15 cm long, fixed to a metal structure and equipped with an ergonomic plastic handle, facilitates and speeds up the insertion of the heating cables between the reliefs of the membranes PRODESO® HEAT e PRODESO® HEAT GRIP.

Article	L cm	Pcs/pack
PSC	15	1



PRODESO® HEAT KIT SYSTEM

Floor and wall electric heating system kit, composed of 3 pieces: **PRODESO® HEAT MEMBRANE**, **PRODESO® HEAT CABLE** AND **PRODESO® HEAT THERMOSTAT KIT**. The polyethylene membrane, with its uncoupling, waterproofing and vapour management properties, has a thickness of just 5.5 mm. *(available 2019)




PRODESO® HEAT KIT SYSTEM

Wall and floor electric heating system

Article	m ² membrane	Cable	Power tot W	Thermostat kit	Wall heated surface (with a cable distance of 6,2 cm)	Floor heated surface (with a cable distance of 9,3 cm)	price €/ kit
PDESHK 4	3,2	PDHCB 23	300	1	1,40	2,20	495,00 €
PDESHK 7	5,6	PDHCB 41	520	1	2,50	3,80	660,00 €
PDESHK 10	8,0	PDHCB 59	750	1	3,70	5,50	820,00 €

PRODESO HEAT THERMOSTAT KIT: digital touch screen thermostat, 2 temperature sensors, flush mounting box, flexible corrugated pipe.

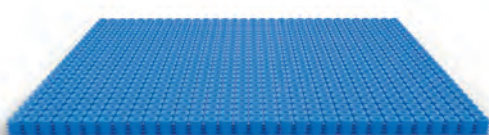

PRODESO HEAT MEMBRANE



PRODESO HEAT CABLE



DIGITAL TOUCH




PRODESO HEAT THERMOSTAT KIT

PRODESO® HEAT STICK MEMBRANE

UNCOUPLING AND WATERPROOFING MEMBRANE

Uncoupling and waterproofing membrane in polypropylene with a thickness of 5.5 mm. The membrane is provided on top with pseudo-square reliefs which create channels for fixing the electric heating cable. On the back of the membrane there is a layer of adhesive which guarantees its fixing to the support, clean plywood, OSB, metal or old flooring.

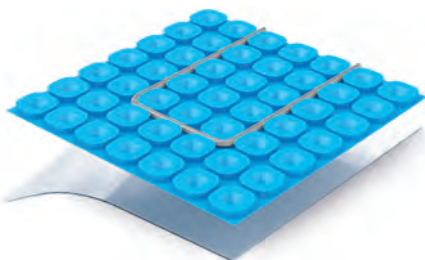

PRODESO® HEAT STICK MEMBRANE


UNCOUPLING WATERPROOFING MEMBRANE FOR ELECTRIC HEATING - 15/5 M²

Article	Description	Width roll LxH Im	Tot. m ²		
PDESHST 151/E Prodeso Heat Stick Membrane		(1 ml x 15 ml = 15 m ²)	15		
PDESHST 051/E Prodeso Heat Stick Membrane		(1 ml x 5 ml = 5 m ²)	5		



PRODESO® ECO STICK MEMBRANE is an uncoupling and waterproofing membrane in polyethylene with a thickness of 3.5 mm. The membrane is provided on top with dovetail square cavities and on bottom with a layer of adhesive which guarantees its fixing to the support, clean plywood, OSB, metal or old flooring. Thanks to its particular geometry PRODESO ECO STICK MEMBRANE transfers loads directly to the support and guarantees the laying of any flooring and the waterproofing even in case of cracked and moisture-sensitive substrates.
*(available 2019)

PRODESO® ECO STICK MEMBRANE

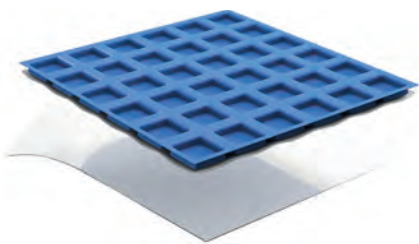

PRODESO® ECO STICK MEMBRANE
UNCOUPLING AND WATERPROOFING MEMBRANE - Thickness 3,5 mm

Article	H roll (MT)	L roll (MT)	€/ml	€/roll
PDESECT 3505/EN	1	5	18,60	93,00
PDESECT 3530/EN	1	30	16,20	486,00





PRODESO® ECO is an uncoupling and waterproofing membrane for problematic supports and horizontal surface of any size that does not require expansion joints in the screed before laying ceramic and natural stone tiles. PRODESO® ECO ensures the laying of every flooring also in case of cracked and not perfectly cured substrates and therefore with possible vapor pressure and in case of old tiles. Membrane in high density polyethylene provided with a grid structure of square cavities, each cut back in a dovetail configuration. On the back side it is provided with a non-woven thermo-welded polypropylene fabric that guarantees the adhesion with the adhesive.

PRODESO® ECO MEMBRANE

PRODESO® ECO MEMBRANE
UNCOUPLING AND WATERPROOFING MEMBRANE - Thickness 3,5 mm

Article	H roll (MT)	L roll (MT)	€/ml	€/roll
PDESEC 3505/EN	1	5	15,50	77,50
PDESEC 3530/EN	1	30	13,50	405,00

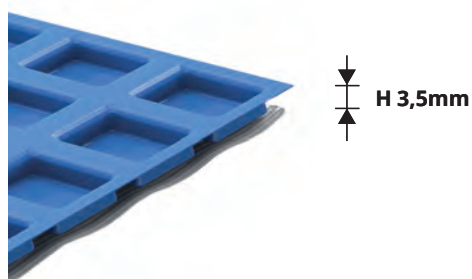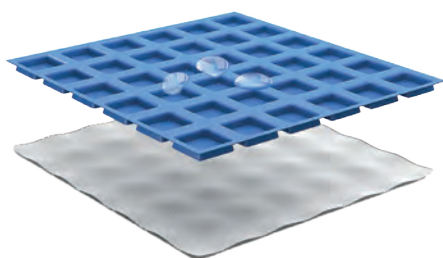

AREA OF USE

- **Use** - Uncoupling membrane for substrates before laying ceramic and natural stone floors. On cement screeds also cracked and not completely cured, existing ceramic flooring and natural stones anchored to the substrate, concrete not completely cured and wooden structures. Very resistant to saline, acid and alkaline solutions, alcohol and oils. In case of particular products, contact the technical office.
- **Don't use** - On lightweight screeds not suitable for the laying of flooring.

WARNINGS

Protect the membrane during installation using walking boards along the main routes. Do not use on substrates subject to continuous rising of water. For further information contact our technical department.



PRODESO® DRAIN SYSTEM

PATENTED



Discover Prodeso Drain!! With its essential draining/waterproofing function guaranteed by the most advanced system in the world.

PRODESO® DRAIN SYSTEM is an innovative and patented membrane of last generation for the draining and waterproofing under tile to guarantee a correct and quick drying of the adhesive in case of large sizes too. The "inner room " drying and drainage area which is created under the tile prevents the up movement of triacetates present in the adhesives and the formation of efflorescence in the joints. The product consists of a high density polyethylene sheet, with semicircular truncated pyramidal cavities, to which is thermo-welded a polypropylene draining fabric above and, below, it is thermo-glued a non-woven


polypropylene fabric. PRODESO® DRAIN uncoupling and vapor management features allow its application on not perfectly cured substrates. Easy and quick to install, it has an overall thickness of only 5 mm, less than any other system and does not require the use of special adhesives. Versatility is an essential quality of this product. Made to ensure the insulation and make the laying of tiles easy both outdoor and in indoor humid areas too such as SPA spas or indoor pools.

An innovative technology that perfectly combines with a simplicity, speed and effectiveness of installation.

Advantages



UNCOUPLING



WATERPROOFING



UNDERTILE FLOORING DRAINAGE / DRYING / MICRO-VENTILATION




LOAD DISTRIBUTION

© 2020 All rights reserved by Progress Profiles, Printed in Italy

PRODESO® DRAIN SYSTEM is a waterproof, draining, uncoupling membrane that allows the vapour management, with a thickness of only 5 mm. The membrane is composed of a high density polyethylene sheet to which a draining layer is thermo-welded at the top; a non-woven polypropylene fabric is glued to the bottom. The reliefs of the polyethylene sheet, create an "air chamber" under the tiles which favors the movement of the air and allows the drainage and rapid drying of the adhesive preventing the up movement of triacetates and the formation of efflorescence in the joints. Thanks to its structure, PRODESO® DRAIN can also be applied on substrates that are not perfectly cured. Its draining capacity makes it particularly suitable for laying big sizes both indoors and outdoors.

PRODESO® DRAIN SYSTEM

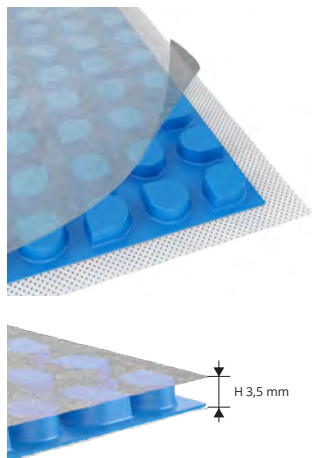

PRODESO® DRAIN UNCOUPLING, DRAINING AND WATERPROOFING MEMBRANE - 20M²

Article	Description	Roll lenght H x L ML	Tot. m ²
PDESDR 201/E	Prodeso Drain Membrane	(92 cm x 22 ml = 20 m ²)	20


AREA OF USE

- **Use** - Drainage, uncoupling and vapour management for ceramic and natural stone floors. On cementitious screeds, even cracked and not completely cured, ceramic floors, tiles, existing natural stones anchored to the substrate, concrete, even if not completely cured, and wooden substrates. Particularly suitable for the application of big sizes tiles. Very resistant to saline, acid and alkaline solutions, to alcohol and oils; in case of particular products, contact the technical office.

- **Do not use** - On lightweight screeds not suitable for laying tiles.


WARNINGS

Once installed, the membrane must be protected against heavy mechanical loads to avoid damage. It is advisable to place running boards to protect the membrane. Do not apply with adhesives containing solvents and on substrates subject to continuous rising moisture. For further informations, consult the technical office.

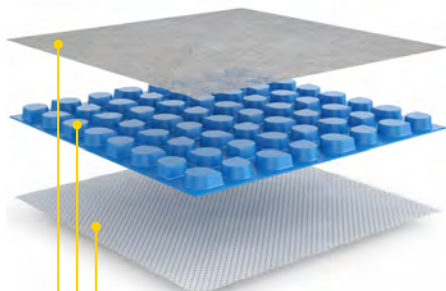

- 1 FABRIC IN POLYPROPYLENE
- 2 SHEET IN POLYETHYLENE
- 3 FABRIC IN POLYPROPYLENE

LAYING'S SECTION

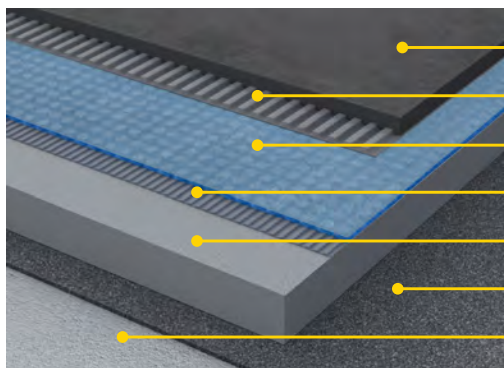

- 1 LARGE SIZE TILES
- 2 ADHESIVE / THIN-SET
- 3 PRODESO® DRAIN MEMBRANE
- 4 ADHESIVE / THIN-SET
- 5 SCREED / PLYWOOD / OSB
- 6 BITUMINOUS SHEET
- 7 CONCRETE





PRODESO® MEMBRANE SYSTEM


PATENTED




© 2020 All rights reserved by Progress Profiles, Printed in Italy

Uncoupling and waterproofing system, particularly good for problematic screeds substrates.


PRODESO® MEMBRANE SYSTEM SECTION

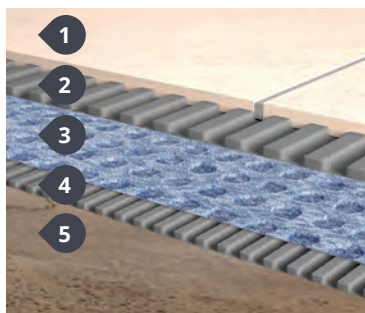


1. Ceramic / Stone or Porcelain Tiles
2. Adhesive
3. PRODESO®
4. Adhesive
5. Screed, Plywood, OSB etc.

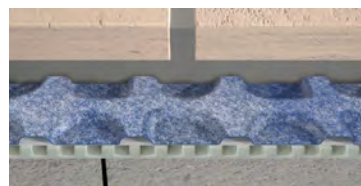


UNCOUPLING

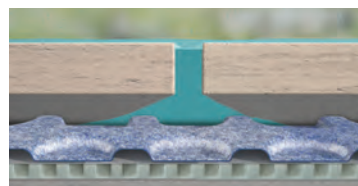


WATERPROOFING

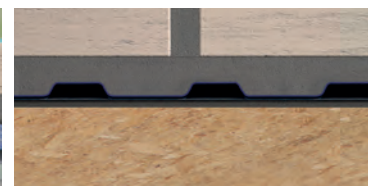

UNCOUPLING

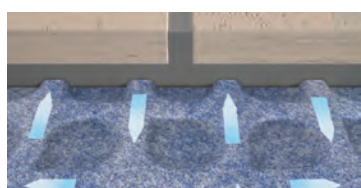

VAPOR AND MOISTURE MANAGEMENT

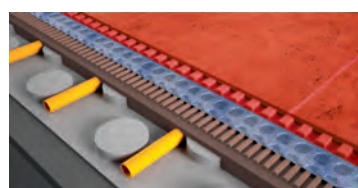

FLOOR HEATING DISTRIBUTION



SUPPORT/LOAD DISTRIBUTION


It is an uncoupling and waterproofing membrane for problematic substrates, balconies, terraces and horizontal surfaces of any size without expansion joints in the screed before the laying of ceramic and natural stone. **PRODESO®** ensures the laying of the flooring and the waterproofing of the substrate also in case of old tiles, on cracked and not perfectly cured substrates, and therefore with possible vapour pressure.

PRODESO® MEMBRANE

UNCOUPLING & WATERPROOFING
MEMBRANE

UNCOUPLING & WATERPROOFING MEMBRANE - Thickness H 3,5 mm

Article	H roll (LM)	L roll (LM)	roll x pallet			
PDES 3530/EN	1	30	8			
PDES 3505/EN	1	5	-			

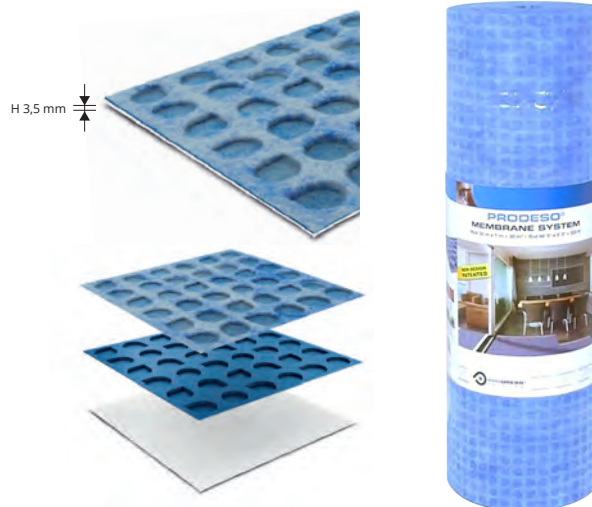

WHY USE PRODESO® MEMBRANE SYSTEM

Time Efficient: Prodeso Membrane reduces drastically the installation times because from the installation of the membrane up to the laying of flooring you can work without interruption.

Flexible: it is suitable for every types of subfloor including very large surfaces both indoor and outdoor.

Safe: it is suitable for substrates with cracks as it does not transmit tension of the substrate to the tile coverings and vice versa. It is also suitable on substrates not perfectly cured since it allows the vapour management.

WARNINGS

Do not lay tiles with a size less than 5 x 5 cm. The technical and application details can be found in the **PRODESO® MEMBRANE SYSTEM** brochure. For other informations not described in the brochure **PRODESO® MEMBRANE SYSTEM**, refer to the technical department.

PROBAND 150/250 is a waterproofing polyethylene tape with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

PROBAND 150/250

ROLLS IN HDPE AND PP

ROLLS IN HDPE AND PP - Thickness 0,42 mm

Article	Roll width H mm x L lm	Rolls/ Pack.			
PRBPE 1505	150 x 5	20			
PRBPE 1507	150 x 7,5	16			
PRBPE 1530	150 x 30	6			
PRBPE 2505	250 x 5	10			
PRBPE 2530	250 x 30	3			

PRBPE 1505 available till depletion



AREA OF USE

• **Use** - Terraces, balconies and outside surfaces of any dimension, bathrooms, showers, swimming pools and tanks. To realize waterproofing joints between floor and wall and along two adjacent rolls of **PROFOIL**, **PRODESO® MEMBRANE SYSTEM** and **PRODESO® HEAT/GRIP SYSTEM**

• **Don't use** - On bituminous coverings, over thermal-insulating layer and lightweight screed. With adhesives containing solvents.

WARNINGS

Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications call the technical department

RECOMMENDED ADHESIVES FOR THE LAYING OF PRODESO® MEMBRANE


 KERAFLEX EASY ULTRALITE S1 KERAFLEX MAXI S1	 F.55 CERMONO PLUS F.55 CERFIX F.55 CERMONO RAPIDO	 EXTRA 30 MAXI ADEFLEX GREEN S1 EXTRA 30 POWER	 H40 NO LIMITS H40 REVOLUTION H40 EXTREME	 SUPERFLEX K77 POWERFLEX K50 LITOSTONE K99	 FLEXBOND C2TES1 FLEXBOND LIGHT C2TES1 WETBOND RAPID C2F	 GRIGOKOLL TEX GRIGOKOLL MAX GRIGOKOLL VELOX
 CERAM 255 STARFLEX CERAM 255 EASY S1 CERAM 270 MULTIFLOW	 ULTRAGRES 440 ULTRAGRES FLEX ULTRAGRES FAST	 PERICOL R-FLEX PERICOL EXTRA FLEX PERICOL FLEX	 335 MAXI S 335 SUPER FLEX 325 RAPID FL	 ARDEX X 78 ARDEX X 90 OUTDOOR ARDEX AF 495	 MUREFLEX MFK 45 ADESIVO FBS 75 MAXIMO M 41	 RT UNIVERSAL RT HI TECH RT RAPID FLEX
 SEYFLEX S1 SEYULTRA T TIXOSEY	 KRISTAL C2TE EXTRA C2TES1	 AZ 59 RAPID MAXI SPECIAL ONE	 CERMIPLUS 2.0 CERMIPLUS XL FLEX 2.0			

PREFORMED CORNERS

Internal and external preformed corners in polyethylene provided on both side with nonwoven polypropylene fabric that guarantees its adhesion to the support.



EXTERNAL CORNER



INTERNAL CORNER

PREFORMED CORNERS IN HDPE AND PP

Thickness 0,42 mm

Article	H x L mm	Pcs/Pack.		
PRBI (internal)	150 x 150	10 Pcs		
PRBE (external)	150 x 150	10 Pcs		

AREA OF USE

- **Use** - Terraces, balconies and outside surfaces of any dimension, bathrooms, showers, swimming pools and tanks. To realize waterproofing joints between floor and wall and along two adjacent rolls of PROFOIL, PRODESO® MEMBRANE SYSTEM and PRODESO® HEAT/GRIP SYSTEM
- **Don't use** - On bituminous coverings, over thermal-insulating layer and lightweight screed. With adhesives containing solvents. adhesive.

PROBAND BU

BUTYLE TAPE

PROBAND BU is an adhesive tape in butyle provided on one side with non-woven polypropylene that guarantees high adhesion.



BUTYLE TAPE - Thickness 1 mm

Article	H roll (mm)	L roll (lm)	Roll / Pack.		
PRBBU 7515	75	15	2		

AREA OF USE

- **Use** - Realization of perimeter junctions in case of bituminous coverings, PVC, wood, polycarbonate, glass, plastic and metal on balconies, terraces and external surfaces of any size.
- **Don't use** - On dirty, incoherent and wet surfaces.

WARNINGS

PROBAND KOLL

SINGLE-COMPONENT HYDROPHOBIC ADHESIVE

PROBAND KOLL is a single-component hydrophobic adhesive for the sealing of PROBAND 150/250 on PRODESO® MEMBRANE and PRODESO® HEAT/GRIP MEMBRANE.



FAST SETTING SINGLE-COMPONENT HYDROPHOBIC ADHESIVE

Pack of 20 Kg pack per pallet = 24 Pcs per pallet 480 Kg.

Article	Colour	Pack. Kg.			
PRBKL	RED	20			

AREA OF USE

- **Use** - For the sealing of the tape PROBAND 150/250 with PRODESO® MEMBRANE and PRODESO® HEAT/GRIP MEMBRANE on balconies, terraces, bathrooms, kitchens, saunas and external surfaces of any size.
- **Don't use** - On bituminous coverings, to glue tiles and to waterproof cement based support. Do not use outside with PRODESO® HEAT/GRIP MEMBRANE

PROBAND KOLL AB

BICOMPONENT HYDROPHOBIC ADHESIVE

PROBAND KOLL AB is a bicomponent hydrophobic adhesive for the sealing of PROBAND 150/250 on PRODESO® MEMBRANE and PRODESO® HEAT/GRIP MEMBRANE.



FAST SETTING BICOMPONENT HYDROPHOBIC ADHESIVE

Pack of 6 Kg - pack/pallet = 50 Pcs - Kg/pallet 300 Kg.

Article	Colour	Pack. Kg.			
PRBKLAB	RED	6			

AREA OF USE

- **use** - Balconies, terraces, bathrooms, kitchens, saunas and external surfaces of any size.
- **Don't use** - as waterproofing sheet, to glue tiles and with PROFOIL and PROFOIL PANEL.

PROBAND FIX

MOISTURE-CURE SEALANT

PROBAND FIX is a moisture-cure sealant with high adhesion and elasticity. It guarantees the adhesion of PROBAND 150/250 with aluminium frames, plastic and metal and between adjacent sheets of PROFOIL.

MOISTURE-CURE SEALANT

pack. of 12 cartridges

Article	Colours	Cartridge lm		
PRBFXB	WHITE	300		
PRBFXG	GREY	300		



GUN FOR MOISTURE-CURE SEALANT CARTRIDGE


Article	Pc/Pack		
PRBFXGUN	1		



MOISTURE-CURE SEALANT CARTRIDGE

pack. of 12 cartridges

Article	Colours	Cartridge lm		
PRBFXUB	WHITE	600		
PRBFXUG	GREY	600		



AREA OF USE

- **Use** - For the fastening of PROBAND 150/250 on supports in PVC, polycarbonate, plastic and metal. For sealing Proband 150/250 between adjacent sheets of PROFOIL in tanks and pools. • **Don't use**: On bitumen membranes. To seal PROBAND with PRODESO®.

PROSHOWER LATERAL AND VERTICAL DRAIN KIT are 2 central drain systems with lateral or vertical outflow equipped with a siphon, grate support, stainless steel grate, butyl double-sided ring for the fixing of the waterproof section, waterproof section and a protection cap with template function too that allows the correct positioning of the butyl ring and the waterproof section. LATERAL AND VERTICAL DRAIN KIT ensure a correct flow of rainwater.

PROSHOWER DRAIN KIT

LATERAL AND VERTICAL DRAINS

LATERAL DRAIN KIT


Pack./pallet = 192

Article	Pcs/Pack.
PSHLDK	1

VERTICAL DRAIN KIT

Pack./pallet = 192

Article	Pcs/Pack.
PSHVDK	1

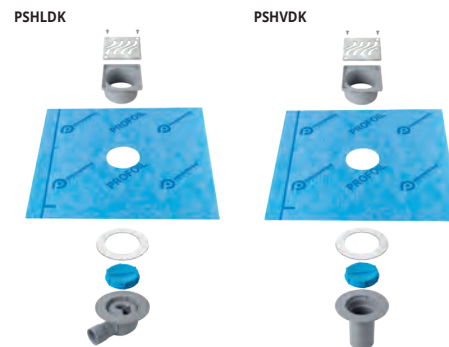

AREA OF USE

- **Use** - Balconies, terraces, outdoor surfaces of any size, kitchens and showers.
- **Don't use** - In environments subject to heavy traffic and where washing with acidic and strong alkaline substances is foreseen.

WARNINGS

After the drain installation, apply the protective cap. Before applying the butyl double-sided adhesive ring on the flange of the drain, thoroughly clean the flange of any dirt residue that may compromise its adhesion. Apply the butyl double-sided adhesive ring and the waterproofing section during the application of the waterproofing system.

PRODRIP is a perimeter drain in ASA (Modified ABS) equipped with wall-floor junction. The junction is covered with non-woven polypropylene to ensure sealing with the used waterproofing system.

PRODRIP

PERIMETER DRAIN

PERIMETER DRAIN

pack. per pallet = 192


Article	Colour	Pcs/Pack.
PDRP	GRIGIO	4

AREA OF USE

- **Use** - To realise perimeter drains on balconies, terraces and outside horizontal surfaces of any size.
- **Don't use** - With bituminous waterproofing and as vertical drain.

WARNINGS

Do not heat with direct flames and do not use adhesive with solvents. Consult the data sheet prior to application in the case of special applications, we recommend that you consult the technical department.

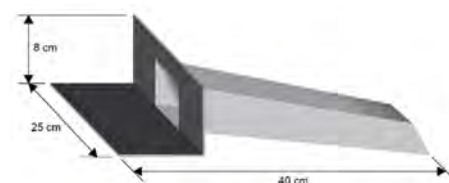

It is a membrane in high density polyethylene. It is covered on top with a polypropylene spunbond and on the back with a non-woven fabric in polypropylene. Both of them are thermo-welded to the polyethylene sheet to guarantee the adhesion of the membrane with the adhesive. **PRODESO SOUND** is an uncoupling and soundproof membrane, with a thickness of 2,3 mm, which does not require any expansion joints before tiling with ceramic or natural stone. **PRODESO SOUND** guarantees the laying of any flooring and the soundproofing in any indoor environment, even in the case of problematic supports and old tiles.

PRODESO[®] SOUND

UNCOUPLING AND SOUNDPROOF MEMBRANE

ROOL - Thickness 2,3 mm


Article	Roll H x L Im	rolls / pallet
PDSND 30	1 x 20	12

AREA OF USE

- **Use** - Uncoupling and soundproof membrane also for cracked screeds. It can be laid on cement and gypsum based screed, old ceramic, natural stone floorings, concrete and wood structure. Very resistant to saline solutions, acids and alkalis, alcohol and oils. In case of particular products, contact our technical department.
- **Don't use** - On lightweight screeds not suitable for the laying of flooring. Do not lay with adhesives containing solvents.

WARNINGS

For the laying of PRODESO SOUND use a C2TES1 cement based adhesive. Tile immediately after the membrane laying to avoid damages. If it is not possible to tile immediately, the membrane must be protected using running boards. Do not use PRODESO SOUND on substrates subject to continuous rising moisture. For information not included in the Technical Details, please contact our technical department.

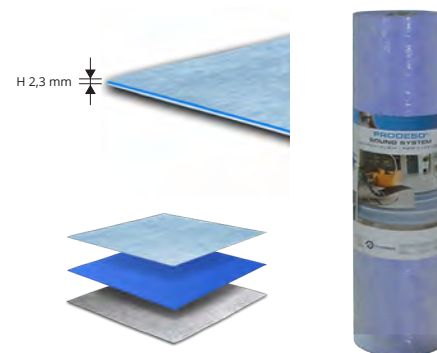


PROECOFON is a roll of closed-cell polyethylene used as edging between the wall and screed or where there are expansion joints. It should be used in all floor-laying work to ensure long life of the floor.

PROECOFON

EXPANDED POLYETHYLENE CLOSED - CELL WITH ADHESIVE

CLOSED-CELL EXPANDED POLYETHYLENE WITH ADHESIVE

Article	Thick. x H mm	lm/roll
PEF 550A	5 X 50	25
PEF 5100A	5 X 100	100



Adhesive junction tape for the membrane PRODESO[®] SOUND

PRODESO SOUND TAPE - height 50 mm

Article	lm/roll	Pc/Pack	Pc/box
PDSNDTP 550	50	6	36



PRODESO[®] SOUND TAPE

PROFOIL

ROLLS IN HDPE AND PP

PROFOIL is a waterproofing polyethylene membrane with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.



ROLLS IN HDPE AND PP - Thickness 0,42 mm

Article	Width roll H x L lm	total m ²			
PFLO 0430	1 x 30	30	40		
PFLO 0405	1 x 5	5	154		

AREAS OF USE

- **Use.** Waterproofing of substrates and vertical structures before the laying of ceramic and stone materials in areas subject to occasional contact with water like bathrooms and kitchens, with high vapor pressure like saunas and Turkish baths and with permanent contact with water also in pressure like swimming pools and tanks. On screed without cracks and completely cured, old ceramic floors and natural stones anchored to the substrate, concrete completely cured and wood supports.
- **Don't use.** On bituminous coverings, over insulating panels and lightweight screed.

WARNINGS

Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications please call the technical department.

PROFOIL PASTE

WATERPROOFING ELASTIC MEMBRANE

PROFOIL PASTE is a ready to use thin-layer waterproofing elastic membrane with low emissions of volatile organic compounds.



WATERPROOFING ELASTIC MEMBRANE

Article	Kg/Bucket	Bucket/ Pallet			
PFLOPST 04	4	64			
PFLOPST 10	10	36			

AREAS OF USE

- **Use.** Waterproofing for bathrooms, kitchens, showers, gypsum-based plasters, cement-based plaster and plaster-board walls.
- **Don't use.** For external application, on wet surfaces or substrates subject to moisture rising, in environments where water is always present, pools and tanks.

WARNINGS

Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications please call the technical department.

PROBAND 150/250

ROLLS IN HDPE AND PP

PROBAND 150/250 is a waterproofing polyethylene tape with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.



ROLLS IN HDPE AND PP - Thickness 0,42 mm

Article	Roll width H mm x L lm	Rolls/ Pack.			
PRBPE 1505	150 x 5	20			
PRBPE 1507	150 x 7,5	16			
PRBPE 1530	150 x 30	6			
PRBPE 2505	250 x 5	10			
PRBPE 2530	250 x 30	3			

PRBPE 1505 available while stocks last

AREAS OF USE AND WARNINGS, see page 179

PREFORMED CORNERS and PIPE COLLAR



EXTERNAL CORNER



INTERNAL CORNER



PIPE COLLAR

PREFORMED CORNERS AND PIPE COLLAR IN HDPE AND PP
Thickness 0,42 mm

Article	H x L mm	Rolls/Pack.			
PRBI (internal)	150 x 150	10 Pcs			
PRBE (external)	150 x 150	10 Pcs			
PRBT (pipe collar)	125 x 125	10 Pcs			


Internal and external preformed corners and pipe collar in polyethylene provided on both side with nonwoven polypropylene fabric that guarantees its adhesion to the support.

AREAS OF USE AND WARNINGS, see page 180

PRODRAIN 10

MEMBRANA DRENANTE

PRODRAIN 10 is a drainage membrane composed by an high density polyethylene (HDPE) sheet provided with truncated cone reliefs. On the top of the reliefs a non-woven polypropylene fabric, in grey colour, permeable to water is thermowelded.

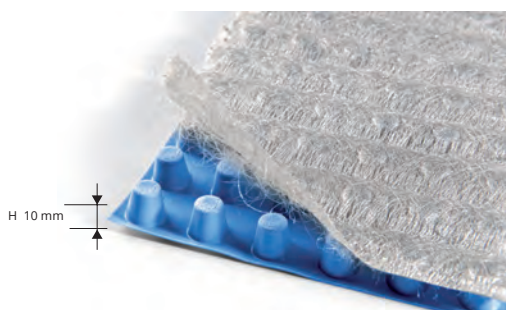

DRAINAGE MEMBRANE

Thickness H 10 mm - Total 12,0 m² - 6 ROLLS PER PALLET = 72 m²

Article	H roll (MT)	L roll (MT)	roll x pallet		
PDRI 10	0,96	12,5	6		

AREAS OF USE

- **Use.** Outside on concrete sloping suitably waterproofed such as terraces, balconies and pavements and in contact with waterproofed vertical structures such as foundation walls. Highly resistant to saline solutions, acid and alkaline, alcohol and oils. In case of special products consult the technical department.
- **Don't use.** On concrete waterproofed without adequate slope to the drained water runoff. As soundproof and thermal-insulating layer.

WARNINGS

Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications call the technical department.

PROFOIL PANEL are high density extruded polystyrene panels covered on both sides with a steam- and waterproofing membrane. The membrane is waterproofing and the adhesive to fix them reinforces the panels for a quick and inexpensive laying.

NOT AVAILABLE IN GERMANY

PROFOIL PANEL


HIGH DENSITY EXTRUDED POLYSTYRENE PANEL

PROFOIL PANEL 1524 mm - high density extruded polystyrene
915 mm x 1524 mm = 1,394 m²

Article	H mm	Pcs /pallet	Mq /pallet		
PFLPAN6	6,35	85	118,49		
PFLPAN9	9,50	80	111,52		
PFLPAN13	12,70	60	83,64		
PFLPAN16	15,90	50	69,70		
PFLPAN25	25,00	30	41,82		
PFLPAN38	38,10	20	27,88		
PFLPAN50	50,80	15	20,91		

PROFOIL PANEL in 1524 mm is available only in small quantity. Please contact the office for availability.


THICKNESS PROFOIL PANEL

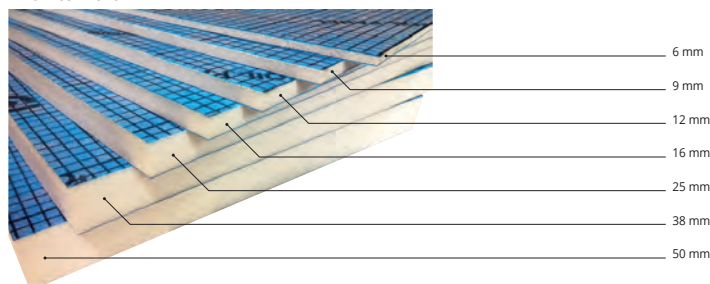

PROFOIL PANEL 2700 mm - high density extruded polystyrene
915 mm x 2700 mm = 2,470 m²

Article	H mm	Pcs /pallet	Mq /pallet		
PFLPAN627	6,35	85	209,95		
PFLPAN927	9,50	80	197,60		
PFLPAN1327	12,70	60	148,20		
PFLPAN1627	15,90	50	123,50		
PFLPAN2527	25,00	30	74,10		
PFLPAN3827	38,10	20	49,40		
PFLPAN5027	50,80	15	37,05		

PFLPAN...

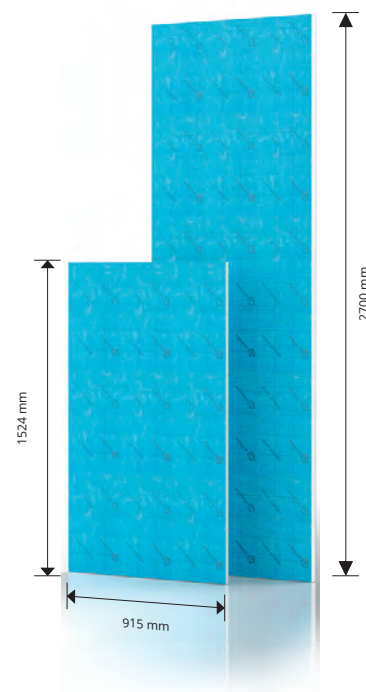

PROFOIL AND PROBAND DOWELS, WASHERS, SCREWS

STAINLESS STEEL/ZINC-COATED METAL/GLASS FIBER NET



PROFOIL DOWELS - pack. 250 Pcs

Article	L mm		
TZPFP 110 (zinc-coated metal)	100		
TZPFP 140 (zinc-coated metal)	140		
TZPFP 170 (zinc-coated metal)	170		
TZPFP 200 (zinc-coated metal)	200		
TIPFP 110 (stainless steel)	110		
TIPFP 140 (stainless steel)	140		
TIPFP 170 (stainless steel)	170		
TIPFP 200 (stainless steel)	200		
TIPFP 250 (stainless steel)	250		



PROFOIL WASHERS (ZINC-COATED METAL) - pack. 100 Pcs

Article	Pcs/Pack.	ø mm	
RFPP 36	100	35	



PROFOIL SCREWS (ZINC-COATED METAL)

Article	Pcs/Pack.	L mm	
VACPP 35	1000	35	
VACPP 55	1000	45	
VACPP 80	1000	80	



PROBAND NET - roll 50 m

Article	H mm	
PRBNET 100	100	

© 2020 All rights reserved by Progress Profiles. Printed in Italy

PRO GOBOARD PANEL highdensity polyisocyanurate foam panel, covered on both sides with a fibre-glass reinforced cement-based waterproof coating to allow the laying of tiles. The panels, tested for a resistance long duration, are available in thickness of 6,25 / 12,5 / 25 and 50 mm, size of 92 x 152 cm and 122 x 244 cm and can be used on floors, false ceilings, walls, showers and ceilings.

PRO GOBOARD PANEL


HIGH DENSITY POLYISOCYANURATE FOAM PANEL

PRO GOBOARD PANEL - highdensity polyisocyanurate foam

Article	Description	Pcs/pallet	Mq/pallet		
PGOBOR06	PRO GOBOARD H 6,25 mm - 92 cm x 152 cm - 1,40 m ²	75	105		
PGOBOR125	PRO GOBOARD H 12,5 mm - 92 cm x 152 cm - 1,40 m ²	60	84		
PGOBOR25	PRO GOBOARD H 25 mm - 122 cm x 244 cm - 2,98 m ²	30	89,4		
PGOBOR50	PRO GOBOARD H 50 mm - 122 cm x 244 cm - 2,98 m ²	15	44,70		

PGOBOR...




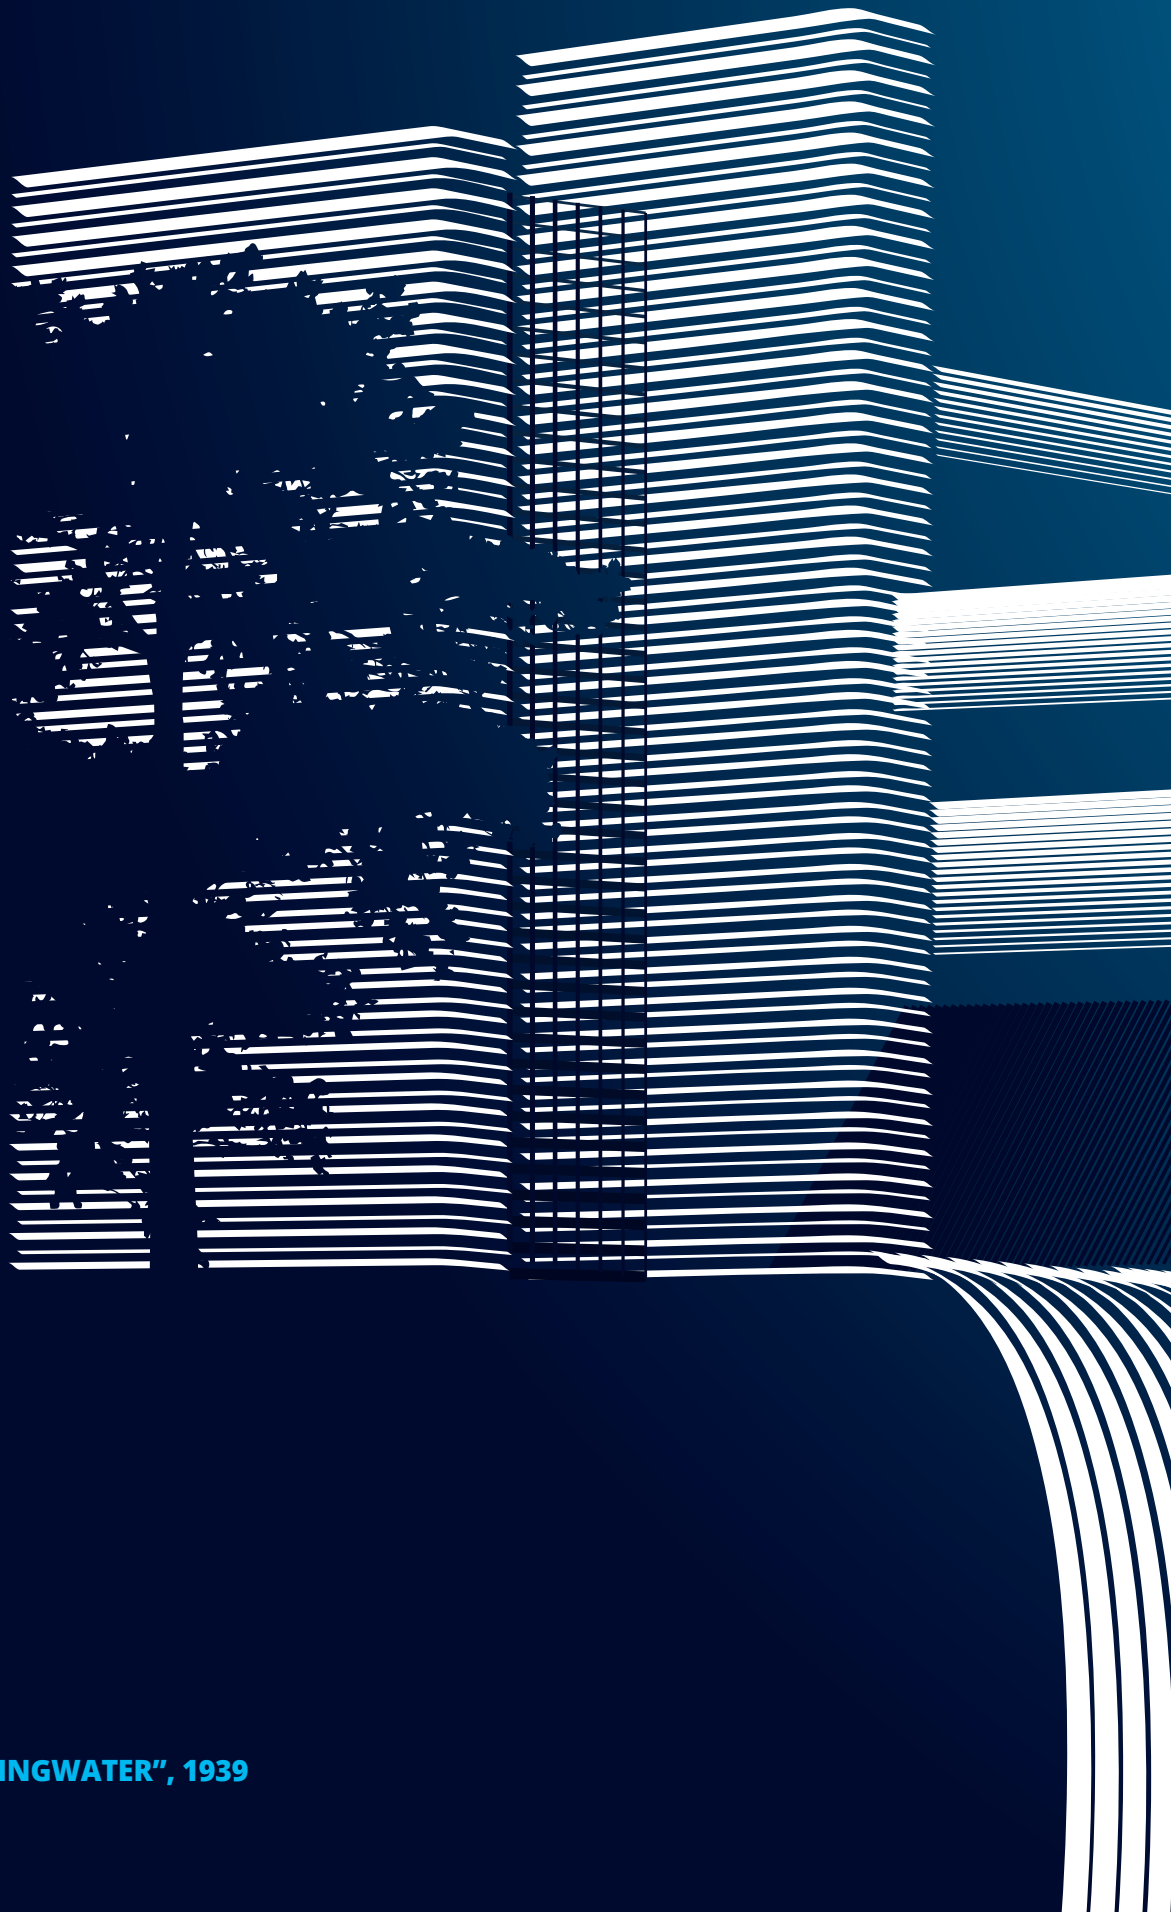

KAUFMANN HOUSE, "FALLINGWATER", 1939
Frank L.I. Wright



SHOWER SYSTEMS

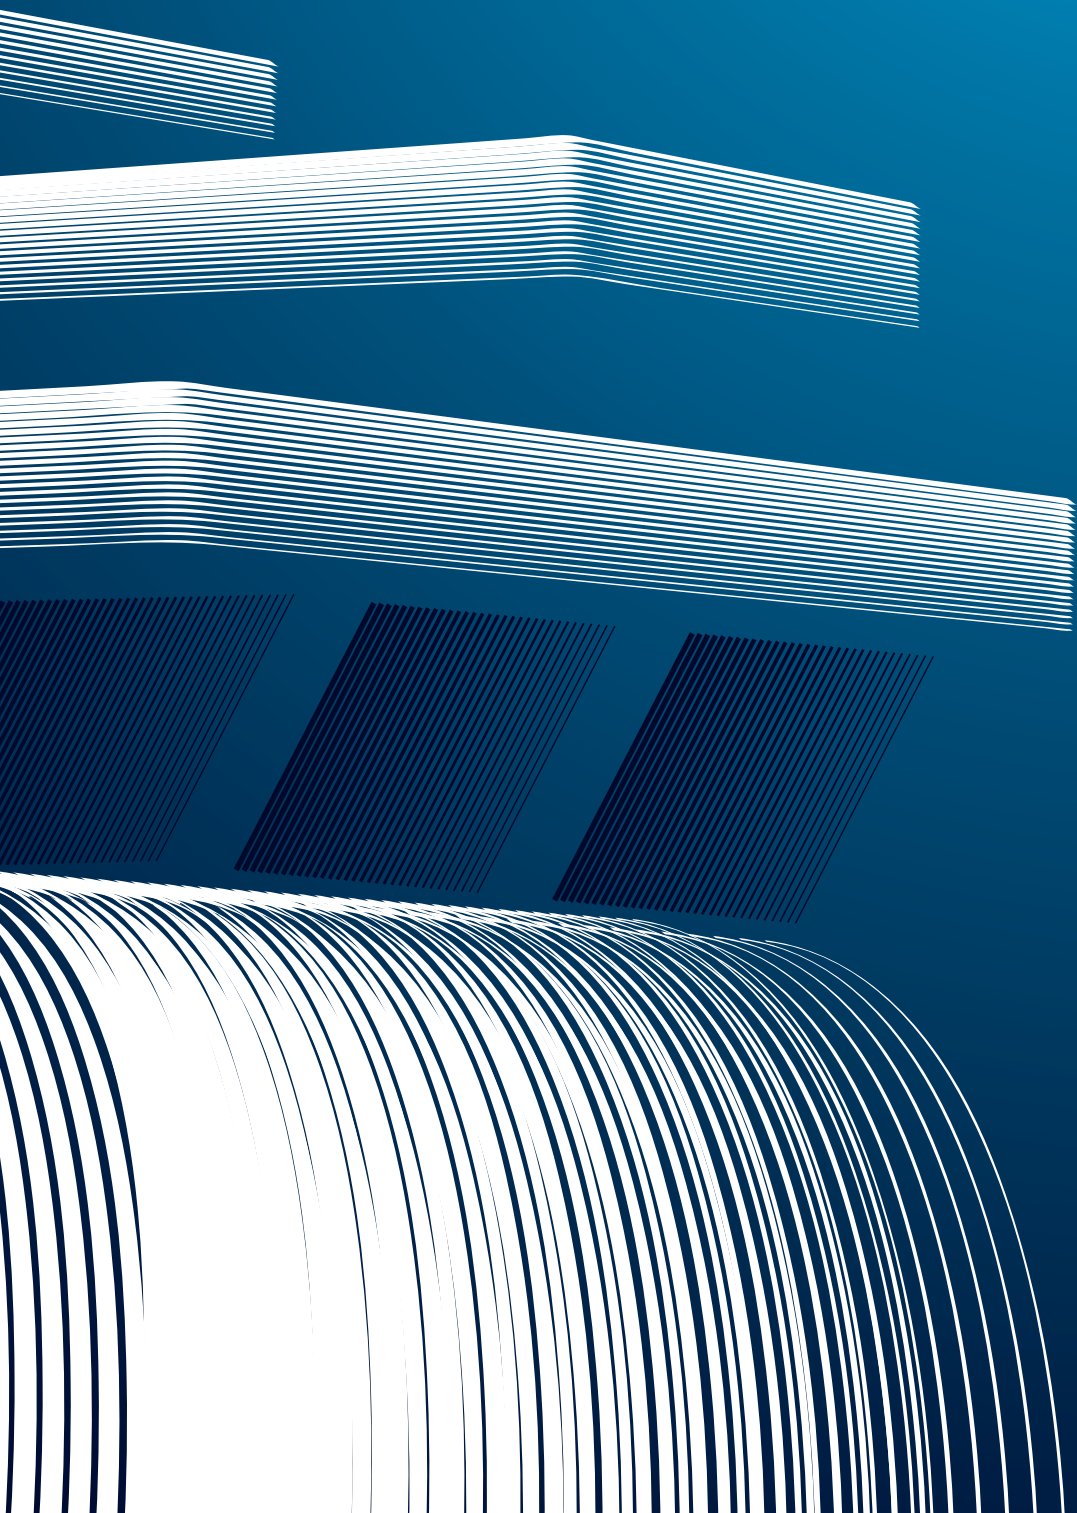

PROSHOWER LINEAR KIT SYSTEM

PROSHOWER LINEAR KIT SYSTEM is an innovative solution, which combines functionality and design to answer to all requirements of the shower.



Article	Description	Pc/Pack.
PSHPANEK	PROSHOWER LINEAR KIT BASE	1

Article	Kit components	Pc/Pack.
PSHPAN...	PROSHOWER PANEL in moulded polystyrene 120x120 cm with glued Profoil	1
PRBFXB	PROBAND FIX white	2
PRBPE 1507	ROLL PROBAND 150 - 7,5 lm	1
PFLO 0405	PROFOIL ROLL - 5 lm	1
PIAA 40212	ALUMINUM PROFILES (screed leveling profile) length 120 cm	2
PRSPD 10	PVC TOWEL	1



PROSHOWER PANEL LINEAR
PSHPAN



PROFOIL
PFO 0405



PROBAND 150
ALUMINUM PROFILES



PROBAND FIX
PRBFXB




PVC TOWEL
PRSPD 10




PIAA 40212


PROSHOWER PANEL EXTENSION
EXEMPLES OF LAYING

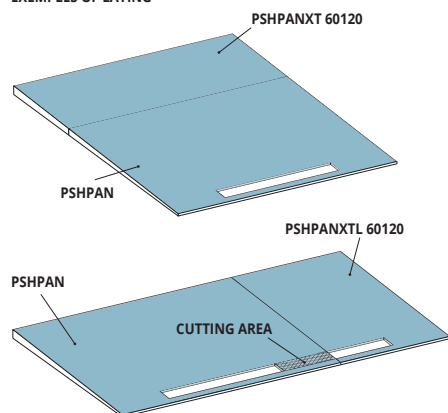

Article	Description	Pc/Pack.
PSHPAN	Proshower panel in moulded polystyrene 120x120 cm with glued Profoil	1



Article	Description	Pc/Pack.
PSHPANXT 60120	PROSHOWER PANEL EXTENSION 120x60 cm for PROSHOWER PANEL LINEAR - Slope 2%	1
PSHPANXTL 60120	LATERAL PROSHOWER PANEL EXTENSION 60x120 cm for PROSHOWER PANEL LINEAR - Slope 2%	1

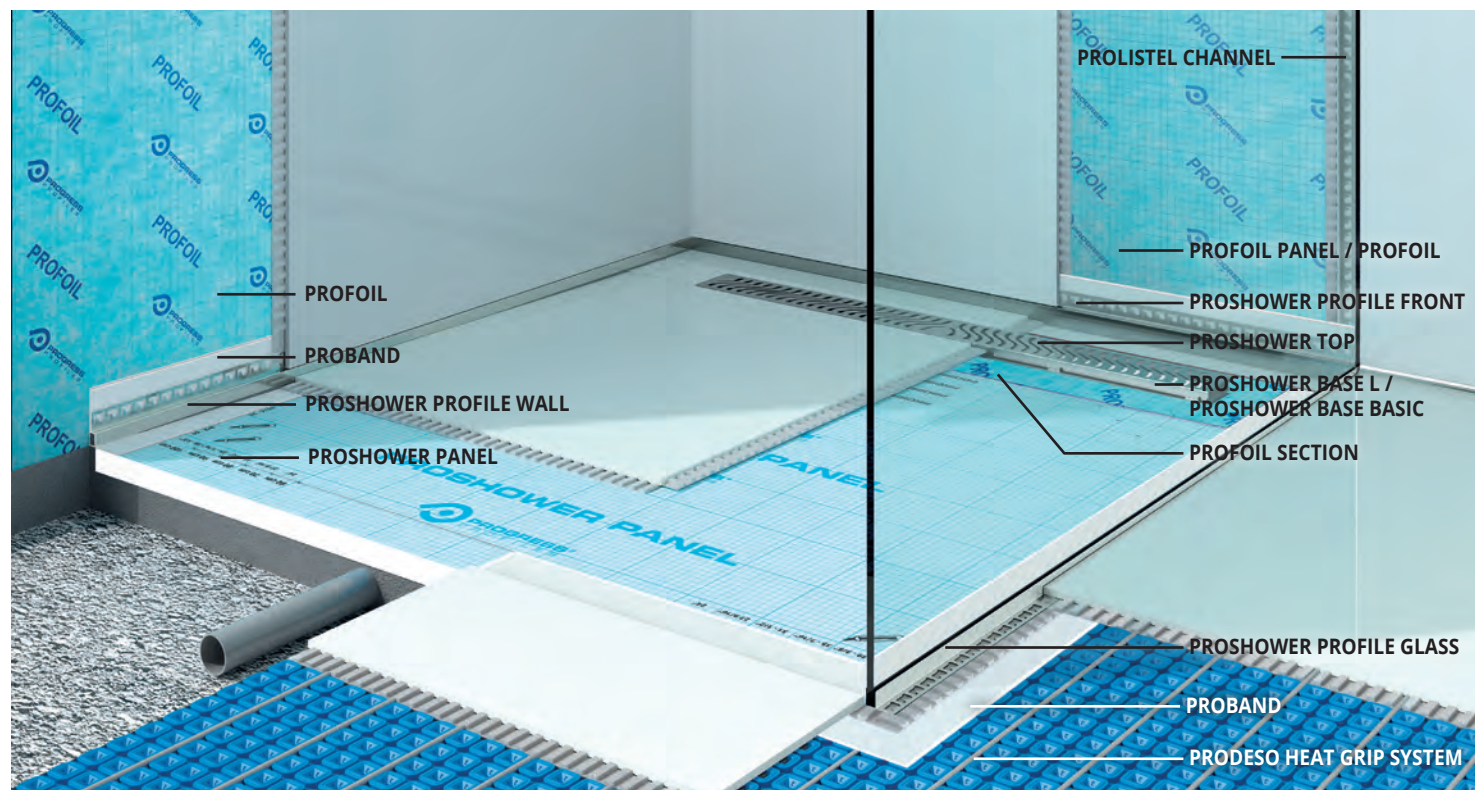

PROFOIL

PROBAND

PROSHOWER PROFILE WALL

PROSHOWER PANEL

PROLISTEL CHANNEL

PROFOIL PANEL / PROFOIL

PROSHOWER PROFILE FRONT

PROSHOWER TOP

PROSHOWER BASE L /
PROSHOWER BASE BASIC

PROFOIL SECTION

PROSHOWER PROFILE GLASS

PROBAND

PRODESO HEAT GRIP SYSTEM

© 2020 All rights reserved by Progress Profiles. Printed in Italy

PROSHOWER BASE L is a channel body in stainless steel AISI 304/1.4301 - V2A steel for the realisation of floor-level shower. The body channel, with an overall height of 85 mm, is completed by 6 different grids in stainless steel. **PROSHOWER BASE L** undergoes electro-polishing and subsequent passivation, which guarantees excellent resistance in any environment. Its low thickness combined with the fully adjustable siphon, the modularity and the high number of grids make it a much sought-after solution.

PROSHOWER BASE L

SUPER POLISHED STAINLESS STEEL
AISI 304/1.4301-V2A





* L 30 cm

DUCT BODY MADE OF AISI 304 STAINLESS STEEL

Article	Description	Pc/Pack.
PSHWDL 30	PROSHOWER BASE L-ACC-L 30 x 8 cm	1
PSHWDL 70	PROSHOWER BASE L-ACC-L 70 x 8 cm	1
PSHWDL 80	PROSHOWER BASE L-ACC-L 80 x 8 cm	1
PSHWDL 90	PROSHOWER BASE L-ACC-L 90 x 8 cm	1
PSHWDL 100	PROSHOWER BASE L-ACC-L 100 x 8 cm	1
PSHWDL 120	PROSHOWER BASE L-ACC-L 120 x 8 cm	1

PSHWDL 30 / 70 / 80 / 90 / 100 / 120

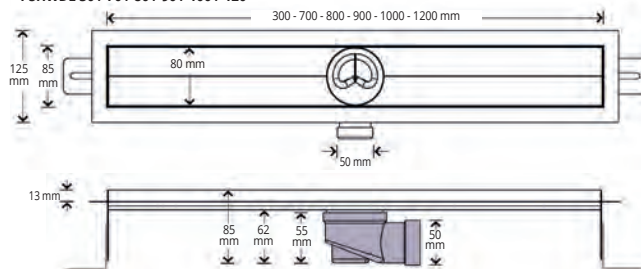

UPON REQUEST

PROSHOWER BASE L with vertical siphon complete of installed Profoil membrane (code ref. PSHWDVS...).
Drain Ø 50 mm.

PROSHOWER BASE BASIC is a water collecting duct system in polypropylene for floor showers, available in several lengths and grids.

PROSHOWER BASE BASIC



GREY POLYPROPYLENE



GREY POLYPROPYLENE DUCT BODY

Article	Description	Pc/Pack.
PSHWBB 60	PROSHOWER BASE BASIC - 60 x 8 cm PP	1
PSHWBB 70	PROSHOWER BASE BASIC - 70 x 8 cm PP	1
PSHWBB 80	PROSHOWER BASE BASIC - 80 x 8 cm PP	1
PSHWBB 90	PROSHOWER BASE BASIC - 90 x 8 cm PP	1

PSHWBB 60 / 70 / 80 / 90

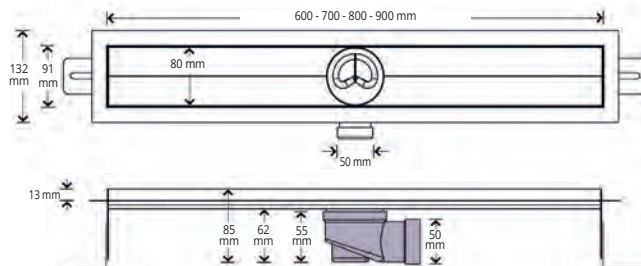


UPON REQUEST

PROSHOWER BASE BASIC with vertical siphon complete of installed Profoil membrane (code ref. PSHWBBVS...).
Drain Ø 50 mm.

PROFOIL SECTION

HDPE E PP GUAINA

Article	Description	Pc/Pack.
PSHANT 30	PROFOIL section and double sided tape 3 lm	1
PSHANT 60	PROFOIL section and double sided tape 3 lm	1
PSHANT 70	PROFOIL section and double sided tape 3 lm	1
PSHANT 80	PROFOIL section and double sided tape 3 lm	1
PSHANT 90	PROFOIL section and double sided tape 3 lm	1
PSHANT 100	PROFOIL section and double sided tape 3 lm	1
PSHANT 120	PROFOIL section and double sided tape 3 lm	1

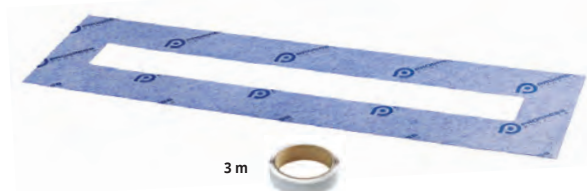


PROFOIL SECTION AND DOUBLE SIDED TAPE

PROSHOWER TOP TILE - LINE - DESIGN - STRIPS - GRILL - SQUARE

SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

TILE

PSHWT 30/60/70/80/90/100/120

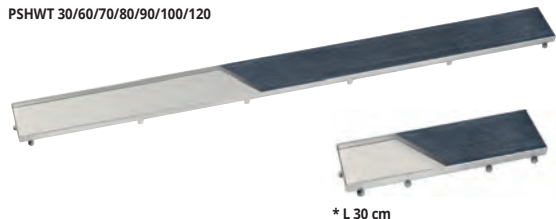

* L 30 cm


LINE

PSHWL 60/70/80/90/100/120



DESIGN

PSHWD 30/60/70/80/90/100/120

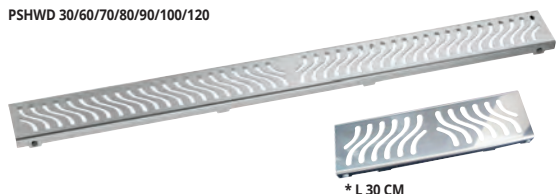

* L 30 CM

STRIPS

PSHWST 60/70/80/90/100/120



GRILL

PSHWGR 60/70/80/90/100/120



SQUARE

PSHWSQ 60/70/80/90/100/120



Article	Description	Pc/Pack.
PSHWT 30	PROSHOWER TILE - ACC - Grid L 30 x 8 cm made of AISI 304 stainless steel	1
PSHWT 60	PROSHOWER TILE - ACC - Grid L 60 x 8 cm made of AISI 304 stainless steel	1
PSHWT 70	PROSHOWER TILE - ACC - Grid L 70 x 8 cm made of AISI 304 stainless steel	1
PSHWT 80	PROSHOWER TILE - ACC - Grid L 80 x 8 cm made of AISI 304 stainless steel	1
PSHWT 90	PROSHOWER TILE - ACC - Grid L 90 x 8 cm made of AISI 304 stainless steel	1
PSHWT 100	PROSHOWER TILE - ACC - Grid L 100 x 8 cm made of AISI 304 stainless steel	1
PSHWT 120	PROSHOWER TILE - ACC - Grid L 120 x 8 cm made of AISI 304 stainless steel	1

PSHWT 30,100,120 Provided only combined with Proshower Base L.
PSHWT 60 Provided only combined with Proshower Base Basic.

Article	Description	Pc/Pack.
PSHWL 60	PROSHOWER LINE - ACC - Grid L 60 x 8 cm made of AISI 304 stainless steel	1
PSHWL 70	PROSHOWER LINE - ACC - Grid L 70 x 8 cm made of AISI 304 stainless steel	1
PSHWL 80	PROSHOWER LINE - ACC - Grid L 80 x 8 cm made of AISI 304 stainless steel	1
PSHWL 90	PROSHOWER LINE - ACC - Grid L 90 x 8 cm made of AISI 304 stainless steel	1
PSHWL 100	PROSHOWER LINE - ACC - Grid L 100 x 8 cm made of AISI 304 stainless steel	1
PSHWL 120	PROSHOWER LINE - ACC - Grid L 120 x 8 cm made of AISI 304 stainless steel	1

PSHWL 100,120 Provided only combined with Proshower Base L.
PSHWL 60 Provided only combined with Proshower Base Basic.

Article	Description	Pc/Pack.
PSHWD 30	PROSHOWER DESIGN - ACC - Grid L 30 x 8 cm made of AISI 304 stainless steel	1 *
PSHWD 60	PROSHOWER DESIGN - ACC - Grid L 60 x 8 cm made of AISI 304 stainless steel	1
PSHWD 70	PROSHOWER DESIGN - ACC - Grid L 70 x 8 cm made of AISI 304 stainless steel	1
PSHWD 80	PROSHOWER DESIGN - ACC - Grid L 80 x 8 cm made of AISI 304 stainless steel	1
PSHWD 90	PROSHOWER DESIGN - ACC - Grid L 90 x 8 cm made of AISI 304 stainless steel	1
PSHWD 100	PROSHOWER DESIGN - ACC - Grid L 100 x 8 cm made of AISI 304 stainless steel	1
PSHWD 120	PROSHOWER DESIGN - ACC - Grid L 120 x 8 cm made of AISI 304 stainless steel	1

PSHWD 30,100,120 Provided only combined with Proshower Base L.
PSHWD 60 Provided only combined with Proshower Base Basic.

Article	Description	Pc/Pack.
PSHWST 60	PROSHOWER STRIPS - ACC - Grid L 60 x 8 cm made of AISI 304 stainless steel	1 *
PSHWST 70	PROSHOWER STRIPS - ACC - Grid L 70 x 8 cm made of AISI 304 stainless steel	1 *
PSHWST 80	PROSHOWER STRIPS - ACC - Grid L 80 x 8 cm made of AISI 304 stainless steel	1 *
PSHWST 90	PROSHOWER STRIPS - ACC - Grid L 90 x 8 cm made of AISI 304 stainless steel	1 *
PSHWST 100	PROSHOWER STRIPS - ACC - Grid L 100 x 8 cm made of AISI 304 stainless steel	1 *
PSHWST 120	PROSHOWER STRIPS - ACC - Grid L 120 x 8 cm made of AISI 304 stainless steel	1 *

PSHWST 100,120 Provided only combined with Proshower Base L.
PSHWST 60 Provided only combined with Proshower Base Basic.

Article	Description	Pc/Pack.
PSHWGR 60	PROSHOWER GRILL - ACC - Grid L 60 x 8 cm made of AISI 304 stainless steel	1 *
PSHWGR 70	PROSHOWER GRILL - ACC - Grid L 70 x 8 cm made of AISI 304 stainless steel	1 *
PSHWGR 80	PROSHOWER GRILL - ACC - Grid L 80 x 8 cm made of AISI 304 stainless steel	1 *
PSHWGR 90	PROSHOWER GRILL - ACC - Grid L 90 x 8 cm made of AISI 304 stainless steel	1 *
PSHWGR 100	PROSHOWER GRILL - ACC - Grid L 100 x 8 cm made of AISI 304 stainless steel	1 *
PSHWGR 120	PROSHOWER GRILL - ACC - Grid L 120 x 8 cm made of AISI 304 stainless steel	1 *

PSHWGR 100,120 Provided only combined with Proshower Base L.
PSHWGR 60 Provided only combined with Proshower Base Basic.

Article	Description	Pc/Pack.
PSHWSQ 60	PROSHOWER SQUARE - ACC - Grid L 60 x 8 cm made of AISI 304 stainless steel	1 *
PSHWSQ 70	PROSHOWER SQUARE - ACC - Grid L 70 x 8 cm made of AISI 304 stainless steel	1 *
PSHWSQ 80	PROSHOWER SQUARE - ACC - Grid L 80 x 8 cm made of AISI 304 stainless steel	1 *
PSHWSQ 90	PROSHOWER SQUARE - ACC - Grid L 90 x 8 cm made of AISI 304 stainless steel	1 *
PSHWSQ 100	PROSHOWER SQUARE - ACC - Grid L 100 x 8 cm made of AISI 304 stainless steel	1 *
PSHWSQ 120	PROSHOWER SQUARE - ACC - Grid L 120 x 8 cm made of AISI 304 stainless steel	1 *

PSHWSQ 100,120 Provided only combined with Proshower Base L.
PSHWSQ 60 Provided only combined with Proshower Base Basic.

© 2020 All rights reserved by Progress Profiles. Printed in Italy




DRAIN REDUCTION

POLYPROPYLENE

Article	Description	Pc/Pack.
PSHWRD 5040	50 to 40 mm polypropylene drain reduction	1



REDUCTION


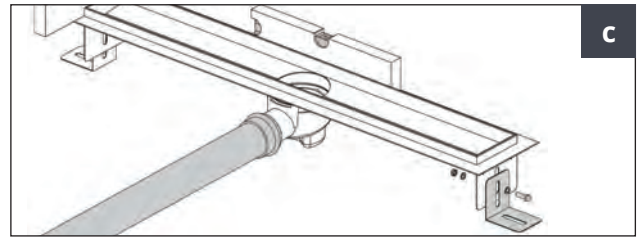
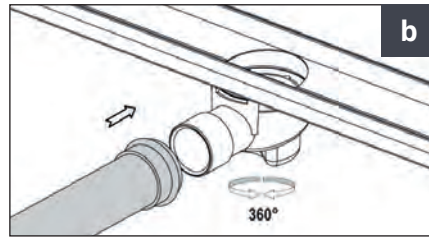



MODULAR ASSEMBLY KIT

Article	Description	Pc/Pack.
PSHWRD	Modular assembly kit to make drain ducts of any length	1



MODULAR ASSEMBLY KIT

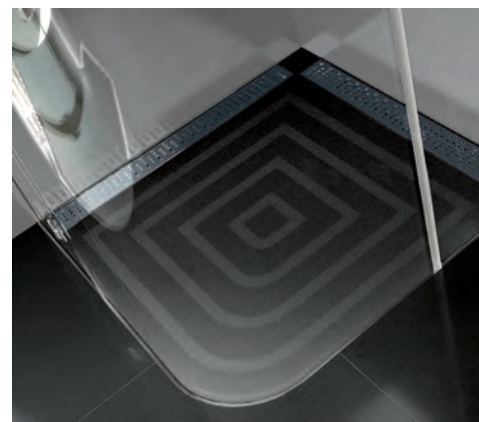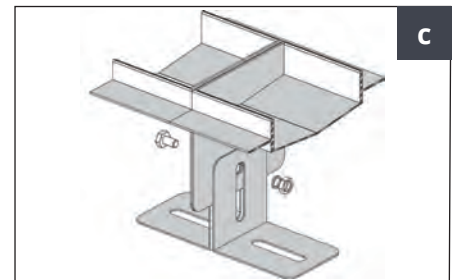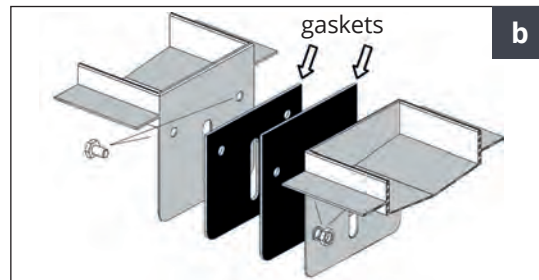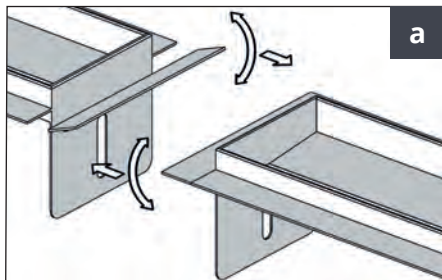


© 2020 All rights reserved by Progress Profiles. Printed in Italy


PROSHOWER PROFILE GLASS

SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A

PROSHOWER PROFILE GLASS Suitable profile for fixing glass slabs in case of floor level showers with a slope of 2%. Due to its particular shape and finish in satin-finish stainless steel AISI 304 / 1.4301 - V2A, it covers and decorates the visible side of the screed.

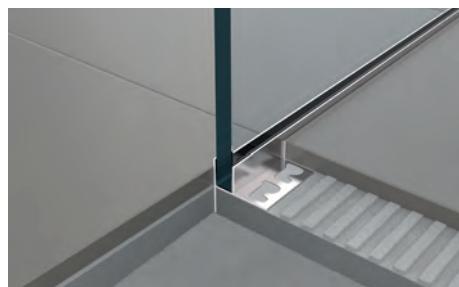

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

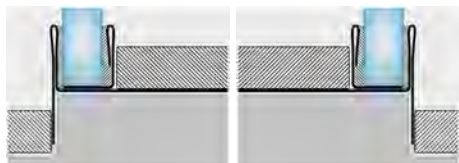

1. Choose "PROSHOWER PROFILE GLASS" according to the desired length.
2. Cut "PROSHOWER PROFILE GLASS" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint.
5. Remove immediately all remains of adhesive from the surface of the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.
6. Insert the sheet of glass and seal.


PROSHOWER PROFILES GLASS IN SATINED STAINLESS STEEL AISI 304/1.4301-V2A - degreased and passivated thermo packed

Article	Description	Pc/Pack.
PSHWPGACS 100DX	Proshower profile glass satined stainless steel rx L 100 cm	1
PSHWPGACS 100SX	Proshower profile glass satined stainless steel lt L 100 cm	1
PSHWPGACS 150DX	Proshower profile glass satined stainless steel rx L 150 cm	1
PSHWPGACS 150SX	Proshower profile glass satined stainless steel lt L 150 cm	1
PSHWPGACS 200DX	Proshower profile glass satined stainless steel rx L 200 cm	1
PSHWPGACS 200SX	Proshower profile glass satined stainless steel lt L 200 cm	1


PSHWPGACS ...SX 2% SLOPE




PSHWPGACS 100SX



PSHWPGACS 150SX




PSHWPGACS 200SX




PSHWPGACS ...DX 2% SLOPE




PSHWPGACS 100DX



PSHWPGACS 150DX



PSHWPGACS 200DX




PROLISTEL CHANNEL

ANODIZED AND POLISHED ALUMINIUM

PROLISTEL CHANNEL is a F-shaped strip in anodized and polished aluminum suitable to decorate the wall coverings in ceramic tiles and natural stones. Its section allows the realization of a decorative joint which can also be used as a guide for the fixing of sheets of glass on floors and walls. Its particular section and the availability in two different finishes make **PROLISTEL CHANNEL** a much sought-after profile that allows an easy workmanlike application.

PLTCH... 08 - 10 - 11 - 12,5



COLOURS

ANODIZED	POLISHED
AA - Anodized silver alum.	BC - Polished chrome alum.

ANODIZED SILVER ALUMINIUM

bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm
PLTCHAA 08	8
PLTCHAA 10	10
PLTCHAA 11	11
PLTCHAA 125	12,5

POLISHED CHROME ALUMINIUM

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PLTCHBC 08	8
PLTCHBC 10	10
PLTCHBC 11	11
PLTCHBC 125	12,5

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

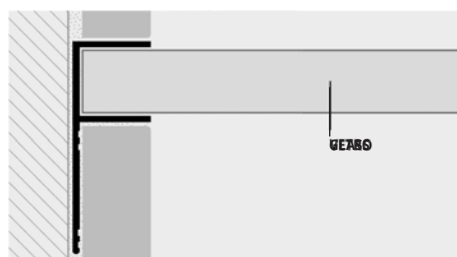

0% SLOPE



1. Choose "PROLISTEL CHANNEL" according to the visible surface and desired finish.
2. Cut "PROLISTEL CHANNEL" to the desired length and apply the adhesive on the surface where the profile will be laid.
3. Press "PROLISTEL CHANNEL" into the adhesive, aligning it with the tiles leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
4. Fill the joint between the profile and tiles with grout in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PROSHOWER PROFILE WALL Profile in satin-finish stainless steel AISI 304 / 1.4301 – V2A. It is suitable to cover and decorate the visible part of wall beside the shower tray in case of floor level showers with a slope of 2%.

PROSHOWER PROFILE WALL


SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A

PROSHOWER PROFILES WALL IN SATINED STAINLESS STEEL AISI 304/1.4301-V2A - degreased and passivated thermo packed















Article	Description	Pc/Pack.
PSHWPLACS 1010DX	Proshower profile wall satined stainless steel 10 mm rx L 100 cm	1
PSHWPLACS 1010SX	Proshower profile wall satined stainless steel 10 mm lt L 100 cm	1
PSHWPLACS 1015DX	Proshower profile wall satined stainless steel 10 mm rx L 150 cm	1
PSHWPLACS 1015SX	Proshower profile wall satined stainless steel 10 mm lt L 150 cm	1
PSHWPLACS 1020DX	Proshower profile wall satined stainless steel 10 mm rx L 200 cm	1
PSHWPLACS 1020SX	Proshower profile wall satined stainless steel 10 mm lt L 200 cm	1
PSHWPLACS 12510DX	Proshower profile wall satined stainless steel 12,5 mm rx L 100 cm	1
PSHWPLACS 12510SX	Proshower profile wall satined stainless steel 12,5 mm lt L 100 cm	1
PSHWPLACS 12515DX	Proshower profile wall satined stainless steel 12,5 mm rx L 150 cm	1
PSHWPLACS 12515SX	Proshower profile wall satined stainless steel 12,5 mm lt L 150 cm	1
PSHWPLACS 12520DX	Proshower profile wall satined stainless steel 12,5 mm rx L 200 cm	1
PSHWPLACS 12520SX	Proshower profile wall satined stainless steel 12,5 mm lt L 200 cm	1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

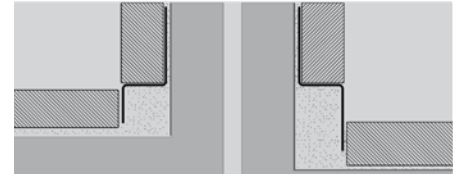


1. Choose "PROSHOWER PROFILE WALL" according to the desired length.
2. Cut "PROSHOWER PROFILE WALL" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.
6. Insert the sheet of glass and seal




PROSHOWER PROFILE FRONT

SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A

PROSHOWER PROFILE FRONT is a satin-finish stainless steel AISI 304/1.4301-V2A profile. It is suitable to cover and decorate the visible part of wall in front of the shower tray in case of floor level showers with slope.

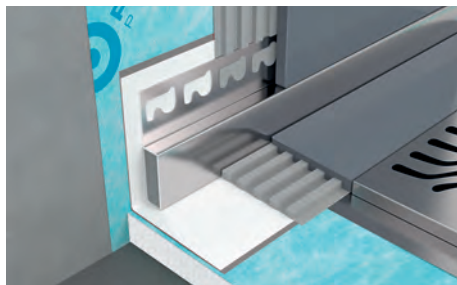

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS


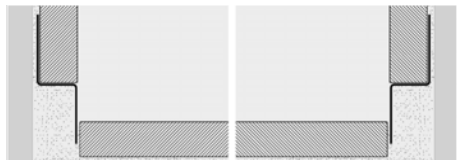


1. Choose "PROSHOWER PROFILE FRONT" according to the desired length.
2. Cut "PROSHOWER PROFILE FRONT" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.
6. Insert the sheet of glass and seal.

PROSHOWER PROFILE FRONT SATINED STAINLESS STEEL AISI 304/1.4301-V2A - degreased and passivated thermo packed

Article	Description	Pc/Pack.
PSHWPFACS 101028	Proshower profile front satined stainless steel 10 mm H 28 mm L 100 cm	1
PSHWPFACS 101038	Proshower profile front satined stainless steel 10 mm H 38 mm L 100 cm	1
PSHWPFACS 101048	Proshower profile front satined stainless steel 10 mm H 48 mm L 100 cm	1
PSHWPFACS 101528	Proshower profile front satined stainless steel 10 mm H 28 mm L 150 cm	1
PSHWPFACS 101538	Proshower profile front satined stainless steel 10 mm H 38 mm L 150 cm	1
PSHWPFACS 101548	Proshower profile front satined stainless steel 10 mm H 48 mm L 150 cm	1
PSHWPFACS 1251028	Proshower profile front satined stainless steel 12,5 mm H 28 mm L 100 cm	1
PSHWPFACS 1251038	Proshower profile front satined stainless steel 12,5 mm H 38 mm L 100 cm	1
PSHWPFACS 1251048	Proshower profile front satined stainless steel 12,5 mm H 48 mm L 100 cm	1
PSHWPFACS 1251528	Proshower profile front satined stainless steel 12,5 mm H 28 mm L 150 cm	1
PSHWPFACS 1251538	Proshower profile front satined stainless steel 12,5 mm H 38 mm L 150 cm	1
PSHWPFACS 1251548	Proshower profile front satined stainless steel 12,5 mm H 48 mm L 150 cm	1


PSHWPFACS ...

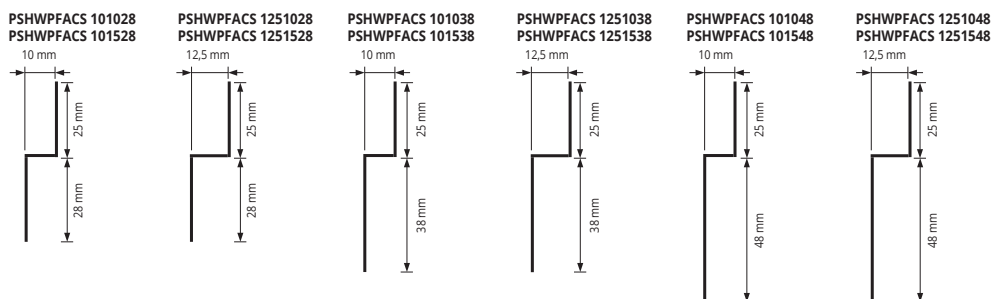


PROSHOWER PROFILE

SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A

PROSHOWER PROFILE is a profile for floor level showers in stainless steel for the protection of the floor edges and as decoration of the screed visible side. The profile has a 2% slope. Its specific shape makes it an easy to lay profile to be used with all kind of floor.

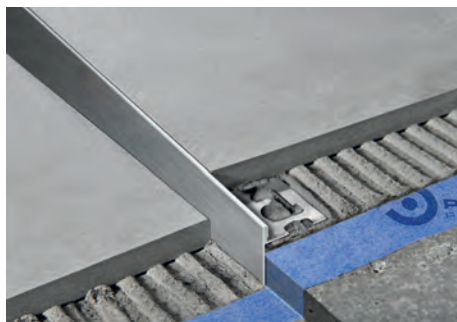



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

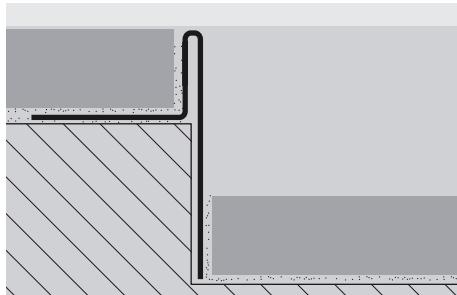


1. Choose "PROSHOWER PROFILE" according to the desired length.
2. Cut "PROSHOWER PROFILE" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.
6. Insert the sheet of glass and seal.

PROSHOWER PROFILE SATINED STAINLESS STEEL AISI 304/1.4301-V2A - degreased and passivated thermo packed


Article	Description	Pc/Pack.
PSHWPACS 1010DX	Proshower profile satined stainless steel H 10 mm L 100 cm rx	1
PSHWPACS 12510DX	Proshower profile satined stainless steel H 12,5 mm L 100 cm rx	1
PSHWPACS 1015DX	Proshower profile satined stainless steel H 10 mm L 150 cm rx	1
PSHWPACS 12515DX	Proshower profile satined stainless steel H 12,5 mm L 150 cm rx	1
PSHWPACS 1020DX	Proshower profile satined stainless steel H 10 mm L 200 cm rx	1
PSHWPACS 12520DX	Proshower profile satined stainless steel H 12,5 mm L 200 cm rx	1
PSHWPACS 1010SX	Proshower profile satined stainless steel H 10 mm L 100 cm lt	1
PSHWPACS 12510SX	Proshower profile satined stainless steel H 12,5 mm L 100 cm lt	1
PSHWPACS 1015SX	Proshower profile satined stainless steel H 10 mm L 150 cm lt	1
PSHWPACS 12515SX	Proshower profile satined stainless steel H 12,5 mm L 150 cm lt	1
PSHWPACS 1020SX	Proshower profile satined stainless steel H 10 mm L 200 cm lt	1
PSHWPACS 12520SX	Proshower profile satined stainless steel H 12,5 mm L 200 cm lt	1




PSHWPACS 1010SX - PSHWPACS 12510SX




PSHWPACS 1010DX - PSHWPACS 12510DX




PSHWPACS 1015SX - PSHWPACS 12515SX

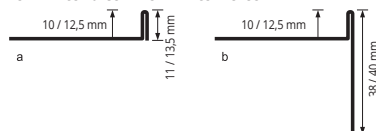


PSHWPACS 1015DX - PSHWPACS 12515DX

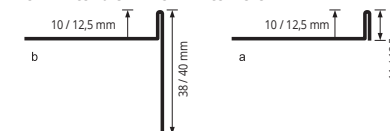

PSHWPACS 1020SX - PSHWPACS 12520SX

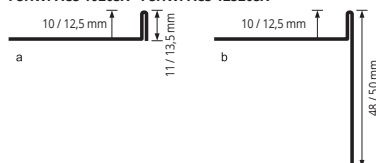

PSHWPACS 1020DX - PSHWPACS 12520DX

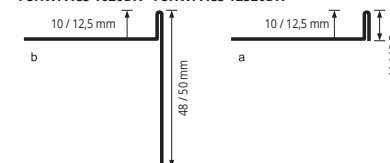

© 2020 All rights reserved by Progress Profiles. Printed in Italy

PROSHOWER CENTRAL KIT SYSTEM is an innovative solution, which combines functionality and design to answer to all requirements of the shower.

PROSHOWER CENTRAL KIT SYSTEM

PROSHOWER DRAIN KIT




Article	Description	Pc/Pack.
PSHPANCEKL	PROSHOWER CENTRAL KIT BASE + PROSHOWER DRAIN LATERAL KIT - lateral drain	1
PSHPANCEKV	PROSHOWER CENTRAL KIT BASE + PROSHOWER DRAIN VERTICAL KIT - vertical drain	1

Article	Kit components	Pc/Pack.
PSHPANC	PROSHOWER PANEL CENTRAL - moulded polystyrene 120 cm x 120 cm	1
PRBFXB	PROBAND FIX white	2
PRBPE 1507	PROBAND 150 - 7,5 lm	1
PFLO 0405	PROFOIL ROLL - 5 lm	1
PRSPD 10	PVC TOWEL	1
PSHLDK/ PSHVDK	PROSHOWER DRAIN LATERAL KIT or PROSHOWER DRAIN VERTICAL KIT	1



PROSHOWER PANEL CENTRAL
PSHPANC




PROFOIL
PFLO 0405



PROBAND 150
PRBPE 1507



PROBAND FIX
PRBFXB



PVC TOWEL
PRSPD 10



PROSHOWER DRAIN
LATERAL KIT
PSHLDK



PROSHOWER DRAIN
VERTICAL KIT
PSHVDK




PROSHOWER DRAIN
LATERAL KIT
PSHLDK




PROSHOWER DRAIN
VERTICAL KIT
PSHVDK

Article	Description	Pc/Pack.
PSHLDK	PROSHOWER DRAIN LATERAL KIT - lateral drain	1
PSHVDK	PROSHOWER DRAIN VERTICAL KIT - vertical drain	1

Article	Description	Pc/Pack.
PSHPANC	PROSHOWER PANEL CENTRAL - moulded polystyrene 120 cm x 120 cm	1



PROSHOWER PANEL CENTRAL
PSHPANC

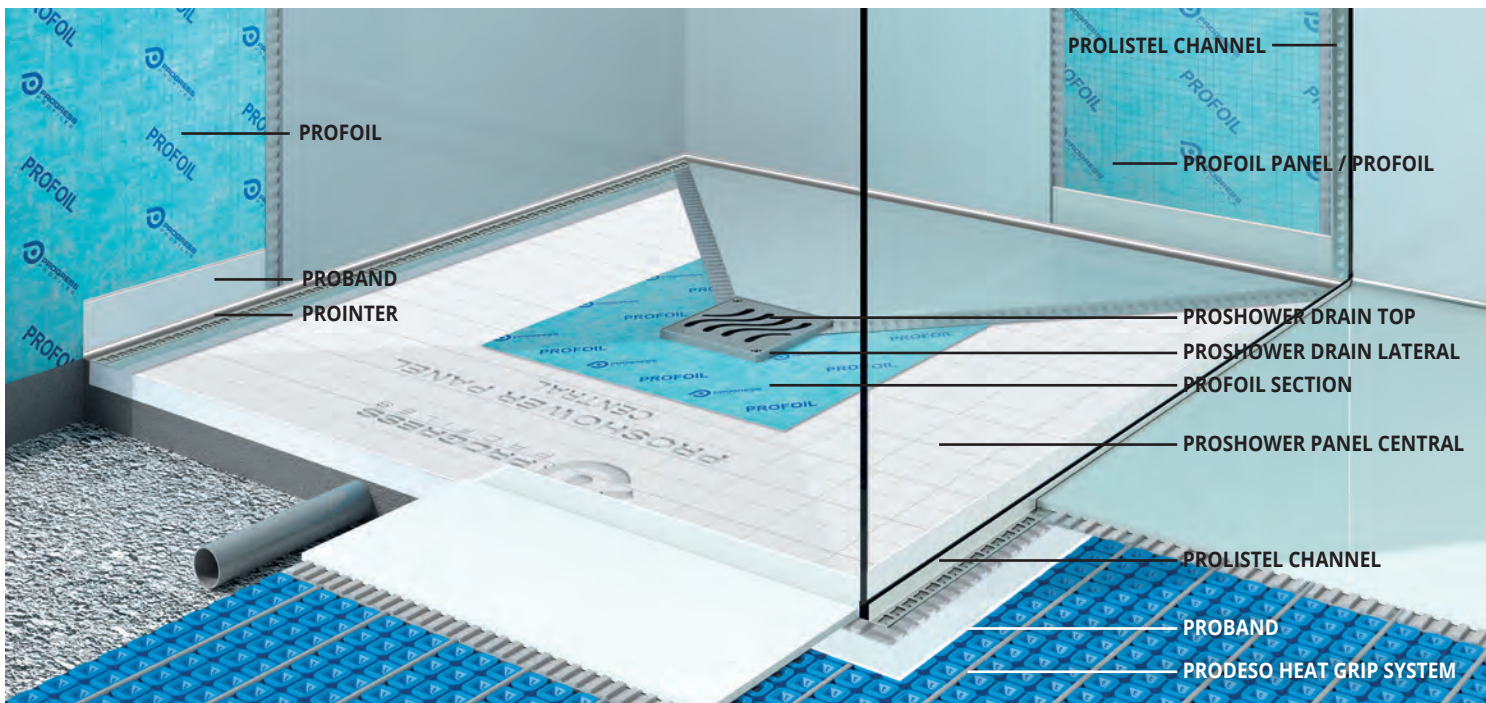

© 2020 All rights reserved by Progress Profiles. Printed in Italy

PROFOIL

ROLLS IN HDPE AND PP

PROFOIL is a waterproofing polyethylene membrane with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

ROLLS IN HDPE AND PP - Thickness 0,42 mm

Article	Width roll H x L lm	total m ²				
PFLO 0430	1 x 30	30	40			
PFLO 0405	1 x 5	5	154			

AREAS OF USE

• **Use.** Waterproofing of substrates and vertical structures before the laying of ceramic and stone materials in areas subject to occasional contact with water like bathrooms and kitchens, with high vapor pressure like saunas and Turkish baths and with permanent contact with water also in pressure like swimming pools and tanks. On screed without cracks and completely cured, old ceramic floors and natural stones anchored to the substrate, concrete completely cured and wood supports.

• **Don't use.** On bituminous coverings, over insulating panels and lightweight screed.

WARNINGS

Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications please call the technical department.



PROFOIL PASTE

WATERPROOFING ELASTIC MEMBRANE

PROFOIL PASTE is a ready to use thin-layer waterproofing elastic membrane with low emissions of volatile organic compounds.

WATERPROOFING ELASTIC MEMBRANE

Article	Kg./Bucket	Bucket/ Pallet				
PFLOPST 04	4	64				
PFLOPST 10	10	36				

AREAS OF USE AND WARNINGS, see page 174



PROBAND 150/250

ROLLS IN HDPE AND PP



ROLLS IN HDPE AND PP - Thickness 0,42 mm


Article	Roll width H mm x L lm	Rolls/ Pack.				
PRBPE 1505	150 x 5	20				
PRBPE 1507	150 x 7,5	16				
PRBPE 1530	150 x 30	6				
PRBPE 2505	250 x 5	10				
PRBPE 2530	250 x 30	3				

AREAS OF USE AND WARNINGS, see page 171

PRBPE 1505 available while stocks last

CORNERS and PIPE COLLAR

HDPE E PP



PREFORMED CORNERS AND PIPE COLLAR IN HDPE AND PP
Thickness 0,42 mm

Article	H x L mm	Rolls/Pack.				
PRBI (internal)	150 x 150	10 Pcs				
PRBE (external)	150 x 150	10 Pcs				
PRBT (pipe collar)	125 x 125	10 Pcs				

AREAS OF USE AND WARNINGS, see page 172

PROBAND FIX

MOISTURE-CURE SEALANT



MOISTURE-CURE SEALANT
pack. of 12 cartridges

Article	Colours	Cartridge lm				
PRBFXB	WHITE	300				
PRBFXG	GREY	300				



GUN FOR MOISTURE-CURE SEALANT CARTRIDGE

Article	Pc/Pack					
PRBFXGUN	1					



MOISTURE-CURE SEALANT CARTRIDGE
pack. of 12 cartridges

Article	Colours	Cartridge lm				
PRBFXUB	WHITE	600				
PRBFXUG	GREY	600				

AREAS OF USE AND WARNINGS, see page 172

PROFOIL PANEL are high density extruded polystyrene panels covered on both sides with a steam- and waterproofing membrane. The membrane is waterproofing and the adhesive to fix them reinforces the panels for a quick and inexpensive laying.

NOT AVAILABLE IN GERMANY

PROFOIL PANEL


HIGH DENSITY EXTRUDED POLYSTYRENE PANEL

PROFOIL PANEL 1524 mm - high density extruded polystyrene
915 mm x 1524 mm = 1,394 m²

Article	H mm	Pcs /pallet	Mq /pallet
PFLPAN6	6,35	85	118,49
PFLPAN9	9,50	80	111,52
PFLPAN13	12,70	60	83,64
PFLPAN16	15,90	50	69,70
PFLPAN25	25,00	30	41,82
PFLPAN38	38,10	20	27,88
PFLPAN50	50,80	15	20,91

PROFOIL PANEL in 1524 mm is available only in small quantity. Please contact the office for availability.


THICKNESS PROFOIL PANEL

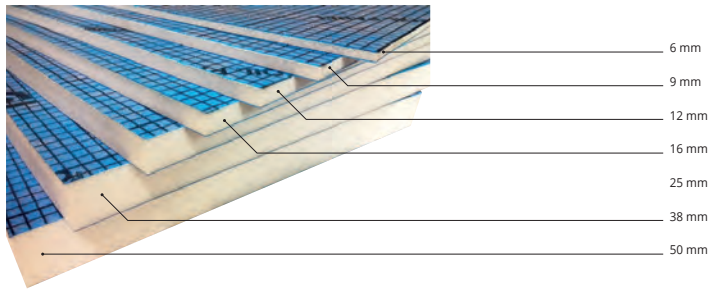



PROFOIL PANEL 2700 mm - high density extruded polystyrene
915 mm x 2700 mm = 2,470 m²

Article	H mm	Pcs /pallet	Mq /pallet
PFLPAN627	6,35	85	209,95
PFLPAN927	9,50	80	197,60
PFLPAN1327	12,70	60	148,20
PFLPAN1627	15,90	50	123,50
PFLPAN2527	25,00	30	74,10
PFLPAN3827	38,10	20	49,40
PFLPAN5027	50,80	15	37,05

PFLPAN...

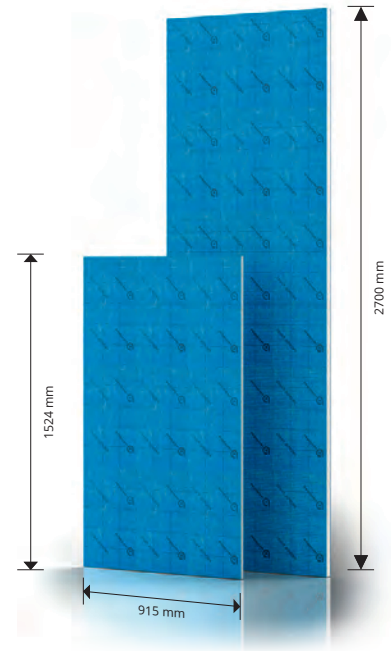

© 2020 All rights reserved by Progress Profiles. Printed in Italy



PROFOIL AND PROBAND DOWELS, WASHERS, SCREWS

STAINLESS STEEL/ZINC-COATED METAL/GLASS FIBER NET



PROFOIL PANEL DOWELS - pack. 250 Pc

Article	L mm
TZPFP 110 (zinc-coated metal)	100
TZPFP 140 (zinc-coated metal)	140
TZPFP 170 (zinc-coated metal)	170
TZPFP 200 (zinc-coated metal)	200
TIPFP 110 (stainless steel)	110
TIPFP 140 (stainless steel)	140
TIPFP 170 (stainless steel)	170
TIPFP 200 (stainless steel)	200
TIPFP 250 (stainless steel)	250



PROFOIL PANEL WASHERS (ZINC-COATED METAL) - pack. 100 Pc

Article	Pcs/Pack.	ø mm
RFPFP 36	100	35



PROFOIL PANEL SCREWS (ZINC-COATED METAL)

Article	Pcs/Pack.	L mm
VACFPF 35	1000	35
VACFPF 55	1000	45
VACFPF 80	1000	80



PROBAND NET - roll 50 m

Article	H mm
PRBNET 100	100

PRO GOBOARD PANEL

HIGH DENSITY POLYISOCYANURATE FOAM PANEL

PRO GOBOARD PANEL highdensity polyisocyanurate foam panel, covered on both sides with a fibre-glass reinforced cement-based waterproof coating to allow the laying of tiles. The panels, tested for a resistance long duration, are available in thickness of 6,25 / 12,5 / 25 and 50 mm, size of 92 x 152 cm and 122 x 244 cm and can be used on floors, false ceilings, walls, showers and ceilings.

PGOBOR...



PRO GOBOARD PANEL - highdensity polyisocyanurate foam

Article	Description	Pcs/pallet	Mq/pallet
PGOBOR06	PRO GOBOARD H 6,25 mm - 92 cm x 152 cm - 1,40 m ²	75	105
PGOBOR125	PRO GOBOARD H 12,5 mm - 92 cm x 152 cm - 1,40 m ²	60	84
PGOBOR25	PRO GOBOARD H 25 mm - 122 cm x 244 cm - 2,98 m ²	30	89,4
PGOBOR50	PRO GOBOARD H 50 mm - 122 cm x 244 cm - 2,98 m ²	15	44,70


PROFOIL PANEL NICHE

HIGH DENSITY EXTRUDED POLYSTYRENE


PROFOIL PANEL NICHE are prefabricated built-in elements of PROFOIL PANEL to make indoor wall niches and support surfaces. The niches can be linked to the waterproofing systems PROFOIL and PROFOIL PANEL. The fixing of the shelf inside the niche is optional. The shelf, part of the, can be fixed at the needed height. It is available in 4 sizes.

NOT AVAILABLE IN GERMANY


PFLPANICH 88




PFLPANICH 1212



PFLPANICH 821



PFLPANICH 1221



Article	Description	Pcs/Pack.
PFLPANICH 88	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 203,2 x 203,2 mm	1

Article	Description	Pcs/Pack.
PFLPANICH 1212	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 304,8 x 304,8 mm	1

Article	Description	Pcs/Pack.
PFLPANICH 821	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 203,2 x 533,4 mm	1

Article	Description	Pcs/Pack.
PFLPANICH 1221	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 304,8 x 533,4 mm	1

© 2020 All rights reserved by Progress Profiles. Printed in Italy


= News 2020

= Production on demand with minimum quantity of 5 pcs. Production delay 4/5 weeks. Price to be agreed





SKIRTING BOARDS

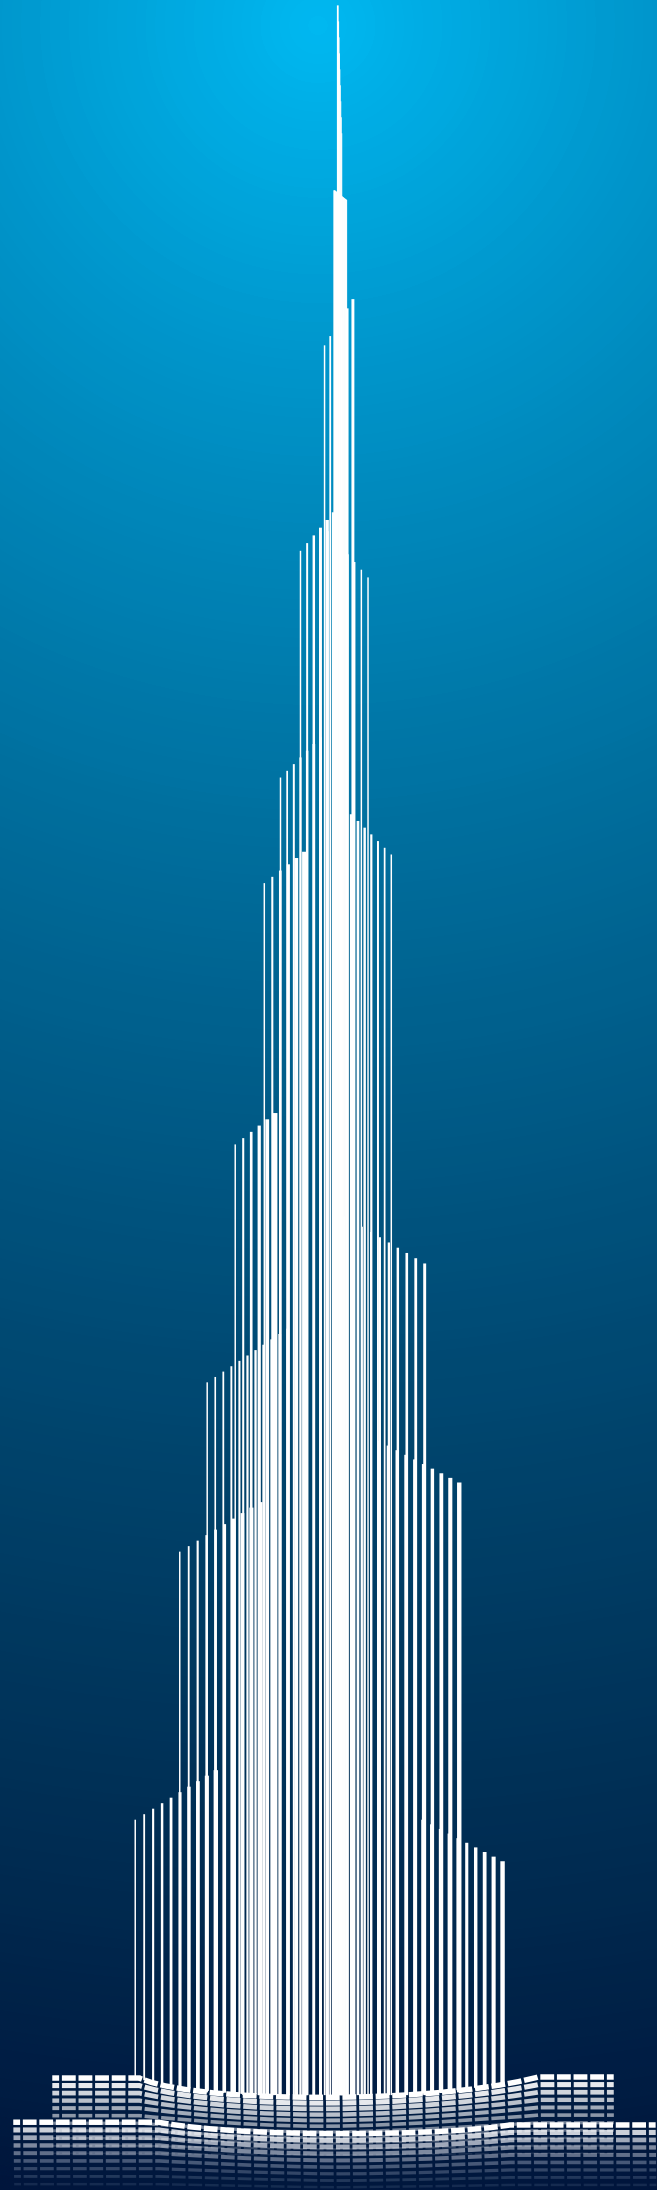



PROSKIRTING CHANNEL is the new innovative skirting designed with an integrated system for plasterboard walls, and devised to create a skirting flush to the wall with decorative inner grooves for a modern and contemporary touch.

PROSKIRTING CHANNEL

ANODIZED, BRUSHED, VARNISHED ALUMINIUM



SUPPORT/ PERFORATED BASE - ANODIZED SILVER ALUM.
thermo packed - bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm
PKGCFAA 75	75

ORDER THE SUPPORT AND THE TOP YOU WISH

VISIBLE TOP - ANODIZED, BRUSHED, WHITE VARNISHED ALUM.
thermo packed bar length 2 lm - pack. 20 Pcs - 40 lm


Article	H mm
PKCHAA 55	55
PKCHBS 55	55
PKCHA 55-01	55

On demand may be realised in other finishes of the colour chart.
Contact our customer service for minimum quantity, timing and price.


INTERNAL CORNER - ANODIZED, BRUSHED, WHITE VARNISHED ALUM. - pack. 5 Pcs

Article	H mm
REPCH... 55	55
REPKCHA 55-01	55

Available in the colours: AA - BS - 01. The code of the selected colour must be added to the article code.
E.g.: REPCH... 55 (chosen finish anodized silver)
REPKCHAA 55.

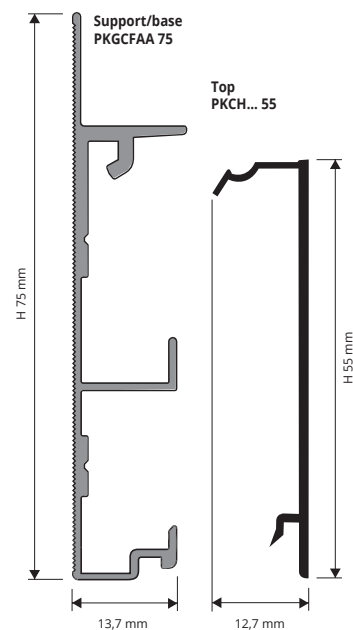

EXAMPLES OF LAYING for instructions see the product below

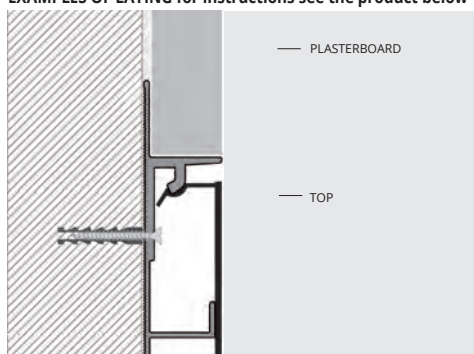

© 2020 All rights reserved by Progress Profiles. Printed in Italy

PROSKIRTING FLAT is the new innovative skirting designed with an integrated system for plasterboard walls, and devised to create a skirting flush to the wall for a modern and contemporary touch.

PROSKIRTING FLAT

ANODIZED, BRUSHED, VARNISHED ALUMINIUM



SUPPORT/ PERFORATED BASE - ANODIZED SILVER ALUM.
thermo packed - bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm
PKGCFAA 75	75

ORDER THE SUPPORT AND THE TOP YOU WISH

VISIBLE TOP - ANODIZED, BRUSHED, WHITE VARNISHED ALUM.
thermo packed - bar length 2 lm - pack. 20 Pcs - 40 lm


Article	H mm
PKFLAA 60	60
PKFLBS 60	60
PKFLA 60-01	60

On demand may be realised in other finishes of the colour chart.
Contact our customer service for minimum quantity, timing and price.


EXTERNAL CORNER - ANODIZED, BRUSHED, WHITE VARNISHED ALUM. - pack. 5 Pcs

Article	H mm
REPFL... 60	60
REPFLA 60-01	60

Available in the colours: AA - BS - 01. The code of the selected colour must be added to the article code.
E.g.: REPFL... 60 (chosen finish anodized silver)
REPFLAA 60.

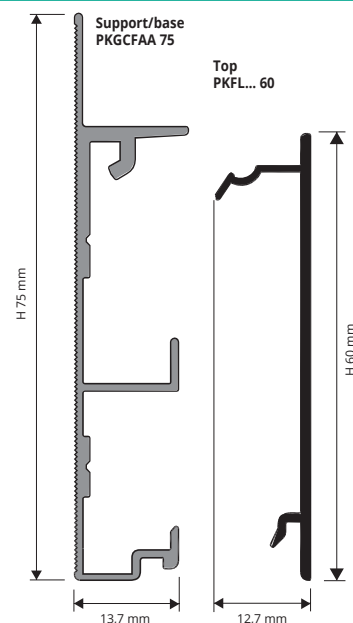

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

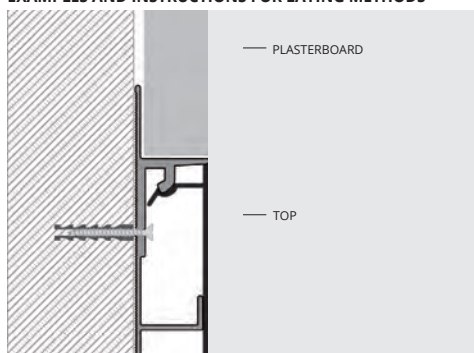

1. Fix the substrate/perforated base to the wall before laying the plasterboard, calculating all the heights and distances. 2. Lay the plasterboard aligning the lower part flush to the "PROSKIRTING CHANNEL" and/or FLAT. 3. Plaster and carry out the surface finishing on the plasterboard. 4. Choose the required Top "PROSKIRTING CHANNEL" and/or FLAT finish, cut and lay the profile fitting the lower part and then the upper part by pressing gently.

IMPORTANT: Pay attention to the external edges of the aluminium Proskirting. They must be protected against agents such as adhesives and sealants and against grinding or scraping actions.

COLOURS

AA - Anodized silver aluminium	BS - Brushed silver aluminium	01 - White varnished alum. (9016)


* = Production on demand with minimum quantity of 100 Pcs. Production delay 4/5 weeks. Price to be agreed

PROSKIRTING INS

ANODIZED SILVER ALUMINIUM

PROSKIRTING INS is the new innovative skirting designed with an integrated system for plasterboard walls, and devised to create a recessed skirting for a modern and minimalist design in line with the latest trends.

PKINSAA 60

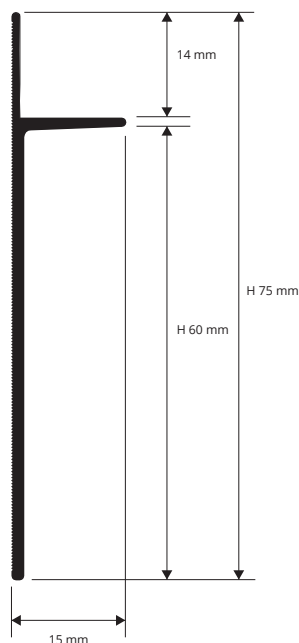


ANODIZED SILVER ALUMINIUM thermo packed
bar length 2 lm - pack. 30 Pcs - 60 lm

Article	H x L mm
PKINSAA 60	60 X 15


ON DEMAND MAY BE REALISED IN OTHER FINISHES OF THE COLOUR CHART. CONTACT OUR CUSTOMER SERVICE FOR MINIMUM QUANTITY (MINIMUM QUANTITY ORDER OF 500 LM), TIMING AND PRICE.

COLOURS



AA - Anodized silver alum.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

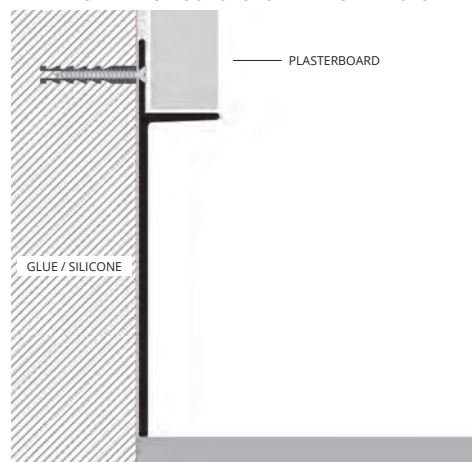

1. Fix "PROSKIRTING INS" using screws (concealed part) and glue/silicone (exposed side), before laying the plasterboard, calculating all the heights and distance. 2. Lay the plasterboard aligning the lower part flush to the "PROSKIRTING INS". 3. Plaster and carry out the surface finishing on the plasterboard.


IMPORTANT: Pay attention to the external edges of the aluminium "Proskirting". They must be protected against agents such as adhesives and sealants and against grinding or scraping actions.

PROSKIRTING LINE

ANODIZED SILVER ALUMINIUM

PROSKIRTING LINE in the innovative skirting suitable for smoothed lime, marmorino, stucco, and Venetian coats on civil plaster or plasterboard.

PKLIAA 60

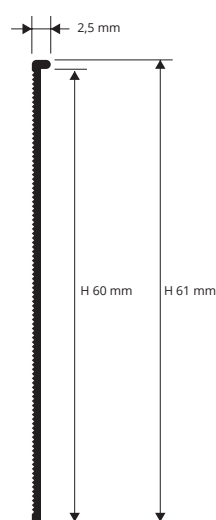

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2 lm - pack. 40 Pcs - 80 lm

Article	H x L mm
PKLIAA 60	60 x 2,5


ON DEMAND MAY BE REALISED IN OTHER FINISHES OF THE COLOUR CHART. CONTACT OUR CUSTOMER SERVICE FOR MINIMUM QUANTITY (MINIMUM QUANTITY ORDER OF 500 LM), TIMING AND PRICE.

COLOURS



AA - Anodized silver alum.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

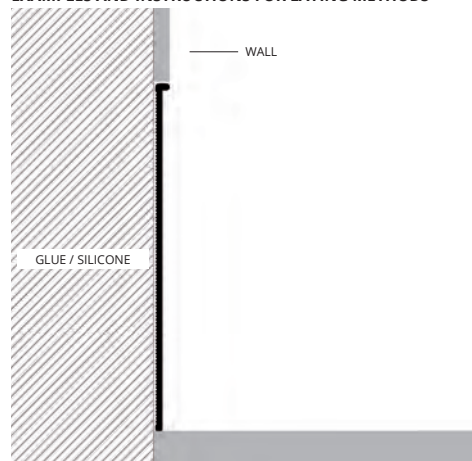

1. Fix the "PROSKIRTING LINE" using glue/silicone (exposed side), before making the required coat, calculating all the heights and distances. 2. Carry out the surface finishing aligning the lower part flush to the "PROSKIRTING LINE".

IMPORTANT: Pay attention to the external edges of the aluminium "Proskirting". They must be protected against agents such as adhesives and sealants and against grinding or scraping actions.

PROSKIRTING ISP is a joint, inspectional "cable duct" baseboard in aluminium, conceived and designed to hide and protect the passage of electric cables, the ones for computer, telephones and other plants as well, allowing an easy and quick access. The supports that are to be fixed on the wall consent accommodate different utility wires/cables as well. Aesthetically pleasant, it is recommended for various public and private environments: offices, schools, residences, commercial centers etc. Available in silver anodized aluminium (H: 100 mm) and in polished titanium and brushed titanium aluminium (H: 70 mm). In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended.

PROSKIRTING ISP

SILVER ANODIZED ALUMINIUM, TITANIUM POLISHED AND BRUSHED ALUM. (H:70 MM)



SKIRTING ANODIZED SILVER ALUMINIUM
thermo packed - bar length 2 lm - pack. 25 Pcs - 50 lm
(H: 100 mm - 40 lm)

Article	H mm
PKISPAA 70	70
PKISPAA 100	100

On demand may be realised in other finishes of the colour chart.
Contact our customer service for minimum quantity, timing and price.

SKIRTING POLISHED TITANIUM ALUMINIUM
thermo packed - bar length 2 lm - pack. 25 Pcs - 50 lm


Article	H mm
PKISPBT 70	70

SKIRTING POLISHED BRUSHED TITANIUM ALUMINIUM
thermo packed - bar length 2 lm - pack. 25 Pcs - 50 lm

Article	H mm
PKISPTS 70	70

UPON REQUEST AVAILABLE IN H 100mm (MINIMUM QUANTITY 200 lm)
Skirtings in polished brushed titanium aluminium match with capsules and joints in varnished PVC with polished titanium aluminium effect (see below).


COLOURS



PUNCHED SUPPORT
support length 2 cm - pack. 10 Pcs

Article	H mm
PKGS 55	55

ARTICLES NOT FOR SALE SINGLY

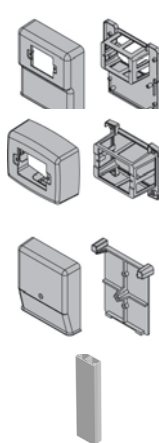

POWER SUPPLY BOX
SOCKET with FASTENING BASIS

Article
SPA 1820

SWITCH BOX
with BOX BASIS

Article
SI 1410

JUNCTION BOX
with FASTENING BASIS

Article
SD 1210


VERTICAL CABLE DUCT PROFILE
bar length 2,7 lm

Article
PSPV


It matches with CSPPK 80. Pag. 197.

LAYING INSTRUCTIONS

1. Choose "PROSKIRTING ISP" in the desired finish and height. 2. Fix the punched support to the wall with screws every 50 cm. 3. If expected, laying the low-voltage electric cables like web, computer, telephone and satellite TV. 4. Attach the profile to the support applying low pressure.

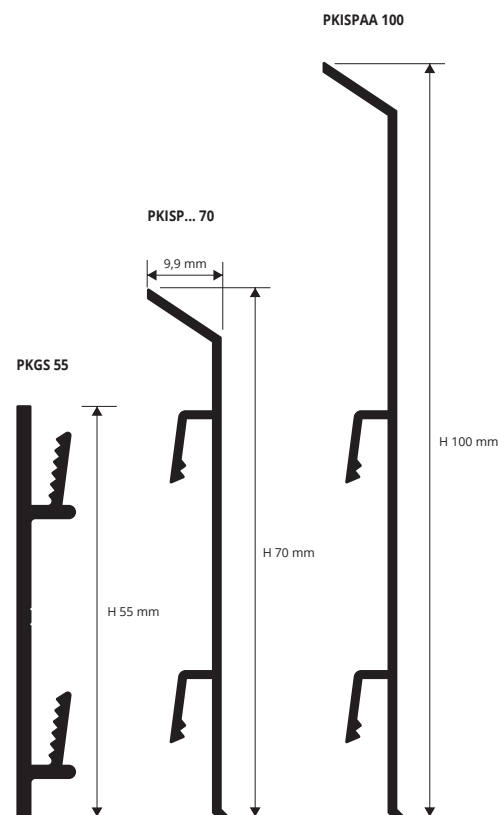

EXAMPLES OF LAYING

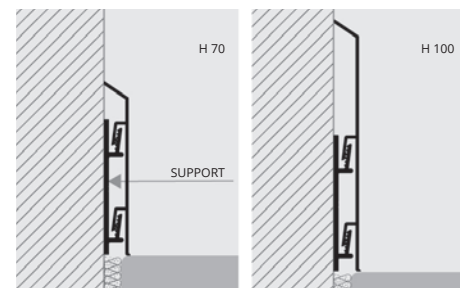

© 2020 All rights reserved by Progress Profiles. Printed in Italy

CORNERS, END CAPS and JOINTS

VARNISHED PLASTIC (finishes anodized silver, polished titanium)

IN/EXTERNAL CORNER - VARNISHED PLASTIC anod. silver - pack. 5 Pcs

Article	H x L mm
PKIAGI 70 (internal)	70 x 24
PKIAGE 70 (external)	70 x 5
PKIAGI 100 (internal)	100 x 24
PKIAGE 100 (external)	100 x 5

JOINTS - VARNISHED PLASTIC anod. silver - pack. 10 Pcs

Article	H mm
PKIGIN 70	70
PKIGIN 100	100

END CAPS R / L - VARNISHED PLASTIC ANOD. silver - pack. 10 Pcs (5 right and 5 left)

Article	H mm
PKITDSAA 70/5	70
PKITDSAA 100/5	100



IN/EXTERNAL CORNER - VARNISHED PLASTIC polished titanium - pack 5 Pcs

Article	H x L mm
PKIAGIBT 70 (internal)	70 X 24
PKIAGEBT 70 (external)	70 X 5


JOINTS - VARNISHED PLASTIC polished titanium - pack. 10 Pcs

Article	H mm
PKIGINBT 70	70


END CAPS R / L - VARNISHED PLASTIC poli. titanium - pack 10 Pcs (5 right and 5 left)

Article	H mm
PKITDSBT 70/5	70


Available on demand aluminium prewelded internal and external flush corners. Price to be agreed. Production delay 4/5 weeks.




PKIAGE.. 70 / 100
external corner



PKIAGI.. 70 / 100
internal corner



PKIGIN.. 70 / 100
joint




PKITDS.. 70 / 100/5
end caps

* = Production on demand with minimum quantity of 100 Pcs. Production delay 4/5 weeks. Price to be agreed


PROSKIRTING LIST 40

ANODISED, BRUSHED, VARNISHED ALUMINIUM

PROSKIRTING LIST is a skirting/baseboard profile in different finishes anodized, polished, brushed, varnished aluminium, 40 mm high and 10 mm wide which can be fixed directly to the wall with adhesive (PKLT .. 40A non-inspectable version) or with aluminum supports (inspectable version PKLT .. 40). The aluminum supports, 20 mm long, are fixed with plugs to the wall, every about 50 cm. PROSKIRTING LIST 40 in aluminum is suitable in any indoor environment.

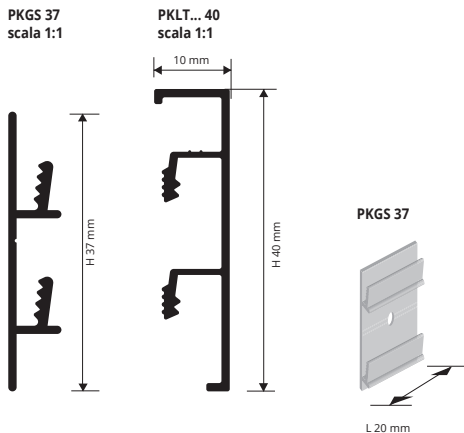

LAYING EXAMPLE

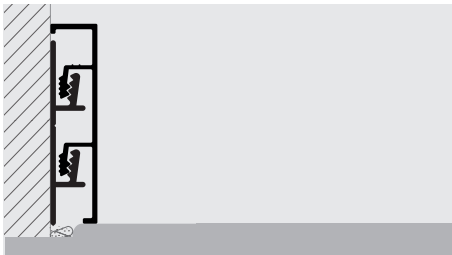

LAYING INSTRUCTIONS

1. Choose "PROSKIRTING LIST" in the desired finish and height. 2. Fix the punched support to the wall with screws every 50 cm. 3. If expected, laying the low-voltage electric cables like web, computer, telephone and satellite TV. 4. Attach the profile to the support applying low pressure.



PROSKIRTING LIST 40 - ANODISED SILVER ALUMINIUM thermo packed - bar length 2 ml - pack. 20 PCS - 40 ml

Article	H mm		
PKLTAA 40 (without adhesive)	40		
PKLTAA 40A (with adhesive)	40		

PROSKIRTING LIST 40 - VARNISHED ALUMINIUM WHITE thermo packed - bar length 2 ml - pack. 20 PCS - 40 ml

Article	H mm		
PKLTA 40-01 (without adhesive)	40		
PKLTA 40-01A (with adhesive)	40		

COLOURS

01 - Aluminium varnished white	AA - Anodised silver aluminium	BS - Brushed silver aluminium



PROSKIRTING LIST 40 - BRUSHED SILVER ALUMINIUM thermo packed - bar length 2 ml - pack. 20 PCS - 40 ml

Article	H mm		
PKLTBS 40 (without adhesive)	40		
PKLTBS 40A (with adhesive)	40		

PUNCHED SUPPORT - Natural aluminium - bar length 2 cm - pack. 10 PCS

Article	H mm		
PKGS 37	37		

COLOURS ON DEMAND 100 PCS / 200 LM

010 - Varnished aluminium matt white	BT - Polished titanium aluminium	TS - Brushed titanium aluminium
RS - Brushed copper aluminium		

INTERNAL and EXTERNAL CORNERS, END CAPS

ANODISED, BRUSHED AND VARNISHED ALUMINIUM

Internal / external corners
REPFLT... 40



End caps
TPKLT... 40



INTERNAL / EXTERNAL CORNER - ANODISED SILVER ALUMINIUM
pack. 5 PCS

Article	H mm		
REPFLTAA 40	40		

INTERNAL / EXTERNAL CORNER - BRUSHED SILVER ALUMINIUM
pack. 5 PCS

Article	H mm		
REPFLTBS 40	40		

INTERNAL / EXTERNAL CORNER - VARNISHED ALUMINIUM WHITE
pack. 5 PCS

Article	H mm		
REPFLTA 40-01	40		

END CAPS - ALL. ANODISED SILVER ALUMINIUM
pack. 4/10 PCS

Article	H mm		
TPKLTAA 40	40		*

END CAPS - BRUSHED SILVER ALUMINIUM
pack. 4/10 PCS

Article	H mm		
TPKLTBS 40	40		*

END CAPS - VARNISHED ALUMINIUM WHITE
pack. 4/10 PCS

Article	H mm		
TPKLTAA 40-01	40		*



= News 2020

= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROSKIRTING LIST is a skirting/baseboard profile in different finishes anodised, polished, brusched, varnished aluminium, 80 mm high and 10 mm wide which can be fixed directly to the wall with adhesive (PKLT .. 80A non-inspectable version) or with aluminum supports (inspectable version PKLT .. 80). The aluminum supports, 20 mm long, are fixed with plugs to the wall, every about 50 cm. PROSKIRTING LIST 80 in aluminum is suitable in any indoor environment.

PROSKIRTING LIST 80

ANODISED, BRUSHED, VARNISHED ALUMINIUM



PROSKIRTING LIST 80 - ANODISED SILVER ALUMINIUM thermo packed - bar lenght 2 ml - pack. 20 PCS - 40 ml

Article	H mm		
PKLTAA 80 (without adhesive)	80		
PKLTAA 80A (with adhesive)	80		



PROSKIRTING LIST 80 - BRUSHED SILVER ALUMINIUM thermo packed - bar lenght 2 ml - pack. 20 PCS - 40 ml


Article	H mm		
PKLTBS 80 (without adhesive)	80		
PKLTBS 80A (with adhesive)	80		

PROSKIRTING LIST 80 - VARNISHED ALUMINIUM WHITE thermo packed - bar lenght 2 ml - pack. 20 PCS - 40 ml

Article	H mm		
PKLTA 80-01 (without adhesive)	80		
PKLTA 80-01A (with adhesive)	80		

PUNCHED SUPPORT - Natural aluminium - bar lenght 2 cm - pack. 10 PCS

Article	H mm		
PKGS 55	55		

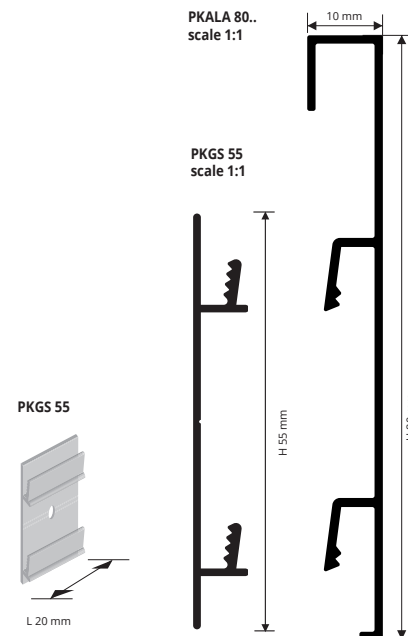


COLOURS

01 - Aluminium varnished white	AA - Anodised silver aluminium	BS - Brushed silver aluminium

COLOURS ON DEMAND 100 PCS / 200 LM

010 - Varnished aluminium matt white	BT - Polished titanium aluminium	TS - Brushed titanium aluminium	RS - Brushed copper aluminium

EXAMPLE FOR THE LAYING



ISTRUZIONI TECNICHE DI POSA

1. Choose "PROSKIRTING LIST" in the desired finish and height. 2. Fix the punched support to the wall with screws every 50 cm. 3. If expected, laying the low-voltage electric cables like web, computer, telephone and satellite TV. 4. Attach the profile to the support applying low pressure.

© 2020 All rights reserved by Progress Profiles. Printed in Italy

INTERNAL and EXTERNAL CORNERS, END CAPS

ANODISED, BRUSHED AND VARNISHED ALUMINIUM

INTERNAL / EXTERNAL CORNER - ANODISED SILVER ALUMINIUM
pack. 5 PCS

Article	H mm		
REPKLTA 80	80		

INTERNAL / EXTERNAL CORNER - BRUSHED SILVER ALUMINIUM
pack. 5 PCS

Article	H mm		
REPKLTS 80	80		

INTERNAL / EXTERNAL CORNER - VARNISHED ALUMINIUM WHITE
pack. 5 PCS

Article	H mm		
REPKLTA 80-01	80		

END CAPS - ALL. ANODISED SILVER ALUMINIUM
pack. 4/10 PCS

Article	H mm		
TPKLTA 80	80		*

END CAPS - BRUSHED SILVER ALUMINIUM
pack. 4/10 PCS

Article	H mm		
TPKLTS 80	80		*

END CAPS - VARNISHED ALUMINIUM WHITE
pack. 4/10 PCS

Article	H mm		
TPKLTA 80-01	80		*

End caps
TPKLT... 80



Internal / external
corners
REPKL... 80



= News 2020

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed



PROSKIRTING LED is an innovative patented baseboard called "cable duct" in anodized aluminium, with illumination led system incorporated. Conceived and designed to illuminate the passage zone such as corridors and house and office entrances as well. It generates soft and indirect light. Moreover, it solves many other problems such as the laying of the baseboard itself, the passage of the electric cables, the ones for PC, telephone and other plants as well. **PROSKIRTING LED** has been designed with double function and utility: 1- **PROSKIRTING LED** complete PKLEDA 80 is an inspectional joint baseboard composed of PKGS 66 support for fixing it with screws on the wall and the **PROSKIRTING LED** PKLEDA 80 at sight profile. 2- **PROSKIRTING LED** PKLEDA 80 is a at sight baseboard profile to be fixed directly with silicone/ adhesive. It is not an inspectional one like **PROSKIRTING LED** complete, and is available also in auto adhesive version (PKLEDA 80A).

PROSKIRTING LED

ANODIZED SILVER ALUMINIUM WITH LED AND POWER SUPPLY BOX



SKIRTING BOARD IN ANOD. SILVER ALU. WITHOUT ADHESIVE. ADAPTOR LED, LED & FLAT NOT INCLUDED (indicate the article) thermo packed - bar length 2 lm - pack. 10 Pcs - 20 lm

Article	H mm
PKLEDA 80	80

SKIRTING BOARD IN ANOD. SILVER ALUM. WITH ADHESIVE, ADAPTOR LED, LED & FLAT NOT INCLUDED (indicate the article) thermo packed - bar length 2 lm - pack. 10 Pcs - 20 lm

Article	H mm
PKLEDA 80A	80

Please, specify in your order the code of the FLAT you choose : matt or gloss. Eg.: PKLEDA 80 + PKGPIAL




POLYCARBONATE FLAT - bar length 2 lm

Article	
PKGPIAL	Gloss
PKGPIAO	Matt


ADHESIVE FLEXIBLE LED COIL
length 5 lm - pack.1 ROLL

Article	
LEDN (neutral light 12V)	
LEDF (cold light 12V)	
LEDC (hot light 12V)	



POWER SUPPLY BOX
SOCKET with FASTENING BASIS

Article	
SPA 1820	



LED POWER SUPPLY 75W - 12V

Article	
ALL 7512	



CABLE RACEWAY/ SUPPORT- COEXTRUDED PVC
bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm
CSPPK 80	70


PUNCHED SUPPORT - NATURAL ALUMINIUM
support length 2 cm - pack. 10 Pcs

Article	H mm
PKGS 66	66


ARTICLES NOT FOR SALE SINGLY



COLOURS




On demand may be realised in other finishes of the colour chart. Contact our customer service for minimum quantity, timing and price.



SWITCH BOX
with BOX BASIS

Article	
SI 1410	



JUNCTION BOX
with FASTENING BASIS


Article	
SD 1210	




VERTICAL CABLE DUCT PROFILE

Article	
PSPV	

It matches with CSPPK 80.

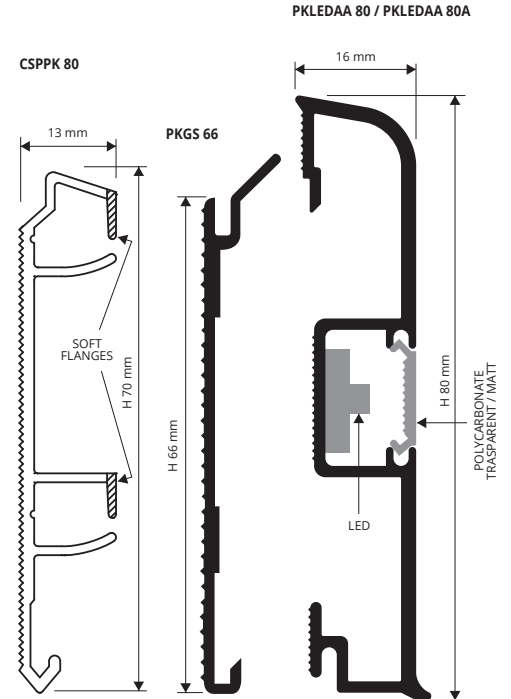


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

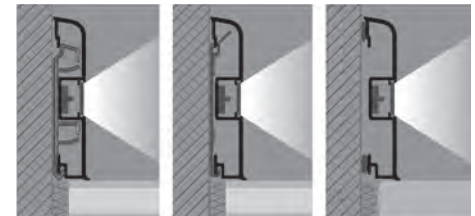


1. Fix the support on the wall putting the screws and plugs every 50 cm (recommended). Make a test with "PROSKIRTING LED" in order to value the height and the correct position of supports. 2. Fix in the chosen spaces the socket/ power supply box basis, switch box basis and, eventually, the junction box. 3. Connect 220V supply to power/ transformer unit, and afterwards, connect the "PROSKIRTING LED" bar next to power unit. 4. Connect the pre-applied led bars inside the "PROSKIRTING LED" with the supplied cables/ wires in continuous way. 5. The power supply unit guarantees about 15 lm of led illumination, beyond that distance it is necessary to add another power supply box/socket. When fixing without support, clean the surface carefully so that it's dry and with no grass trace, apply the silicone on the knurled sides of the profile and lay down correctly, pressing uniformly and with no hammering. For the application of "PROSKIRTING LED" with adhesive, we recommend the temperature not below 15°.

CORNERS, END CAPS and JOINTS


VARNISHED PLASTIC SILVER FINISH




PKAGI 80
internal corner



PKAGE 80
external corner



PKGIN 80
joint



PKTDSAA 80/5
end caps

IN/EXTERNAL CORNER - VARNISHED PLASTIC (SILVER FIN.)
pack. 5 Pcs

Article	H x L mm
PKAGI 80 (internal)	80 X 40
PKAGE 80 (external)	80 X 40

JOINTS - VARNISHED PLASTIC (SILVER FIN.) - pack. 10 Pcs

Article	H mm
PKGIN 80	80

END CAPS R / L - VARNISHED PLASTIC (SILVER FIN.)
pack. 10 Pcs (5 right and 5 left)

Article	H mm
PKTDSAA 80/5	80



PKAGE 80
external corner



PKAGI 80
internal corner



PKGIN 80
joint



PKTDSAA 80/5
end caps

* = Production on demand with minimum quantity of 100 Pcs. Production delay 4/5 weeks. Price to be agreed



PROSKIRTING GILED is an innovative profile in silver anodized aluminum and polished chrome, with 80 and 100 mm height, with a rigid vinyl resin TOP PROFILE, with a 17,5mm exposed surface, available in 9 different marmorised finishes, provided with an integrated LED lighting system generating a soft and indirect light. **PROSKIRTING GILED** can be used instead of the classic skirting board or rotated 180 degrees and installed along the ceiling edges, allowing to cover up to 15mm wide joints. The reflection of the LED light by the aluminum surface of the profile creates a modern atmosphere. **PROSKIRTING GILED** is equipped with all the trim pieces available such as inside and outside corner, joints, end caps and power supply box.

Conceived and designed by the designer Gilberto Toneguzzi.

PROSKIRTING GILED

ANODIZED ALUMINIUM
POLISHED ALUMINIUM



SKIRTING H 80 mm IN ANOD. SILVER, POLI. CHROME ALUM.
TOP PROFILE NOT INCLUDED (indicate the article)
thermo packed - bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm		
PKGLEDA 80	80		
PKGLEDB 80	80		*
PKGLEDA 80A (adh.)	80		
PKGLEDB 80A (adh.)	80		*
PKGLEDA 80F (punch.)	80		*
PKGLEDB 80F (punch.)	80		*




TOP PROFILE IN PVC - bar length 2 lm

Article			
TOPPKGL...			

In the order specify the chosen colour of the TOP PROFILE.
E.g. TOPPKGL... (colour gold) TOPPKGLMBO.

Specify the chosen colour of the PVC TOP PROFILE (see below).

PVC TOP PROFILE COLOURS



On demand may be realised in other finishes of the colour chart. Contact our customer service for minimum quantity, timing and price.

SKIRTING COLOURS



SKIRTING H 100 mm IN ANOD. SILVER, POLI. CHROME ALUM.
TOP PROFILE NOT INCLUDED (indicate the article)
thermo packed - bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm		
PKGLEDA 100	100		
PKGLEDB 100	100		*
PKGLEDA 100A (adh.)	100		
PKGLEDB 100A (adh.)	100		*
PKGLEDA 100F (punch.)	100		*
PKGLEDB 100F (punch.)	100		*

ADHESIVE FLEXIBLE LED COIL

length 5 lm - pack. 1 ROLL

Article			
LEDN (neutral light)			
LEDF (cold light)			
LEDC (hot light)			



LED ADAPTOR AC/DC 75W - 12V (15 lm)

LED ADAPTOR AC/DC 25W - 12V (5 lm)

Article			
ALL 7512 (supplies 15 lm)			
ALL 2512 (supplies 5 lm)			

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROSKIRTING GILED" depending on the desired finish and fixing system; 2. If you are installing the version with adhesive: clean the surface on which the profile is to be laid, ensuring that it is dry. Remove the protective film and place the profile, applying adequate pressure on it. If you are installing the punched version, drill the surface on which the profile is to be laid using a drill with 5mm diameter and insert the 5x 25mm screws. Screw the profile; 3. Connect the 12/24 V adaptor; 4. Fix the LED light to the inclined side of the aluminum profile or to the vinyl resin support and install electrical wiring; 5. Apply the rigid vinyl resin insert to the aluminum profile.

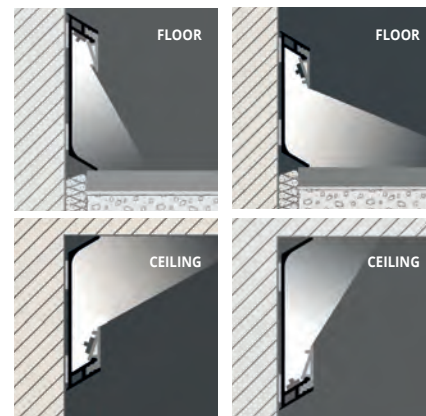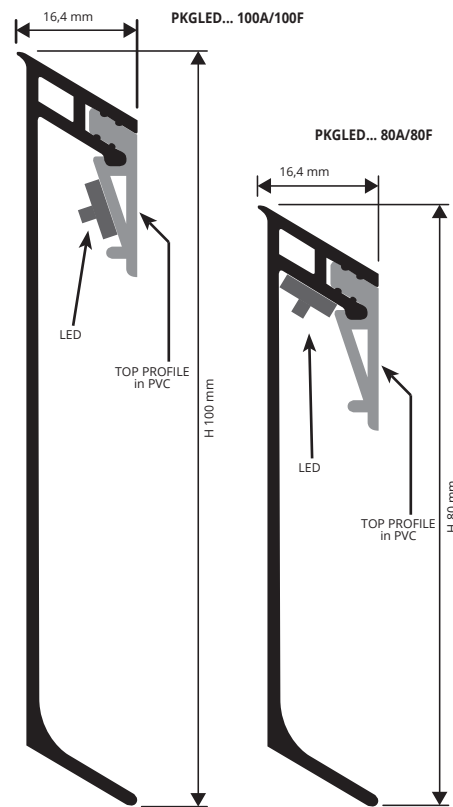

CORNERS, END CAPS and JOINTS

VARNISHED PLASTIC

FLUSH CORNERS - varnished plastic

IN/EXTERNAL CORNER - FLUSH CORNERS
VARNISHED PLASTIC ANOD. SILVER, POLI. CHROME - pack. 5 Pcs

Article	H x L mm		
REPKGLEDA 80 (external)	80 x 10		
RIPKGLEDA 80 (internal)	80 x 10		
REPKGLEDB 80 (external)	80 x 10		*
RIPKGLEDB 80 (internal)	80 x 10		*

FLUSH JOINT - VARNISHED PLASTIC ANOD. SILVER, POLI. CHROME
pack. 5 Pcs

Article	H mm		
GIPKGLEDA 80	80		
GIPKGLEDB 80	80		*

FLUSH END CAPS R / L - VARNISHED PLASTIC ANOD. SILVER,
POLI. CHROME - pack. 6 Pcs (3 right and 3 left)

Article	H mm		
TPKGLEDA 80/3	80		
TPKGLEDB 80/3	80		*

FLUSH CORNERS - varnished plastic

IN/EXTERNAL CORNER - FLUSH CORNERS
VARNISHED PLASTIC ANOD. SILVER, POLI. CHROME - pack. 5 Pcs

Article	H x L mm		
REPKGLEDA 100 (external)	100 x 10		
RIPKGLEDA 100 (internal)	100 x 10		
REPKGLEDB 100 (external)	100 x 10		*
RIPKGLEDB 100 (internal)	100 x 10		*

FLUSH JOINT - VARNISHED PLASTIC ANOD. SILVER, POLI. CHROME
pack. 5 Pcs

Article	H mm		
GIPKGLEDA 100	100		
GIPKGLEDB 100	100		*

FLUSH END CAPS R / L - VARNISHED PLASTIC ANOD. SILVER,
POLI. CHROME - pack. 6 Pcs (3 right and 3 left)

Article	H mm		
TPKGLEDA 100/3	100		
TPKGLEDB 100/3	100		*

INTERNAL CORNER
RIPKGLEDA... 80/100



EXTERNAL CORNER
REPKGLEDA... 80/100



JOINT
GIPKGLEDA... 80/100



END CAPS
TPKGLEDA... 80/100




* = Production on demand with minimum quantity of 100 Pcs. Production delay 4/5 weeks. Price to be agreed


PROSKIRTING

ANODIZED SILVER ALUMINIUM

PROSKIRTING is an innovative patented "cable channel" skirting in anodized aluminium. Studied and designed to resolve various problems related to the installation of skirting and to the laying of electrical, computer and telephone cables and other service systems. **PROSKIRTING** has been designed to offer a dual function: 1- **PROSKIRTING** complete PKAA 80 is a snap-on inspectable skirting consisting of a support PKGS 66 to be screwed to the wall and the visible profile **PROSKIRTING** PKAA 80. 2- **PROSKIRTING** PKAA 80 is the visible skirting profile to be fixed directly with silicone/adhesive. It is not inspectable like **PROSKIRTING** complete; it is also available in a self-adhesive version (PKAA 80A).

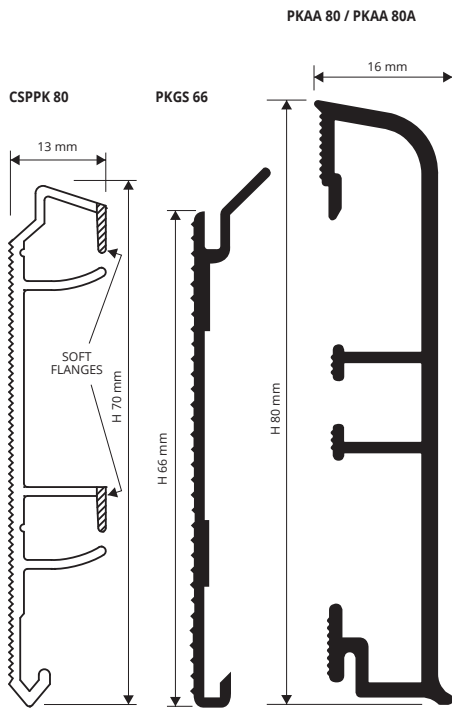

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

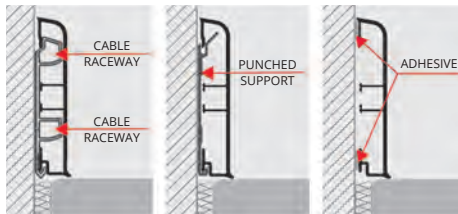

1. Choose the system with or without support
2. Fix the support to the wall with screws and screw anchors at 50 cm intervals (recommended)
3. When laying without support, thoroughly clean the surface ensuring that it is grease-free and dry, apply the silicone on the knurled sides of the profiles and lay correctly by applying pressure evenly over the whole profile without using a hammer.
4. For the "PROSKIRTING" with adhesive, application is recommended at a temperature of at least 15°. Always use the inside/outside corner linking elements and end caps for impeccable, faultless laying.




ONLY SKIRTING (for sale singly) - ANODIZED SILVER ALUMINIUM thermo packed - bar length 2 lm - pack. 10 Pcs - 20 lm

Article	H mm
PKAA 80	80
PKAA 80A (with adhesive)	80

On demand may be realised in other finishes of the colour chart. Contact our customer service for minimum quantity, timing and price.

Advantages: profile to be glued. Aesthetically superior thanks to the HI-TECH design with rounded shell-shape top and bottom edges that are easy to clean. PROSKIRTING is made in anodized aluminium with silver finish; the anodizing layer is approx. 15/20 micron. Recommended for indoor and outdoor use thanks to its good anti-oxidation properties.

- Single visible skirting profile, which may be inspectable or fixed.
- Minimum stock investment with just 2 products for three functions.
- Easy to install and clean.
- Patented innovative HI-TECH design.
- Inside-outside corners-end caps and joints varnished in the same finish as the profile.
- The PROSKIRTING profile is antistatic and stops electromagnetic and electrostatic discharge.



POWER SUPPLY BOX
SOCKET with FASTENING BASIS

Article
SPA 1820

SWITCH BOX
with BOX BASIS

Article
SI 1410



CABLE RACEWAY/ SUPPORT- COEXTRUDED PVC
bar length 2 lm - pack. 20 Pcs - 40 lm

Article
CSPPK 80


PUNCHED SUPPORT - NATURAL ALUMINIUM
support length 2 cm - pack. 10 Pcs

Article	H mm
PKGS 66	66


ARTICLES NOT FOR SALE SINGLY



COLOURS



OTHER COLOURS
ANODIZED, POLISHED, BRUSHED AND VARNISHED AVAILABLE.



JUNCTION BOX
with FASTENING BASIS

Article
SD 1210


VERTICAL CABLE DUCT PROFILE
bar length 2,7 lm

Article
PSPV

It matches with CSPPK 80

CORNERS, END CAPS and JOINTS

VARNISHED PLASTIC SILVER FINISH.

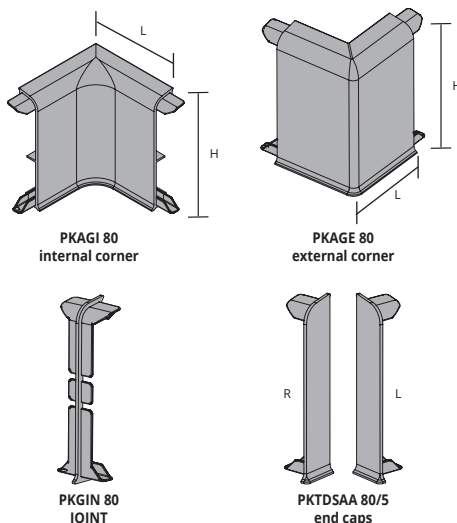

IN/EXTERNAL CORNER - VARNISHED PLASTIC (silver finish.)

pack. 5 Pcs

Article	H x L mm
PKAGI 80 (internal)	80 x 40
PKAGE 80 (external)	80 x 40

JOINTS - VARNISHED PLASTIC (silver finish.) - pack. 10 Pcs

Article	H mm
PKGIN 80	80

END CAPS R / L - VARNISHED PLASTIC (silver finish.)

pack. 10 Pcs (5 right and 5 left)

Article	H mm
PKTDSAA 80/5	80



PROSKIRTING 40 is an anodized silver aluminium skirting profile, with a height of 40 mm. It can be fixed directly to the wall with adhesive (non-inspectionable adhesive version PKAA 40A) or to a support (inspectionable version PKAA 40) in punched aluminium, pieces 20 mm long to be fixed to the wall with screws, every about 50 cm.

PROSKIRTING 40

ANODIZED SILVER ALUMINIUM





SKIRTING - SILVER ANODIZED ALUMINIUM thermo packed
bar length 2 lm - pack. 20 Pcs - 40 ml

Article	H mm
PKAA 40 (without adhesive)	40
PKAA 40A (with adhesive)	40

PUNCHED SUPPORT - NATURAL ALUMINIUM
support length 2 cm - pack. 10 Pcs

Article	H mm	It matches with PKAA 40
PKGS 37	37	

COLOURS

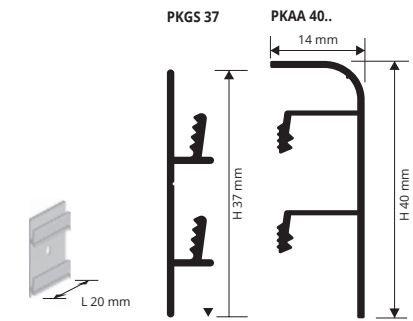

CORNERS, END CAPS and JOINTS

VARNISHED PLASTIC (SILVER FINISH)

IN/EXTERNAL CORNERS - VARNISHED PLASTIC (silver finish.)
pack. 5 Pcs


Article	H mm
PKAGI 40 (internal)	40
PKAGE 40 (external)	40

JOINTS - VARNISHED PLASTIC (silver finish.) - pack. 10 Pcs

Article	H mm
PKGIN 40	40

END CAPS R / L - VARNISHED PLASTIC (silver finish.) - pack. 10 Pcs (5 right and 5 left)

Article	H mm
PKTDSAA 40/5	40

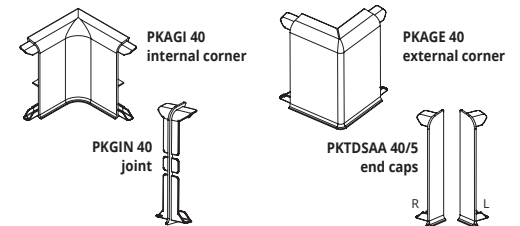

PROSKIRTING SHELL is an innovative aluminum skirting board, with 70mm height, in silver anodized finish. The skirting board can be fixed to the wall with silicone or screwed to 20mm long aluminum punched flanges, that have to be fastened to the wall at 50cm distance from each other. It allows to cover up to 25mm high perimeter edges. Moreover the version with punched flanges allows the housing of low tension electrical cables, such as internet, phone, TV and satellite cables and can be easily inspected. The optional completing pieces, such as inside/ outside corners, linking elements and end caps make **PROSKIRTING SHELL** easy to install and guarantee a practical and elegant end result.

PROSKIRTING SHELL


ANODIZED SILVER ALUMINIUM



SKIRTING - ANODIZED SILVER ALUMINIUM thermo packed
bar length 2 lm - pack. 25 Pcs - 50 lm

Article	H mm
PKSHAA 70 (without adhesive)	70
PKSHAA 70A (with adhesive)	70


COLOURS



PUNCHED SUPPORT - NATURAL ALUMINIUM
support length 2 cm - pack. 10 Pcs


Article	H mm
PKGS 55	55

ARTICLES NOT FOR SALE SINGLY

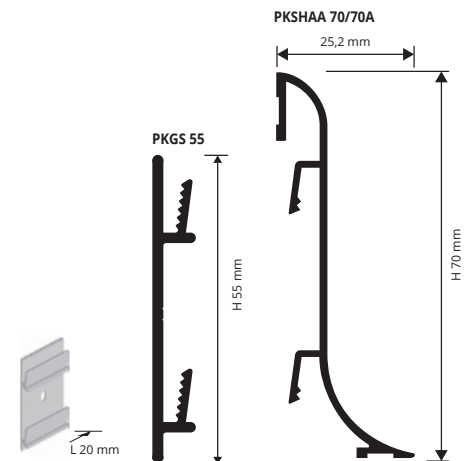

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose the right version of "PROSKIRTING SHELL" depending on the desired fixing solution; 2. If you want to build low tension electrical cables (e.g. internet, phone, TV and satellite cables) into the profile, fasten the punched flanges to the wall using dowels at 50cm distance from each other; 3. Install electrical wiring and fasten "PROSKIRTING SHELL" to the flanges; 4. If you are installing the version with adhesive, first clean and the surface where the profile will be installed, then apply the silicone once the surface is dry. Remove the protective film and lay the profile, applying adequate pressure on it.

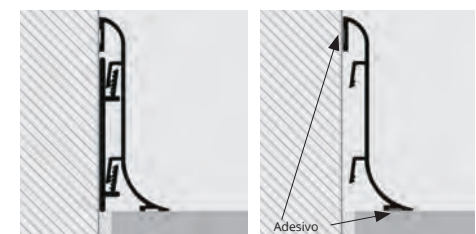

CORNERS, END CAPS and JOINTS

VARNISHED PLASTIC (SILVER FINISH)

EDGE COVER CORNERS

IN/EXTERNAL CORNER - EDGE COVER
VARNISHED PLASTIC (silver finish.) - pack. 5 Pcs

Article	H x L mm
RIPKSHAA 70 (internal)	70 x 20
REPKSHAA 70 (external)	70 x 20


JOINT - EDGE COVER - VARNISHED PLASTIC (silver finish.)
pack. 5 Pcs

Article	H mm
GIPKSHAA 70	70

END CAPS R / L - EDGE COVER
VARNISHED PLASTIC (silver finish.) - pack. 6 Pcs (3 right and 3 left)

Article	H mm
TPKSHAA 70/3	70

EXTERNAL CORNER REPKSHAA 70 INTERNAL CORNER RIPKSHAA 70 JOINT GIPKSHAA 70 END CAPS TPKSHAA 70

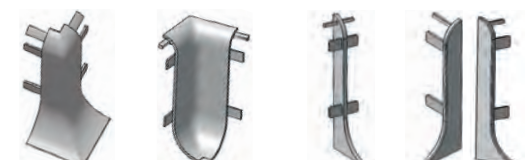






SKIRTING 40

POLISHED AND SATINED
STAINLESS STEEL AISI 304/1.4301-V2A

SKIRTING 40 made in stainless steel AISI 304/1.4301-V2A in height 40 mm. Available with or without adhesive. Superior aesthetic quality, extremely strong and easy to lay, it is ideal for all public and private environments that require high standards of hygiene and image. Used increasingly more often in contrast combinations with wood, carpeted floors, etc. for an unmistakable hi-tech effect. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended.

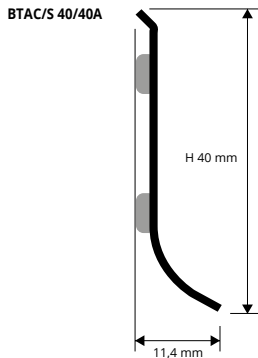


EXAMPLES OF LAYING



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
with protective film - bar length 2 lm - pack. 25 Pcs - 50 lm

Article	H mm		
BTAC 40A (with adhesive)	40		
BTAC 40 (without adhesive)	40		

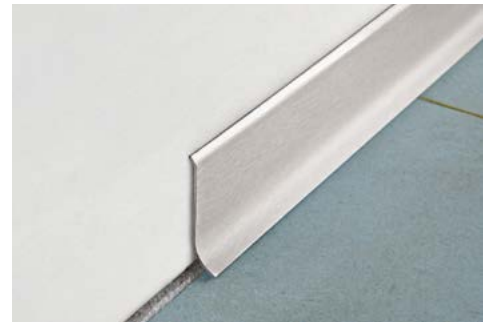

SATINED STAINLESS STEEL AISI 304/1.4301-V2A
with protective film - bar length 2 lm - pack. 25 Pcs - 50 lm

Article	H mm		
BTACS 40A (with adhesive)	40		
BTACS 40 (without adhesive)	40		

LAYING INSTRUCTIONS

1. Choose the "SKIRTING 40" also choose with or without adhesive.
2. Cut the profile to the required length, taking care to calculate the width of the inside-outside corner joints.
3. For the self-adhesive version, the surface must be smooth, grease-free and not porous. It is not recommended for plaster and mortar surfaces (version without adhesive is better, using fast-setting acrylic silicone which is suitable for fixing aluminium to mortar - plaster, etc.).
4. Use the corner linking elements-joints and right and left end caps to facilitate laying.

COLOURS



SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

CORNERS, END CAPS AND JOINTS

STEEL and VARNISHED METAL

VARNISHED METAL - EDGE COVER CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER - EDGE COVER VARNISHED METAL POLISHED STEEL EFFECT

Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RIZCTAC 40/... (internal)	40 x 20		
REZCTAC 40/... (external)	40 x 20		

JOINT - EDGE COVER VARNISHED METAL POLISHED STEEL EFFECT

Article	H mm	pack. 2Pcs	pack. 5Pcs
GIZCTAC 40/...	40		

Choose the desired packaging.
E.g.: RIZCTAC 40/2 (pack. 2 Pcs) - RIZCTAC 40/5 (pack. 5 Pcs)

END CAPS R / L - EDGE COVER - VARNISHED METAL POLISHED STEEL EFFECT - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)

Article	H mm	pack. 4Pcs	pack. 10Pcs
TPZCTAC 40/...	40		

Choose the desired packaging.
E.g.: TPZCTAC 40/2 (pack. 4 Pcs: 2 right + 2 left)
TPZCTAC 40/5 (pack. 10 Pcs: 5 right + 5 left)

INTERNAL/EXTERNAL CORNER - EDGE COVER VARNISHED METAL SATINED STAINLESS ST. EFFECT

Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RIZCTACS 40/... (internal)	40 x 20		
REZCTACS 40/... (external)	40 x 20		

JOINT - EDGE COVER VARNISHED METAL SATINED STAINLESS ST. EFFECT



Article	H mm	pack. 2Pcs	pack. 5Pcs
GIZCTACS 40/...	40		

Choose the desired packaging.
E.g.: RIZCTACS 40/2 (pack. 2 Pcs) - RIZCTACS 40/5 (pack. 5 Pcs)

END CAPS R / L - EDGE COVER - VARNISHED METAL SATINED STAINLESS ST. EFFECT - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)

Article	H mm	pack. 4Pcs	pack. 10Pcs
TPZCTACS 40/...	40		

Choose the desired packaging.
E.g.: TPZCTACS 40/2 (pack. 4 Pcs: 2 right + 2 left)
TPZCTACS 40/5 (pack. 10 Pcs: 5 right + 5 left)

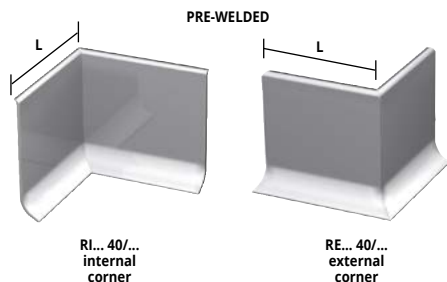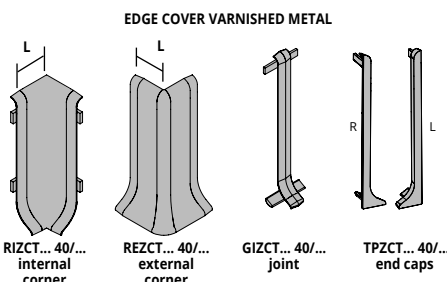

STEEL AISI 304/1.4301-V2A - FLUSH CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER FLUSH PRE-WELDED - POLISHED STEEL EFFECT

Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RIAC 40/... (internal)	40 x 50		
REAC 40/... (external)	40 x 50		

Choose the desired packaging.
E.g.: RIAC 40/2 (pack. 2 Pcs) - RIAC 40/5 (pack. 5 Pcs)

INTERNAL/EXTERNAL CORNER FLUSH PRE-WELDED - SATINED STAINLESS STEEL

Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RIACS 40/... (internal)	40 x 50		
REACS 40/... (external)	40 x 50		

Choose the desired packaging.
E.g.: RIACS 40/2 (pack. 2 Pcs) - RIACS 40/5 (pack. 5 Pcs)


SKIRTING 40 made in anodized, polished and brushed aluminium in height 40 mm. Available with or without adhesive. Superior aesthetic quality and easy to lay, it is ideal for all public and private environments. Can be used with all types of flooring. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended. Please contact the technical department for informations concerning the skirting bending radius.

SKIRTING 40

ANODIZED, POLISHED, VARNISHED and BRUSHED ALUMINIUM



BT... 40/40A



ANODIZED SILVER ALUMINIUM thermo packed
bar length 2 lm - pack. 40 Pcs - 80 lm

Article	H mm		
BTAA 40A (with adhesive)	40		
BTAA 40 (without adhesive)	40		

POLISHED TITANIUM ALUMINIUM thermo packed
bar length 2 lm - pack. 40 Pcs - 80 lm

Article	H mm		
BTBT 40A (with adhesive)	40		
BTBT 40 (without adhesive)	40		

VARNISHED SEMIGLOSSY AND MATT WHITE ALUMINIUM thermo packed - bar length 2 lm - pack. 40 Pcs - 80 lm

Article	H mm		
BTA 40-01A (with adhesive)	40		
BTA 40-01 (without adhesive)	40		
BTA 40-010A (with adhesive)	40		*
BTA 40-010 (without adhesive)	40		*

BRUSHED ALUMINIUM (silver-copper-titanium) thermo packed - bar length 2 lm - pack. 40 Pcs - 80 lm

Article	H mm		
BTBS 40A (with adhesive)	40		
BTBS 40 (without adhesive)	40		
BTRS 40A (with adhesive)	40		*
BTRS 40 (without adhesive)	40		*
BTTS 40A (with adhesive)	40		
BTTS 40 (without adhesive)	40		

(There aren't combinations for the finish alu. RS)

On demand may be realised in other finishes of the colour chart. Contact our customer service for minimum quantity, timing and price.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "SKIRTING 40" also choose with or without adhesive.
2. Cut the profile to the required length, taking care to calculate the width of the inside-outside corner joints.
3. For the self-adhesive version, the surface must be smooth, grease-free and not porous. It is not recommended for plaster and mortar surfaces (version without adhesive is better, using fast-setting acrylic silicone which is suitable for fixing aluminium to mortar - plaster, etc.).
4. Use the corner linking elements-joints and right and left end caps to facilitate laying.

COLOURS

SEMIGLOSSY	MATT	ANODIZED	POLISHED	BRUSHED
01 - White varnished alum. (9016)	010 - White varnished alum. (9016)	AA - Anodized silver alum.	BT - Polished titanium alum.	BS - Brushed silver alum. RS - Brushed copper alum. TS - Brushed titanium alum.

CORNERS, END CAPS AND JOINTS

VARNISHED METAL and VARNISHED PLASTIC

VARNISHED METAL - EDGE COVER CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL ANODIZED, POLISHED

Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RIZCTAA 40/... (internal)	40 x 20		
REZCTAA 40/... (external)	40 x 20		
RIZCTBT 40/... (internal)	40 x 20		
REZCTBT 40/... (external)	40 x 20		
RIZCTBS 40/... (internal)	40 x 20		
REZCTBS 40/... (external)	40 x 20		
RIZCTRS 40/... (internal)	40 x 20		
REZCTRS 40/... (external)	40 x 20		
RIZCTTS 40/... (internal)	40 x 20		
REZCTTS 40/... (external)	40 x 20		
RIZCT01 40/... (internal)	40 x 20		
REZCT01 40/... (external)	40 x 20		
RIZCT010 40/... (internal)	40 x 20		
REZCT010 40/... (external)	40 x 20		



Choose the desired packaging.
E.g.: RIZCTAA 40/2 (pack. 2 Pcs) - RIZCTAA 40/5 (pack. 5Pcs)

JOINT - EDGE COVER
VARNISHED METAL ANODIZED, POLISHED

Article	H mm	pack. 2Pcs	pack. 5Pcs
GIZCTAA 40/...	40		
GIZCTBT 40/...	40		
GIZCTBS 40/...	40		
GIZCTRS 40/...	40		
GIZCTTS 40/...	40		
GIZCT01 40/...	40		
GIZCT010 40/...	40		

END CAPS R / L - EDGE COVER - VARNISHED METAL ANODIZED, POLISHED - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)

Article	H mm	pack. 4Pcs	pack. 10Pcs
TPZCTAA 40/...	40		
TPZCTBT 40/...	40		
TPZCTBS 40/...	40		
TPZCTRS 40/...	40		
TPZCTTS 40/...	40		
TPZCT01 40/...	40		
TPZCT010 40/...	40		

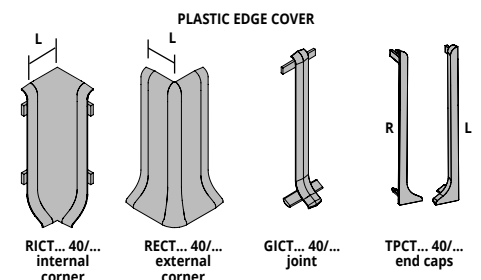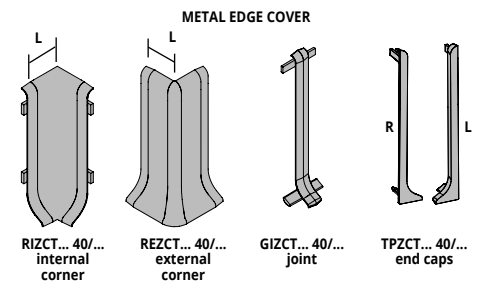

VARNISHED PLASTIC - EDGE COVER CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM

Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RICTAA 40/... (internal)	40 x 20		
RECTAA 40/... (external)	40 x 20		
RICTBT 40/... (internal)	40 x 20		
RECTBT 40/... (external)	40 x 20		

Choose the desired packaging.
E.g.: RICTAA 40/2 (pack. 2 Pcs) - RICTAA 40/5 (pack. 5 Pcs)

JOINT - EDGE COVER
VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM

Article	H mm	pack. 2Pcs	pack. 5Pcs
GICTAA 40/...	40		
GICTBT 40/...	40		

END CAPS R / L - EDGE COVER - VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)

Article	H mm	pack. 4Pcs	pack. 10Pcs
TPCTAA 40/...	40		
TPCTBT 40/...	40		

Available on demand aluminium prewelded internal and external flush corners. Finishing: 01 - 010 - AA - BT - BS - RS - TS. Price to be agreed. Production delay 4/5 weeks.

Choose the desired packaging.
E.g.: TPCTAA 40/2 (pack. 4 Pcs: 2 right + 2 left)
TPCTAA 40/5 (pack. 10 Pcs: 5 right + 5 left)

News 2020


* = Production on demand with minimum quantity of 100 Pcs. Production delay 4/5 weeks. Price to be agreed

SKIRTING 60

POLISHED and SATINED
STAINLESS STEEL AISI 304/1.4301-V2A

SKIRTING 60 made in stainless steel AISI 304/1.4301-V2A in height 60 mm. Available with or without adhesive. Superior aesthetic quality, extremely strong and easy to lay, it is ideal for all public and private environments that require high standards of hygiene and image. Used increasingly more often in contrast combinations with wood, carpeted floors, etc. for an unmistakable hi-tech effect. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended.

BTAC/S 60/60A




POLISHED STAINLESS STEEL AISI 304/1.4301-V2
with protective film - bar length 2 lm - pack. 25 Pcs - 50 lm

Article	H mm		
BTAC 60A (with adhesive)	60		
BTAC 60 (without adhesive)	60		

SATINED STAINLESS STEEL AISI 304/1.4301-V2A
with protective film - bar length 2 lm - pack. 25 Pcs - 50 lm

Article	H mm		
BTACS 60A (with adhesive)	60		
BTACS 60 (without adhesive)	60		

EXAMPLES OF LAYING

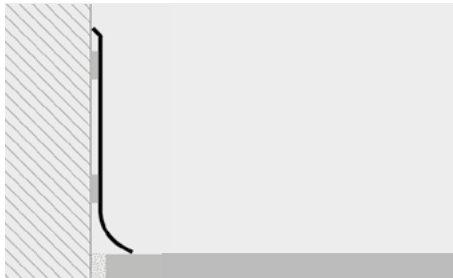

LAYING INSTRUCTIONS

1. Choose the "SKIRTING 60" also choose with or without adhesive. 2. Cut the profile to the required length, taking care to calculate the width of the inside-outside corner joints. 3. For the self-adhesive version, the surface must be smooth, grease-free and not porous. It is not recommended for plaster and mortar surfaces (version without adhesive is better, using fast-setting acrylic silicone which is suitable for fixing aluminium to mortar - plaster, etc.). 4. Use the corner linking elements-joints and right and left end caps to facilitate laying.

COLOURS



AC - Polished stainless steel
AISI 304/1.4301-V2A

ACS - Satined stainless steel
AISI 304/1.4301-V2A

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

CORNERS, END CAPS AND JOINTS

STEEL and VARNISHED METAL

VARNISHED METAL - EDGE COVER CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER - EDGE COVER VARNISHED METAL POLISHED STEEL EFFECT

Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RIZCTAC 60/... (internal)	60 x 20		
REZCTAC 60/... (external)	60 x 20		

JOINT - EDGE COVER VARNISHED METAL POLISHED STEEL EFFECT

Article	H mm	pack. 2Pcs	pack. 5Pcs
GIZCTAC 60/...	60		

Choose the desired packaging.
E.g.: RIZCTAC 60/2 (pack. 2 Pcs) - RIZCTAC 60/5 (pack. 5 Pcs)

END CAPS R / L - EDGE COVER - VARNISHED METAL POLISHED STEEL EFFECT - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)

Article	H mm	pack. 4Pcs	pack. 10Pcs
TPZCTAC 60/...	60		

Choose the desired packaging.
E.g.: TPZCTAC 60/2 (pack. 4 Pcs: 2 right + 2 left)
TPZCTAC 60/5 (pack. 10 Pcs: 5 right + 5 left)

INTERNAL/EXTERNAL CORNER - EDGE COVER VARNISHED METAL SATINED STAINLESS ST. EFFECT

Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RIZCTACS 60/... (internal)	60 x 20		
REZCTACS 60/... (external)	60 x 20		

JOINT - EDGE COVER VARNISHED METAL SATINED STAINLESS ST. EFFECT


Article	H mm	pack. 2Pcs	pack. 5Pcs
GIZCTACS 60/...	60		

Choose the desired packaging.
E.g.: RIZCTACS 60/2 (pack. 2 Pcs) - RIZCTACS 60/5 (pack. 5 Pcs)

END CAPS R / L - EDGE COVER - VARNISHED METAL SATINED STAINLESS ST. EFFECT - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)

Article	H mm	pack. 4Pcs	pack. 10Pcs
TPZCTACS 60/...	60		

Choose the desired packaging.
E.g.: TPZCTACS 60/2 (pack. 4 Pcs: 2 right + 2 left)
TPZCTACS 60/5 (pack. 10 Pcs: 5 right + 5 left)

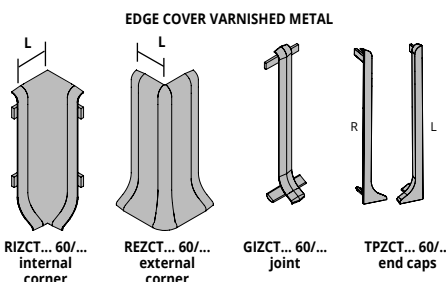


RIZCT... 60/...
internal corner

REZCT... 60/...
external corner

GIZCT... 60/...
joint

TPZCT... 60/...
end caps

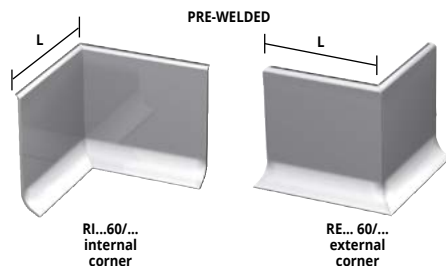

RI...60/...
internal corner

RE... 60/...
external corner

STEEL AISI 304/1.4301-V2A - FLUSH CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER FLUSH PRE-WELDED - POLISHED STEEL EFFECT

Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RIAC 60/... (internal)	60 x 50		
REAC 60/... (external)	60 x 50		

Choose the desired packaging.
E.g.: RIAC 60/2 (pack. 2 Pcs) - RIAC 60/5 (pack. 5 Pcs)

INTERNAL/EXTERNAL CORNER FLUSH PRE-WELDED - SATINED STAINLESS STEEL


Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RIACS 60/... (internal)	60 x 50		
REACS 60/... (external)	60 x 50		

Choose the desired packaging.
E.g.: RIACS 60/2 (pack. 2 Pcs) - RIACS 60/5 (pack. 5 Pcs)

SKIRTING 60 made in anodized, polished and brushed aluminium in height 60 mm. Available with or without adhesive. Superior aesthetic quality and easy to lay, it is ideal for all public and private environments. Can be used with all types of flooring. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended. Please contact the technical department for informations concerning the skirting bending radius.

SKIRTING 60

ANODIZED, POLISHED, VARNISHED and BRUSHED ALUMINIUM

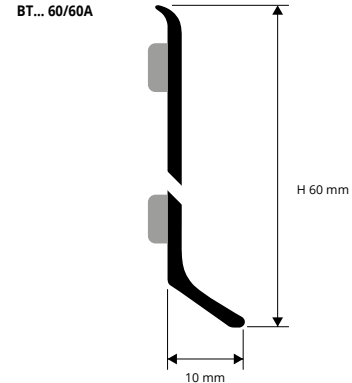

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2 lm - pack. 40 Pcs - 80 lm

Article	H mm		
BTAA 60A (with adhesive)	60		
BTAA 60 (without adhesive)	60		

POLISHED TITANIUM ALUMINIUM thermo packed
bar length 2 lm - pack. 40 Pcs - 80 lm

Article	H mm		
BTBT 60A (with adhesive)	60		
BTBT 60 (without adhesive)	60		

VARNISHED SEMIGLOSSY AND MATT WHITE ALUMINIUM thermo packed - bar length 2 lm - pack. 40 Pcs - 80 lm

Article	H mm		
BTA 60-01A (with adhesive)	60		
BTA 60-01 (without adhesive)	60		
BTA 60-010A (with adhesive)	60		
BTA 60-010 (without adhesive)	60		

Available on demand aluminium prewelded internal and external flush corners. Finishing: 01 - 010 - AA - BT - BS - RS - TS. Price to be agreed. Production delay 4/5 weeks.

BRUSHED ALUMINIUM (silver-copper-titanium) thermo packed - bar length 2 lm - pack. 40 Pcs - 80 lm

Article	H mm		
BTBS 60A (with adhesive)	60		
BTBS 60 (without adhesive)	60		
BTRS 60A (with adhesive)	60		
BTRS 60 (without adhesive)	60		
BTTS 60A (with adhesive)	60		
BTTS 60 (without adhesive)	60		

COLOURS

SEMIGLOSSY	MATT
01 - White varnished alum. (9016)	010 - White varnished alum. (9016)
ANODIZED	POLISHED
AA - Anodized silver alum.	BT - Polished titanium alum.
BRUSHED	
BS - Brushed silver alum.	TS - Brushed titanium alum.
	RS - Brushed copper alum.
	ON DEMAND

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



CORNERS, END CAPS AND JOINTS

VARNISHED METAL and VARNISHED PLASTIC

VARNISHED METAL - EDGE COVER CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER - EDGE COVER VARNISHED METAL ANODIZED, POLISHED

Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RIZCTAA 60/... (internal)	60 x 20		
REZCTAA 60/... (external)	60 x 20		
RIZCTBT 60/... (internal)	60 x 20		
REZCTBT 60/... (external)	60 x 20		
RIZCTBS 60/... (internal)	60 x 20		
REZCTBS 60/... (external)	60 x 20		
RIZCTRS 60/... (internal)	60 x 20		
REZCTRS 60/... (external)	60 x 20		
RIZCTTS 60/... (internal)	60 x 20		
REZCTTS 60/... (external)	60 x 20		
RIZCT01 60/... (internal)	60 x 20		
REZCT01 60/... (external)	60 x 20		
RIZCT010 60/... (internal)	60 x 20		
REZCT010 60/... (external)	60 x 20		

JOINT - EDGE COVER VARNISHED METAL ANODIZED, POLISHED

Article	H mm	pack. 2Pcs	pack. 5Pcs
GIZCTAA 60/...	60		
GIZCTBT 60/...	60		
GIZCTBS 60/...	60		
GIZCTRS 60/...	60		
GIZCTTS 60/...	60		
GIZCT01 60/...	60		
GIZCT010 60/...	60		

END CAPS R / L - EDGE COVER - VARNISHED METAL ANODIZED, POLISHED - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)

Article	H mm	pack. 4Pcs	pack. 10Pcs
TPZCTAA 60/...	60		
TPZCTBT 60/...	60		
TPZCTBS 60/...	60		
TPZCTRS 60/...	60		
TPZCTTS 60/...	60		
TPZCT01 60/...	60		
TPZCT010 60/...	60		

VARNISHED PLASTIC - EDGE COVER CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER - EDGE COVER VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM

Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RICTAA 60/... (internal)	60 x 20		
RECTAA 60/... (external)	60 x 20		
RICTBT 60/... (internal)	60 x 20		
RECTBT 60/... (external)	60 x 20		

JOINT - EDGE COVER VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM

Article	H mm	pack. 2Pcs	pack. 5Pcs
GICTAA 60/...	60		
GICTBT 60/...	60		

END CAPS R / L - EDGE COVER - VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)

Article	H mm	pack. 4Pcs	pack. 10Pcs
TPCTAA 60/...	60		
TPCTBT 60/...	60		

VARNISHED PLASTIC - FLUSH CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER - FLUSH VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM




Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RIBAA 60/... (internal)	60 x 25		
REBAA 60/... (external)	60 x 25		
RIBBT 60/... (internal)	60 x 25		
REBBT 60/... (external)	60 x 25		

JOINT - FLUSH VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM

Article	H mm	pack. 2Pcs	pack. 5Pcs
GIBAA 60/...	60		
GIBBT 60/...	60		

END CAPS R / L - FLUSH - VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)

Article	H mm	pack. 4Pcs	pack. 10Pcs
TPBAA 60/...	60		
TPBBT 60/...	60		

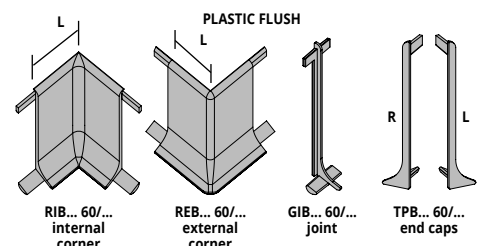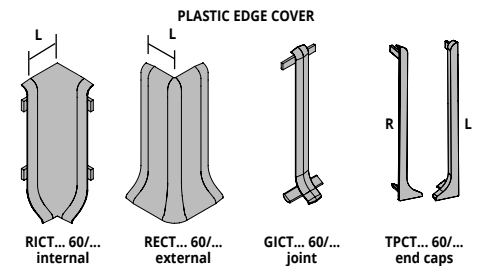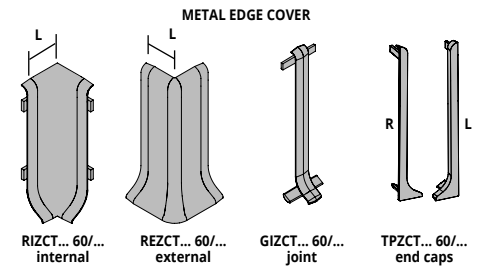


Choose the desired packaging.
E.g.: RIZCTAA 60/2 (pack. 2 Pcs) - RIZCTAA 60/5 (pack. 5 Pcs)
E.g.: TPZCTAA 60/2 (pack. 4 Pcs: 2 right + 2 left)
TPZCTAA 60/5 (pack. 10 Pcs: 5 right + 5 left)

SKIRTING 80

POLISHED AND SATINED
STAINLESS STEEL AISI 304/1.4301-V2A

SKIRTING 80 made in stainless steel AISI 304/1.4301-V2A in height 80 mm. Available with or without adhesive. Superior aesthetic quality, extremely strong and easy to lay, it is ideal for all public and private environments that require high standards of hygiene and image. Used increasingly more often in contrast combinations with wood, carpeted floors, etc. for an unmistakable hi-tech effect. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended.

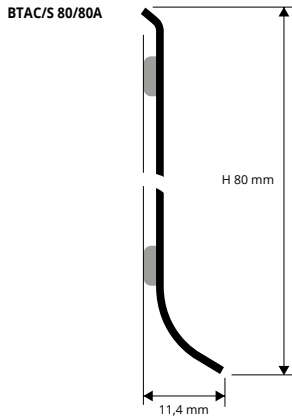


POLISHED STAINLESS STEEL AISI 304/1.4301-V2
with protective film - bar length 2 lm - pack. 25 Pcs - 50 lm

Article	H mm		
BTAC 80A (with adhesive)	80		
BTAC 80 (without adhesive)	80		

SATINED STAINLESS STEEL AISI 304/1.4301-V2A
with protective film - bar length 2 lm - pack. 25 Pcs - 50 lm

Article	H mm		
BTAC 80A (with adhesive)	80		
BTACS 80 (without adhesive)	80		

EXAMPLES OF LAYING

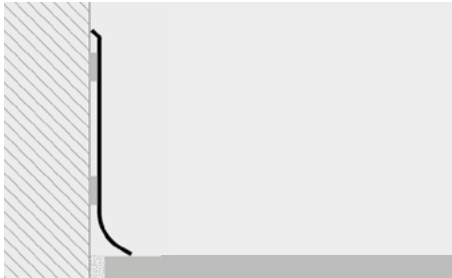

LAYING INSTRUCTIONS

1. Choose the "SKIRTING 80" also choose with or without adhesive. 2. Cut the profile to the required length, taking care to calculate the width of the inside-outside corner joints. 3. For the self-adhesive version, the surface must be smooth, grease-free and not porous. It is not recommended for plaster and mortar surfaces (version without adhesive is better, using fast-setting acrylic silicone which is suitable for fixing aluminium to mortar - plaster, etc.). 4. Use the corner linking elements-joints and right and left end caps to facilitate laying.

COLOURS



SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

CORNERS, END CAPS AND JOINTS

STEEL and VARNISHED METAL

VARNISHED METAL - EDGE COVER CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER - EDGE COVER VARNISHED METAL POLISHED STEEL EFFECT

Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RIZCTAC 80/... (internal)	80 x 20		
REZCTAC 80/... (external)	80 x 20		

JOINT - EDGE COVER VARNISHED METAL POLISHED STEEL EFFECT

Article	H mm	pack. 2Pcs	pack. 5Pcs
GIZCTAC 80	80		

Choose the desired packaging.
E.g.: RIZCTAC 80/2 (pack. 2 Pcs) - RIZCTAC 80/5 (pack. 5 Pcs)

END CAPS R / L - EDGE COVER - VARNISHED METAL POLISHED STEEL EFFECT - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)

Article	H mm	pack. 4Pcs	pack. 10Pcs
TPZCTAC 80/...	80		

Choose the desired packaging.
E.g.: TPZCTAC 80/2 (pack. 4 Pcs: 2 right + 2 left)
TPZCTAC 80/5 (pack. 10 Pcs: 5 right + 5 left)

INTERNAL/EXTERNAL CORNER - EDGE COVER VARNISHED METAL SATINED STAINLESS ST. EFFECT

Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RIZCTACS 80/... (internal)	80 x 20		
REZCTACS 80/... (external)	80 x 20		

JOINT - EDGE COVER VARNISHED METAL SATINED STAINLESS ST. EFFECT



Article	H mm	pack. 2Pcs	pack. 5Pcs
GIZCTACS 80/...	80		

Choose the desired packaging.
E.g.: RIZCTACS 80/2 (pack. 2 Pcs) - RIZCTACS 80/5 (pack. 5 Pcs)

END CAPS R / L - EDGE COVER - VARNISHED METAL SATINED STAINLESS ST. EFFECT - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)

Article	H mm	pack. 4Pcs	pack. 10Pcs
TPZCTACS 80/...	80		

Choose the desired packaging.
E.g.: TPZCTACS 80/2 (pack. 4 Pcs: 2 right + 2 left)
TPZCTACS 80/5 (pack. 10 Pcs: 5 right + 5 left)

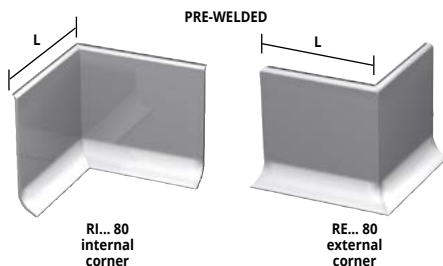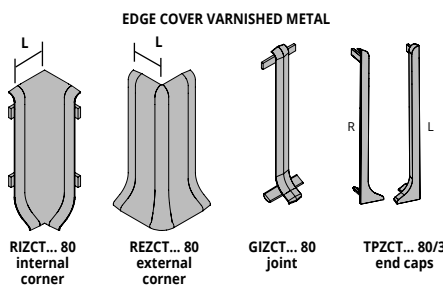

STEEL AISI 304/1.4301-V2A - FLUSH CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER FLUSH PRE-WELDED - POLISHED STEEL EFFECT

Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RIAC 80/... (internal)	80 x 50		
REAC 80/... (external)	80 x 50		

Choose the desired packaging.
E.g.: RIAC 80/2 (pack. 2 Pcs) - RIAC 80/5 (pack. 5 Pcs)

INTERNAL/EXTERNAL CORNER FLUSH PRE-WELDED - SATINED STAINLESS STEEL

Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RIACS 80/... (internal)	80 x 50		
REACS 80/... (external)	80 x 50		

Choose the desired packaging.
E.g.: RIACS 80/2 (pack. 2 Pcs) - RIACS 80/5 (pack. 5 Pcs)


SKIRTING 80 made in anodized, polished and brushed aluminium in height 80 mm. Available with or without adhesive. Superior aesthetic quality and easy to lay, it is ideal for all public and private environments. Can be used with all types of flooring. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended. Please contact the technical department for informations concerning the skirting bending radius.

SKIRTING 80

ANODIZED, POLISHED, VARNISHED and BRUSHED ALUMINIUM



BT... 80/80A

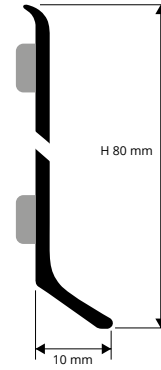

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2 lm - pack. 25 Pcs - 50 lm

Article	H mm
BTAA 80A (with adhesive)	80
BTAA 80 (without adhesive)	80

POLISHED TITANIUM ALUMINIUM thermo packed
bar length 2 lm - pack. 25 Pcs - 50 lm

Article	H mm
BTBT 80A (with adhesive)	80
BTBT 80 (without adhesive)	80

VARNISHED SEMIGLOSSY AND MATT WHITE ALUMINIUM thermo packed - bar length 2 lm - pack. 25 Pcs - 50 lm

Article	H mm
BTA 80-01A (with adhesive)	80
BTA 80-01 (without adhesive)	80
BTA 80-010A (with adhesive)	80
BTA 80-010 (without adhesive)	80

BRUSHED ALUMINIUM (silver-copper-titanium) thermo packed - bar length 2 lm - pack. 25 Pcs - 50 lm

Article	H mm
BTBS 80A (with adhesive)	80
BTBS 80 (without adhesive)	80
BTRS 80A (with adhesive)	80
BTRS 80 (without adhesive)	80
BTTS 80A (with adhesive)	80
BTTS 80 (without adhesive)	80

COLOURS

SEMIGLOSSY	MATT
	ON DEMAND
01 - White varnished alum. (9016)	010 - White varnished alum. (9016)
ANODIZED	POLISHED
AA - Anodized silver alum.	BT - Polished titanium alum.
BRUSHED	
BS - Brushed silver alum.	TS - Brushed titanium alum.
	ON DEMAND
	RS - Brushed copper alum.

Available on demand aluminium prewelded internal and external flush corners. Finishing: 01 - 010 - AA - BT - BS - RS - TS. Price to be agreed. Production delay 4/5 weeks.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



CORNERS, END CAPS AND JOINTS

VARNISHED METAL and VARNISHED PLASTIC

VARNISHED METAL - EDGE COVER CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL ANODIZED, POLISHED

Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RIZCTAA 80/... (internal)	80 x 20		
REZCTAA 80/... (external)	80 x 20		
RIZCTBT 80/... (internal)	80 x 20		
REZCTBT 80/... (external)	80 x 20		
RIZCTBS 80/... (internal)	80 x 20		
REZCTBS 80/... (external)	80 x 20		
RIZCTRS 80/... (internal)	80 x 20		
REZCTRS 80/... (external)	80 x 20		
RIZCTTS 80/... (internal)	80 x 20		
REZCTTS 80/... (external)	80 x 20		
RIZCT01 80/... (internal)	80 x 20		
REZCT01 80/... (external)	80 x 20		
RIZCT010 80/... (internal)	80 x 20		
REZCT010 80/... (external)	80 x 20		

JOINT - EDGE COVER

VARNISHED METAL ANODIZED, POLISHED

Article	H mm	pack. 2Pcs	pack. 5Pcs
GIZCTAA 80/...	80		
GIZCTBT 80/...	80		
GIZCTBS 80/...	80		
GIZCTRS 80/...	80		
GIZCTTS 80/...	80		
GIZCT01 80/...	80		
GIZCT010 80/...	80		

END CAPS R / L - EDGE COVER - VARNISHED METAL ANODIZED, POLISHED - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)

Article	H mm	pack. 4Pcs	pack. 10Pcs
TPZCTAA 80/...	80		
TPZCTBT 80/...	80		
TPZCTBS 80/...	80		
TPZCTRS 80/...	80		
TPZCTTS 80/...	80		
TPZCT01 80/...	80		
TPZCT010 80/...	80		

VARNISHED PLASTIC - EDGE COVER CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM

Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RICTAA 80/... (internal)	80 x 20		
RECTAA 80/... (external)	80 x 20		
RICTBT 80/... (internal)	80 x 20		
RECTBT 80/... (external)	80 x 20		

JOINT - EDGE COVER

VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM

Article	H mm	pack. 2Pcs	pack. 5Pcs
GICTAA 80/...	80		
GICTBT 80/...	80		

END CAPS R / L - EDGE COVER - VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)

Article	H mm	pack. 4Pcs	pack. 10Pcs
TPCTAA 80/...	80		
TPCTBT 80/...	80		

VARNISHED PLASTIC - FLUSH CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER - FLUSH
VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM

Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RIBAA 80/... (internal)	80 x 25		
REBAA 80/... (external)	80 x 25		
RIBBT 80/... (internal)	80 x 25		
REBBT 80/... (external)	80 x 25		

JOINT - FLUSH


VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM

Article	H mm	pack. 2Pcs	pack. 5Pcs
GIBAA 80/...	80		
GIBBT 80/...	80		

END CAPS R / L - FLUSH - VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)


Article	H mm	pack. 4Pcs	pack. 10Pcs
TPBAA 80/...	80		
TPBBT 80/...	80		

METAL EDGE COVER

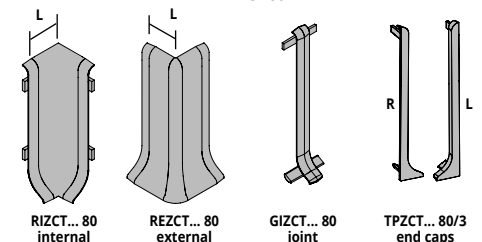


RIZCT... 80 internal corner, REZCT... 80 external corner, GIZCT... 80 joint, TPZCT... 80/3 end caps

PLASTIC EDGE COVER

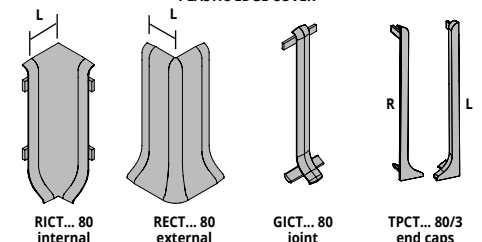

RICT... 80 internal corner, RECT... 80 external corner, GICT... 80 joint, TPCT... 80/3 end caps

PLASTIC FLUSH

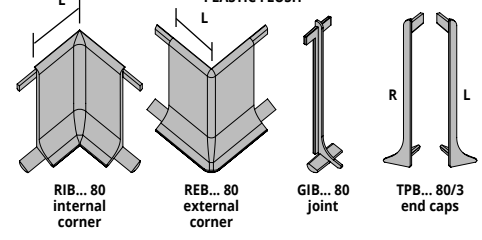

RIB... 80 internal corner, REB... 80 external corner, GIB... 80 joint, TPB... 80/3 end caps

Choose the desired packaging.
E.g.: RIZCTAA 80/2 (pack. 2 Pcs) - RIZCTAA 80/5 (pack. 5 Pcs)
E.g.: TPZCTAA 80/2 (pack. 4 Pcs: 2 right + 2 left)
TPZCTAA 80/5 (pack. 10 Pcs: 5 right + 5 left)

© 2020 All rights reserved by Progress Profiles. Printed in Italy


News 2020

* = Production on demand with minimum quantity of 100 Pcs. Production delay 4/5 weeks. Price to be agreed

SKIRTING 100 SKIRTING 150

POLISHED AND SATINED
STAINLESS STEEL AISI 304/1.4301-V2A

SKIRTING 100 and **SKIRTING 150** made in stainless steel AISI 304/1.4301-V2A in height 100 and 150 mm. Available with or without adhesive. Superior aesthetic quality, extremely strong and easy to lay, it is ideal for all public and private environments that require high standards of hygiene and image. Used increasingly more often in contrast combinations with wood, carpeted floors, etc. for an unmistakable hi-tech effect. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended.

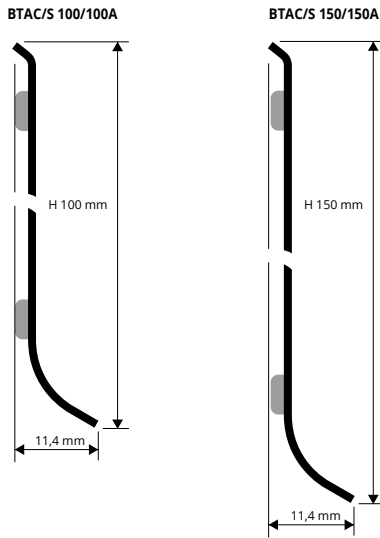

POLISHED STAINLESS STEEL AISI 304/1.4301-V2
with protective film - bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm		
BTAC 100A (with adhesive)	100		
BTAC 100 (without adhesive)	100		

POLISHED STAINLESS STEEL AISI 304/1.4301-V2
with protective film - bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm		
BTAC 150A (with adhesive)	150		
BTAC 150 (without adhesive)	150		


SATINED STAINLESS STEEL AISI 304/1.4301-V2A
with protective film - bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm		
BTACS 100A (with adhesive)	100		
BTACS 100 (without adhesive)	100		

SATINED STAINLESS STEEL AISI 304/1.4301-V2A
with protective film - bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm		
BTACS 150A (with adhesive)	150		
BTACS 150 (without adhesive)	150		

EXAMPLES OF LAYING

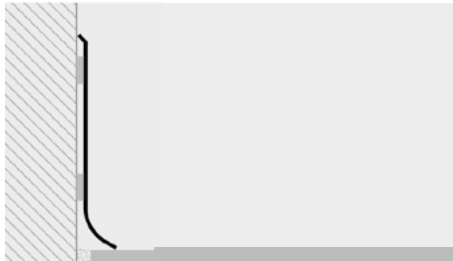

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

LAYING INSTRUCTIONS

1. Choose the "SKIRTING 100 -150" also choose with or without adhesive. 2. Cut the profile to the required length, taking care to calculate the width of the inside-outside corner joints. 3. For the self-adhesive version, the surface must be smooth, grease-free and not porous. It is not recommended for plaster and mortar surfaces (version without adhesive is better, using fast-setting acrylic silicone which is suitable for fixing aluminium to mortar - plaster, etc.). 4. Use the corner linking elements-joints and right and left end caps to facilitate laying.

COLOURS



CORNERS, END CAPS AND JOINTS

STEEL and VARNISHED METAL

VARNISHED METAL - EDGE COVER CORNERS H100 - articles not for sale singly

INTERNAL/EXTERNAL CORNER - EDGE COVER VARNISHED METAL POLISHED STEEL EFFECT

Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RIZCTAC 100/... (internal)	100 x 20		
REZCTAC 100/... (external)	100 x 20		

INTERNAL/EXTERNAL CORNER - EDGE COVER VARNISHED METAL SATINED STAINLESS ST. EFFECT

Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RIZCTACS 100/... (internal)	100 x 20		
REZCTACS 100/... (external)	100 x 20		

JOINT - EDGE COVER VARNISHED METAL POLISHED STEEL EFFECT

Article	H mm	pack. 2Pcs	pack. 5Pcs
GIZCTAC 100/...	100		

JOINT - EDGE COVER VARNISHED METAL SATINED STAINLESS ST. EFFECT

Article	H mm	pack. 2Pcs	pack. 5Pcs
GIZCTACS 100/...	100		

Choose the desired packaging.
E.g.: RIZCTAC 100/2 (pack. 2 Pcs) - RIZCTAC 100/5 (pack. 5 Pcs)

Choose the desired packaging.
E.g.: RIZCTACS 100/2 (pack. 2 Pcs) - RIZCTACS 100/5 (pack. 5 Pcs)

END CAPS R / L - EDGE COVER - VARNISHED METAL POLISHED STEEL EFFECT - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)

Article	H mm	pack. 4Pcs	pack. 10Pcs
TPZCTAC 100/...	100		

END CAPS R / L - EDGE COVER - VARNISHED METAL SATINED STAINLESS ST. EFFECT - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)

Article	H mm	pack. 4Pcs	pack. 10Pcs
TPZCTACS 100/...	100		

Choose the desired packaging.
E.g.: TPZCTAC 100/2 (pack. 4 Pcs: 2 right + 2 left)
TPZCTAC 100/5 (pack. 10 Pcs: 5 right + 5 left)

Choose the desired packaging.
E.g.: TPZCTACS 100/2 (pack. 4 Pcs: 2 right + 2 left)
TPZCTACS 100/5 (pack. 10 Pcs: 5 right + 5 left)

STEEL AISI 304/1.4301-V2A - FLUSH CORNERS H100 articles not for sale singly

INTERNAL/EXTERNAL CORNER - FLUSH PRE-WELDED POLISHED-SATINED STAINLESS STEEL EFFECT

Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RIAC 100/... (internal)	100 x 50		
REAC 100/... (external)	100 x 50		
RIACS 100/... (internal)	100 x 50		
REACS 100/... (external)	100 x 50		



Choose the desired packaging.
E.g.: RIAC 100/2 (pack. 2 Pcs) - RIAC 100/5 (pack. 5 Pcs)

STEEL AISI 304/1.4301-V2A - FLUSH CORNERS H150 articles not for sale singly

INTERNAL/EXTERNAL CORNER - FLUSH PRE-WELDED POLISHED-SATINED STAINLESS STEEL EFFECT

Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RIAC 150/... (internal)	150 x 50		
REAC 150/... (external)	150 x 50		
RIACS 150/... (internal)	150 x 50		
REACS 150/... (external)	150 x 50		


Choose the desired packaging.
E.g.: RIACS 150/2 (pack. 2 Pcs) - RIACS 150/5 (pack. 5 Pcs)

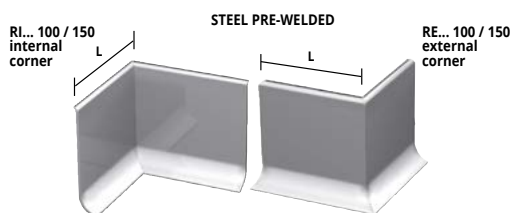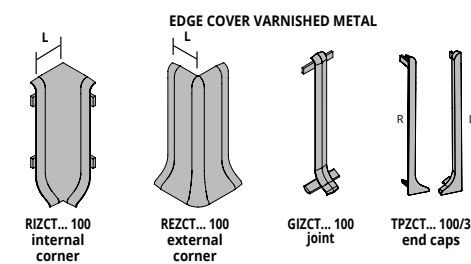


SKIRTING 100 made in anodized, polished and brushed aluminium in height 100 mm. Available with or without adhesive. Superior aesthetic quality and easy to lay, it is ideal for all public and private environments. Can be used with all types of flooring. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended. Please contact the technical department for informations concerning the skirting bending radius.

SKIRTING 100

ANODIZED, POLISHED, VARNISHED and BRUSHED ALUMINIUM

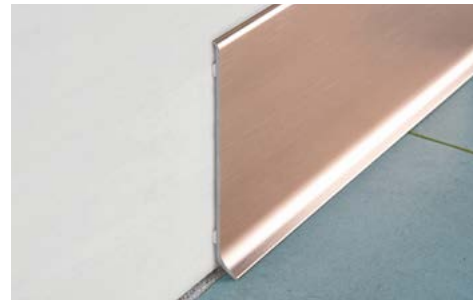

BT... 100/100A

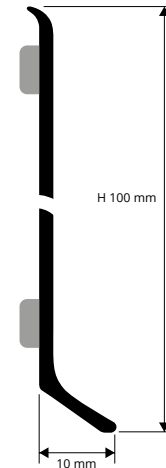

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm		
BTAA 100A (with adhesive)	100		
BTAA 100 (without adhesive)	100		

POLISHED TITANIUM ALUMINIUM thermo packed
bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm		
BTBT 100A (with adhesive)	100		*
BTBT 100 (without adhesive)	100		*

VARNISHED SEMIGLOSSY AND MATT WHITE ALUMINIUM thermo packed - bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm		
BTA 100-01A (with adhesive)	100		
BTA 100-01 (without adhesive)	100		
BTA 100-010A (with adhesive)	100		*
BTA 100-010 (without adhesive)	100		*

BRUSHED ALUMINIUM (silver-copper-titanium) thermo packed - bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm		
BTBS 100A (with adhesive)	100		
BTBS 100 (without adhesive)	100		
BTRS 100A (with adhesive)	100		*
BTRS 100 (without adhesive)	100		*
BTTS 100A (with adhesive)	100		*
BTTS 100 (without adhesive)	100		*

COLOURS

SEMIGLOSSY		MATT	
		ON DEMAND	
01 - White varnished alum. (9016)		010 - White varnished alum. (9016)	
ANODIZED		POLISHED	
		ON DEMAND	
AA - Anodized silver alum.		BT - Polished titanium alum.	
BRUSHED			
		ON DEMAND	ON DEMAND
BS - Brushed silver alum.	TS - Brushed titanium alum.	RS - Brushed copper alum.	

Available on demand aluminium prewelded internal and external flush corners. Finishing: 01 - 010 - AA - BT - BS - RS - TS. Price to be agreed. Production delay 4/5 weeks.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "SKIRTING 100" also choose with or without adhesive. 2. Cut the profile to the required length, taking care to calculate the width of the inside-outside corner joints. 3. For the self-adhesive version, the surface must be smooth, grease-free and not porous. It is not recommended for plaster and mortar surfaces (version without adhesive is better, using fast-setting acrylic silicone which is suitable for fixing aluminium to mortar - plaster, etc.). 4. Use the corner linking elements-joints and right and left end caps to facilitate laying.

CORNERS, END CAPS AND JOINTS

VARNISHED METAL and VARNISHED PLASTIC

VARNISHED METAL - EDGE COVER CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER - EDGE COVER VARNISHED METAL ANODIZED, POLISHED

Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RIZCTAA 100/... (internal)	100 x 20		
REZCTAA 100/... (external)	100 x 20		
RIZCTBT 100/... (internal)	100 x 20		*
REZCTBT 100/... (external)	100 x 20		*
RIZCTBS 100/... (internal)	100 x 20		*
REZCTBS 100/... (external)	100 x 20		*
RIZCTRS 100/... (internal)	100 x 20		*
REZCTRS 100/... (external)	100 x 20		*
RIZCTTS 100/... (internal)	100 x 20		*
REZCTTS 100/... (external)	100 x 20		*
RIZCT01 100/... (internal)	100 x 20		*
REZCT01 100/... (external)	100 x 20		*
RIZCT010 100/... (internal)	100 x 20		*
REZCT010 100/... (external)	100 x 20		*

JOINT - EDGE COVER

VARNISHED METAL ANODIZED, POLISHED

Article	H mm	pack. 2Pcs	pack. 5Pcs
GIZCTAA 100/...	100		
GIZCTBT 100/...	100		*
GIZCTBS 100/...	100		*
GIZCTRS 100/...	100		*
GIZCTTS 100/...	100		*
GIZCT01 100/...	100		*
GIZCT010 100/...	100		*

END CAPS R / L - EDGE COVER - VARNISHED METAL ANODIZED, POLISHED - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)

Article	H mm	pack. 4Pcs	pack. 10Pcs
TPZCTAA 100/...	100		
TPZCTBT 100/...	100		*
TPZCTBS 100/...	100		*
TPZCTRS 100/...	100		*
TPZCTTS 100/...	100		*
TPZCT01 100/...	100		*
TPZCT010 100/...	100		*

VARNISHED PLASTIC - EDGE COVER CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER - EDGE COVER

VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM

Article	HxL mm	pack. 2Pcs	pack. 5Pcs
RICTAA 100 (internal)	100 x 20		
RECTAA 100 (external)	100 x 20		
RICTBT 100 (internal)	100 x 20		*
RECTBT 100 (external)	100 x 20		*


JOINT - EDGE COVER

VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM


Article	H mm	pack. 2Pcs	pack. 5Pcs
GICTAA 100	100		
GICTBT 100	100		*

Article	H mm	pack. 4Pcs	pack. 10Pcs
TPCTAA 100/...	100		
TPCTBT 100/...	100		*

METAL EDGE COVER

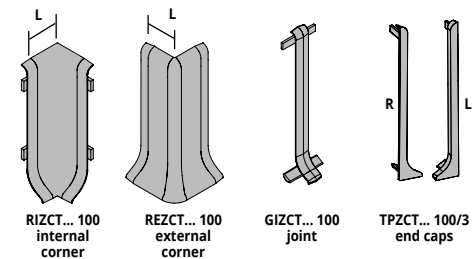

PLASTIC EDGE COVER

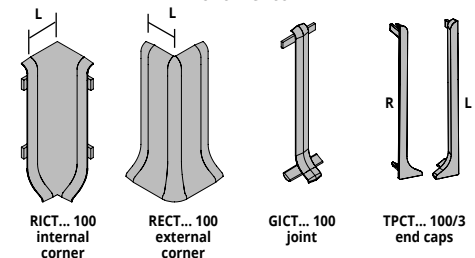


Choose the desired packaging.
E.g.: RIZCTAA 100/2 (pack. 2 Pcs) - RIZCTAA 100/5 (pack. 5 Pcs)
E.g.: TPZCTAA 100/2 (pack. 4 Pcs: 2 right + 2 left)
TPZCTAA 100/5 (pack. 10 Pcs: 5 right + 5 left)

SKIRTING 7016

FOAMED VINYL RESIN
77 WOODEN FINISHES (53 on demand),
AND 3 IN SOLID COLOUR

SKIRTING 7016 is a vinyl resin foam profile with a height of 70 mm, available in 77 wooden finishes (53 on demand) and 3 finishes in solid colour that could be matched with the PROINSERT SYSTEM's profiles. The profile, suitable like skirting for floating and glued wood floor, laminate and LVT, could be laid with suitable adhesive, nails, screws or using the pre-punched support fixed to the wall with screws every 50 cm. Its special section, that allows to cover a 16 mm perimetral joint, and wide range of finishes make it a very requested, elegant and economic skirting board profile.

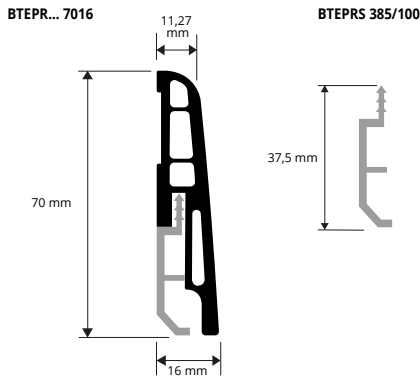

FOAMED VINYL RESIN (wood finishes - black - white and silver)
bar length 2,5 lm - pack 20 Pcs - 50 lm

Article	H mm
BTEPR... 7016	70

SUPPORT / FIXING CLIP - PLASTIC
support length 5 cm - pack. 100 Pcs

Article	H mm
BTEPRS 385/100	37,5

Order the SUPPORT and choose the SKIRTING in the desired finish.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose "SKIRTING 7016" in the desired finish. 2. Fix the pre-punched support to the wall with screws every 50 cm. 3. Attach the profile to the support applying low pressure. 4. Alternatively fix the profile using a suitable fast adhesive, nails or screws



On request it is possible to realize other finishes of the color range: minimum order 400 Pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

IN/EXTERNAL CORNERS and END CAPS KIT (wood finishes - black - white and silver)


Article	H mm
KIT BTEPR ...7016I (internal kit)	70
KIT BTEPR ...7016E (external kit)	70

Available in the wood finishes: 04W-05W-13W-18W-21W-25W-29W-30W-31W-32W-33W-34W-35W-36W-37W-38W-39W-41W-42W-44W-45W-53W-54W-55W-B-N-AA.
The code of the selected colour must be added to the article code.
E.g.: BTEPR... 7016 (chosen finish Dark beech) BTEPR04W 7016

SKIRTING 7011

FOAMED VINYL RESIN
77 WOODEN FINISHES (50 on demand),
AND 3 IN SOLID COLOUR

SKIRTING 7011 is a vinyl resin foam profile with a height of 70 mm x 10,5mm, available in 77 wooden finishes (50 on demand) and 3 finishes standard colours that could be matched with the PROINSERT SYSTEM's profiles. Suitable as skirting/Baseboard for floating and glued wood floor, laminate and LVT, could be laid with suitable adhesive, or else with nails.




FOAMED VINYL RESIN (wood finishes - black - white and silver)
bar length 2,5 lm - pack 20 Pcs - 50 lm

Article	H mm
BTEPR... 7011	70

Available in the wood finishes: 05W-07W-09W-18W-21W-29W-30W-31W-32W-34W-35W-37W-40W-41W-42W-43W-44W-46W-47W-48W-49W-65W-73W-75W-69W-71W-72W-B-N-AA.
The code of the selected colour must be added to the article code.
E.g.: BTEPR... 7011 (chosen finish Light oak) BTEPR05W 7011

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

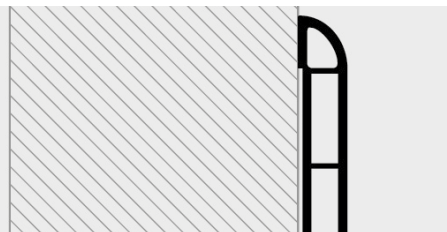

1. Choose the "SKIRTING 7011" in the required the colour. 2. Lay the "SKIRTING 7011" using quick-setting suitable adhesive for gluing flexible PVC onto mortar-plaster-accessorised walls, etc. or fix with nails.

COLOURS

(For a precise assessment of colours request the wood finishes sample range)




On request it is possible to realize other finishes of the color range: minimum order 400 Pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

IN/EXTERNAL CORNERS and END CAPS KIT


FOAMED VINYL RESIN 77 WOODEN FINISHES (50 on demand), AND 3 IN SOLID COLOUR

INTERNAL CORNER KIT



KIT BTEPR ... 7011I

EXTERNAL CORNER KIT



KIT BTEPR ... 7011E

IN/EXTERNAL CORNERS and END CAPS KIT (wood finishes - black - white and silver)

Article	H mm
KIT BTEPR ...7011I (internal kit)	70
KIT BTEPR ...7011E (external kit)	70


The kits are composed respectively by 1 inside corner + two end caps and 1 outside corner + two end caps.

Available in the wood finishes: 05W-07W-09W-18W-21W-29W-30W-31W-32W-34W-35W-37W-40W-41W-42W-43W-44W-46W-47W-48W-49W-65W-73W-75W-69W-71W-72W-B-N-AA.
The code of the selected colour must be added to the article code.
E.g.: KIT BTEPR ...7011I (chosen finish Light oak) KIT BTEPR04W 7011I

SKIRTING in PVC foam height 70 mm in 4 semi-matt colours and 8 wood finishes to be matched with the PROINSERT SYSTEM profiles for floating laminated wood floors and traditional parquet floors. Laying is done by gluing (acetic silicone -acrylic-mastic) or using screws or nails. Attractive, strong, hardwearing and economic, it is easy to lay and ideal for many public premises (hospitals, schools, gymnasiums, rest homes and creative areas) and private environments.

SKIRTING

EXPANDED VINYL RESIN

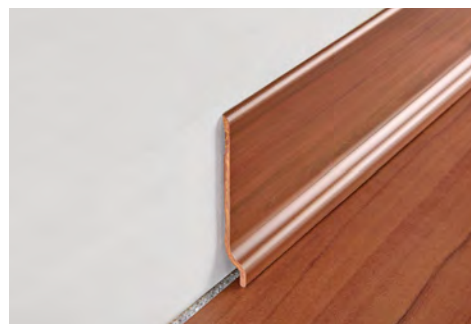

EXPANDED RIGID VINYL RESIN (black - light and dark grey - white)
bar length 2 lm - pack. 60 Pcs - 120 lm


Article	H mm
BTPR... 70	70

EXPANDED RIGID VINYL RESIN (8 wood finishes)
bar length 2 lm - pack. 60 Pcs - 120 lm

Article	H mm
BTPR... 70	70

Available in the wood finishes: B - GC - GS - N - 04W - 05W - 06W - 07W - 08W - 09W - 10W - M.
The code of the selected colour must be added to the article code. E.g.: BTPR... 70 (chosen colour - black) BTPRN 70.

The shade of the wooden finish in rigid expanded vinyl resin/PVC results slightly different from the film usually applied on the profiles in aluminium.

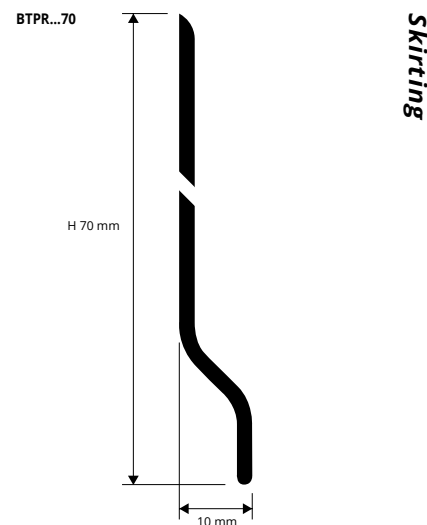

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "SKIRTING" in the required colour. 2. Lay the "SKIRTING" using quick-setting acrylic silicone, mastic or bostik, suitable for gluing flexible PVC onto mortar-plaster-accessorised walls, etc. or fix with screws/nails.

COLOURS


B - White	GC - Light grey	GS - Dark grey	N - Black	04W - Dark beech	05W - Light oak (strip)
06W - Dark oak (walnut)	07W - Light cherry (strip)	08W - Dark cherry (board)	09W - Red walnut (merbau-apple-walnut)	10W - Wengé (panga panga-wengé)	M - Mogano

© 2020 All rights reserved by Progress Profiles. Printed in Italy

ANGLE BAR produced in expanded PVC in 4 semi-matt colours and 8 wood finishes used to protect angles. Laying is done by gluing (acetic silicone - acrylic-mastic) or using screws or nails. Attractive, strong, hardwearing and economic, it is easy to lay and ideal for many public premises (hospitals, schools, gymnasiums, rest homes and creative areas) and private environments.

ANGLE BAR

EXPANDED VINYL RESIN

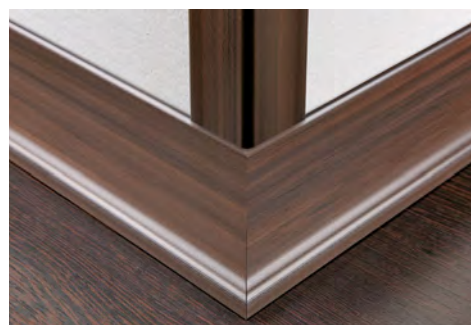

EXPANDED RIGID VINYL RESIN (black - light and dark grey - white)
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	L x H mm
AGE... 25	25 x 25

EXPANDED RIGID VINYL RESIN (8 wood finishes)
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm
AGE... 25	25 x 25

Available in the wood finishes: B - GC - GS - 11 - 04W - 05W - 06W - 07W - 08W - 09W - 10W - M.
The code of the selected colour must be added to the article code. E.g.: AGE... 25 (chosen finish black) AGEN 25.

The shade of the wooden finish in rigid expanded vinyl resin/PVC results slightly different from the film usually applied on the profiles in aluminium.

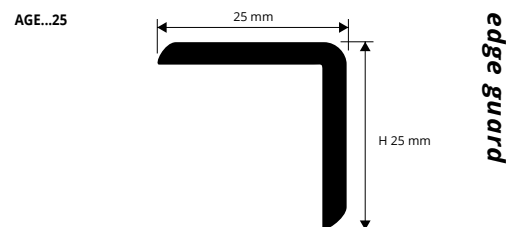

EXAMPLES OF LAYING




SKIRTING 60 SKIRTING 120


NON-TOXIC FLEXIBLE VINYL RESIN
IN 6 COLOURS

PVC FLEXIBLE SKIRTING 60/120 height 60 mm and 120 mm, is a very strong profile ideal for easily achieving special, attractive, superior finishes. Installation recommended with glue or silicone. Easy to install, the shaped edges ensure perfect adhesion to the surface. The projecting rounded flange covers the terminal expansion joint.


BTPV... 60

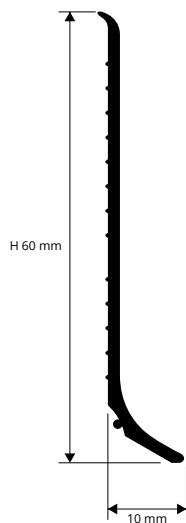

BTPV... 120

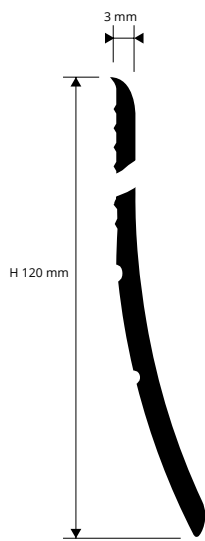

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

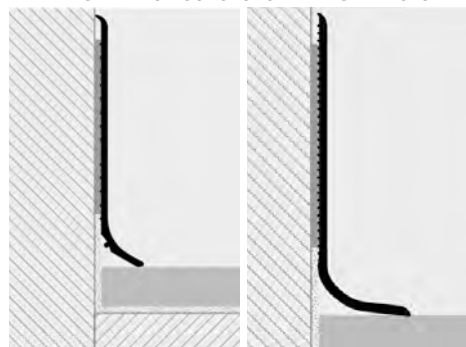

1. Choose the "SKIRTING 60 - 120" of the required height 60/120mm and choose the colour. 2. Lay the "SKIRTING 60 - 120" using an adhesive suitable for gluing flexible PVC onto mortar, plaster, accessorised walls, etc. or fix with screws/nails.

As regards the items with adhesive, the adhesive roll is sold separately (50 lm for H:60), (50 lm for H:120)


NON-TOXIC FLEXIBLE VINYL RESIN

rolls length 50 lm

Article	H mm		
BTPV... 60A (with adhesive)	60		
BTPV... 120A (with adhesive)	120		
BTPV... 60	60		
BTPV... 120	120		

Available in the colours: B - GC - GS - T - M - N.
The code of the selected colour must be added to the article code.
E.g.: BTPV... 60 (chosen finish light gray) BTPVGC 60.

COLOURS



ATTENTION: IN ORDER TO USE, LAY AND FIX PROPERLY THIS PRODUCT PLEASE LOOK AT OUR WEBSITE OR APP LAYING / FIXING VIDEO FOR CORRECT INSTALLATION.




SKIRTING 62F


FLEXIBLE VINYL RESIN
IN 6 COLOURS

SKIRTING 62F is a new 62 mm skirting board made of non-toxic, flexible vinyl resin. This profile is very resistant and particularly suited for providing highly aesthetic perimeter skirting of excellent quality at reasonable prices. It differs from the BTPV... 60 skirting board in that it is provided with a bottom flange that allows it to be placed perpendicularly (90°) to the wall/lining and welded to PVC floors. In addition, the horizontal flange covers the floor's perimeter expansion joint. We recommend applying the skirting using glue/adhesive/Bostik/mastic. Alternatively, you can choose the self-adhesive version for quick, effortless installation.

BTPF... 62 / BTPF... 62A

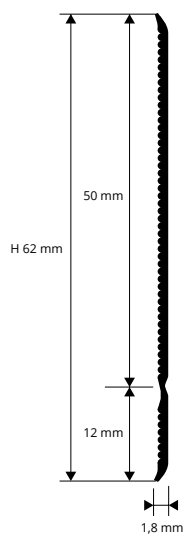

EXAMPLES OF LAYING

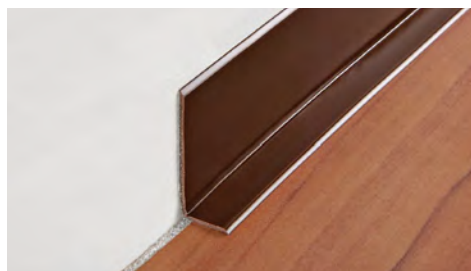

LAYING INSTRUCTIONS

1. Choose the colour of the "SKIRTING 62F" board, indicating whether you want it with or without a self-adhesive backing. 2. Cut the "SKIRTING 62F" to length, taking into account the width of the internal and external connections. 3. Self-adhesive skirting is recommended only for surfaces that are perfectly smooth, non-oily and non-porous. On plaster and mortar surfaces, use a non-adhesive version and apply the skirting using quick-setting acrylic silicone suitable for gluing aluminium to mortar, plaster, etc.

ATTENTION: IN ORDER TO USE, LAY AND FIX PROPERLY THIS PRODUCT PLEASE LOOK AT OUR WEBSITE OR APP LAYING / FIXING VIDEO FOR CORRECT INSTALLATION



FLEXIBLE VINYL RESIN


rolls length 50 lm with or without adhesive

Article	H mm		
BTPF... 62A (with adhesive)	62		
BTPF... 62 (without adhesive)	62		

Available in the colours: B - GC - GS - T - M - N.
The code of the selected colour must be added to the article code.
E.g.: BTPF...62 (chosen finish light gray) BTPFGC 62.

As regards the items with adhesive, the adhesive roll is sold separately (50 lm)

COLOURS

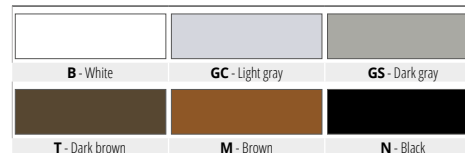

SKIRTING COVECAP is a series of flexible co-extruded non-toxic vinyl profiles. **SKIRTING COVECAP** is a **SKIRTING/ BASEBOARD** with capping seal used to provide an elegant and functional solution to finish the top of resilient floor covering where it has been covered up to the wall, support floor covering at a wear point and protects the exposed edges. The visible portion of the profiles is rounded and available in white - light grey - dark grey - dark brown - brown and black.

SKIRTING COVECAP

NON-TOXIC FLEXIBLE CO-EXTRUDED VINYL RESIN



NON-TOXIC FLEXIBLE CO-EXTRUDED VINYL RESIN
bar length 2,50 lm - pack. 20 / 30 / 40 Pcs - 50 / 75 / 100 lm

Article	H mm			
BTVCC... 60 (40pc)	60			
BTVCC... 80 (30pc)	80			
BTVCC... 100 (20pc)	100			

Available in the colours: B - GC - GS - T - M - N.
The code of the selected colour must be added to the article code.
E.g.: BTVCC... 60 (chosen colour white) BTVCCB 60.


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Select the "SKIRTING COVECAP" of the desired color and height.
2. Using a utility knife cut the "SKIRTING COVECAP" to the desired length.
3. Apply the proper adhesive or glue/mastic and install the profile

ATTENTION: THE INSTALLATION OF THIS PROFILES IS RECOMMENDED FOR AN EXPERT INSTALLER OF VINYL FLOORINGS

Adhesive version: add the letter A after the article. As regards the items with adhesive, the adhesive roll is sold separately.


BTVCC... 80

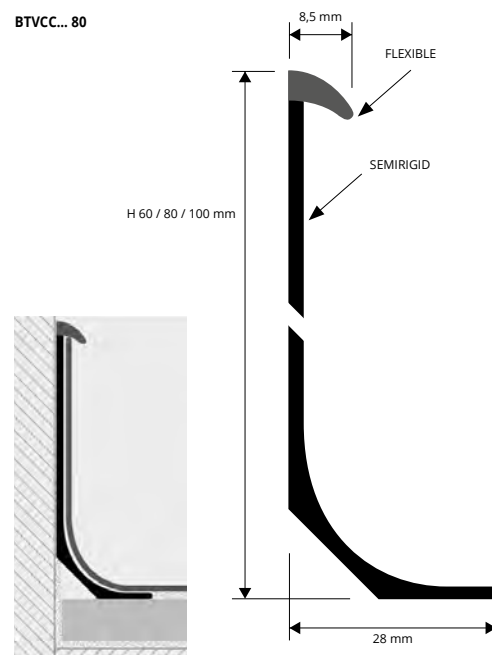

SEMIRIGID




COLOURS - FLEXIBLE PART



PROCAP is a non-toxic co-extruded flexible vinyl resin profile that in combination with PROSEAL FLEX allows a correct application and finishing of vinyl flooring and carpet along the wall-floor joint. The visible surface of the profile is available in white, light gray, dark gray, dark brown, brown and black. Its ease of application makes it a very practical profile for the finishing of vinyl and carpet flooring

PROCAP S / L

NON-TOXIC CO-EXTRUDED FLEXIBLE VINYL RESIN

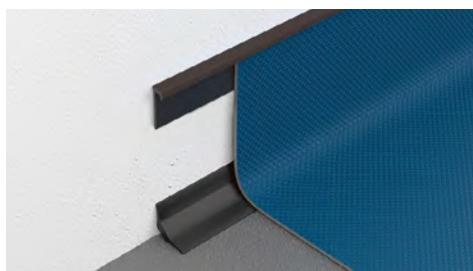

PROCAP S/L - NON-TOXIC FLEXIBLE CO-EXTRUDED VINYL RESIN
bar length 2,50 - pack. 20 Pcs - 50 lm


Article	H x L mm			
PRCPS...	31 x 5,3			
PRCPL...	55 x 10			

Available in the colours: B - GC - GS - T - M - N.
The code of the selected colour must be added to the article code.
E.g.: PRCPL... (chosen colour white) PRCPLB


PROSEAL FLEX - FLEXIBLE BLACK NON-TOXIC VINYL RESIN
bar length 2,5 lm - pack. 40 Pcs - 100 lm

Article	L X H mm			
PSF 15-11	15x15			
PSF 20-11	20x20			
PSF 25-11	25x25			


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

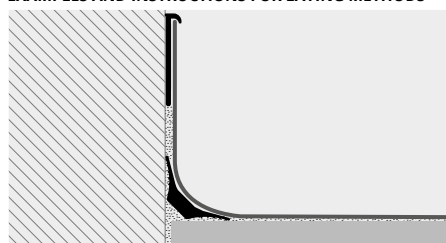


PRCPS



PSF



PRCPL




1. Choose "PROCAP S-L" according to height and desired colour.
2. Cut "PROCAP S-L" to the right length. 3. Apply a suitable adhesive and lay the profile. 4. Lay the desired resilient flooring.

PROSEAL WOOD

EXPANDED PVC
2 WOOD FINISHING AND 4 MATCHING COLOURS

PROSEAL WOOD is a new inner connector square suitable for creating a concave skirting for wood / rolled-melamine floating wood / ceramic / marble tiles to reduce the floor /covering detachment. The particular material used allows to resist to the main chemical agents ant to small breakages. **PROSEAL WOOD**'s dimensions allow the necessary expansion of the outer joint. Ideal for public (schools, rest homes, recreational area) and private places. In expanded PVC , in 2 wood finishes 4 in matching colours to combine with various wood finishes. Easy to lay with fixing silicone.

transition profiles
PSAW... 20



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROSEAL WOOD" color and/or wood finish required.
2. The laying must be carried out using fast fixing acrylic silicone, mastic, bostik suitable for gluing PVC with mortar - plaster - wall units etc., or fix using screws/nails.



EXPANDED PVC - 2 WOOD FINISHING

bar length 2,5 lm - pack. 40 Pcs - 100 lm

Article	L x H mm
PSAW... 20	21 x 21

Available in the wood finishes: 05W - 10W , and colours: B - GC - GS - N.
The code of the selected colour must be added to the article code. E.g.: PSAW...20 (chosen finish black) PSAWN 20.

The shade of the wooden finish in rigid expanded vinyl resin/PVC results slightly different from the film usually applied on the profiles in aluminium.

COLOURS

B - White	GC - Light gray	GS - Dark gray	N - Black	05W - Light oak (strip)	10W - Wengé (panga panga-wengé)



EXPANDED PVC - 4 COLOURS

bar length 2,5 lm - pack. 40 Pcs - 100 lm


Article	L x H mm
PSAW... 20	21 x 21

PROANGLE WOOD

EXPANDED PVC
2 WOOD FINISHING AND 4 MATCHING COLOURS

PROANGLE WOOD is a new inner connector square suitable for creating a convex skirting for wood / rolled-melamine floating wood / ceramic / marble floor to reduce the floor /covering detachment. The particular material used allows to resist to the main chemical agents and to small breakages. **PROANGLE WOOD**'s dimensions allow the necessary expansion of the outer joint. Ideal for public (schools, rest homes, recreational area) and private places. In expanded PVC , in 2 wood finishes 4 in matching colors to combine with various wood finishes. Easy to lay with fixing silicone.

transition profiles
PGAW... 15



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROANGLE WOOD" color and/or wood finish required.
2. The laying must be carried out using fast fixing acrylic silicone, mastic, bostik, suitable for gluing PVC with mortar-plaster-wall units etc., or fix using screws/nails.



EXPANDED PVC - 2 WOOD FINISHING

bar length 2,5 lm - pack. 40 Pcs - 100 lm

Article	L x H mm
PGAW... 15	15 x 15

Available in the wood finishes: 05W - 10W, and colours: - GC - GS - N.
The code of the selected colour must be added to the article code. E.g.: PGAW...15 (chosen finish black) PGAWN 15.

The shade of the wooden finish in rigid expanded vinyl resin/PVC results slightly different from the film usually applied on the profiles in aluminium.

COLOURS


B - White	GC - Light gray	GS - Dark gray	N - Black	05W - Light oak (strip)	10W - Wengé (panga panga-wengé)




EXPANDED PVC - 4 COLOURS

bar length 2,5 lm - pack. 40 Pcs - 100 lm


Article	L x H mm
PGAW... 15	15 x 15

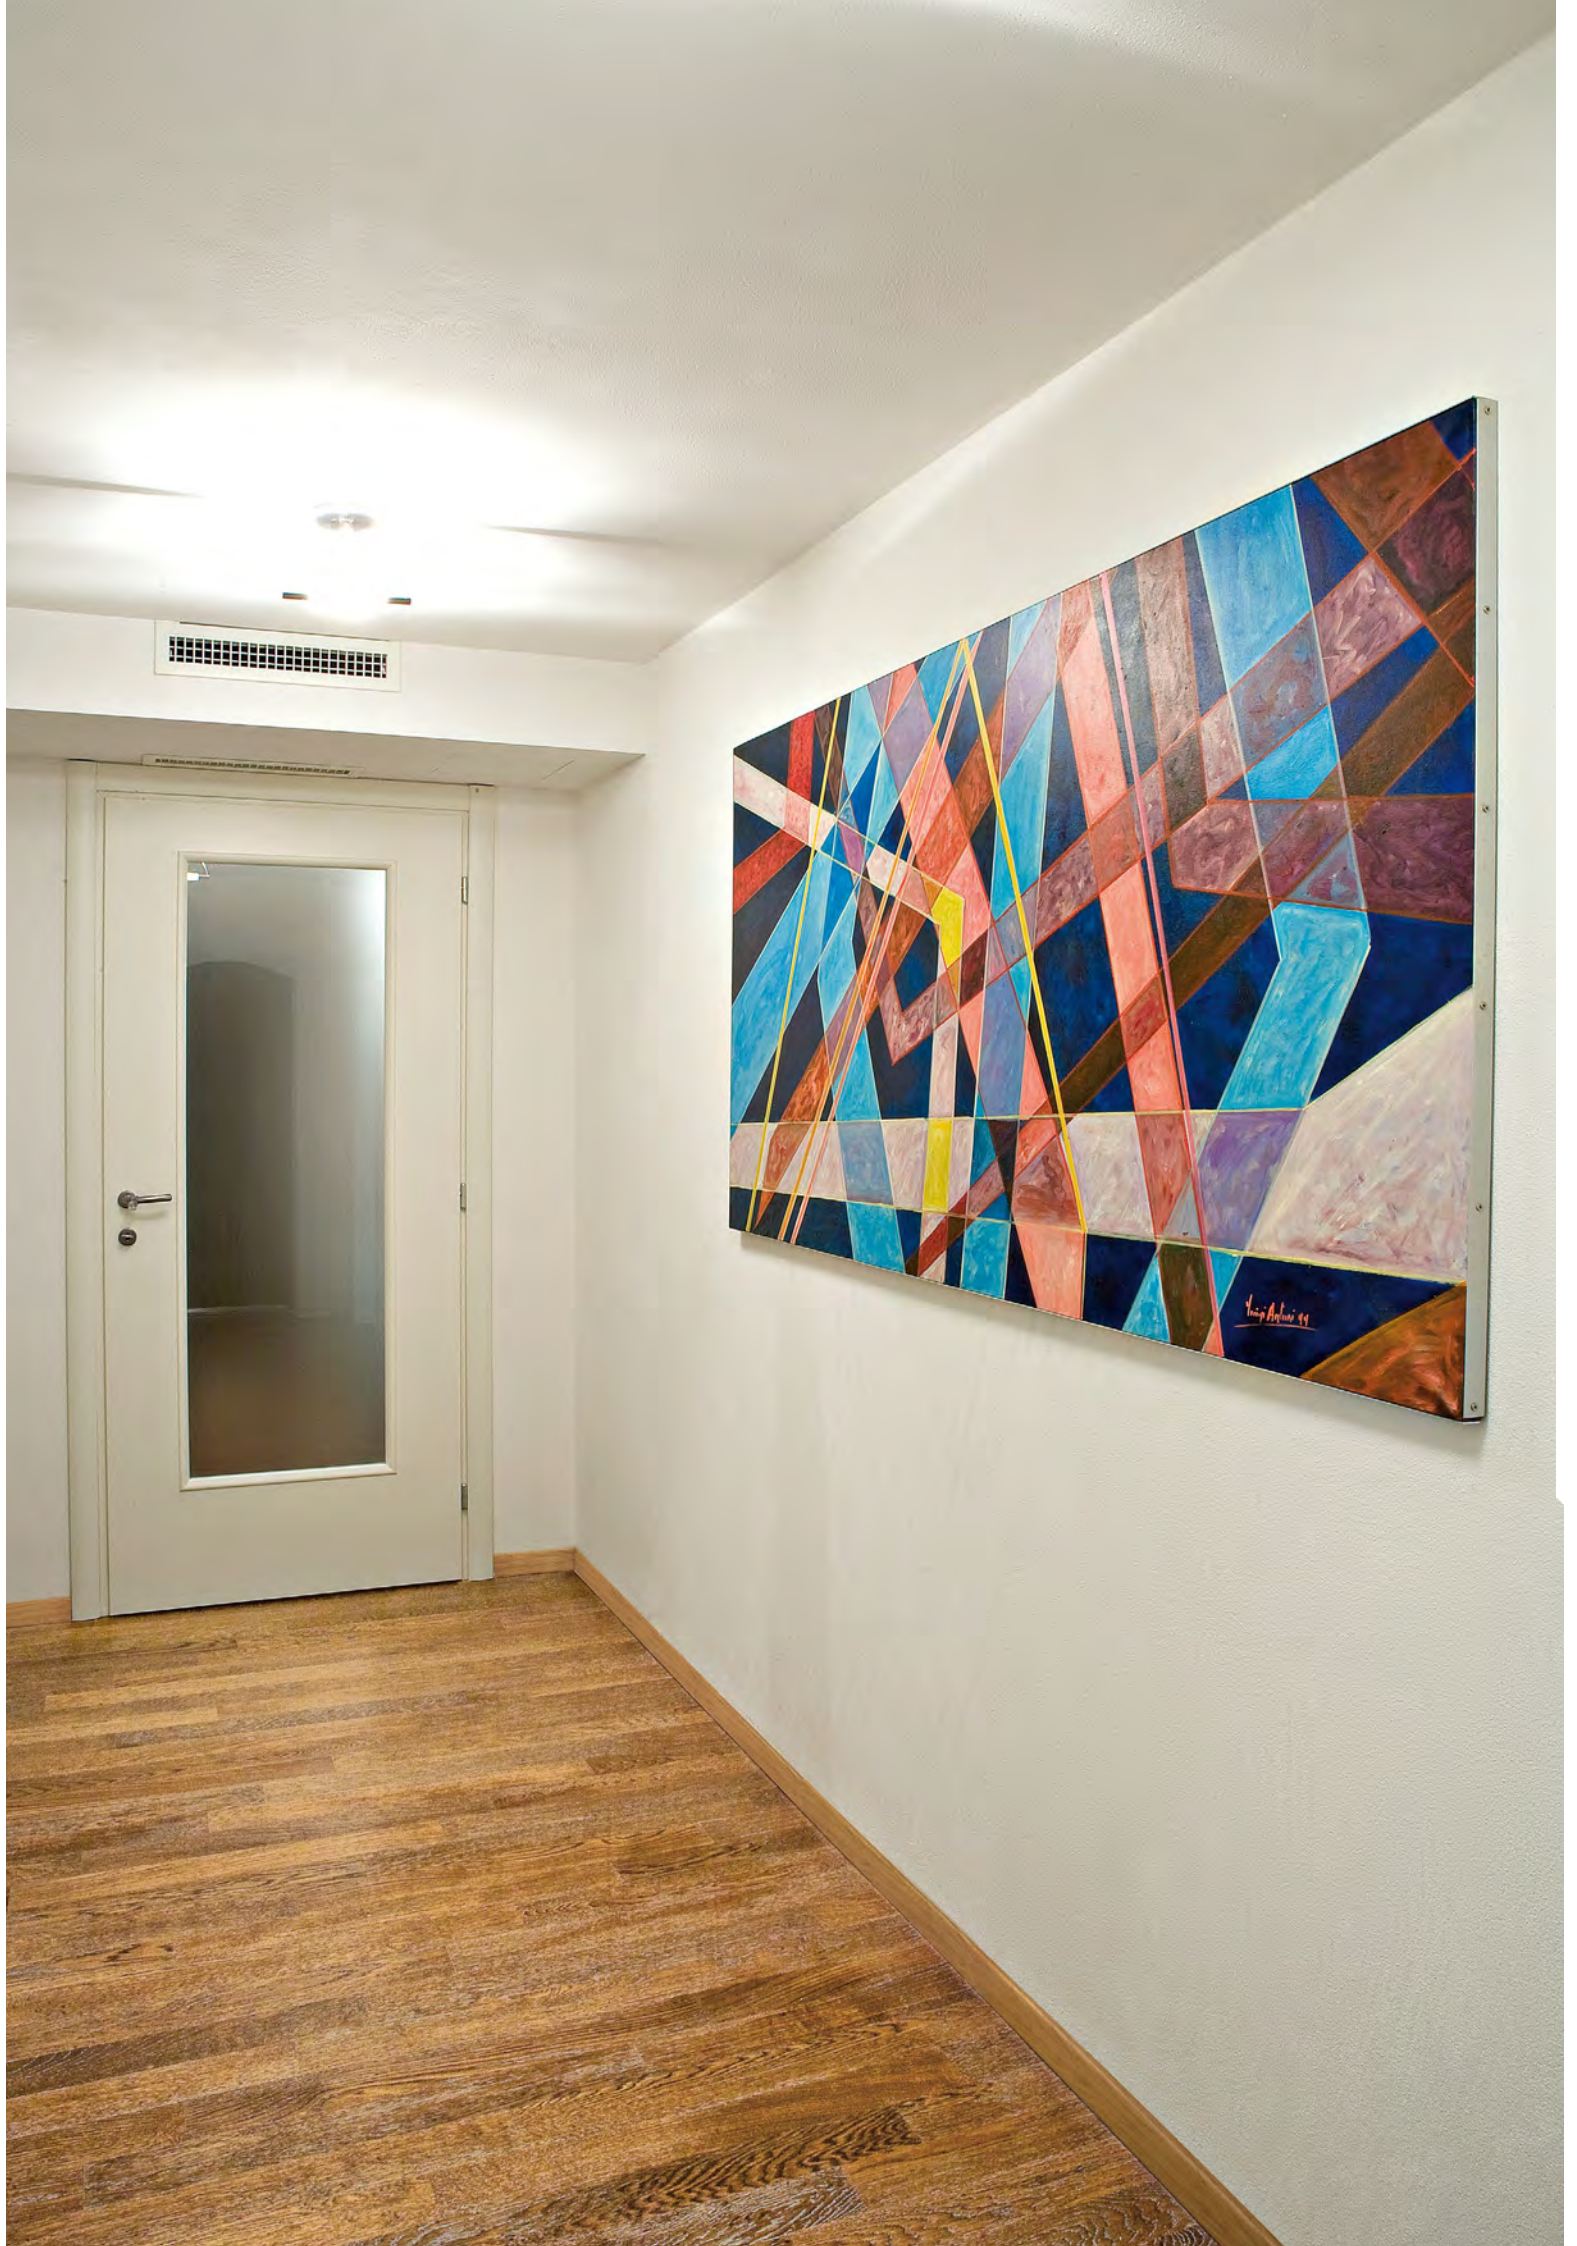

**CULTURAL CENTER,
NEW CALEDONIA,
1998**
Renzo Piano

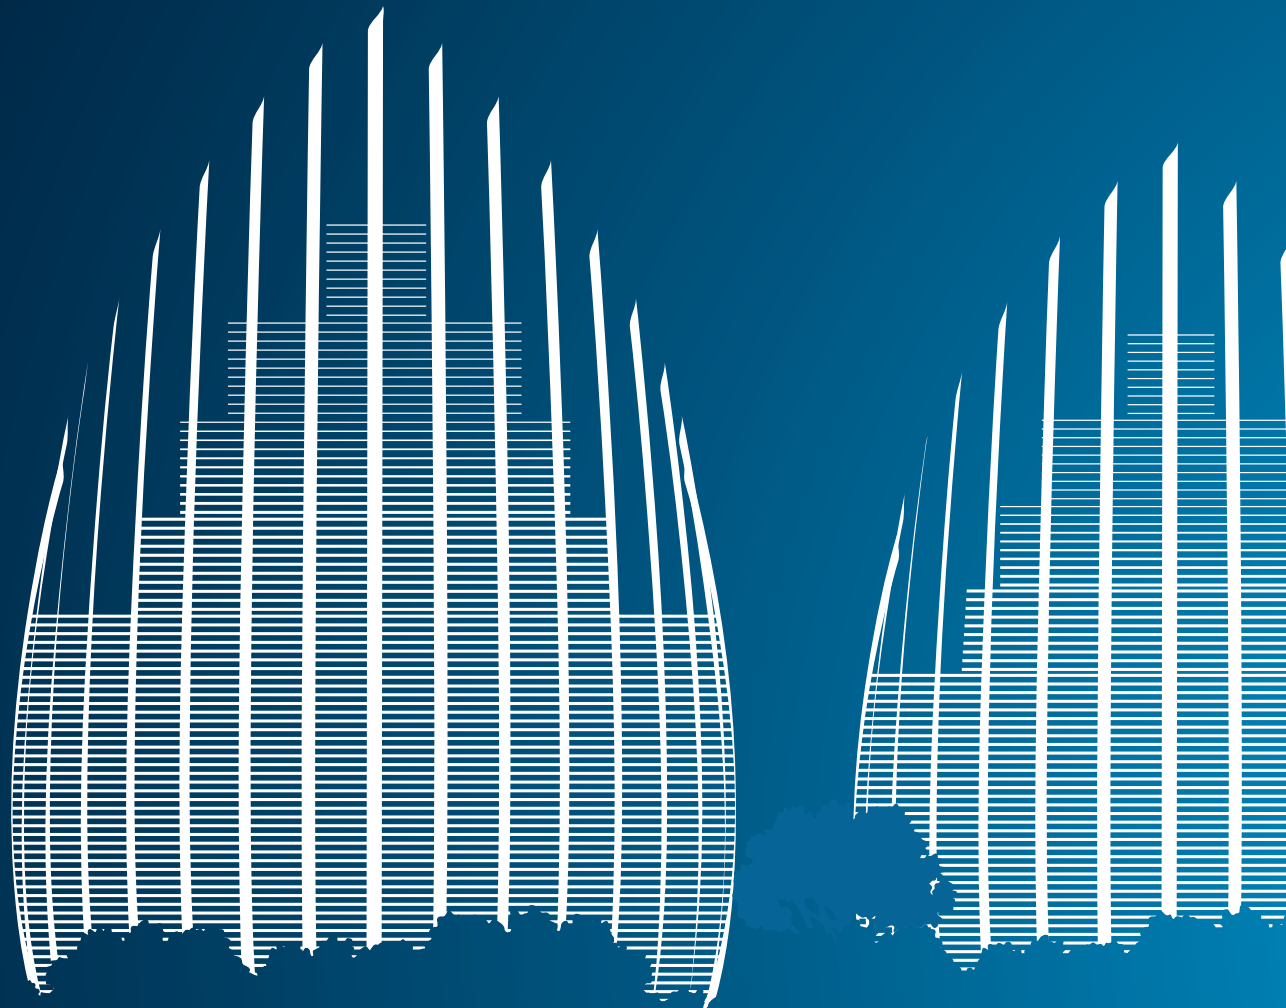

PROFILES FOR LAMINATE, PARQUET
AND CARPETED FLOORS

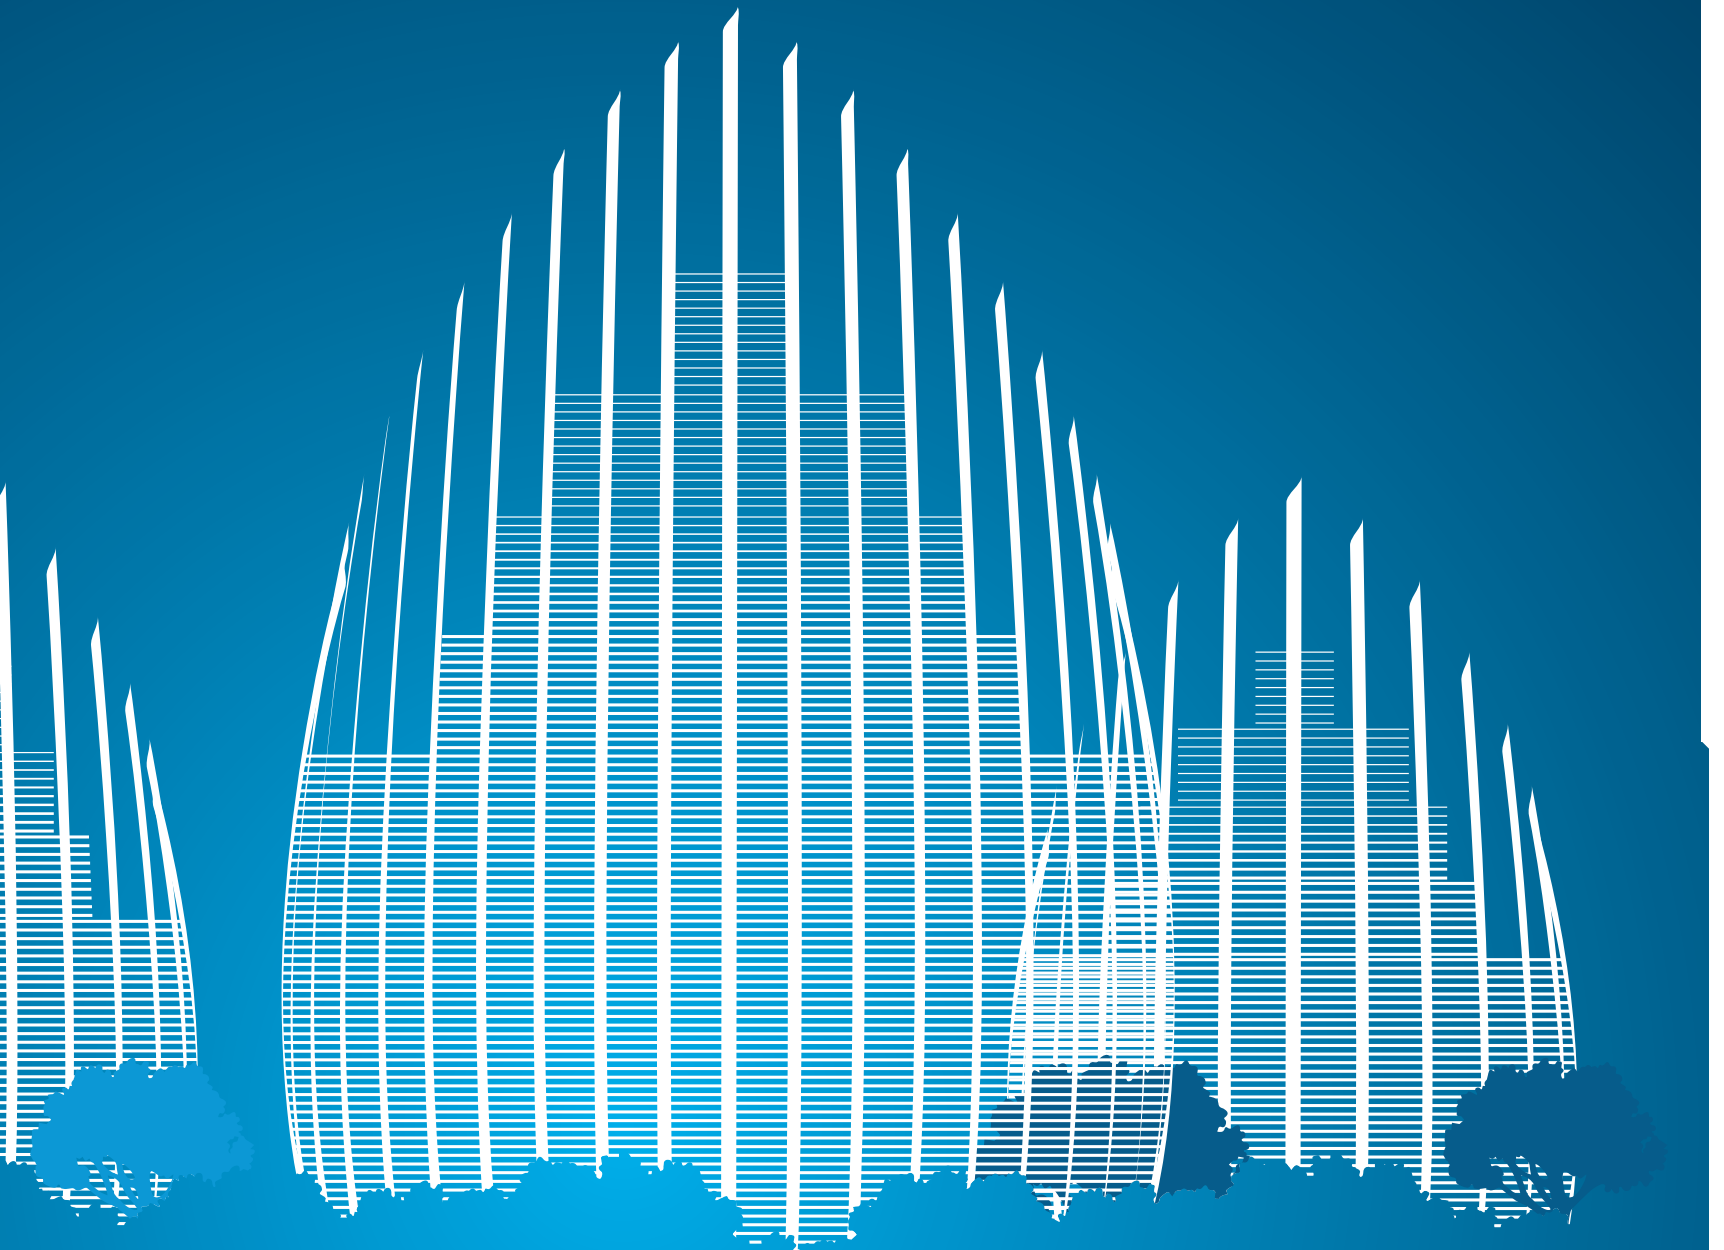

PROMULTIFIX SYSTEM®

INSTRUCTIONS FOR LAYING

PROGRESS PROFILES® has filed an innovative patent PROMULTIFIX SYSTEM® in respect of a wide range of aluminum profiles covered with very strong films in 77 wooden finishes are available (of which 55 on demand), plus 6 anodized finishes (of which 3 on demand).

The PROMULTIFIX SYSTEM® system is a multipurpose profile for finishing laminate, melamine-coated, parquet and wood floating floors.





























FIXING: it can be fixed with adhesive, nylon anchors, glue, flatten down base and screws.

STANDARD Wooden FINISHES: Light oak (strip), Light cherry (strip), Red walnut (merbau-apple-walnut), Light zerbano, Oak powder, White oak, Grey oak, Victoria oak, Pink oak, Havana oak, Edinburgh oak, Carvi oak, Ice oak, Grace oak, Honey oak, Black decapè, Cork oak, Sand oak, Tripoli, Bangkok, Liotard, New white.

STANDARD ALUMINUM FINISHES: anodized Silver, Gold and Bronze.

COLOURS

(For a precise assessment of colours request the wooden finishes sample range)


ANODIZED								
ON DEMAND - MINIMUM QUANTITY 100 PCS								
								
AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium	AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium			
								
05W - Light oak (strip)	07W - Light cherry (strip)	09W - Red walnut (merbau-apple-walnut)	18W - Light zerbano	21W - Oak powder	29W - White oak	30W - Grey oak	31W - Victoria oak	32W - Pink oak
								
34W - Havana oak	35W - Edinburgh oak	37W - Carvi oak	41W - Ice oak	42W - Grace oak	44W - Honey oak	46W - Black decapè	48W - Cork oak	49W - Sand oak
								
65W - Tripoli	73W - Bangkok	75W - Liotard	93W - New white					

On request it is possible to realize other finishes of the color range: minimum order 100 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

PROMULTIFIX SYSTEM

PROMULTIFIX SYSTEM is composed of an aluminium profile with adhesive, with a lengthwise groove in form of dovetail, where nylon anchors can be inserted, or a punched aluminium flatten down base for an easy and invisible fixing.


NYLON SCREW ANCHORS

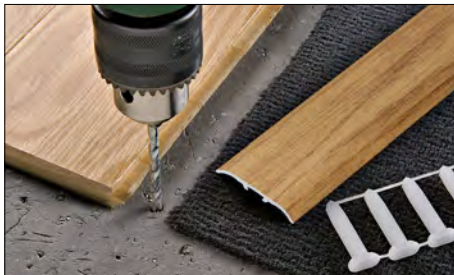

PERIMETRIC SUPPORTS




FLATTEN DOWN BASE

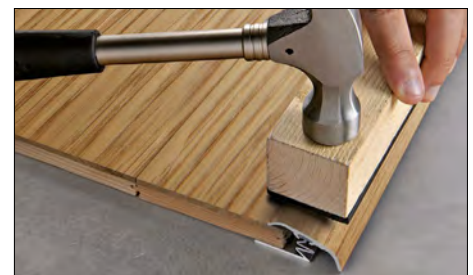


It is a system composed of a special TOP with adhesive, with a visible surface of 44.7 mm, anodized aluminium or covered with wooden film. The aluminium TOP can be fixed to the floor in different ways: with adhesive, with nylon anchors, support with removable spacers, flatten down base.

PROMULTIFIX SYSTEM


ALUMINIUM PROFILES FIXING KIT

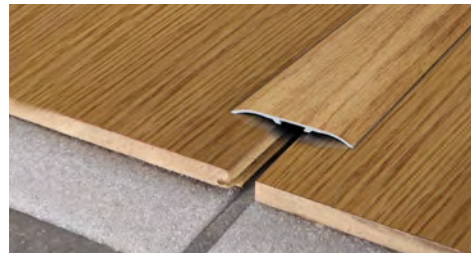


PMPFX... 42090AS / 42A

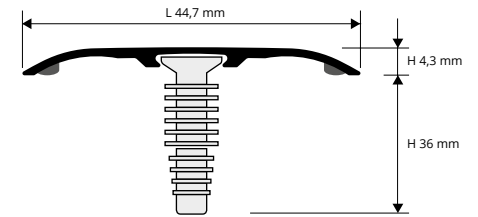

PMPFX... 42090AS / 42A



PMPFX... 42090AS / 42A + PFIXBS 23

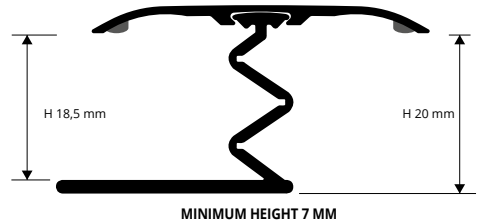

TOP IN ANOD. ALUMINIUM with adhesive (6 finishes of which 3 on demand) n.3 KIT (15 screws, 12 perimeter pins, 6 joints) thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm
PMPFX... 42A	44,7

TOP IN ANOD. ALUMINIUM with adhesive (6 finishes of which 3 on demand) + n.1 KIT (5 screws, 4 perimeter pins, 2 joints) thermo packed - bar length 0,90 lm - 15 Pcs

Article	L mm
PMPFX... 42090AS	44,7

TOP IN ALUM. COVERED with adhesive (77 wooden finishes of which 55 on demand) + n.3 KIT (15 screws, 12 perimeter pins, 6 joints) thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm
PMPFX... 42A	44,7

TOP IN ALUM. COVERED with adhesive (77 wooden finishes of which 55 on demand) + n.1 KIT (5 screws, 4 perimeter pins, 2 joints) thermo packed - bar length 0,90 lm - 15 Pcs



Article	L mm
PMPFX... 42090AS	44,7

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 05W - 07W - 09W - 18W - 21W - 29W - 30W - 31W - 32W - 34W - 35W - 37W - 41W - 42W - 44W - 46W - 48W - 49W - 65W - 73W - 75W - 93W. The code of the selected colour must be added to the article code. E.g.: PMPFX... 42A (chosen finish anod. gold) PMPFXAO 42A.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose the profile of the required finish, if necessary cut the TOP in the required length.
2. Clean, remove the grease and dry the substrate: the temperature should be at least of 15° C.
- Fixing with adhesive tape:**
 3. Remove the paper protection from the adhesive and lay the TOP with a vertical pressure without moving the profile.
- Fixing with screw anchors:**
 3. Drill the substrate with a 6 mm bit, 5 holes per linear meter.
 4. Remove the paper protection from the adhesive.
 5. Insert the screw anchors in the profile dovetail groove.
 6. Beat with a rubber/pvc hammer to insert the screw anchors into the holes.
- Fixing of the aluminium flatten down base:**
 3. Cut the flatten down base to the requested length.
 4. Remove the paper protection from the adhesive.
 5. insert the base into the profile groove dovetail, then fix or glue the base to the floor.
 6. Make a uniform pressure on the profile with the hands or a rubber hammer.
- Perimetric laying:**
 3. Remove the paper protection from the adhesive.
 4. Cut the perimetric pins according to the thickness of the floor.
 5. Insert the perimetric pins into the profile groove dovetail using 4 supports per linear meter.
 6. Fix the profil making a uniform pressure on the profile with the hands, but do not move the profile.

One fixing kit is composed of: 5 screws, 4 perimetric pins, 2 joints

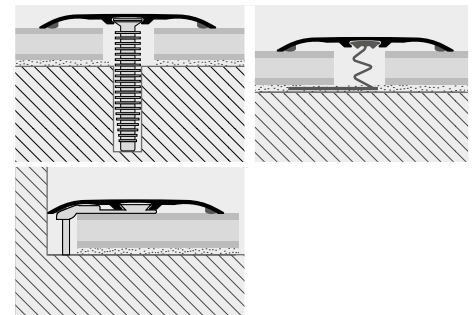


SCREWS AND SCREW ANCHORS, TAP-DOWN BASE

NICKEL - PLATED FLATHEAD SCREWS + SCREW ANCHORS

pack. 1.000 Pcs


Article	Ø mm	L mm
VINIPT 325	3	25



PROFIXER TAP-DOWN BASE - ALUM. PUNCHED/PERFORED

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
PFIXBS 23	23

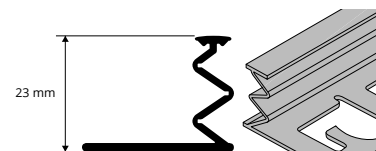












































































WOODEN/LVT

COLOURS
STANDARD AND ON DEMAND

STANDARD COLORS ARE SHOWN UNDER EACH PRODUCT







For a precise assessment of colours request the wooden finishes sample range
For sample finishes, contact the sales office for minimum quantities, timing and costs.

WOOD COLOURS

								
04W - Dark beech	05W - Light oak (strip)	06W - Dark oak (Walnut)	07W - Light cherry (strip)	08W - Dark cherry (board)	09W - Red walnut (merbau-apple-walnut)	10W - Wengè (Panga-Panga - Wengè)	11W - Decapè bleached	13W - Indonesian teak
								
18W - Light zerbano	21W - Oak powder	25W - Bleached fir	28W - Aspen oak	29W - White oak	30W - Grey oak	31W - Victoria oak	32W - Pink oak	33W - Sawed oak
								
34W - Havana oak	35W - Edinburgh oak	36W - American oak	37W - Carvi oak	38W - Queens oak	39W - Grey elm	40W - Brown oak	41W - Ice oak	42W - Grace oak
								
43W - Manhattan oak	44W - Honey oak	45W - Marocco oak	46W - Black decapè	47W - Black oak	48W - Cork oak	49W - Sand oak	50W	51W
								
52W	53W	54W	55W	56W	57W	58W	59W	60W
								
61W	62W	63W	64W	65W - Tripoli	66W	67W	68W	69W
								
70W	71W	72W	73W - Bangkok	74W	75W - Liotard	76W	77W	78W
								
79W	80W	81W	82W	83W	84W	85W	86W	87W
					* only for SKIRTING BTPRM 70 ANGLE BAR AGEM 25			
88W	89W	90W	93W - New white	M - Mahogany *				

© 2020 All rights reserved by Progress Profiles, Printed in Italy

ANODIZED COLOURS


					
AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium	AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium

PROGRESS® PROFILES has filed an innovative patent PROINSERT SYSTEM in respect of a wide range of aluminum profiles covered with very strong films in 77 wooden finishes are available, plus 6 anodized finishes.

The **PROINSERT SYSTEM** system comprises a complete set of profiles for finishing laminate, melamine-coated, parquet and wood floating floors.

INTERCHANGEABLE INSERTS in 7 heights: (H 07, 09, 11, 13, 15, 17 and 19 mm). **PROFILES COVERED** with film: resistant to wear and UV rays (classe AC1). **TWO VERSATILE VERSIONS OF BASES:** available for fixing with glue or screws.


INSTRUCTIONS FOR LAYING:

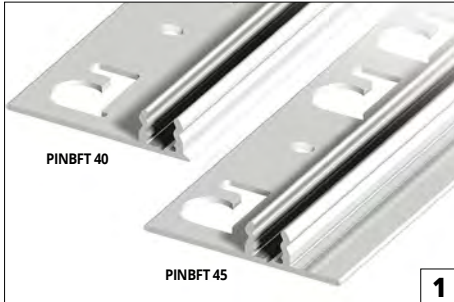


1) Choose between the two types of aluminum base.



2) Fix and/or glue the base to the floor.

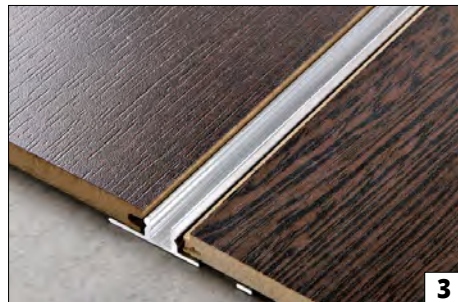


3) Lay the floor correctly leaving between 3 and 10 mm gap for the natural expansion of the wood.

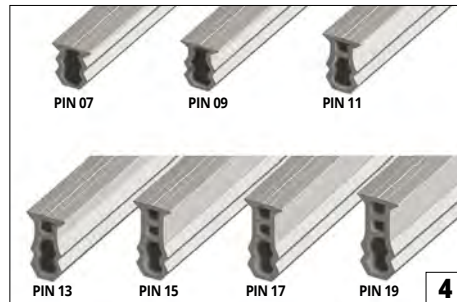

4) Choose the vinyl resin insert according to the clear height and thickness of the floor.



5) Keep the profile with the groove for insertion facing upwards and slot in the insert from the top downwards (if it does not slide easily, lubricate with water, silicone spray or vegetable oil).

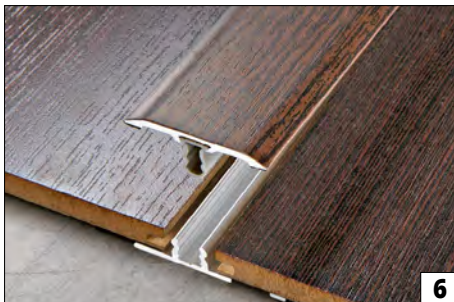

6) Place the profile over the "U" shaped channel.



7) With the help of a wooden tapping block, apply pressure evenly over the whole length of the profile using a hammer. If tapping is done correctly, a "click" will be heard when the profile slots into place.

THESE PROFILES ARE APPLIED TO CREATE:

- Threshold covers and expansion joints (SOL 30, SOL 40P and SOL 50)
- Transition joints for differences in level and floors in differing materials and thickness (ZERO CURVE)
- Perimeter joints or terminal expansion pieces (TERMINAL PIN)
- Corner joints and step nosings (serie STYLE STAIR)


SOL 30, SOL 40P AND SOL 50



ZERO CURVE



TERMINAL PIN

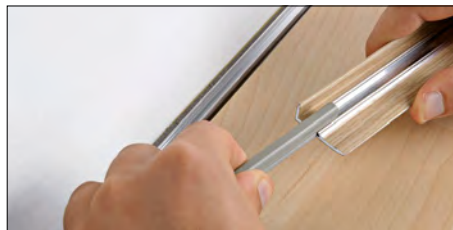

STYLE STAIR / STYLE STAIR L




PROFIXER LINE SYSTEM

The **PROFIXER LINE SYSTEM** comprises an assortment of profiles in aluminum with a longitudinal dovetail groove/channel into which the anchors or the tap-down punched/perforated aluminum profile may be inserted for easy and invisible fixing.

NYLON SCREW ANCHORS



TAP-DOWN BASE

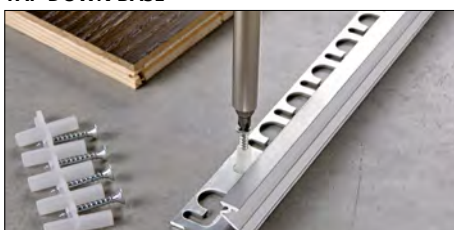

© 2020 All rights reserved by Progress Profiles, Printed in Italy

SOL 40P range comprises a large assortment of universal jointing profiles in aluminium covered with film that is highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Thanks to the insert in rigid PVC (non-conducting) between the base and the top, the new **SOL 40P** stops and eliminates electrostatic charges and magnetic fields and whatever else may be transmitted between two floors (e.g.: heated floors). 77 wooden finishes are available (of which 45 on demand), plus 6 anodized finishes (of which 3 on demand). Any insert of height H 7, 9, 11, 13, 15, 17 and 19 mm may be used with either the punched/perforated base for screwing or for gluing. Covering width 40 mm.

SOL 40P

TOP 77 WOODEN FINISHES (45 on demand)
6 ANODIZED FINISHES (3 on demand)
+ PIN INSERT + ALUMINIUM BASE



ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (PIN 17, 19 - 40,5 lm)

Article	H mm
PISPC... 407 (PIN insert 07)	7 / 10
PISPC... 409 (PIN insert 09)	9 / 12
PISPC... 4011 (PIN insert 11)	11 / 14
PISPC... 4013 (PIN insert 13)	13 / 16
PISPC... 4015 (PIN insert 15)	15 / 18
PISPC... 4017 (PIN insert 17)	17 / 20
PISPC... 4019 (PIN insert 19)	19 / 22

COMPLETE

ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(6 anod. alum. finishes of which 3 on demand) thermo packed
length 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)



Article	H mm
PISPC... 4079S (PIN insert 07)	7 / 10
PISPC... 4099S (PIN insert 09)	9 / 12
PISPC... 40119S (PIN insert 11)	11 / 14
PISPC... 40139S (PIN insert 13)	13 / 16
PISPC... 40159S (PIN insert 15)	15 / 18
PISPC... 40179S (PIN insert 17)	17 / 20
PISPC... 40199S (PIN insert 19)	19 / 22

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(77 wooden finishes of which 45 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (PIN 17, 19 - 40,5 lm)


Article	H mm
PISPC... 407 (PIN insert 07)	7 / 10
PISPC... 409 (PIN insert 09)	9 / 12
PISPC... 4011 (PIN insert 11)	11 / 14
PISPC... 4013 (PIN insert 13)	13 / 16
PISPC... 4015 (PIN insert 15)	15 / 18
PISPC... 4017 (PIN insert 17)	17 / 20
PISPC... 4019 (PIN insert 19)	19 / 22

COMPLETE

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(77 wooden finishes of which 45 on demand) thermo packed
length 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)



Article	H mm
PISPC... 4079S (PIN insert 07)	7 / 10
PISPC... 4099S (PIN insert 09)	9 / 12
PISPC... 40119S (PIN insert 11)	11 / 14
PISPC... 40139S (PIN insert 13)	13 / 16
PISPC... 40159S (PIN insert 15)	15 / 18
PISPC... 40179S (PIN insert 17)	17 / 20
PISPC... 40199S (PIN insert 19)	19 / 22

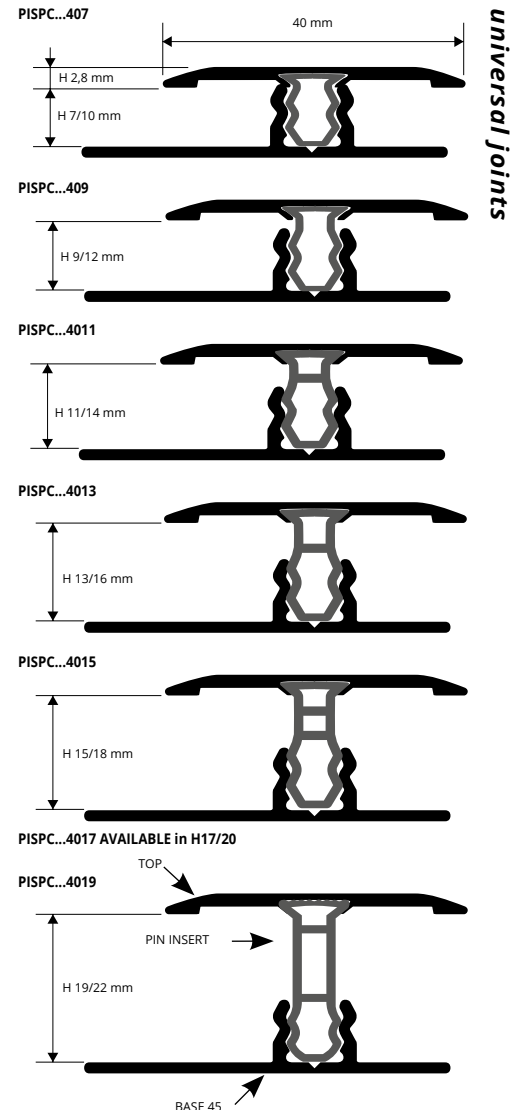

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PISPC... 4079S (chosen finish anod. gold) PISPCAO 4079S.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Fix and/or glue the base to the floor. 2. Lay the floor leaving from 3 to 10 mm between the floor and the insert. 3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. 4. With the aid of a board, hammer the TOP to the desired fitting level.

COLOURS

(For a precise assessment of colours request the wooden finishes sample range)


ANODIZED								
			ON DEMAND - MINIMUM QUANTITY 100 PCS					
AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium	AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium			

On request it is possible to realize other finishes of the color range: minimum order 100 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

ZERO CURVE

TOP 77 WOODEN FINISHES (45 on demand)
AND 6 ANODIZED FINISHES (3 on demand)
+ PIN INSERT + ALUMINIUM BASE

The **ZERO CURVE** range comprises a large assortment of terminal transition profiles for joining floors at different levels and with different thickness varying from 7 to 20 mm.
77 wooden finishes are available (of which 45 on demand), plus 6 anodized finishes (of which 3 on demand). There is a profile (top) and an insert (pin) for each height, while the base (punched or perforated) allows fixing by screwing or gluing.

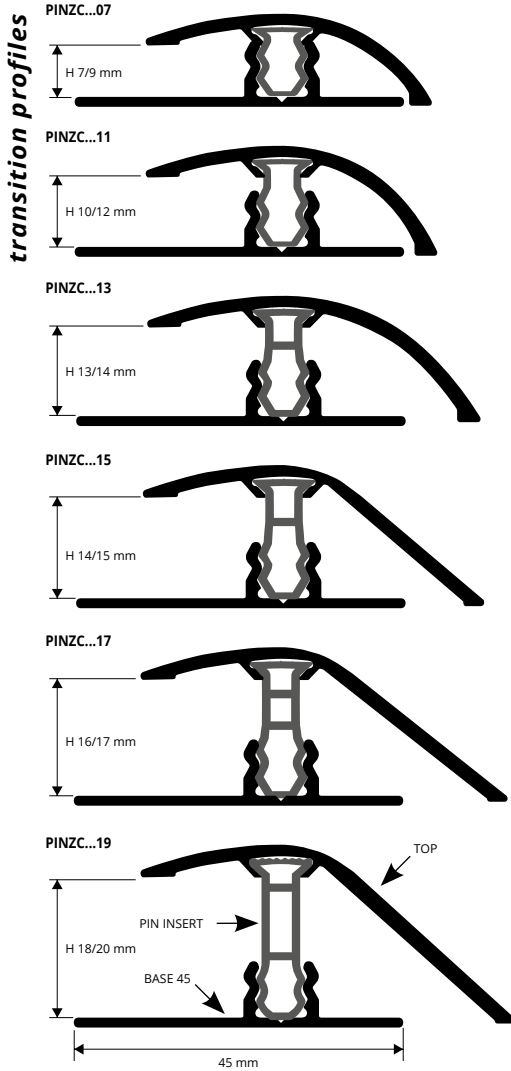

ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm - (PIN 15, 17 - 40,5 lm) (PIN 19 - 27 lm)

Article	H mm
PINZC... 07 (top PINZ... 07 + PIN 07)	7 / 9
PINZC... 11 (top PINZ... 07 + PIN 11)	10 / 12
PINZC... 13 (top PINZ... 09 + PIN 13)	13 / 14
PINZC... 15 (top PINZ... 13 + PIN 15)	14 / 15
PINZC... 17 (top PINZ... 13 + PIN 17)	16 / 17
PINZC... 19 (top PINZ... 15 + PIN 19)	18 / 20

COMPLETE

ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)



Article	H mm
PINZC... 07S (top PINZ... 07 + PIN 07)	7 / 9
PINZC... 11S (top PINZ... 07 + PIN 11)	10 / 12
PINZC... 13S (top PINZ... 09 + PIN 13)	13 / 14
PINZC... 15S (top PINZ... 13 + PIN 15)	14 / 15
PINZC... 17S (top PINZ... 13 + PIN 17)	16 / 17
PINZC... 19S (top PINZ... 15 + PIN 19)	18 / 20



ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORATED
(77 wooden finishes of which 45 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm - (PIN 15, 17 - 40,5 lm) (PIN 19 - 27 lm)

Article	H mm
PINZC... 07 (top PINZ... 07 + PIN 07)	7 / 9
PINZC... 11 (top PINZ... 07 + PIN 11)	10 / 12
PINZC... 13 (top PINZ... 09 + PIN 13)	13 / 14
PINZC... 15 (top PINZ... 13 + PIN 15)	14 / 15
PINZC... 17 (top PINZ... 13 + PIN 17)	16 / 17
PINZC... 19 (top PINZ... 15 + PIN 19)	18 / 20

COMPLETE

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORATED
(77 wooden finishes of which 45 on demand) thermo packed
L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)



Article	H mm
PINZC... 07S (top PINZ... 07 + PIN 07)	7 / 9
PINZC... 11S (top PINZ... 07 + PIN 11)	10 / 12
PINZC... 13S (top PINZ... 09 + PIN 13)	13 / 14
PINZC... 15S (top PINZ... 13 + PIN 15)	14 / 15
PINZC... 17S (top PINZ... 13 + PIN 17)	16 / 17
PINZC... 19S (top PINZ... 15 + PIN 19)	18 / 20

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.

The code of the selected colour must be added to the article code. E.g.: PINZC... 07S (chosen finish anod. gold) PINZCAO 07S.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Fix and/or glue the base to the floor. 2. Lay the floor leaving from 3 to 10 mm between the floor and the insert. 3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. 4. With the aid of a board, hammer the TOP to the desired fitting level.

COLOURS

(For a precise assessment of colours request the wooden finishes sample range)

ANODIZED								
AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium	ON DEMAND - MINIMUM QUANTITY 100 PCS	AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium		
04W - Dark beech	05W - Light oak (strip)	07W - Light cherry (strip)	09W - Red walnut (merbau-apple-walnut)	13W - Indonesian teak	18W - Light zerbano	21W - Oak powder	25W - Bleached fir	29W - White oak
30W - Grey oak	31W - Victoria oak	32W - Pink oak	33W - Sawed oak	34W - Havana oak	35W - Edinburgh oak	36W - American oak	37W - Carvi oak	38W - Queens oak
39W - Grey elm	41W - Ice oak	42W - Grace oak	44W - Honey oak	45W - Marocco oak	46W - Black decapé	48W - Cork oak	49W - Sand oak	53W
54W	55W	65W - Tripoli	73W - Bangkok	75W - Liotard				

On request it is possible to realize other finishes of the color range: minimum order 100 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

© 2020 All rights reserved by Progress Profiles, Printed in Italy




TERMINAL PIN

TOP 77 WOODEN FINISHES (45 on demand)
AND 6 ANODIZED FINISHES (3 on demand)
+ PIN INSERT + ALUMINIUM BASE

The **TERMINAL PIN** series consists in a wide range of terminal/ outer joint squares ideal to realize the connection and junction with floors in laminate or melamine and/or wood/parquet rolled floor. The **TERMINAL PIN** allows the floor underneath to expand for more than 5 / 10 mm. It prevents from the use of the skirting -board and covers perfectly any kind of floor with a minimum thickness of 7 mm and a maximum of 22 mm. It delimitates the floor in proximity of walls, coverings, windows, doors, sliding doors, doormats buss etc. 77 wooden finishes are available (of which 45 on demand), plus 6 anodized finishes (of which 3 on demand).

terminal - outer profiles

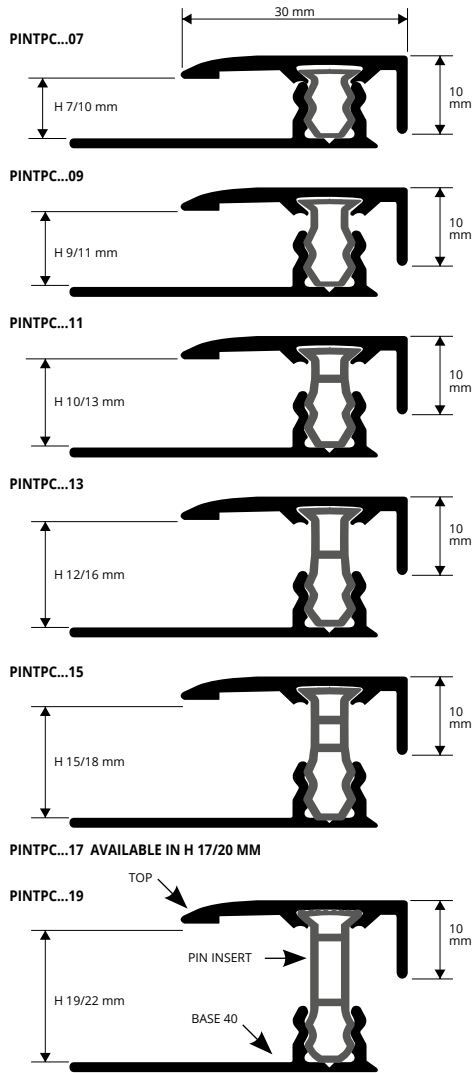

ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (PIN 11, 15, 17 - 40,5 lm) (PIN 19 - 27 lm)

Article	H mm		
PINTPC... 07 (PIN insert 07)	7 / 10		
PINTPC... 09 (PIN insert 09)	9 / 11		
PINTPC... 11 (PIN insert 11)	10 / 13		
PINTPC... 13 (PIN insert 13)	12 / 16		
PINTPC... 15 (PIN insert 15)	15 / 18		
PINTPC... 17 (PIN insert 17)	17 / 20		
PINTPC... 19 (PIN insert 19)	19 / 22		

COMPLETE

ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)

Article	H mm		
PINTPC... 07S (PIN insert 07)	7 / 10		
PINTPC... 09S (PIN insert 09)	9 / 11		
PINTPC... 11S (PIN insert 11)	10 / 13		
PINTPC... 13S (PIN insert 13)	12 / 16		
PINTPC... 15S (PIN insert 15)	15 / 18		
PINTPC... 17S (PIN insert 17)	17 / 20		
PINTPC... 19S (PIN insert 19)	19 / 22		

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(77 wooden finishes of which 45 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (PIN 11, 15, 17 - 40,5 lm) (PIN 19 - 27 lm)

Article	H mm		
PINTPC... 07 (PIN insert 07)	7 / 10		
PINTPC... 09 (PIN insert 09)	9 / 11		
PINTPC... 11 (PIN insert 11)	10 / 13		
PINTPC... 13 (PIN insert 13)	12 / 16		
PINTPC... 15 (PIN insert 15)	15 / 18		
PINTPC... 17 (PIN insert 17)	17 / 20		
PINTPC... 19 (PIN insert 19)	19 / 22		

COMPLETE

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(77 wooden finishes of which 45 on demand) thermo packed
L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)

Article	H mm		
PINTPC... 07S (PIN insert 07)	7 / 10		
PINTPC... 09S (PIN insert 09)	9 / 11		
PINTPC... 11S (PIN insert 11)	10 / 13		
PINTPC... 13S (PIN insert 13)	12 / 16		
PINTPC... 15S (PIN insert 15)	15 / 18		
PINTPC... 17S (PIN insert 17)	17 / 20		
PINTPC... 19S (PIN insert 19)	19 / 22		

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PINTPC... 07S (chosen finish anod. gold) PINTPCAO 07S.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Fix PINBFTL 40 base at the outer edge/wall.
2. Align the laminate/melamine/wood floor, ensuring that approx. 3/10mm gap is left on each side to accommodate the natural expansion between the floor and the base.
3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base.
4. With the aid of a board, hammer the TOP to the desired fitting level.

COLOURS

(For a precise assessment of colours request the wooden finishes sample range)

ANODIZED						
AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium	ON DEMAND - MINIMUM QUANTITY 100 PCS	AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium

04W - Dark beech	05W - Light oak (strip)	07W - Light cherry (strip)	09W - Red walnut (merbau-apple-walnut)	13W - Indonesian teak	18W - Light zerbano	21W - Oak powder	25W - Bleached fir	29W - White oak
30W - Grey oak	31W - Victoria oak	32W - Pink oak	33W - Sawed oak	34W - Havana oak	35W - Edinburgh oak	36W - American oak	37W - Carvi oak	38W - Queens oak
39W - Grey elm	41W - Ice oak	42W - Grace oak	44W - Honey oak	45W - Marocco oak	46W - Black decapè	48W - Cork oak	49W - Sand oak	53W
54W	55W	65W - Tripoli	73W - Bangkok	75W - Liotard				

On request it is possible to realize other finishes of the color range: minimum order 100 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

The **TERMINAL** range comprises a large assortment of perimeter joint or edging profiles in aluminium covered in 77 wooden finishes are available (of which 64 on demand), plus 6 anodized finishes (of which 3 on demand). They are used in various laying situations. Ideal as an edging profile for wood parquet, laminate and melamine-coated floors. They finish the floor where it joins to abutting surfaces, windows, glazed areas, doors, terraces and may also be used for joining two floors: wood/tiles, wood/carpeting.

TERMINAL

ALUMINIUM
77 WOODEN FINISHES (64 on demand)
6 ANODIZED FINISHES (3 on demand)



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm
(H 11 - H 13 - H 15 mm - 81 lm)

Article	H mm
PINT... 07	7
PINT... 09	9
PINT... 11	11
PINT... 13	13
PINT... 15	15

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 05W - 09W - 18W - 21W - 29W - 30W - 31W - 34W - 37W - 41W - 42W - 44W - 46W.

The code of the selected colour must be added to the article code. E.g.: PINT... 07 (chosen finish anod. gold) PINTAO 07.



ALUMINIUM COVERED (77 wooden finishes of which 64 on demand)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm
(H 11 - H 15 mm - 81 lm)

Article	H mm
PINT... 09	9
PINT... 11	11
PINT... 15	15

ALUMINIUM COVERED (77 wooden finishes of which 64 on demand)
thermo packed
bar length 0,90 lm - 20 Pcs - BLISTER PACKS




Article	H mm
PINT... 07S	7 / 8
PINT... 09S	9 / 10
PINT... 11S	11 / 12
PINT... 15S	15 / 16

ANODIZED ALUM. (6 anod. alum. finishes of which 3 on demand)
thermo packed
bar length 0,90 lm - 20 Pcs - BLISTER PACKS

Article	H mm
PINT... 07S	7 / 8
PINT... 09S	9 / 10
PINT... 11S	11 / 12
PINT... 15S	15 / 16

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 05W - 09W - 18W - 21W - 29W - 30W - 31W - 34W - 37W - 41W - 42W - 44W - 46W.

The code of the selected colour must be added to the article code. E.g.: PINT... 07S (chosen finish anod. gold) PINTAO 07S.

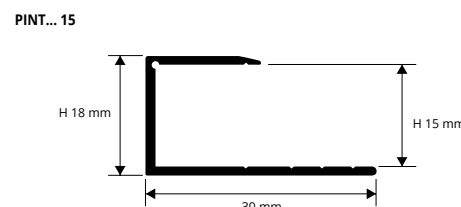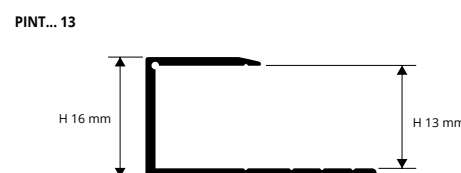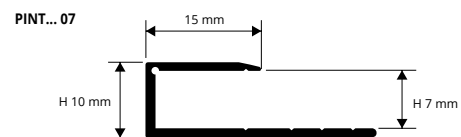

terminal - outer profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the **TERMINAL** according to the required height and finish and fix with screws and screw anchors or with glue/silicone; the profile must be placed next to the abutting surface e.g. wall, glazing, etc. 2. Align the laminate/melamine/wood floor, ensuring that a large enough gap is left to accommodate the natural expansion between the floor and the profile (approx. 3/10mm on one side).

COLOURS

(For a precise assessment of colours request the wooden finishes sample range)


ANODIZED					
			ON DEMAND - MINIMUM QUANTITY 100 PCS		
AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium	AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium

05W - Light oak (strip)	09W - Red walnut (merbau-apple-walnut)	18W - Light zerbano	21W - Oak powder	29W - White oak	30W - Grey oak	31W - Victoria oak	34W - Havana oak	37W - Carvi oak
				<p>On request it is possible to realize other finishes of the color range: minimum order 100 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.</p>				
41W - Ice oak	42W - Grace oak	44W - Honey oak	46W - Black decape					

STYLE STAIR

TOP (77 WOODEN FINISHES (56 on demand)
6 ANODIZED FINISHES (3 on demand)
+ PIN INSERT + ALUMINIUM BASE

The **STYLE STAIR** range comprises a large assortment of aluminium step nosing profiles for the edges of steps in wood, parquet, laminate or melamine with thickness varying from 7 to 20 mm. 77 wooden finishes are available (of which 56 on demand), plus 6 anodized finishes (of which 3 on demand). Select the most suitable profile for the thickness of the floor. There is a profile (top) and an insert (pin) for each height, while the base (punched or perforated) allows fixing by screwing or gluing.

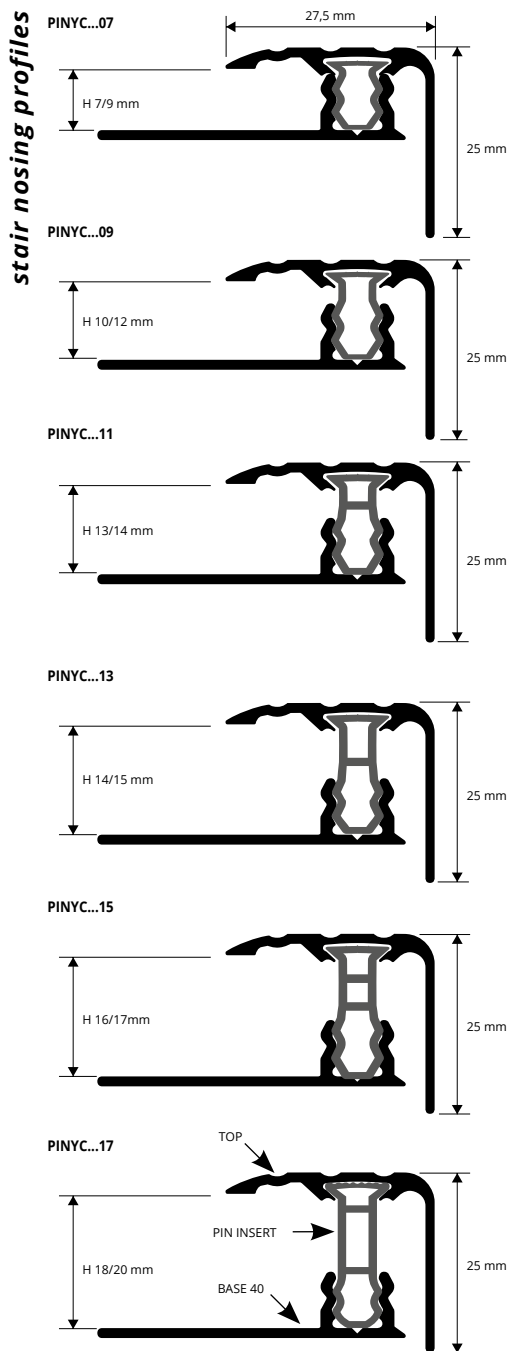

ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)

Article	H mm		
PINYC... 07 (PIN insert 07)	7 / 9		
PINYC... 09 (PIN insert 09)	10 / 12		
PINYC... 11 (PIN insert 11)	13 / 14		
PINYC... 13 (PIN insert 13)	14 / 15		
PINYC... 15 (PIN insert 15)	16 / 17		
PINYC... 17 (PIN insert 17)	18 / 20		

COMPLETE




ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(77 wooden finishes of which 56 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)

Article	H mm		
PINYC... 07 (PIN insert 07)	7 / 9		
PINYC... 09 (PIN insert 09)	10 / 12		
PINYC... 11 (PIN insert 11)	13 / 14		
PINYC... 13 (PIN insert 13)	14 / 15		
PINYC... 15 (PIN insert 15)	16 / 17		
PINYC... 17 (PIN insert 17)	18 / 20		

COMPLETE

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 05W - 07W - 09W - 18W - 21W - 29W - 30W - 31W - 32W - 34W - 35W - 37W - 41W - 42W - 44W - 46W - 48W - 49W - 65W - 73W - 75W. The code of the selected colour must be added to the article code. E.g.: PINYC... 07 (chosen finish anod. gold) PINYCAO 07.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

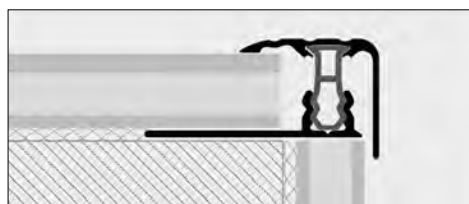

1. Fix the base exactly over the stair riser. 2. Align the laminate/melamine/wood floor, ensuring that approx. 3/10mm gap is left on one side to accommodate the natural expansion between the floor and the base. 3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. 4. With the aid of a board, hammer the TOP to the desired fitting level.

COLOURS

(For a precise assessment of colours request the wooden finishes sample range)

ANODIZED					
ON DEMAND - MINIMUM QUANTITY 100 PCS					
AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium	AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium

05W - Light oak (strip)	07W - Light cherry (strip)	09W - Red walnut (merbau-apple-walnut)	18W - Light zerbano	21W - Oak powder	29W - White oak	30W - Grey oak	31W - Victoria oak	32W - Pink oak
34W - Havana oak	35W - Edinburgh oak	37W - Carvi oak	41W - Ice oak	42W - Grace oak	44W - Honey oak	46W - Black decape'	48W - Cork oak	49W - Sand oak
65W - Tripoli	73W - Bangkok	75W - Liotard						

On request it is possible to realize other finishes of the color range: minimum order 100 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

STYLE STAIR L comprises a large range of aluminium stair nosing protecting profiles for step in timber, parquet, laminate or melamine material with thickness varying from 7 to 20 mm. 77 wooden finishes are available (of which 53 on demand), plus 6 anodized finishes (of which 3 on demand). The profiles are made with 3 pcs. A natural aluminium base to scrow or glue to the pavement, a PIN in non-toxic rigid to insert in the TOP, then a TOP should be selected most suitable for the floor.

STYLE STAIR L

TOP 77 WOODEN FINISHES (53 on demand)
6 ANODIZED FINISHES (3 on demand)
+ PIN INSERT + ALUMINIUM BASE



ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)

Article	H mm
PINYLC... 07 (PIN insert 07)	7 / 9
PINYLC... 09 (PIN insert 09)	10 / 12
PINYLC... 11 (PIN insert 11)	13 / 14
PINYLC... 13 (PIN insert 13)	14 / 15
PINYLC... 15 (PIN insert 15)	16 / 17
PINYLC... 17 (PIN insert 17)	18 / 20

COMPLETE







ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(77 wooden finishes of which 53 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)

Article	H mm
PINYLC... 07 (PIN insert 07)	7 / 9
PINYLC... 09 (PIN insert 09)	10 / 12
PINYLC... 11 (PIN insert 11)	13 / 14
PINYLC... 13 (PIN insert 13)	14 / 15
PINYLC... 15 (PIN insert 15)	16 / 17
PINYLC... 17 (PIN insert 17)	18 / 20

COMPLETE


Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 04W - 05W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 53W - 54W - 55W.

The code of the selected colour must be added to the article code. E.g.: PINYLC... 07 (chosen finish anod. gold) PINYLCAO 07.

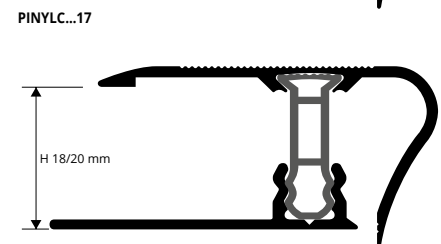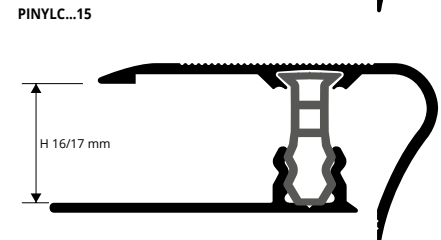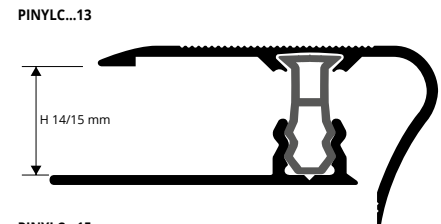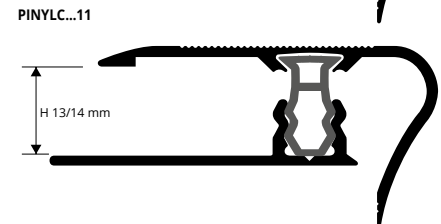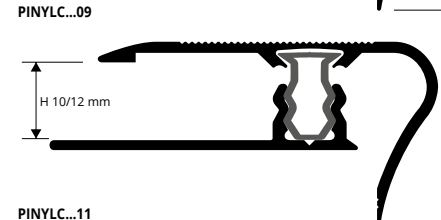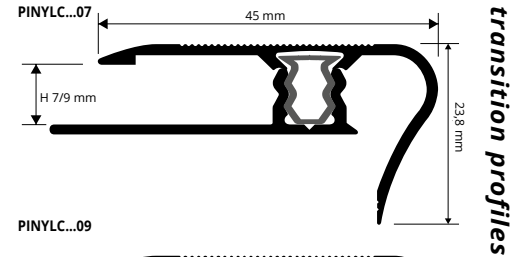

transition profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

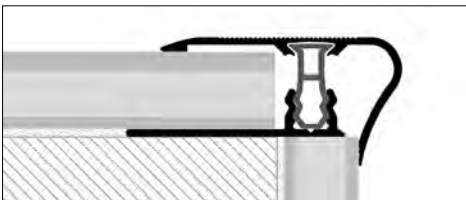

1. Fix the base exactly over the stair riser. 2. Align the laminate/melamine/wood floor, ensuring that approx. 3/10mm gap is left on one side to accommodate the natural expansion between the floor and the base. 3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. 4. With the aid of a board, hammer the TOP to the desired fitting level.

COLOURS

(For a precise assessment of colours request the wooden finishes sample range)

ANODIZED					
ON DEMAND - MINIMUM QUANTITY 100 PCS					
AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium	AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium
04W - Dark beech	05W - Light oak (strip)	13W - Indonesian teak	18W - Light zerbano	21W - Oak powder	25W - Bleached fir
29W - White oak	30W - Grey oak	31W - Victoria oak	32W - Pink oak	33W - Sawed oak	34W - Havana oak
35W - Edinburgh oak	36W - American oak	37W - Carvi oak	38W - Queens oak	39W - Grey elm	41W - Ice oak
42W - Grace oak	44W - Honey oak	45W - Marocco oak	53W	54W	55W

On request it is possible to realize other finishes of the color range: minimum order 100 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.



UNIVERSAL, CONNECTION AND PERIMETER JOINTS



SOL 30P (Page 244)



ZERO CURVE (Page 244)



TERMINAL PIN (Page 244)

CONNECTION JOINTS



**PROINTER KL
ACC / ALL** (Page 31-33)



**PROSHELL D
ALL** (Page 157)



**PROSHELL R
ALL** (Page 157)



PROLEVALL 305
(Page 80)



PROLINOLEUM
(Page 85)



PROFLOOR 24
(Page 85)



**PROSLIDER KL
ALL** (Page 86)



**PROCOVER
1045 ALL** (Page 86)

STAIR NOSINGS PROFILES



PROSTYLE KL 10 (Page 159)



PROSTAIR KL 20 (Page 159)


LVT PROFILES - SOL 30P

ALUMINIUM
77 WOODEN FINISHES (52 on demand)
6 ANODIZED FINISHES (3 on demand)

SOL 30P, ZERO CURVE AND TERMINAL PIN are profile which serve as expansion joints, junction and as perimetrical expansion joint between different floors in vinyl. The profiles are composed of a **BASE** in PVC to fix to the support and of three **TOP**. The choice of the **TOP** depend on the desired application. Their particular section, together with the wide range of finishes available and the ease of installation, make them a much-sought profiles, that could be easily matched with every type of floor in vinyl.

universal joints

PISPC... 3046
PISPCAA 4046

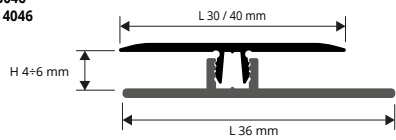

EXAMPLES OF LAYING



INSTRUCTIONS FOR LAYING METHODS

1. Choose SOL P / ZERO CURVE / TERMINAL PIN according to the desired finish. 2. Cut the **BASE** in vinyl resin/PVC to the desired length and fix it with adhesive or dowels to the support. 3. Lay the floor in vinyl, leaving a 5 mm joint between the vertical walls of the base in vinyl resin/PVC and the floor. 4. Cut the desired **TOP** in aluminium to the desired length. 5. Place a small wooden board on the **TOP** in aluminium and hammer equally in order to facilitate the insertion of the **TOP** into the pvc base.

ALUMINIUM TOP 77 wooden finishes (52 on demand)
6 anod. finishes (3 on demand) + **BASE** (vinyl resin/PVC) -
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm
PISPC... 3046 (anod. top)	30
PISPC... 3046 (wood top)	30

Available colours: see the samples below.
The code of the selected colour must be added to the article code.
E.g.: PISPC... 3046 (chosen finish anod. gold) PISPCAO 3046.

ALUMINIUM TOP (anod. silver) + **BASE** (vinyl resin/PVC)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	L mm
PISPCAA 4046 (top)	40

LVT PROFILES - ZERO CURVE

ALUMINIUM
77 WOODEN FINISHES (52 on demand)
6 ANODIZED FINISHES (3 on demand)

transition profiles

PINZC... 2646
PINZCAA 3246



EXAMPLES OF LAYING



ALUMINIUM TOP 77 wooden finishes (52 on demand)
6 anod. finishes (3 on demand) + **BASE** (vinyl resin/PVC) -
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm
PINZC... 2646 (anod. top)	26
PINZC... 2646 (wood top)	26

Available colours: see the samples below.
The code of the selected colour must be added to the article code.
E.g.: PINZC... 2646 (chosen finish anod. gold) PINZCAO 2646.

ALUMINIUM TOP (anod. silver) + **BASE** (vinyl resin/PVC)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	L mm
PINZCAA 3246 (top)	32

LVT PROFILES - TERMINAL PIN

ALUMINIUM
77 WOODEN FINISHES (52 on demand)
6 ANODIZED FINISHES (3 on demand)

terminal

PINTPC... 1946
PINTPCAA 2546



EXAMPLES OF LAYING



ALUMINIUM TOP 77 wooden finishes (52 on demand)
6 anod. finishes (3 on demand) + **BASE** (vinyl resin/PVC) -
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm
PINTPC... 1946 (anod. top)	19
PINTPC... 1946 (wood top)	19

Available colours: see the samples below.
The code of the selected colour must be added to the article code.
E.g.: PINTPC... 1946 (chosen finish anod. gold) PINTPCAO 1946.

ALUMINIUM TOP (anod. silver) + **BASE** (vinyl resin/PVC)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm
PINTPCAA 2546 (top)	25

COLOURS

(For a precise assessment of colours request the wooden finishes sample range)


ANODIZED									
ON DEMAND - MINIMUM QUANTITY 100 PCS									
AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium	AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium				
05W - Light oak (strip)	09W - Red walnut (merbau-apple-walnut)	13W - Indonesian teak	18W - Light zerbano	21W - Oak powder	25W - Bleached fir	29W - White oak	30W - Grey oak	31W - Victoria oak	
33W - Sawed oak	34W - Havana oak	36W - American oak	37W - Carvi oak	38W - Queens oak	39W - Grey elm	41W - Ice oak	42W - Grace oak	43W - Manhattan oak	
44W - Honey oak	45W - Morocco oak	46W - Black decape	47W - Black oak	48W - Cork oak	49W - Sand oak	93W - New white			

On request it is possible to realize other finishes of the color range: minimum order 100 pcs. Production delay 4/5 weeks. Price to be agreed.
For sample finishes, contact the sales office for minimum quantities, timing and costs.

PROWALK 2510 & 2520 are new stair-nosing profiles for existing stairways. Designed to protect and restore stair steps made of wood, laminate, ceramic, etc. Made with anodized aluminium and wooden finishes. Available in self-adhesive or perforated versions. Sizes available: 2.7 m lengths and 0.9 m & 1.35 m Self-Pack.

PROWALK 2510 & 2520

ANODIZED ALUMINIUM AND WOODEN FINISHES
PUNCHED OR SELF ADHESIVE

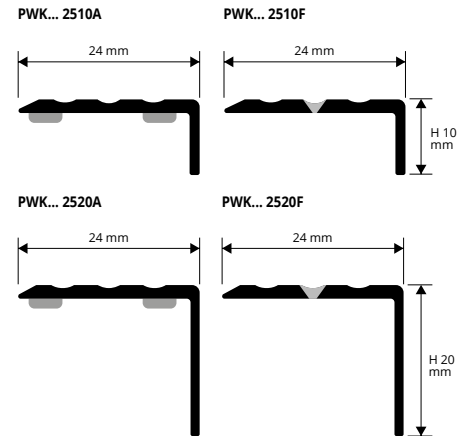

stair nosing profiles

ANODIZED ALUMINIUM with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm		
PWK... 2510A	24 x 10		
PWK... 2520A	24 x 20		

ANODIZED ALUMINIUM punched thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm		
PWK... 2510F	24 x 10		
PWK... 2520F	24 x 20		

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 0,90 lm - pack. 20 Pcs



Article	L x H mm		
PWK... 25109AS	24 x 10		
PWK... 25209AS	24 x 20		

ANOD. ALUM. PUNCHED with screws and screw anchors thermo packed - bar length 0,90 lm - pack. 20 Pcs



Article	L x H mm		
PWK... 25109FS	24 x 10	4,44	
PWK... 25209FS	24 x 20	5,12	

ANOD. ALUM. PUNCHED with screws and screw anchors thermo packed - bar length 1,35 lm - pack. 20 Pcs



Article	L x H mm		
PWK... 251013FS	24 x 10		

Available in the colours: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PWK... 2510A (chosen finish anod. silver) PWKAA 2510A.


ALUMINIUM WOOD FINISH with adhesive thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm		
PWK... 2510A	24 x 10		*
PWK... 2520A	24 x 20		*

Available on demand in the colours: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W with a minimum quantity order of 100 pcs.

The code of the selected colour must be added to the article code. E.g.: PWK... 2510A (chosen finish dark beech) PWK04 2510A.


EXAMPLES OF LAYING

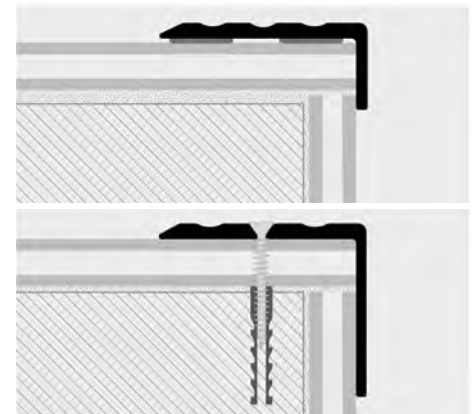

PROSTEP INS is a step cover profile in silver anodized aluminium ideal for protecting and laying laminated wood / floating melaminic and parquets. Available in two heights 10.5 and 16.

PROSTEP INS

ANODIZED SILVER ALUMINIUM

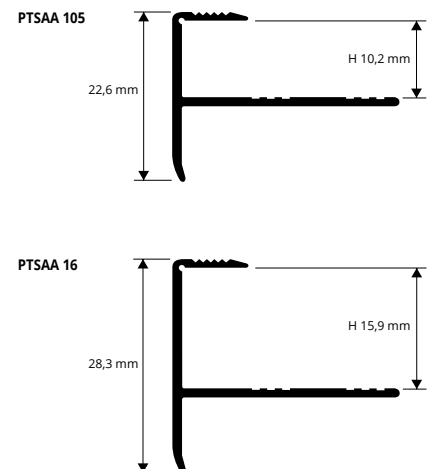

stair nosing profiles


ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PTSAA 105	10,2		
PTSAA 16	15,9		

EXAMPLES OF LAYING



COLOURS



= News 2020


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed.

SOL 30 SELF-ADHESIVE


ALUMINIUM COVERED WITH PROTECTIVE FILM
IN 77 WOODEN FINISHES (67 on demand)

SOL 30 self-adhesive is a joint/threshold cover profile in aluminum covered with film in 77 wooden finishes (67 on demand), which is highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Easy to lay and to match with any wood finish; the surface has an open pore embossed finish. Recommended for covering joints between floors in laminate, wood, ceramic tiles, etc.


threshold - joint-cover profiles

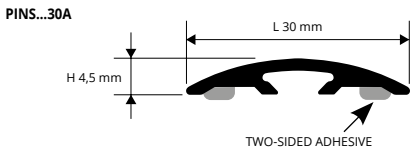

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

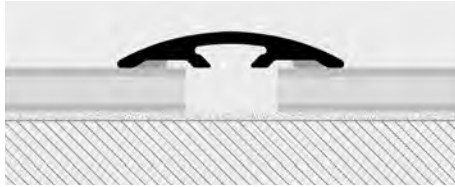

1. Choose the adhesive "SOL 30" in the required finish. 2. Cut the profile to the required length and clean, degrease and dry the surface, checking that the temperature for application is at least 15°. 3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers.

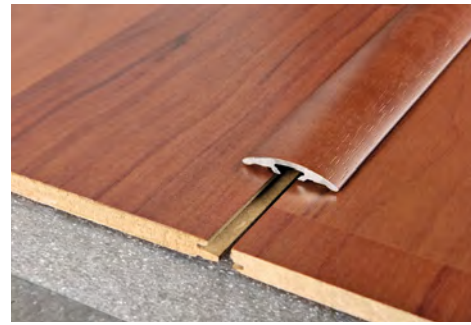

ALUMINIUM COVERED 77 wooden finishes (67 on demand) with ADHESIVE thermo packed - length 30 mm - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm
PINS...30A	30

Available in the wooden finishes: 04W - 05W - 07W - 08W - 09W - 10W - 11W - 28W - 29W - 30W.
The code of the selected colour must be added to the article code. E.g.: PINS... 30A (chosen finish dark beech) PINZ04W 30A.



ALUMINIUM COVERED 77 wooden finishes (67 on demand) with ADHESIVE - thermo packed - bar length 0,90 lm - 20 Pcs


Article	L mm
PINS...309AS	30

ZERO CURVE SELF-ADHESIVE

ANODISED ALUMINIUM AND ALUMINIUM COVERED WITH PROTECTIVE FILM
IN 77 WOODEN FINISHES (45 on demand)

ZERO CURVE self-adhesive is a transition profile in anodised aluminum and aluminum covered with film in 77 wooden finishes (45 on demand), which is highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Easy to lay and to match with any wood finish; the surface has an open pore embossed finish. Recommended for covering joints between floors in laminate, wood, ceramic tiles, etc.

transition profiles

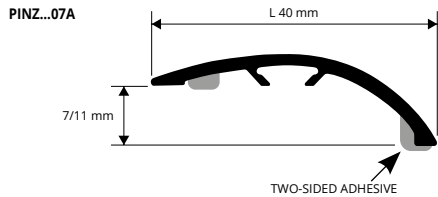

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "ZERO CURVE" with adhesive with the required finish. 2. Cut the profile to the required length and clean, degrease and dry the surface, checking that the temperature for application is at least 15°. 3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using an iron/steel hammer.



ALUMINIUM COVERED 77 wooden finishes (45 on demand) with ADHESIVE thermo packed - length 40 mm - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm
PINZ...07A	40
PINZAA 07A	40

Available in the finish: AA - 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PINZ... 07A (chosen finish dark beech) PINZ04W 07A.



ALUMINIUM COVERED 77 wooden finishes (45 on demand) with ADHESIVE thermo packed - bar length 0,90 lm - 20 Pcs

Article	L mm
PINZ...079AS	40

COLOURS

(For a precise assessment of colours request the wooden finishes sample range)

ANODIZED									
AA - Anod. silver aluminium									
04W - Dark beech	05W - Light oak (strip)	07W - Light cherry (strip)	09W - Red walnut (merbau-apple-walnut)	13W - Indonesian teak	18W - Light zerbano	21W - Oak powder	25W - Bleached fir	29W - White oak	
30W - Grey oak	31W - Victoria oak	32W - Pink oak	33W - Sawed oak	34W - Havana oak	35W - Edinburgh oak	36W - American oak	37W - Carvi oak	38W - Queens oak	
39W - Grey elm	41W - Ice oak	42W - Grace oak	44W - Honey oak	45W - Marocco oak	46W - Black decape'	48W - Cork oak	49W - Sand oak	53W	
54W	55W	65W - Tripoli	73W - Bangkok	75W - Liotard					

On request it is possible to realize other finishes of the color range: minimum order 100 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

© 2020 All rights reserved by Progress Profiles, Printed in Italy

SOL 40P self-adhesive is a joint/threshold cover profile in aluminum covered with film in 77 wooden finishes (45 on demand), which is highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Easy to lay and to match with any wood finish; the surface has an open pore embossed finish. Recommended for covering joints between floors in laminate, wood, ceramic tiles, etc.



Available in the colours: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code.
E.g.: PNSP... 40 PA (chosen finish dark beech) PNSP04W 40 PA.

ALUMINIUM COVERED 77 wooden finishes (45 on demand) with ADHESIVE thermo packed - length 40 mm - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm
PNSP.. 40 PA	40

SILVER ANODIZED ALUMINIUM with ADHESIVE thermo packed - length 40 mm - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm
PNSPAA 40 PA	40

ALUMINIUM COVERED 77 wooden finishes (45 on demand) with ADHESIVE - thermo packed - bar length 0,90 lm - 20 Pcs 


Article	L mm
PNSP.. 409 PAS	40

ALUMINIUM COVERED 77 wooden finishes (45 on demand) with ADHESIVE - thermo packed - bar length 1 lm - 20 Pcs 

Article	L mm
PNSP.. 4010 PAS	40

SOL 40P SELF-ADHESIVE

ALUMINIUM COVERED WITH PROTECTIVE FILM IN 77 WOODEN FINISHES (45 on demand)




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the adhesive "SOL 40" in the required finish. 2. Cut the profile to the required length and clean, degrease and dry the surface, checking that the temperature for application is at least 15°. 3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers.

threshold - joint-cover profiles

PROCOVER WOOD is a joint-cover profile in aluminum covered with a very strong film available in 77 wooden finishes (72 on demand). It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

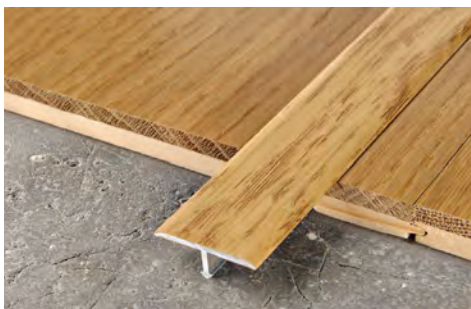

Available in the wooden finishes: 05W - 11W - 28W - 29W - 30W.
The code of the selected colour must be added to the article code.
Es.: PCRA.. 149 (chosen finish light oak) PCRA04W 149.

ALUMINIUM COVERED 77 wooden finishes (72 on demand) thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm
PCRA... 149	14 x 9
PCRA... 269	26 x 9


COLOURS




On request it is possible to realize other finishes of the color range: minimum order 100 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

PROCOVER WOOD

ALUMINIUM COVERED WITH PROTECTIVE FILM IN 77 WOODEN FINISHES (72 on demand)

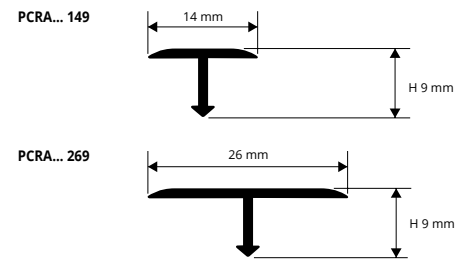

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

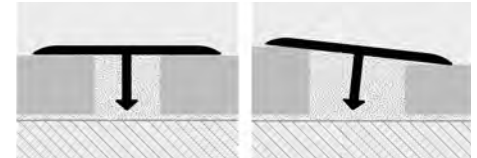

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm - 2/32" - 1/8" side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

threshold - joint-cover profiles

PROCOVER INSERT

VINYL RESIN / BLACK RUBBER


Vinyl resin/rubber profile "U-form" for inserting PROCOVER with PINBFT 45 or PINBFT 40 Proinsert System base.

VINYL RESIN / RUBBER
length 2,7 lm and/or in rolls


Article
PCPCR

PROINSERT BASE 45 and BASE 40 - ALUM. PUNCHED/PERFORED
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
PINBFT 45	45
PINBFT 40	40



PCRA... 149/1499/209/269
+ INS
+ BASE 45/40






PROFIXER LINE SYSTEM

ZERO CURVE INSERTS + NYLON ANCHORS + BASE
77 WOODEN FINISHES (45 on demand)
AND 6 ANODIZED FINISHES (3 on demand)

The **PROFIXER LINE SYSTEM** comprises an assortment of profiles in aluminium with a longitudinal dovetail groove/channel into which the anchors or the tap-down punched/perforated aluminium profile may be inserted for easy and invisible fixing.

The profiles are covered with wooden finishes that are highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Plus six anodized finishes (3 available on demand). The **PROFIXER LINE SYSTEM** profiles are recommended for floors up to 22.5 mm thick.

transition profiles

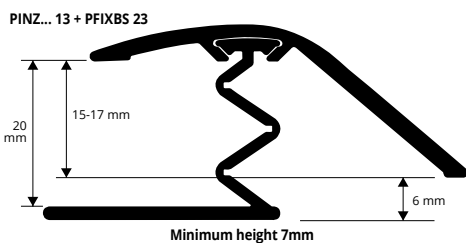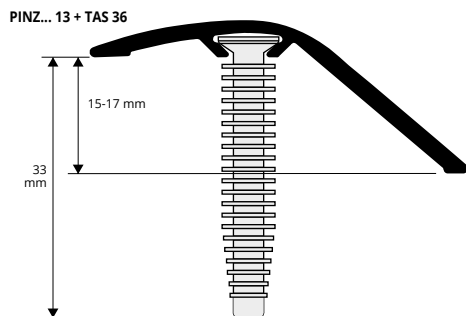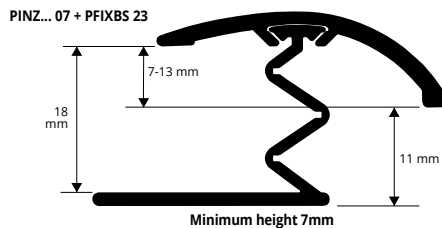

ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
PINZ... 07 (width 40 mm)	7 - 13
PINZ... 13 (width 47 mm)	15 - 17

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.

The code of the selected colour must be added to the article code. E.g.: PINZ... 07 (chosen finish anod. gold) PINZAO 07.

ALUMINIUM COVERED (77 wooden finishes of which 45 on demand)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
PINZ... 07 (width 40 mm)	7 - 13
PINZ... 13 (width 47 mm)	15 - 17

ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 0,90 lm - 20 Pcs
with 5 anchors



Article	H mm
PINZ... 07S (width 40 mm)	7 - 13
PINZ... 13S (width 47 mm)	15 - 17

ALUMINIUM COVERED (77 wooden finishes of which 45 on demand)
thermo packed - bar length 0,90 lm - 20 Pcs
with 5 anchors



Article	H mm
PINZ... 07S (width 40 mm)	7 - 13
PINZ... 13S (width 47 mm)	15 - 17

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.

The code of the selected colour must be added to the article code. E.g.: PINZ... 07 (chosen finish anod. gold) PINZAO 07.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the PROFIXER LINE SYSTEM profile in the required type and finish.
2. Cut the profile to the required length.
- 3a. For the version with screw anchors: make 5 drill holes per linear metre on the floor using a Ø 7mm drill, insert the anchors into the relative groove/channel of the profile and with the help of a rubber/plastic hammer, tap evenly over the surface until the anchor slots into the hole.
- 3b. For the version with tap-down aluminium base: first insert the base into the groove/channel of the "TOP" profile and then fix or glue the base to the floor; alternatively first fix or glue the base to the floor and then insert the 'profile'.
4. Close the profile, applying uniform pressure, either manually or with the help of a rubber hammer.

COLOURS

(For a precise assessment of colours request the wooden finishes sample range)

ANODIZED					
ON DEMAND - MINIMUM QUANTITY 100 PCS					
AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium	AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium
04W - Dark beech	05W - Light oak (strip)	07W - Light cherry (strip)	09W - Red walnut (merbau-apple-walnut)	13W - Indonesian teak	18W - Light zerbano
21W - Oak powder	25W - Bleached fir	29W - White oak	30W - Grey oak	31W - Victoria oak	32W - Pink oak
33W - Sawed oak	34W - Havana oak	35W - Edinburgh oak	36W - American oak	37W - Carvi oak	38W - Queens oak
39W - Grey elm	41W - Ice oak	42W - Grace oak	44W - Honey oak	45W - Marocco oak	46W - Black decapè
48W - Cork oak	49W - Sand oak	53W	54W	55W	65W - Tripoli
73W - Bangkok	75W - Liotard				

On request it is possible to realize other finishes of the color range: minimum order 100 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.


© 2020 All rights reserved by Progress Profiles, Printed in Italy

NYLON 36 SCREW ANCHORS AND TAP-DOWN BASE

SCREW ANCHORS 36 - H 36 mm - pack. 20 Pcs
for SOL 30-40-50 and ZERO CURVE 07-15


Article	H mm
TAS 36	36

minimum order 5 pcs.



PROFIXER TAP-DOWN BASE - ALUM. PUNCHED/PERFORATED
for SOL 30-40-50 and ZERO CURVE 07-15
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
PFIXBS 23	23

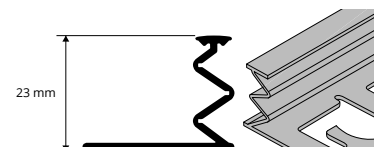


The **PROFIXER LINE SYSTEM** comprises an assortment of profiles in aluminium with a longitudinal dovetail groove/channel into which the anchors or the tap-down punched/perforated aluminium profile may be inserted for easy and invisible fixing.

The profiles are covered with wooden finishes that are highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Plus six anodized finishes (3 available on demand). The **PROFIXER LINE SYSTEM** profiles are recommended for floors up to 22.5 mm thick.


PROFIXER LINE SYSTEM

INSERTS SOL 30 - SOL 40P - SOL 50
+ NYLON ANCHORS + BASE

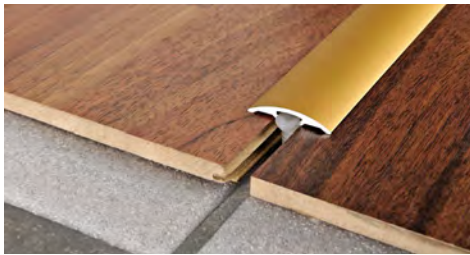

ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm
PINS... 30	30
PNSP... 40P	40


ANODIZED ALUM. (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 0,90 lm - 20 Pcs with 5 anchors 

Article	L mm
PINS... 309S	30

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 100 pcs)

ALUMINIUM COVERED (77 wooden finishes of which 67 on demand)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm
PINS... 30	30

ALUM. COVERED (77 wooden finishes of which 67 on demand)
thermo packed - bar length 0,90 lm - 20 Pcs with 5 anchors 

Article	L mm
PINS... 309S	30

Available in the wooden finishes: 04W - 05W - 07W - 08W - 09W - 10W - 11W - 28W - 29W - 30W.
The code of the selected colour must be added to the article code.
E.g.: PINS...30 (chosen finish dark beech) PINS04W 30.





ALUMINIUM COVERED (77 wooden finishes of which 45 on demand)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm
PNSP... 40 P	40

Available in the colours: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code.
E.g.: PINS... 30 (chosen finish anod. gold) PINSAO 30.

ANODIZED SILVER ALUMINIUM
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm
PINSAA 50	50

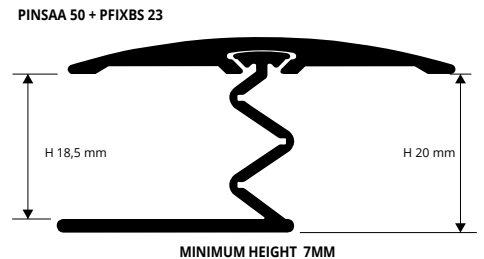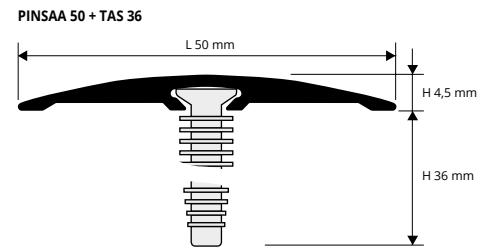


Joints

NYLON 36 SCREW ANCHORS AND TAP-DOWN BASE

SCREW ANCHORS 36 - H 36 mm - pack. 20 Pcs
for SOL 30-40-50 and ZERO CURVE 07-15


Article	H mm
TAS 36	36

minimum order 5 pcs.




PROFIXER TAP-DOWN BASE - ALUM. PUNCHED/PERFORATED
for SOL 30-40-50 and ZERO CURVE 07-15

Article	H mm
PFIKBS 23	23

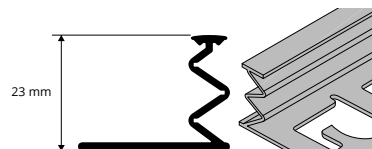

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

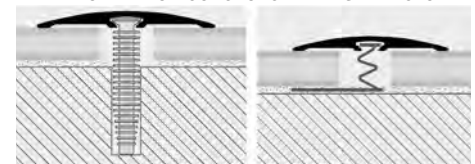

1. Choose the PROFIXER LINE SYSTEM profile in the required type and finish. 2. Cut the profile to the required length.

For the version with screw anchors:

3. Make 5 drill holes per linear metre on the floor using a Ø 7mm drill, insert the anchors into the relative groove/channel of the profile and with the help of a rubber/plastic hammer, tap evenly over the surface until the anchor slots into the hole.

For the version with tap-down aluminium base:


3. First insert the base into the groove/channel of the "TOP" profile and then fix or glue the base to the floor; alternatively first fix or glue the base to the floor and then insert the "profile". 4. Close the profile, applying uniform pressure, either manually or with the help of a rubber hammer.

PROSCREW 34

ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM

universal joints with screw

PSWC... 34




BASE + TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM + SCREWS AND SCREW ANCHORS thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm		
PSWCAA 34	34		
PSWCAO 34	34		*
PSWCSB 34	34		*
PSWCAB 34	34		*
PSWCCH 34	34		*

To order the following items (top and base), see page 247


EXAMPLES OF LAYING

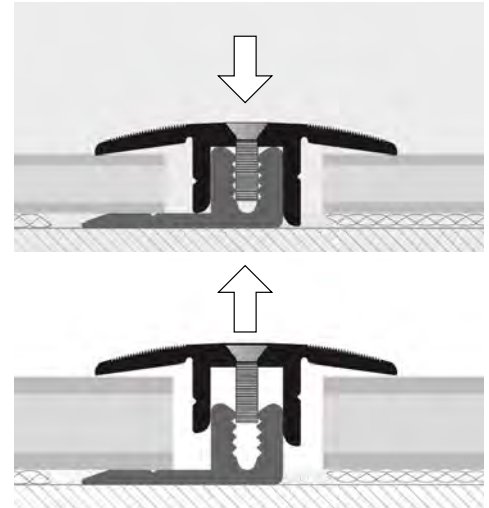

PROSCREW 44

ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM

PSWC... 44




BASE + TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM + SCREWS AND SCREW ANCHORS thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm		
PSWCAA 44	44		
PSWCAO 44	44		*
PSWCSB 44	44		*
PSWCAB 44	44		*
PSWCCH 44	44		*

To order the following items (top and base), see page 247


EXAMPLES OF LAYING

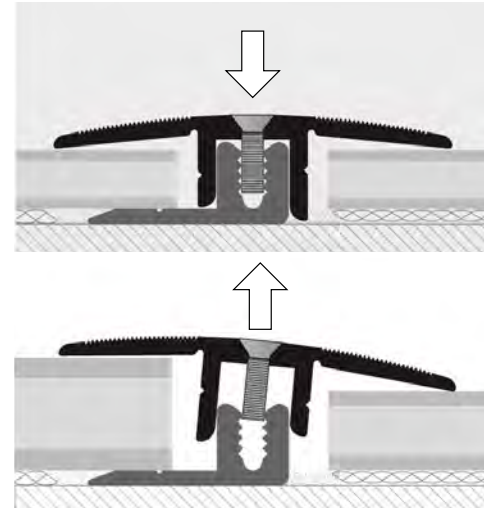

PROSCREW 33

ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM

PSWC... 33

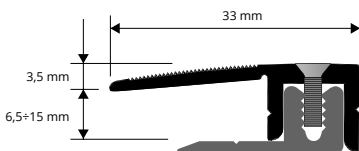


BASE + TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM + SCREWS AND SCREW ANCHORS thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm		
PSWCAA 33	33		
PSWCAO 33	33		*
PSWCSB 33	33		*
PSWCAB 33	33		*
PSWCCH 33	33		*

To order the following items (top and base), see page 247

EXAMPLES OF LAYING

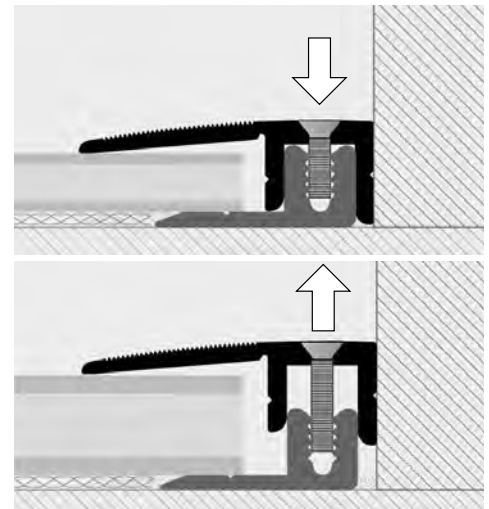

COLOURS



ON DEMAND (minimum quantity 100 pcs)



* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed.

© 2020 All rights reserved by Progress Profiles, Printed in Italy




BASE + TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM + SCREWS AND SCREW ANCHORS thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm		
PSWCAA 50	50		
PSWCAO 50	50		*
PSWCSB 50	50		*
PSWCAB 50	50		*
PSWCCH 50	50		*

To order the following items (top and base), see page 247


EXAMPLES OF LAYING

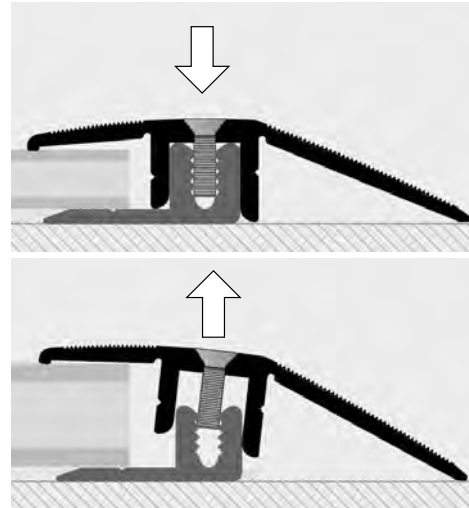

PROSCREW 50

ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM

PSWC... 50

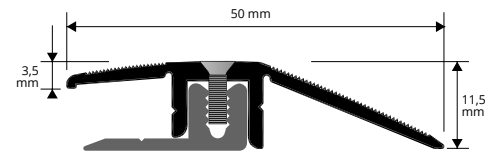

universal joints with screw

COLOURS



ON DEMAND (minimum quantity 100 pcs)



SCREWS to fix all perforated versions

NICKEL PLATED

WHITE NICKEL-PLATED FLATHEAD SCREW UNI 7688 3X10

pack. 14 Pcs


Article	Ø mm	H mm	
VIZBP 310	05	10	

WHITE NICKEL-PLATED FLATHEAD SCREW UNI 7688 3X16


pack. 14 Pcs

Article	Ø mm	H mm	
VIZBP 316	05	16	

VIZBP 310



VIZBP 316




KIT PROSCREW



KIT PROSCREW

Article	
KIT PROSCREW	KIT consists of 14 screws VIZBP 310, 14 screws VIZBP 316, 15 screws + screw anchors VINPT 325

KIT PROSCREW

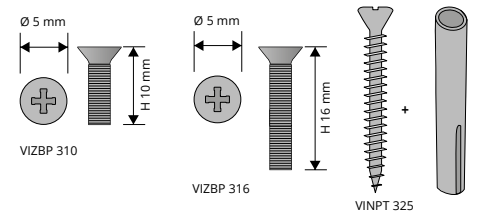

EXAMPLES OF LAYING

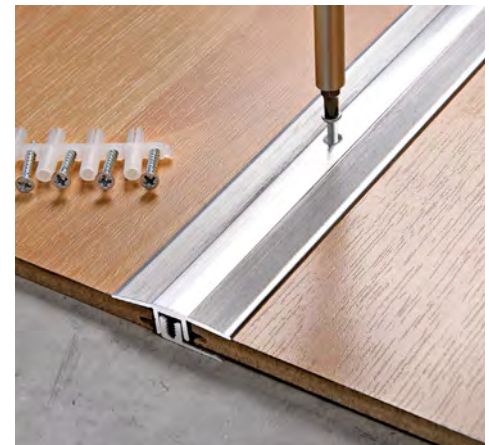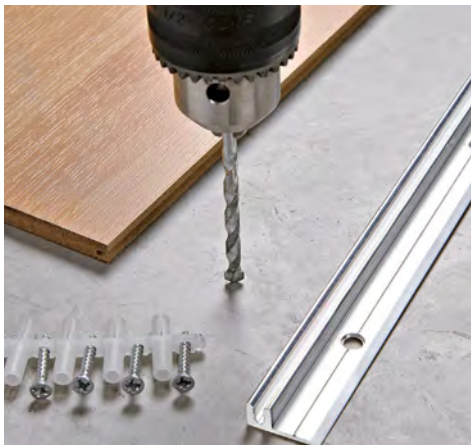


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed.

SKIRTING 7016

FOAMED VINYL RESIN
77 WOODEN FINISHES (53 on demand),
AND 3 IN SOLID COLOUR

SKIRTING 7016 is a vinyl resin foam profile with a height of 70 mm, available in 77 wooden finishes (53 on demand) and 3 finishes in solid colour that could be matched with the PROINSERT SYSTEM's profiles. The profile, suitable like skirting for floating and glued wood floor, laminate and LVT, could be laid with suitable adhesive, nails, screws or using the pre-punched support fixed to the wall with screws every 50 cm. Its special section, that allows to cover a 16 mm perimetral joint, and wide range of finishes make it a very requested, elegant and economic skirting board profile.

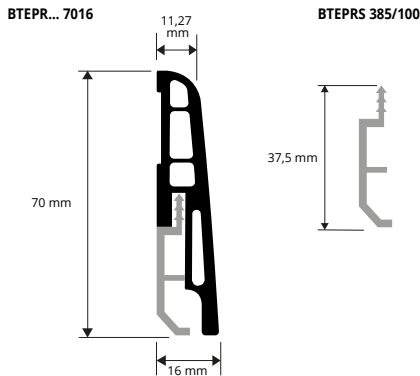

FOAMED VINYL RESIN (wooden finishes, black, white and silver)
bar length 2,5 lm - pack. 20 Pcs - 50 lm

Article	H mm
BTEPR... 7016	70

SUPPORT / FIXING CLIP - PLASTIC
support length 5 cm - pack. 100 Pcs

Article	H mm
BTEPRS 385/100	37,5

Order the support and choose the skirting in the desired finish.

IN/EXTERNAL CORNERS and END CAPS KIT
(wooden finishes - black - white and silver)

Article	H mm
KIT BTEPR ...7016I (internal kit)	70
KIT BTEPR ...7016E (external kit)	70

Available in the wooden finishes: 04W-05W-13W-18W-21W-25W-29W-30W-31W-32W-33W-34W-35W-36W-37W-38W-39W-41W-42W-44W-45W-53W-54W-55W-B-N-AA.
The code of the selected colour must be added to the article code.
E.g.: BTEPR... 7016 (chosen finish Dark beech) BTEPR04W 7016



On request it is possible to realize other finishes of the color range: minimum order 400 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose the "SKIRTING 7016" in the required the colour. 2. Lay the skirting using quick-setting acrylic silicone, mastic or bostik, suitable for gluing flexible PVC onto mortar-plaster-accessorised walls, etc. or fix with screws/nails.

SKIRTING 7011

FOAMED VINYL RESIN
77 WOODEN FINISHES (50 on demand),
AND 3 IN SOLID COLOUR

SKIRTING 7011 is a vinyl resin foam profile with a height of 70 mm x 10,5 mm, available in 77 wooden finishes (50 on demand) and 3 finishes standard colours that could be matched with the PROINSERT SYSTEM's profiles. Suitable as skirting/baseboard for floating and glued wood floor, laminate and LVT, could be laid with suitable adhesive, or else with nails.



FOAMED VINYL RESIN (wooden finishes, black, white and silver)
bar length 2,5 lm - pack. 20 Pcs - 50 lm

Article	H mm
BTEPR... 7011	70

Available in the wooden finishes: 05W-07W-09W-18W-21W-29W-30W-31W-32W-34W-35W-37W-40W-41W-42W-43W-44W-46W-47W-48W-49W-65W-73W-75W-69W-71W-72W-B-N-AA.
The code of the selected colour must be added to the article code.
E.g.: BTEPR... 7011 (chosen finish Light oak) BTEPR05W 7011

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "SKIRTING 7011" in the required the colour. 2. Lay the skirting using quick-setting suitable adhesive for gluing flexible PVC onto mortar-plaster-accessorised walls, etc. or fix with nails.

COLOURS


(For a precise assessment of colours request the wooden finishes sample range)

On request it is possible to realize other finishes of the color range: minimum order 400 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

IN/EXTERNAL CORNERS and END CAPS KIT


FOAMED VINYL RESIN 77 WOODEN FINISHES (50 on demand), AND 3 IN SOLID COLOUR

INTERNAL CORNER KIT



KIT BTEPR ... 7011I

EXTERNAL CORNER KIT



KIT BTEPR ... 7011E

IN/EXTERNAL CORNERS and END CAPS KIT
(wooden finishes - black - white and silver)

Article	H mm
KIT BTEPR ...7011I (internal kit)	70
KIT BTEPR ...7011E (external kit)	70

The kits are composed respectively by 1 inside corner + two end caps and 1 outside corner + two end caps.

Available in the wooden finishes: 05W-07W-09W-18W-21W-29W-30W-31W-32W-34W-35W-37W-40W-41W-42W-43W-44W-46W-47W-48W-49W-65W-73W-75W-69W-71W-72W-B-N-AA.
The code of the selected colour must be added to the article code.
E.g.: KIT BTEPR ...7011I (chosen finish Light oak) KIT BTEPR04W 7011I


PROSEAL WOOD is a new inner connector square suitable for creating a concave skirting for wood / rolled-melamine floating wood / ceramic / marble tiles to reduce the floor / covering detachment. The particular material used allows to resist to the main chemical agents ant to small breakages. **PROSEAL WOOD**'s dimensions allow the necessary expansion of the outer joint. Ideal for public (schools, rest homes, recreational area) and private places. In expanded PVC , in 2 wooden finishes 4 in matching colours to combine with various wooden finishes. Easy to lay with fixing silicone.

PROSEAL WOOD

EXPANDED PVC 2 WOODEN FINISHES AND 4 PLAIN COLOURS



PSAW... 20



transition profiles

EXPANDED PVC - 2 WOODEN FINISHES

bar length 2,5 lm - pack. 40 Pcs - 100 lm

Article	L x H mm
PSAW... 20	21 x 21

Available in the wooden finishes: 05W - 10W .

The code of the selected colour must be added to the article code. E.g.: PSAW...20 (chosen colour wengè) PSAWN 20.

COLOURS



The shade of the wooden finish in rigid expanded vinyl resin/ PVC results slightly different from the film usually applied on the profiles in aluminum.

EXPANDED PVC - 4 COLOURS


bar length 2,5 lm - pack. 40 Pcs - 100 lm

Article	L x H mm
PSAW... 20	21 x 21


Available in the colours: B - GC - GS - N.

The code of the selected colour must be added to the article code. E.g.: PSAW...20 (chosen colour black) PSAWN 20.

COLOURS

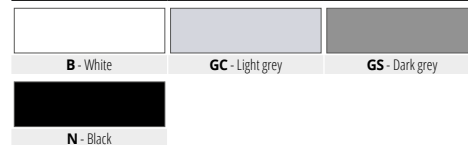

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

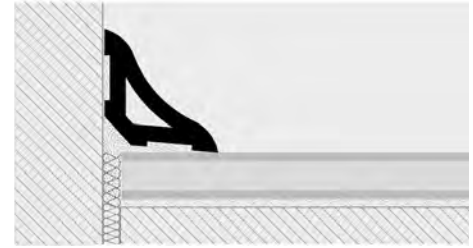

1. Choose "PROSEAL WOOD" color and/or wood finish required.
2. The laying must be carried out using fast fixing acrylic silicone, mastic, bostik suitable for gluing PVC with mortar - plaster - wall units etc., or fix using screws/nails.


PROANGLE WOOD is a new inner connector square suitable for creating a convex skirting for wood / rolled-melamine floating wood / ceramic / marble floor to reduce the floor / covering detachment. The particular material used allows to resist to the main chemical agents and to small breakages. **PROANGLE WOOD**'s dimensions allow the necessary expansion of the outer joint. Ideal for public (schools, rest homes, recreational area) and private places. In expanded PVC , in 2 wooden finishes 4 in matching colors to combine with various wooden finishes. Easy to lay with fixing silicone.

PROANGLE WOOD

EXPANDED PVC 2 WOODEN FINISHES AND 4 PLAIN COLOURS



PGAW... 15



transition profiles

EXPANDED RIGID PVC - 2 WOODEN FINISHES

bar length 2,5 lm - pack. 40 Pcs - 100 lm

Article	L x H mm
PGAW... 15	15 x 15

Available in the wooden finishes: 05W - 10W .

The code of the selected colour must be added to the article code. E.g.: PSAW...20 (chosen colour wengè) PSAWN 20.

COLOURS



The shade of the wooden finish in rigid expanded vinyl resin/ PVC results slightly different from the film usually applied on the profiles in aluminum.

EXPANDED RIGID - 4 COLOURS


bar length 2,5 lm - pack. 40 Pcs - 100 lm

Article	L x H mm
PGAW... 15	15 x 15

Available in the colours: B - GC - GS - N.

The code of the selected colour must be added to the article code. E.g.: PSAW...20 (chosen colour black) PSAWN 20.

COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




1. Choose "PROANGLE WOOD" color and/or wood finish required.
2. The laying must be carried out using fast fixing acrylic silicone, mastic, bostik, suitable for gluing PVC with mortar-plaster-wall units etc., or fix using screws/nails.

SKIRTING

EXPANDED VINYL RESIN - 12 FINISHES
(4 PLAIN COLOURS AND 8 WOODEN FINISHES)

SKIRTING in PVC foam height 70 mm in 12 finishes: 4 in semi-matt black-grey-white and 8 wooden finishes to be matched with the PROINSERT SYSTEM profiles for floating laminated wood floors and traditional parquet floors. Laying is done by gluing (acetic silicone - acrylic - mastic) or using screws or nails. Attractive, strong, hardwearing and economic, it is easy to lay and ideal for many public premises (hospitals, schools, gymnasiums, rest homes and creative areas) and private environments. Easy to match with many wood species.



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose the "SKIRTING" in the required colour. 2. Lay the skirting using quick-setting acrylic silicone, mastic or bostik, suitable for gluing flexible PVC onto mortar-plaster-accessorised walls, etc. or fix with screws/nails.



EXPANDED RIGID VINYL RESIN (black - light and dark grey - white)
bar length 2 lm - pack. 60 Pcs - 120 lm

Article	H mm		
BTPR... 70	70		

EXPANDED RIGID VINYL RESIN (11 wooden finishes)
bar length 2 lm - pack. 60 Pcs - 120 lm

Article	H mm		
BTPR... 70	70		

Available in the colours: B - GC - GS - N - 04W - 05W - 06W - 07W - 08W - 09W - 10W - M.
The code of the selected colour must be added to the article code. E.g.: BTPR... 70 (chosen colour black) BTPRN 70.

COLOURS


B - White	GC - Light grey	GS - Dark grey	N - Black	04W - Dark beech	05W - Light oak (strip)
06W - Dark oak (Walnut)	07W - Light cherry (strip)	08W - Dark cherry (board)	09W - Red walnut (Merbau-Apple-Walnut)	10W - Wengé (Panga-Panga - Wengé)	M - Mahogany

The shade of the wooden finish in rigid expanded vinyl resin/pvc results slightly different from the film usually applied on the profiles in aluminum.


ANGLE BAR

EXPANDED VINYL RESIN - 12 FINISHES
(4 PLAIN COLOURS AND 8 WOODEN FINISHES)

ANGLE BAR produced in expanded PVC in 12 finishes: 4 colours in semi-matt, black-grey-white and 8 wooden finishes used to protect angles. Laying is done by gluing (acetic silicone - acrylic - mastic) or using screws or nails. Attractive, strong, hardwearing and economic, it is easy to lay and ideal for many public premises (hospitals, schools, gymnasiums, rest homes and creative areas) and private environments. Easy to match with many wood species.

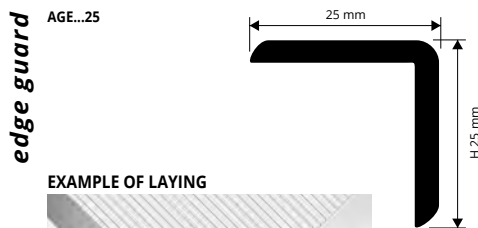

EXAMPLE OF LAYING



EXPANDED RIGID VINYL RESIN (black - light and dark grey - white)
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm		
AGE... 25	25 x 25		

EXPANDED RIGID VINYL RESIN (8 wooden finishes)
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm		
AGE... 25	25 x 25		

Available in the colours: B - GC - GS - N - 04W - 05W - 06W - 07W - 08W - 09W - 10W - M.
The code of the selected colour must be added to the article code. E.g.: AGE... 25 (chosen colour black) AGEN 25.

The shade of the wooden finish in rigid expanded vinyl resin/pvc results slightly different from the film usually applied on the profiles in aluminum.

LVT PROFILES - SOL 30P

ALUMINIUM 6 ANODIZED FINISHES (3 on demand)
AND 77 WOODEN FINISHES (52 on demand)


ALUMINIUM TOP 77 wooden fin. (52 on demand), 6 anodized fin. (3 on demand)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm		
PNSP... 3046 (anod. top)	30		
PNSP... 3046 (wood top)	30		

Available in the anodized finishes: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 100 pcs) 05W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 33W - 34W - 36W - 37W - 38W - 39W - 41W - 42W - 43W - 44W - 45W - 46W - 47W - 48W - 49W. The code of the selected colour must be added to the article code. E.g.: PNSP... 3046 (chosen finish anod. gold) PNSPAO 3046.

ALUMINIUM TOP (anod. silver)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm		
PNSPAA 4046 (top)	40		



BASE (vinyl resin/PVC) - bar length 2,7 lm

Article	L mm		
PINBFT 3646 (base vinyl resin/PVC)	36		



LVT PROFILES - ZERO CURVE

ALUMINIUM 6 ANODIZED FINISHES (3 on demand)
AND 77 WOODEN FINISHES (52 on demand)

ALUMINIUM TOP 77 wooden fin. (52 on demand), 6 anodized fin. (3 on demand)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm		
PINZ... 2646 (anod. top)	26		
PINZ... 2646 (wood top)	26		


ALUMINIUM TOP (anod. silver)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm		
PINZAA 3246 (top)	32		



BASE (vinyl resin/PVC) - bar length 2,7 lm

Article	L mm		
PINBFT 2346 (base vinyl resin/PVC)	23		



LVT PROFILES - TERMINAL PIN

ALUMINIUM 6 ANODIZED FINISHES (3 on demand)
AND 77 WOODEN FINISHES (52 on demand)

ALUMINIUM TOP 77 wooden fin. (52 on demand), 6 anodized fin. (3 on demand)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm		
PINTP... 1946 (anod. top)	19		
PINTP... 1946 (wood top)	19		


ALUMINIUM TOP (anod. silver)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm		
PINTPAA 2546 (top)	25		



BASE (vinyl resin/PVC) - bar length 2,7 lm

Article	L mm		
PINBFT 2346 (base vinyl resin/PVC)	23		



SOL 30 (only top)

77 WOODEN-FINISHES (67 on demand)
6 ANODIZED FINISHES (3 on demand)

ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length **2,7 lm** - pack. **40 Pcs - 108 lm**


Article	L mm	H mm	Weight
PINS... 30	30		

Available in the anodized finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs), 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W.
The code of the selected colour must be added to the article code. E.g.: PINS... 30 (chosen finish anod. gold) PINSAO 30.

ALUMINIUM COVERED (77 wooden finishes f which 67 on demand)
thermo packed - bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	L mm	H mm	Weight
PINS... 30	30		

PINS... 30



TERMINAL PIN (only top)

77 WOODEN-FINISHES (45 on demand)
6 ANODIZED FINISHES (3 on demand)

ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length **2,7 lm** - pack. **40 Pcs - 108 lm**


Article	H mm	Weight
PINTP... 10	10	

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 100 pcs) 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PINTP... 10 (chosen finish anod. gold) PINTPAO 10.

ALUMINIUM COVERED (77 wooden finishes f which 45 on demand)
thermo packed - bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	Weight
PINTP... 10	10	

PINTP... 10

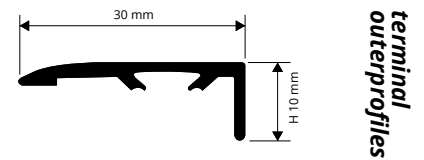

ZERO CURVE 07-09-13-15 (only top)

77 WOODEN-FINISHES (45 on demand)
6 ANODIZED FINISHES (3 on demand)

ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length **2,7 lm**
pack. **20 Pcs - 54 lm (H 7 - H 9 mm - 108 lm)**


Article	H mm	Weight
PINZ... 07	7 / 11	
PINZ... 09	11 / 14	
PINZ... 13	15 / 17	
PINZ... 15	19 / 22	

Available in the anodized finishes: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 100 pcs) 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PINZ... 07 (chosen finish anod. gold) PINZAO 07.


ALUMINIUM COVERED (77 wooden finishes f which 45 on demand)
thermo packed - bar length **2,7 lm**
pack. **20 Pcs - 54 lm (H 7 - H 9 mm - 108 lm)**

Article	H mm	Weight
PINZ... 07	7 / 11	
PINZ... 09	11 / 14	
PINZ... 13	15 / 19	
PINZ... 15	19 / 22	


PINZ... 07




PINZ... 09



PINZ... 13



PINZ... 15



transition profiles

STYLE STAIR (only top)

77 WOODEN-FINISHES (56 on demand)
6 ANODIZED FINISHES (3 on demand)

ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length **2,7 lm** - pack. **20 Pcs - 54 lm**


Article	L x H mm	Weight
PINY...	27,5 x 25	

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 100 pcs) 05W - 07W - 09W - 18W - 21W - 29W - 30W - 31W - 32W - 34W - 35W - 37W - 41W - 42W - 44W - 46W - 48W - 49W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PINY... (chosen finish anod. gold) PINYAO.

ALUMINIUM COVERED (77 wooden finishes f which 56 on demand)
thermo packed - bar length **2,7 lm** - pack. **10 Pcs - 27 lm**

Article	L x H mm	Weight
PINY...	27,5 x 25	

PINY...



STYLE STAIR L (only top)

77 WOODEN-FINISHES (53 on demand)
6 ANODIZED FINISHES (3 on demand)

ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length **2,7 lm** - pack. **20 Pcs - 54 lm**


Article	L x H mm	Weight
PINYL...	45 x 23,8	

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 100 pcs), 04W - 05W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 53W - 54W - 55W.
The code of the selected colour must be added to the article code. E.g.: PINYL... (chosen finish anod. gold) PINYAO.

ALUMINIUM COVERED (77 wooden finishes f which 53 on demand)
thermo packed - bar length **2,7 lm** - pack. **10 Pcs - 27 lm**

Article	L x H mm	Weight
PINYL...	45 x 23,8	

PINYL...

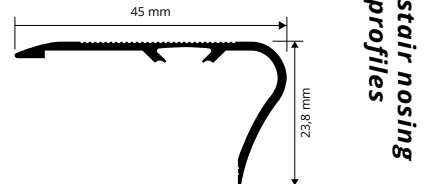

SOL 40 P (only top)

77 WOODEN-FINISHES (45 on demand)
6 ANODIZED FINISHES (3 on demand)

ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length **2,7 lm** - pack. **40 Pcs - 108 lm**


Article	L mm	H mm	Weight
PNSP... 40P	40		

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 100 pcs) 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PNSP... 40P (chosen finish anod. gold) PNSPAO 40P.

ALUMINIUM COVERED (77 wooden finishes f which 45 on demand)
thermo packed - bar length **2,7 lm** - pack. **10 Pcs - 27 lm**


Article	L mm	H mm	Weight
PNSP... 40P	40		

PNSP... 40P

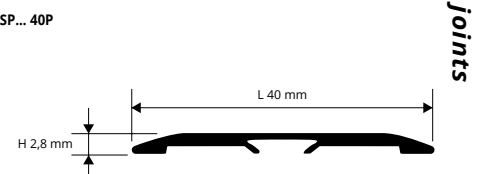

INTERCHANGEABLE INSERT


RIGID IMPACT-RESISTANT
NO-TOXIC VINYL RESIN

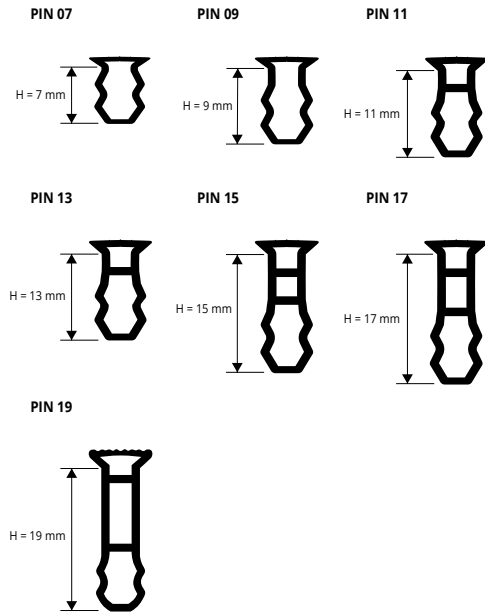

RIGID IMPACT-RESISTANT NO-TOXIC VINYL RESIN
bar length 2,7 lm - pack. 20 Pcs - 54 LM

Article	H mm		
PIN 07	7		
PIN 09	9		
PIN 11	11		
PIN 13	13		
PIN 15	15		
PIN 17	17		
PIN 19	19		

FOR SOL 40 P AND TERMINAL PIN

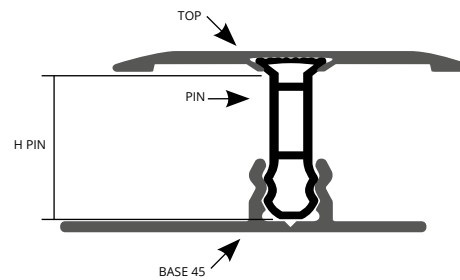

RIGID IMPACT-RESISTANT NO-TOXIC VINYL RESIN
bar length 2,7 lm - pack. 20 Pcs - 54 LM


Article	H mm		
PIN 09	9		
PIN 11	11		
PIN 13	13		
PIN 15	15		
PIN 17	17		
PIN 19	19		

FOR ZERO CURVE, STYLE STAIR

For a correct assembly, see the drawings of the complete products in the previous pages

PROINSERT BASE 45 AND BASE 40

NATURAL ALUMINIUM

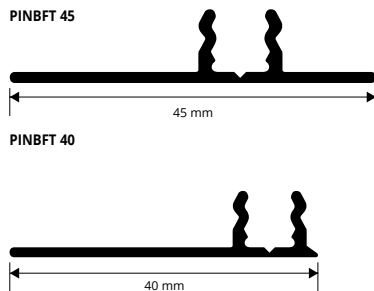

ALUM. PUNCHED/PERFORED FOR SOL 30-40-50 AND ZERO CURVE
bar length 2,7 lm - pack. 20 Pcs - 54 lm



Article	width mm		
PINBFT 45	45		
PINBFT 40	40		

SCREWS and SCREW ANCHORS to fix all perforated version

NICKEL-PLATED

NICKEL - PLATED FLATHEAD SCREWS + SCREW ANCHORS
pack. 1.000 Pcs

Article	Ø mm	length mm	
VINIPT 325	03	25	

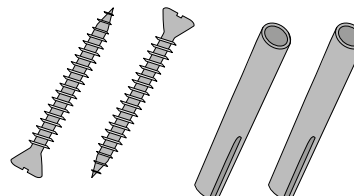


KIT PROSCREW

KIT PROSCREW

Article	
KIT PROSCREW	Kit consists of 14 screws VIZBP 310, 14 screws VIZBP 316, 15 screws + screw anchors VINIPT 325

KIT PROSCREW

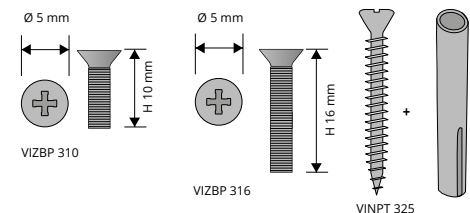




TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm		
PSW... 34	34		


PSW... 34

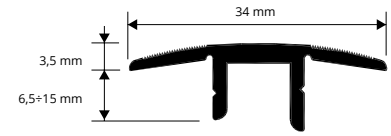

TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm		
PSW... 44	44		


PSW... 44



TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm		
PSW... 33	33		


PSW... 33

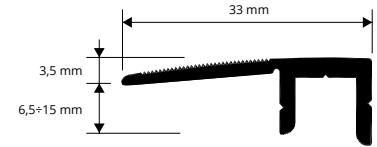

TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm		
PSW... 50	50		

PSW... 50

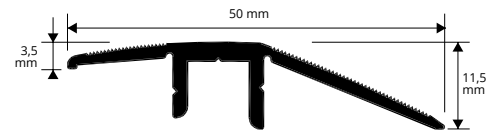

COLOURS



ON DEMAND (minimum quantity 100 pcs)



PROSCREW 50

GOLD, SILVER, BRONZE, SAND AND CHAMPAGNE ANODIZED ALUMINIUM


PROSCREW BASE 07

NATURAL ALUMINIUM

BASE IN NATURAL ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm		
PSWBAN 07F	22,6		

PSWBAN 07F



SCREWS to fix all perforated versions


WHITE NICKEL-PLATED FLATHEAD SCREW UNI 7688 3X10
pack. 14 Pcs

Article	Ø mm	length mm	
VIZBP 310	05	10	


WHITE NICKEL-PLATED FLATHEAD SCREW UNI 7688 3X16
pack. 14 Pcs


Article	Ø mm	length mm	
VIZBP 316	05	16	

VIZBP 310





VIZBP 316



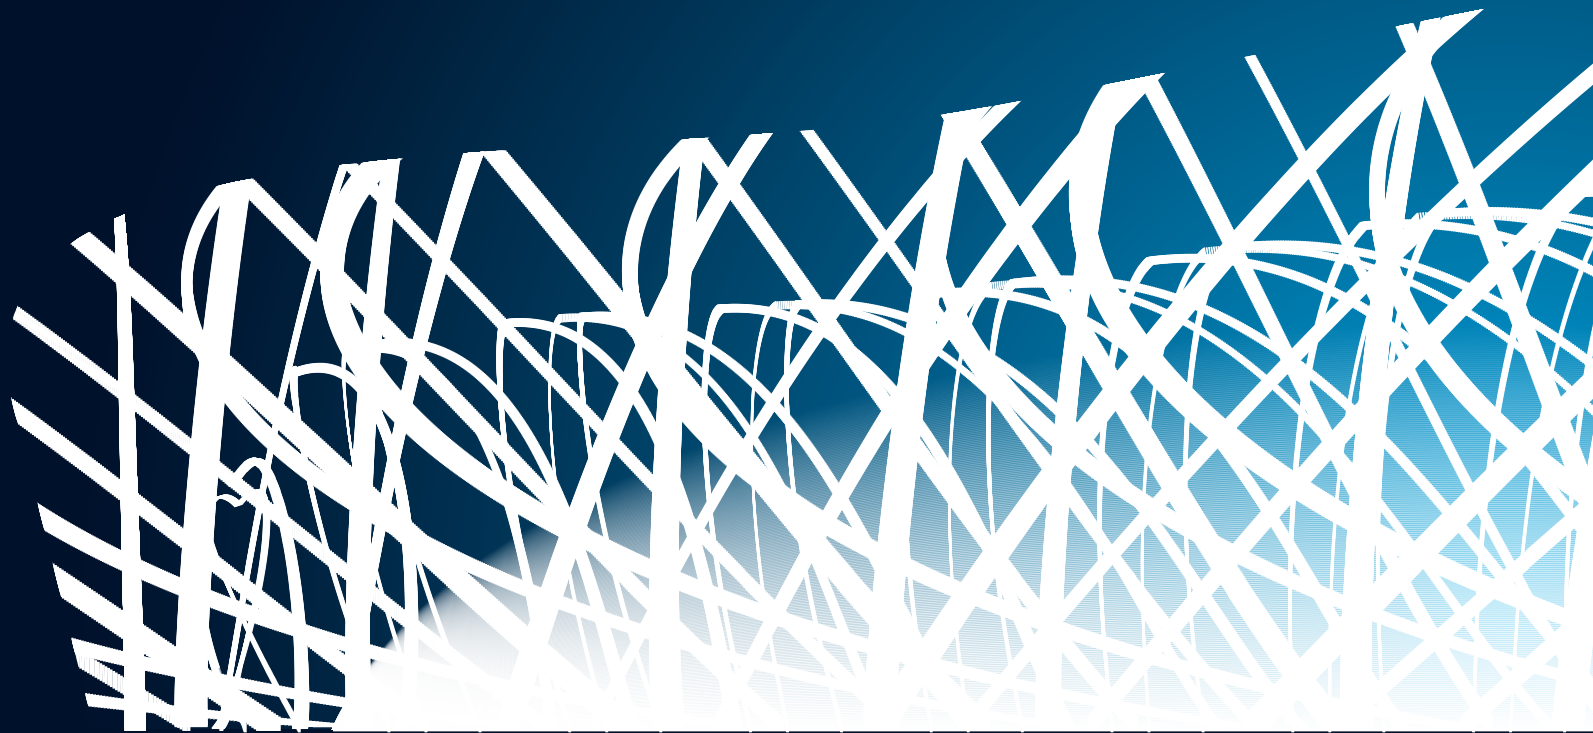


DO IT YOUR SELF PROFILES

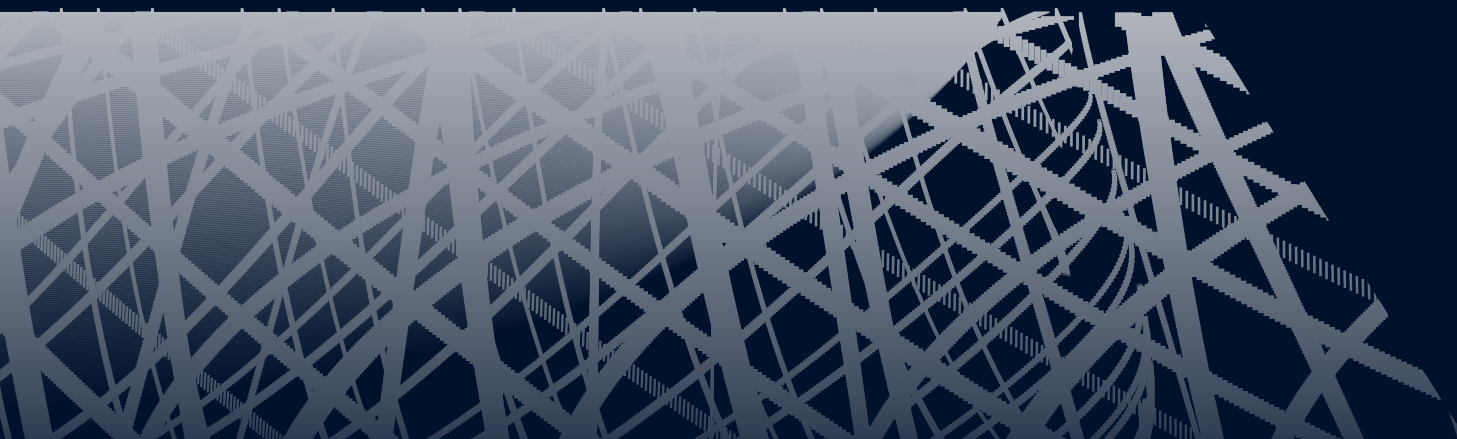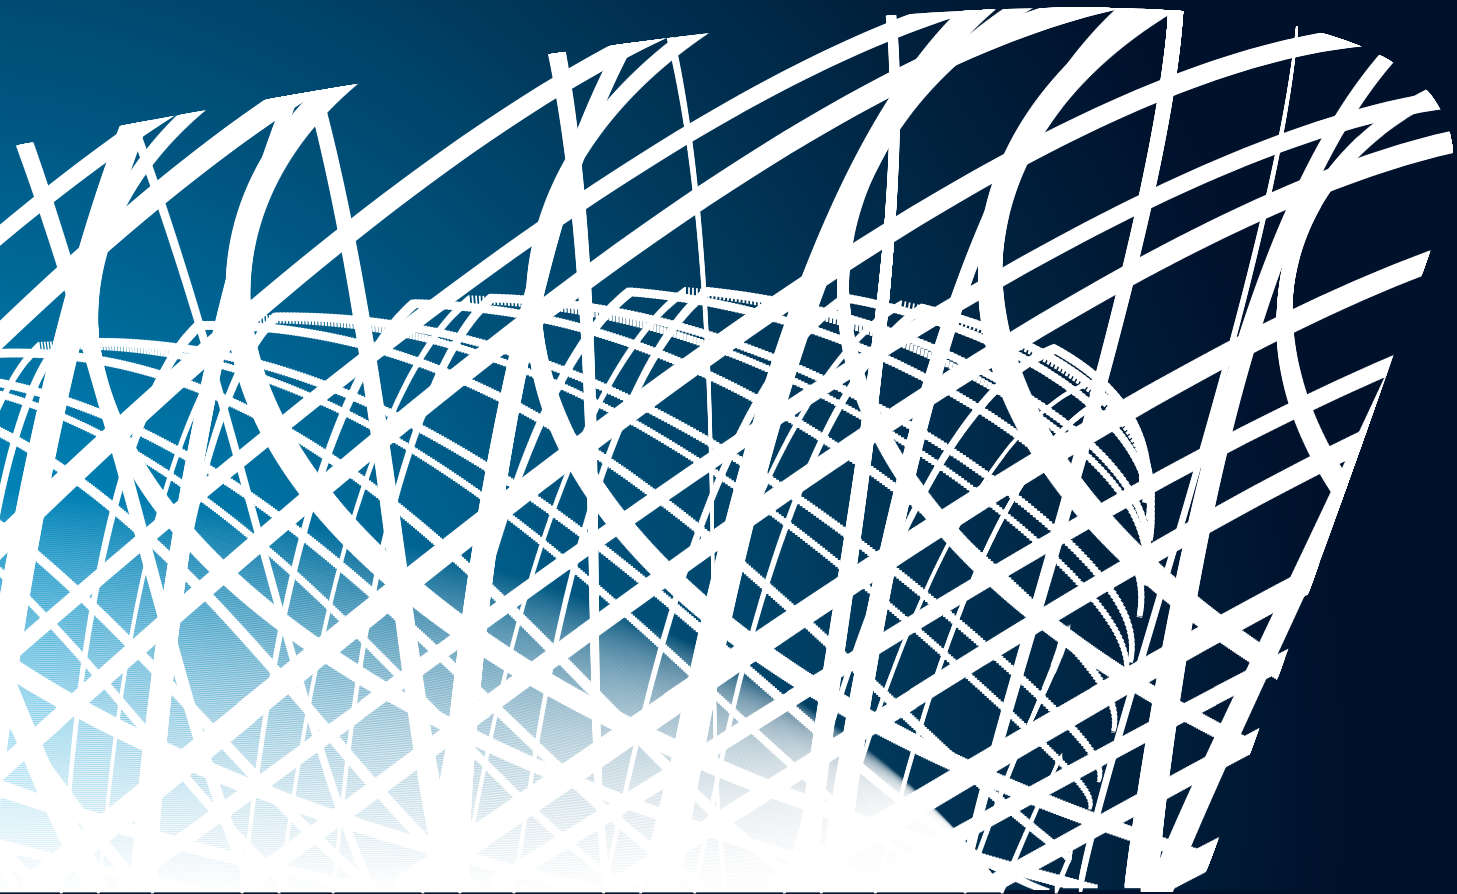

CORNER EQUAL SIDES

POLISHED STAINLESS STEEL 1.4016

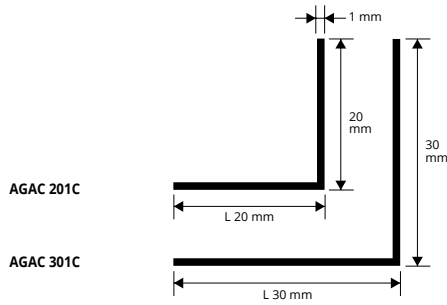

POLISHED STAINLESS STEEL 1.4016 with protective film
thick 1 mm - bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
AGAC 201C	20 x 20		
AGAC 301C	30 x 30		


On demand are available 1 lm bars.

COLOURS



CORNER EQUAL SIDES

POLISHED BRASS

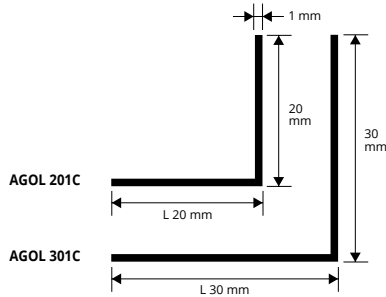


POLISHED BRASS with protective film
thick 1 mm - bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
AGOL 201C	20 x 20		*
AGOL 301C	30 x 30		*


On demand are available 1 lm bars.

COLOURS



CORNER EQUAL SIDES

ANODIZED GOLD AND SILVER, POLISHED CHROME AND WHITE VARNISHED ALUMINIUM

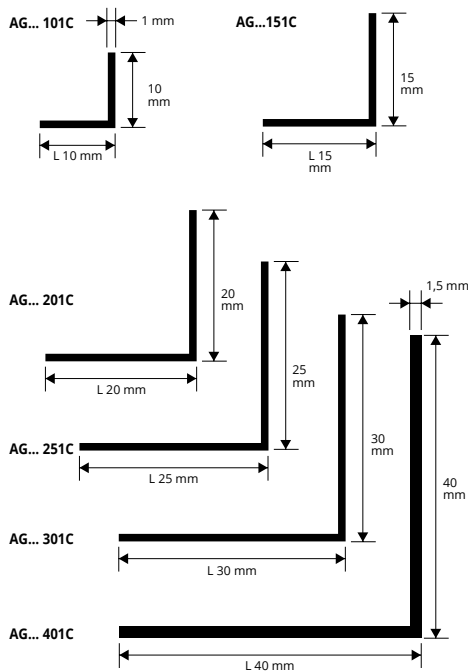

ANODIZED GOLD and SILVER ALUMINIUM thermo packed
bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
AG... 101C	10 x 10		
AG... 151C	15 x 15		
AG... 201C	20 x 20		
AG... 251C	25 x 25		
AG... 301C	30 x 30		
AG... 401C	40 x 40		

Available in the finishes: AO - AA.
The code of the selected colour must be added to the article code.
E.g.: AG... 101C (chosen finish anodized gold) AGAO 101C.

POLISHED CHROME ALUMINIUM thermo packed
bar length 2 lm - pack. 10 Pcs - 20 lm


Article	L x H mm		
AGBC 101C	10 x 10		
AGBC 151C	15 x 15		
AGBC 201C	20 x 20		
AGBC 251C	25 x 25		
AGBC 301C	30 x 30		
AGBC 401C	40 x 40		

WHITE VARNISHED ALUMINIUM thermo packed
bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
AGB 101C	10 x 10		
AGB 151C	15 x 15		
AGB 201C	20 x 20		
AGB 251C	25 x 25		
AGB 301C	30 x 30		
AGB 401C	40 x 40		

On demand are available 1 lm bars.

COLOURS

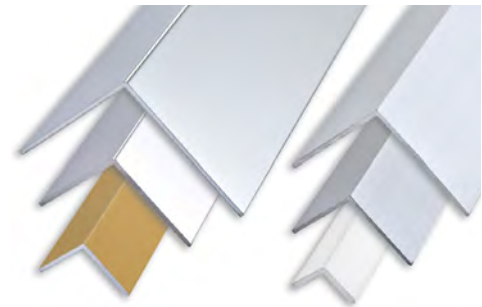

© 2020 All rights reserved by Progress Profiles, Printed in Italy

CORNER EQUAL SIDES

NON - TOXIC VINYL RESIN



NON - TOXIC VINYL RESIN

bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
AGP10...C	10 x 10		
AGP15...C	15 x 15		
AGP20...C	20 x 20		
AGP25...C	25 x 25		

Available in the colours: B-N.

The code of the selected colour must be added to the article code.
E.g.: AGP10...C (colour white) AGP10BC.


On demand are available 1 lm bars.

COLOURS

B - White	N - Black

AGP10...C

1,2 / 1,5 mm



AGP15...C

15 mm

20 mm

25 mm

L 15 mm

L 20 mm

L 25 mm

L 10 mm

L 15 mm


L 20 mm

L 25 mm

L 25 mm

CORNER "L-FORM"

ANODIZED GOLD AND SILVER, POLISHED CHROME AND WHITE VARNISHED ALUMINIUM

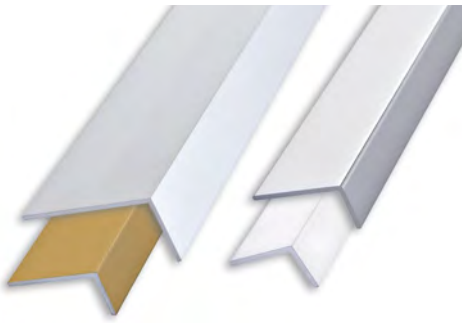

ANODIZED GOLD AND SILVER ALUMINIUM thermo packed

bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
AL... 1510C	15 x 10		
AL... 1020C	20 x 10		
AL... 3015C	30 x 15		

Available in the finishes: AO - AA.

The code of the selected colour must be added to the article code.
E.g.: AL... 1510C (chosen finish anodized gold) ALAO1510C.

POLISHED CHROME ALUMINIUM thermo packed

bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
ALBC 1510C	15 x 10		
ALBC 1020C	20 x 10		
ALBC 3015C	30 x 15		

WHITE VARNISHED ALUMINIUM thermo packed


bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
ALB 1510C	15 x 10		
ALB 3015C	30 x 15		

On demand are available 1 lm bars.


AL... 1510C

1 mm




AL... 1020C

10 mm



AL... 3015C

15 mm



COLOURS



AO - Anodized gold alum.

AA - Anodized silver alum.


BC - Polished chrome alum.



B - White varnished alum.

CORNER "L-FORM"

NON - TOXIC VINYL RESIN

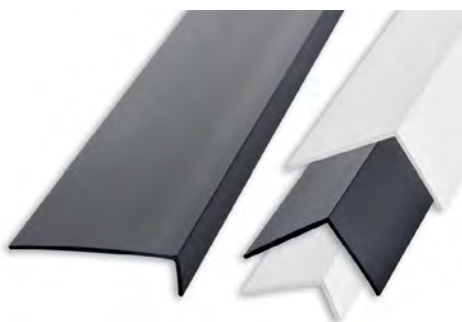

NON TOXIC VINYL RESIN

bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
ALP20...C	20 x 10		
ALP25...C	25 x 20		
ALP30...C	30 x 20		
ALP40...C	40 x 10		

Available in the colours: B-N.

The code of the selected colour must be added to the article code.
E.g.: ALP20...C (colour white) ALP20BC.


On demand are available 1 lm bars.

COLOURS

B - White	N - Black

ALP20...C

1,2 / 1,5 mm



ALP25...C

25 mm

30 mm

40 mm

20 mm

20 mm

10 mm

20 mm

25 mm

30 mm

40 mm


40 mm

40 mm


CANAL "U FORM"

ANODIZED GOLD AND SILVER, POLISHED CHROME AND WHITE VARNISHED ALUMINIUM


CU... 081C




CU... 101C



CU... 151C



CU... 201C



ANODIZED GOLD AND SILVER ALUMINIUM thermo packed

bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
CU... 081C	8 x 8		
CU... 101C	10 x 10		
CU... 151C	10 x 15		
CU... 201C	10 x 20		

Available in the finishes: AO - AA.

The code of the selected colour must be added to the article code. E.g.: CU... 101C (chosen finish anodized gold) CUAO 101C.

POLISHED CHROME ALUMINIUM thermo packed

bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
CUBC 081C	8 x 8		
CUBC 101C	10 x 10		
CUBC 151C	10 x 15		

WHITE VARNISHED ALUMINIUM thermo packed


bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
CUB 081C	8 x 8		
CUB 101C	10 x 10		
CUB 151C	10 x 15		
CUB 201C	10 x 20		*

On demand are available 1 lm bars.




COLOURS

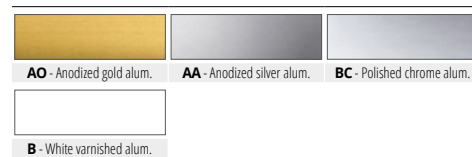


CANAL DOUBLE "U FORM"

ANODIZED GOLD AND SILVER, POLISHED CHROME AND WHITE VARNISHED ALUMINIUM


CW... 167C




CW... 161C



CW... 201C



CW... 208C



ANODIZED GOLD AND SILVER ALUMINIUM thermo packed

bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
CW... 167C	16 x 7		
CW... 161C	16 x 12		
CW... 201C	20 x 10		
CW... 208C	20 x 18		

Available in the finishes: AO - AA.

The code of the selected colour must be added to the article code. E.g.: CW... 167C (chosen finish anodized gold) CWAO 167C.

POLISHED CHROME ALUMINIUM thermo packed

bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
CWBC 167C	16 x 7		
CWBC 161C	16 x 12		
CWBC 201C	20 x 10		
CWBC 208C	20 x 18		

WHITE VARNISHED ALUMINIUM thermo packed


bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
CWB 161C	16 x 12		*
CWB 208C	20 x 18		*

On demand are available 1 lm bars.




COLOURS

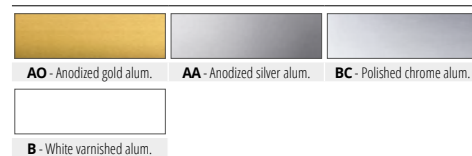

FLAT

ANODIZED GOLD AND SILVER, POLISHED CHROME AND WHITE VARNISHED ALUMINIUM

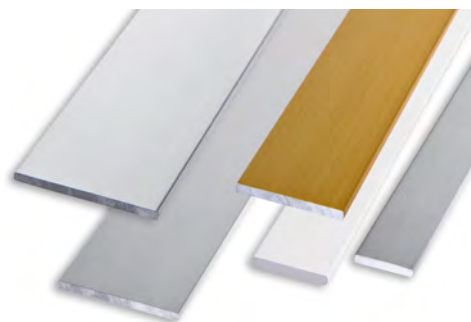

ANODIZED GOLD AND SILVER ALUMINIUM thermo packed
bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L mm		
PI... 102C	10		
PI... 122C	12		
PI... 152C	15		
PI... 202C	20		
PI... 252C	25		
PI... 302C	30		
PI... 402C	40		

Available in the finishes: AO - AA.
The code of the selected colour must be added to the article code.
E.g.: PI... 122C (chosen finish anodized gold) PIAO 122C.

POLISHED CHROME ALUMINIUM thermo packed
bar length 2 lm - pack. 10 Pcs - 20 lm


Article	L mm		
PIBC 102C	10		
PIBC 122C	12		
PIBC 152C	15		
PIBC 202C	20		
PIBC 252C	25		
PIBC 302C	30		
PIBC 402C	40		

WHITE VARNISHED ALUMINIUM thermo packed
bar length 2 lm - pack. 10 Pcs - 20 lm


Article	L mm		
PIB 102C	10		
PIB 152C	15		
PIB 202C	20		
PIB 252C	25		
PIB 302C	30		
PIB 402C	40		

On demand are available 1 lm bars.


PI... 102C



PI... 122C




PI... 152C




PI... 202C




PI... 252C




PI... 302C



PI... 402C



COLOURS



EMPTY ROUND TUBE

ANODIZED GOLD AND SILVER ALUMINIUM
POLISHED CHROME ALUMINIUM



ANODIZED GOLD AND SILVER ALUMINIUM thermo packed
thick 1 mm - bar length 2 lm - pack. 10 Pcs - 20 lm

Article	Ø mm ext.		
TV... 061C	6		
TV... 081C	8		
TV... 101C	10		
TV... 121C	12		
TV... 161C	16		
TV... 181C	18		
TV... 201C	20		
TV... 241C	24		

Available in the finishes: AO - AA.
The code of the selected colour must be added to the article code.
E.g.: TV... 122C (chosen finish anodized gold) TVAO 122C.

POLISHED CHROME ALUMINIUM thermo packed
thick 1 mm - bar length 2 lm - pack. 10 Pcs - 20 lm

Article	Ø mm ext.		
TVBC 081C	8		*
TVBC 101C	10		*
TVBC 121C	12		*
TVBC 161C	16		*
TVBC 181C	18		*
TVBC 201C	20		*
TVBC 241C	24		*

TV... 061C



TV... 081C




TV... 101C




TV... 121C




Ø 16 mm




Ø 18 mm




Ø 20 mm



Ø 24 mm



COLOURS




On demand are available 1 lm bars.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

FULL ROUND TUBE

ANODIZED GOLD AND SILVER ALUMINIUM
POLISHED CHROME ALUMINIUM

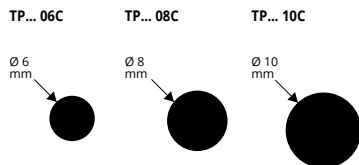

ANODIZED GOLD AND SILVER ALUMINIUM thermo packed
bar length 2 lm - pack. 10 Pcs - 20 lm

Article	Ø mm ext.		
TP... 06C	6		*
TP... 08C	8		
TP... 10C	10		

Available in the finishes: AO - AA.
The code of the selected colour must be added to the article code.
E.g.: TP... 122C (chosen finish anodized gold) TPAO 122C.

POLISHED CHROME ALUMINIUM thermo packed
bar length 2 lm - pack. 10 Pcs - 20 lm

Article	Ø mm ext.		
TPBC 06C	6		*
TPBC 08C	8		*
TPBC 10C	10		*

On demand are available 1 lm bars.




COLOURS



EMPTY SQUARE TUBE

ANODIZED GOLD AND SILVER ALUMINIUM
POLISHED CHROME ALUMINIUM

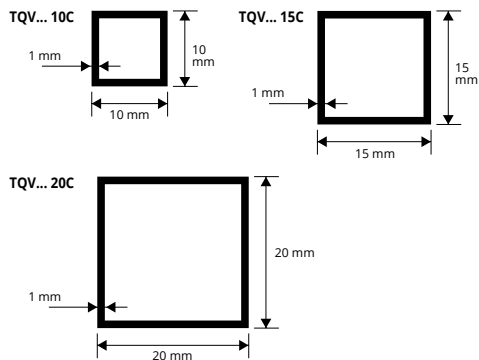

ANODIZED GOLD AND SILVER ALUMINIUM thermo packed
bar length 2 lm - pack. 10 Pcs - 20 lm


Article	L x H mm		
TQV... 10C	10 x 10		
TQV... 15C	15 x 15		
TQV... 20C	20 x 20		

Available in the finishes: AO - AA.
The code of the selected colour must be added to the article code.
E.g.: TQV... 10C (chosen finish anodized gold) TQVAO 10C.

POLISHED CHROME ALUMINIUM thermo packed
bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
TQVBC 10C	10 x 10		
TQVBC 15C	15 x 15		
TQVBC 20C	20 x 20		

On demand are available 1 lm bars.

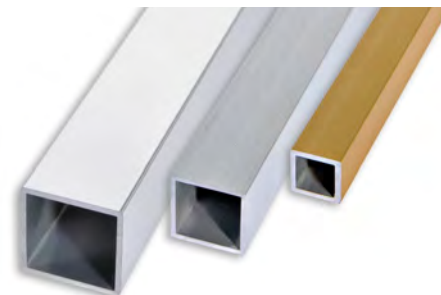


COLOURS



EMPTY RECTANGULAR TUBE

ANODIZED GOLD AND SILVER, POLISHED CHROME
AND WHITE VARNISHED ALUMINIUM

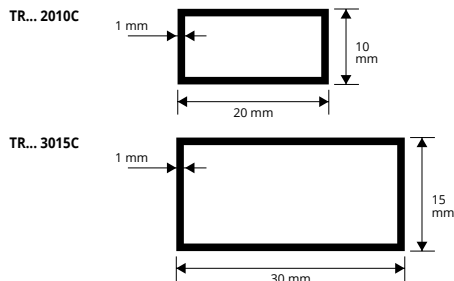

ANODIZED GOLD AND SILVER ALUMINIUM thermo packed
bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
TR... 2010C	20 x 10		
TR... 3015C	30 x 15		

Available in the finishes: AO - AA.
The code of the selected colour must be added to the article code.
E.g.: TR... 2010C (chosen finish anodized gold) TRA0 2010C.


POLISHED CHROME ALUMINIUM thermo packed
bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
TRBC 2010C	20 x 10		
TRBC 3015C	30 x 15		


WHITE VARNISHED ALUMINIUM thermo packed
bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
TRB 2010C	20 x 10		*

On demand are available 1 lm bars.

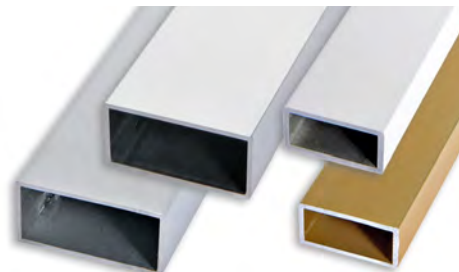

COLOURS

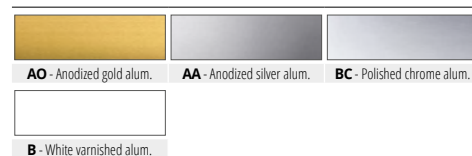

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

FULL SQUARE TUBE

ANODIZED GOLD AND SILVER ALUMINIUM




ANODIZED GOLD AND SILVER ALUMINIUM thermo packed
bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
TQP... 08C	8 x 8		
TQP... 10C	10 x 10		


Available in the finishes: AO - AA. The code of the selected colour must be added to the article code. E.g.: TQP... 08C (chosen finish anodized gold) TQPAO 08C.

On demand are available 1 lm bars.

TQP... 08C



TQP... 10C



COLOURS



AO - Anodized gold alum.

AA - Anodized silver alum.

CURVE PROFILE

ANODIZED GOLD AND SILVER, POLISHED CHROME AND WHITE VARNISHED ALUMINIUM



ANODIZED GOLD AND SILVER ALUMINIUM thermo packed
thick 1 mm - bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L mm		
UG... 181C	18		
UG... 221C	22		
UG... 251C	25		

Available in the finishes: AO - AA. The code of the selected colour must be added to the article code. E.g.: UG... 181C (chosen finish anodized gold) UGAO 181C.

POLISHED CHROME ALUMINIUM thermo packed
thick 1 mm - bar length 2 lm - pack. 10 Pcs - 20 lm


Article	L mm		
UGBC 181C	18		
UGBC 221C	22		
UGBC 251C	25		

WHITE VARNISHED ALUMINIUM thermo packed
thick 1 mm - bar length 2 lm - pack. 10 Pcs - 20 lm


Article	L mm		
UGB 181C	18		

On demand are available 1 lm bars.


UG... 181C




UG... 221C



UG... 251C



COLOURS



AO - Anodized gold alum.

AA - Anodized silver alum.

BC - Polished chrome alum.




B - White varnished alum.


PROFILE "T FORM"

ANODIZED GOLD AND SILVER ALUMINIUM
POLISHED CHROME ALUMINIUM

T... 1515C



T... 2525C



ANODIZED GOLD AND SILVER ALUMINIUM thermo packed
thick 1 mm - bar length 2 lm - pack. 10 Pcs - 20 lm


Article	L x H mm		
T... 1515C	15 x 15		
T... 2525C	25 x 25		

Available in the finishes: AO - AA.
The code of the selected colour must be added to the article code.
E.g.: T... 1515C (chosen finish anodized gold) TAO 1515C.

POLISHED CHROME ALUMINIUM thermo packed
thick 1 mm - bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
TBC 1515C	15 x 15		
TBC 2525C	25 x 25		

On demand are available 1 lm bars.

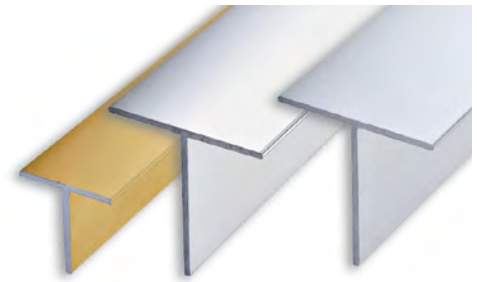


COLOURS




CURTAINBALANCE

ANODIZED SILVER AND WHITE VARNISHED ALUMINIUM

CTAA 304C
CTB 304C



CTAA 404C
CTB 404C



ANODIZED SILVER ALUMINIUM thermo packed
thick 4 mm - bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L mm		
CTAA 304C	30		
CTAA 404C	40		*

WHITE VARNISHED ALUMINIUM thermo packed
thick 4 mm - bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L mm		
CTB 304C	30		*
CTB 404C	40		*

On demand are available 1 lm bars.



COLOURS



PIF 153
PIF 203
PIF 253
PIF 403




FLAT IRON

thick 3 mm - bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L mm		
PIF 153	15		
PIF 203	20		
PIF 253	25		
PIF 403	40		

items not for sell individually.

AGF 203
AGF 303
AGF 403




CORNER EQUAL SIDES IRON

thick 3 mm - bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
AGF 203	20 x 20		
AGF 303	30 x 30		
AGF 403	40 x 40		

items not for sell individually.

ALF 3020
ALF 4020




CORNER "L-FORM" IRON

thick 2 mm - bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
ALF 3020	30 x 20		*
ALF 4020	40 x 20		*

items not for sell individually.

TVF 12
TVF 16
TVF 20
TVF 25




EMPTY ROUND TUBE IRON

bar length 2 lm - pack. 10 Pcs - 20 lm

Article	Ø mm ext.		
TVF 12	12		*
TVF 16	16		*
TVF 20	20		*
TVF 25	25		*

items not for sell individually.

TPF 10
TPF 12




FULL ROUND TUBE IRON

bar length 2 lm - pack. 10 Pcs - 20 lm

Article	Ø mm ext.		
TPF 10	10		*
TPF 12	12		*

items not for sell individually.

TQPF 08
TQPF 10
TQPF 12
TQPF 14




FULL SQUARE TUBE IRON

bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
TQPF 08	8 x 8		*
TQPF 10	10 x 10		*
TQPF 12	12 x 12		*
TQPF 14	14 x 14		*

items not for sell individually.

TQVF 20
TQVF 25
TQVF 30
TQVF 40




EMPTY SQUARE TUBE IRON

bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
TQVF 20	20 x 20		*
TQVF 25	25 x 25		*
TQVF 30	30 x 30		*
TQVF 40	40 x 40		*

items not for sell individually.

TRF 3020
TRF 4020




EMPTY RECTANGULAR TUBE IRON

bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
TRF 3020	30 x 20		
TRF 4020	40 x 20		

items not for sell individually.

TF 20




PROFILE "T-FORM" IRON

bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
TF 20	20 x 20		*

items not for sell individually.

CUF 1515
CUF 3020



CANAL "U FORM" IRON

bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm		
CUF 1515	15 x 15		*
CUF 3020	30 x 20		*

items not for sell individually.



PRODUCTS FOR LAYING



TRANSPARENCY

FOR A PERFECT LAYING.

PATENTED

Completely visible joint

$H \geq 50 \text{ mm}$

$H \geq 50 \text{ mm}$



The only one with 2 elements

Save 3 pieces on intersections

PATENTED

1407796
1424326
EP 2573296 B1
EP 2952652 B1
Patents Pending

© 2020 All rights reserved by Progress Profiles, Printed in Italy

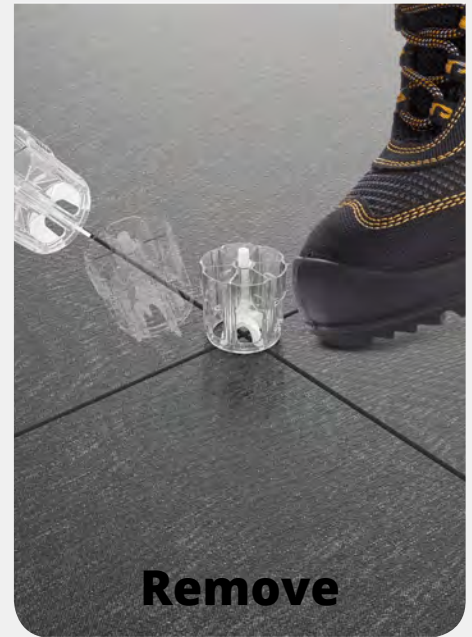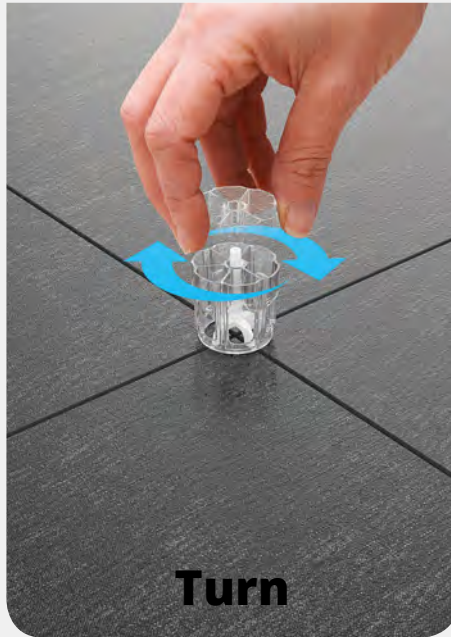

Kicking the clip in the direction of the joint.

ADVANTAGES

- 1 Simple and quick to lay with **only 2 elements: leveler & cap**. No need for expensive hand tools.
- 2 The only worldwide leveling system with multiple size levelers (2,3 and 5 mm). Built in spacers are available to accommodate "+" intersections as well as "T" joints **with a single leveler saving up to 3 pieces per joint**.
- 3 The only System capable of leveling 3 to 40 mm floors and wall coverings with only 2 parts: **leveler & cap**. Simply flip the cap over to work with various thicknesses.
- 4 It guarantees a minimum joint of 1 mm, maximum 5 mm.
- 5 Vertical compression reduces movement and widening of joints.
- 6 The thin base of the leveler allows for easy placement without mortar accumulation.
- 7 The shaped hole in the middle of the cross and T-shaped levelers allow a perfect control of the tiles lining up. Moreover the holes on their base enable a perfect anchoring between adhesive and tile.

Proleveling System

DESCRIPTION

Proleveling System is a revolutionary and innovative leveling system when laying medium and large materials with a thickness between 3 and 40 mm.

The patented system is made of 2 elements:

- A leveling base (1-2-3-5 mm size) with spaced notches that allow spacing/separating/ joining floors of any type and material in a way that is: linear, cross and half cross with joints to be chosen between 1mm, 2 mm, 3 mm and 5 mm.
- The threaded stem is attached perpendicularly to the base in a way that allows for easy adjustment with turns of the cap during installation. Removal of the cap and Stem after the materials are set is made easy with strategically placed breakage points that release with either increased pressure by turning the cap or by kicking the cap in the direction of the joint.

One cap fits all threaded stems and can be reused an infinite amount of times for big cost savings.

The new PPLS (patented) system assists in the reduction or elimination of ledging and lippage in the installation of various types of materials that are applied to floors or walls with mortar including: Large Format Tile, Natural Stone, Thin Profile Tile and many others.

LAYING SYSTEM

- Choose the desired type of Leveler (spacers) based on the requested joints and joining:
 - 1 mm Linear, Cross and Half Cross Version
 - 2 mm Linear, Cross and Half Cross Version
 - 3 mm Linear, Cross and Half Cross Version
 - 5 mm Linear, Cross and Half Cross Version
- Apply the thinset or mortar on a level base with the proper notched trowel as called out in the setting materials manufacturer's installation instructions.
- During the application of the tile or other materials, position the base of the chosen Leveler under the edge of the tile at the appropriate joint location and continue laying in sequence.
- Attach the cap to the threaded stem by rotating it clockwise. Level the joint by rotating the cap using the minimum amount of pressure needed.
- Once the setting materials have become solid and the floor or wall is ready for grout: kick the cap in the direction of the joint to detach connection points between base and stem.

Remover: Fixed on a drill allows to remove levelers from caps.



By turning the cap it is possible to level a thickness of up to 40 mm with an 8 mm joint.



T-shaped leveler installation.



Linear leveler installation.



Proleveling System



JOINT WIDTH
1 hole = 1mm
2 holes = 2mm
3 holes = 3mm
0 holes = 5mm



PRSL 1
PRSL 2
PRSL 3
PRSL 5

PRST 1
PRST 2
PRST 3
PRST 5

PRSC 1
PRSC 2
PRSC 3
PRSC 5

PRSTT

PRST

LINEAR LEVELER PROLEVELING SYSTEM

Article	thick mm	Pcs/Pack.	Box
PRSL 1	1	100	3000 Pcs
PRSL 2	2	100	3000 Pcs
PRSL 3	3	100	3000 Pcs
PRSL 5	5	100	3000 Pcs

"T" LEVELER PROLEVELING SYSTEM

Article	thick mm	Pcs/Pack.	Box
PRST 1	1	100	3000 Pcs
PRST 2	2	100	3000 Pcs
PRST 3	3	100	3000 Pcs
PRST 5	5	100	3000 Pcs

CROSS LEVELER PROLEVELING SYSTEM

Article	thick mm	Pcs/Pack.	Box
PRSC 1	1	100	3000 Pcs
PRSC 2	2	100	3000 Pcs
PRSC 3	3	100	3000 Pcs
PRSC 5	5	100	3000 Pcs

PROLEVELING SYSTEM REMOVER FOR LEVELER

Article	Pcs/Pack.	Box
PRSSV	50	1250 Pcs



PRSSV

ROTATING POMMEL CAP FOR LEVELER PROLEVELING SYSTEM

Article	Pcs/Pack.	Box
PRSTT	50	1000 Pcs
PRST	50	1000 Pcs



PROTECTION CAP FOR PROLEVELING SYSTEM

Article	Pcs/Pack.	Box
PRSPC	50	2500 Pcs





It protects the marble and natural stones surface from scratches that could be provoked by the cap during the floor levelling.

Tiles cm x cm	30 X 30	40 X 40	45 X 45	50 X 50	60 X 60	80 X 80	90 X 90	120 X 120
U. / MQ (Type of leveler)*	11 (only +)	6 (only +)	5 (only +)	4 (only +)	3 (only +)	5 (2+, 3L)	5 (2+, 3L)	3 (1+, 2L)



* + = cross leveler, L = linear leveler, T = "T" shape leveler


Tiles cm x cm	30 X 60	40 X 80	45 X 90	120 X 30	100 X 50	120 X 60
U. / MQ (Type of leveler)*	6 (only +)	6 (3+, 3L)	6 (3+, 3L)	6 (3+, 3L)	4 (2+, 2L)	4 (2+, 2L)



* + = cross leveler, L = linear leveler, T = "T" shape leveler

Tilest cm x cm	10 X 100	12 X 100	15 X 100	20 X 100	10 X 120	12 X 120	15 X 120	20 X 120	10 X 80	12 X 80	15 X 80	20 X 80	40 x 80	45 x 90	100 x 50	120 x 60
U. / MQ (Type of leveler)*	20 (only T)	17 (only T)	14 (only T)	10 (only T)	17 (only T)	14 (only T)	11 (only T)	9 (only T)	25 (only T)	21 (only T)	17 (only T)	13 (only T)	6 (only T)	5 (only T)	4 (only T)	4 (only T)

* + = cross leveler, L = linear leveler, T = "T" shape leveler



(10x100) (10x80)
(12x100) (12x80)
(15x100) (15x80)
(20x100) (20x80)
(10x120) (40x80)
(12x120) (45x90)
(15x120) (100x50)
(20x120) (120x60)

PROSUPPORT TUBE SYSTEM

BASE + SCREW + EXTENSION + MULTI-FUNCTION HEAD SELF-LEVELLING AND FIX

PROSUPPORT TUBE SYSTEM is an adjustable and modular supports system for outdoor floating floors from the height of 29 mm to 1000 mm. The system is composed of 1 base, 2 screws, 1 flange, 2 heads and several pvc pipes to obtain the requested height. Both heads, according to the screw, can be fix or self-levelling.

PATENTED

FULL SECTIONAL KIT

FULL KIT	PC./PACK. FULL KIT	BASE KIT	HEAD	FLANGE	PIPE	H (mm) min/max with self-leveling head	H (mm) min/max with fix head
PST 3454/..	40	(PSTK 0202 + PSTH 04 / 02)				34/54	29/49
PST 5474/..	40	(PSTK 0204 + PSTH 04 / 02)				54/74	49/69
PST 7494/..	40	(PSTK 0202 + PSTH 04 / 02 + PSTGH 02 + PSTT 35)				74/94	69/89
PST 94114/..	40	(PSTK 0202 + PSTH 04 / 02 + PSTGH 02 + PSTT 55)				94/114	89/109
PST 114134/..	40	(PSTK 0202 + PSTH 04 / 02 + PSTGH 02 + PSTT 75)				114/134	109/129
PST 134154/..	40	(PSTK 0202 + PSTH 04 / 02 + PSTGH 02 + PSTT 95)				134/154	129/149
PST 154174/..	40	(PSTK 0202 + PSTH 04 / 02 + PSTGH 02 + PSTT 115)				154/174	149/169
PST 174194/..	40	(PSTK 0202 + PSTH 04 / 02 + PSTGH 02 + PSTT 135)				174/194	169/189
PST 194214/..	40	(PSTK 0202 + PSTH 04 / 02 + PSTGH 02 + PSTT 155)				194/214	189/209

EXAMPLE: 1) FULL KIT= BASE KIT + HEAD (PST 3454/4= PSTK 0202 + PSTH 04)
2) FULL KIT= BASE KIT + HEAD + FLANGE + PIPE (PST 7494/4= PSTK 0202 + PSTH 04 + PSTGH 02 + PSTT35)



BASE KIT (base + screw without head 20-40mm)
polypropylene - pack. 40pcs (PSTK 0202) - pack. 20 pcs (PSTK 0204)

Article	thickness (mm)	kit / pack.
PSTK 0202	20	40
PSTK 0204	40	20

Items not for sale individually. Minimum order one pack.

HEAD with removable flaps 2/4 mm
polypropylene - pack. 40 pcs

Article	Flap thickness (mm)	Pcs/pack
PSTH 02	2	40
PSTH 04	4	40

Items not for sale individually. Minimum order one pack.

HOW TO ORDER

Heights from 29 to 74 mm

- 1A) Choose the base kit (base+screws without head) of the needed height (Ex. PSTK 0202).
- 2) Choose the code no. of the needed head (Ex. PSTH 04).
- 1B) Choose the full kit (Ex. PST 3454/4)



For heights from 74 till 155 mm

- 1A) Indicate the code of the base kit PSTK 0202.
- 2) Choose the code of the requested head. (Ex. PSTH 04).
- 3) Choose the pipe of the requested height (Ex. PSTT 55).
- 4) Choose the connection nut PSTGH 02.
- 1B) Choose the full kit (Ex. PST 7494/4)



ANTI-NOISE AND ANTI-SLIP DISK
rubber - H 1,5 mm - Ø 150 - pack. 120 pcs

Article	H / Ø mm	Pcs/pack
PSTG	H 1,5 - Ø150	120

The non-slip rubber disk to be used with the heads of PROSUPPORT TUBE SYSTEM reduces noises till 25 dB.

Items not for sale individually. Minimum order one pack.



FLANGE 40 mm
polypropylene - pack. 40 pcs

Article	H (mm)	Pcs/pack
PSTGH 02	40	40

Connection nut with a lower side of 110 mm inner diameter, where the pipe of different heights should be inserted, and one side with thread where the regulation screws should be inserted.

Items not for sale individually. Minimum order one pack.



PIPE (OUTER DIAMETER Ø110 mm THICKNESS 4 mm)
polyethylene or polypropylene - pack. 40 pcs


Article	H (mm)	Pcs/pack
PSTT 35	35	40
PSTT 55	55	40
PSTT 75	75	40
PSTT 95	95	40
PSTT 115	115	40
PSTT 135	135	40
PSTT 155	155	40

Items not for sale individually. Minimum order one pack.


PIPE (OUTER DIAMETER Ø110 mm THICKNESS 4 mm)
polyethylene or polypropylene - pallet. 43 pcs

Article	H (mm)	lm/pallet
PSTT 2700	2,7	116

Items not for sale individually. Minimum order one pallet

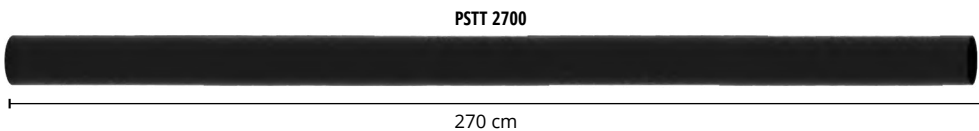

UPON REQUEST IT IS POSSIBLE TO HAVE HEIGHTS TILL 1000 MM USING PIPES FROM 155 TILL 955. For information and installation instructions ask for the technical data sheet. Price to be agreed. Production delay 4/5 weeks.

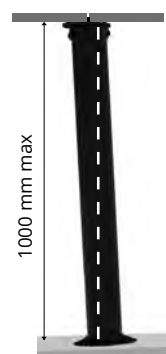

SELF-LEVELLING HEAD MODE
Max height 1000 mm with max slope of 5%.



FIXED HEAD MODE
Max height 1000 mm






PERIMETER SPACER PROSUPPORT TUBE

PERIMETER SPACER PROSUPPORT SYSTEM
Stainless steel AISI 316L / 1.4404 - V4A - pack. 40 Pcs

Article

DPP

Perimeter spacer of stainless steel AISI 316L / 1.4404 - V4A for laying outdoor floating floors. The profile makes a 5 mm wide perimeter gap, for the outflow of rainwater; moreover, thanks to the rounded fin with which is provided, it does not damage the waterproofing sheath. The slit width of 0.5 cm and the length of 18 cm ensure a perfect anchorage of the spacer with the heads of the Prosupport System.

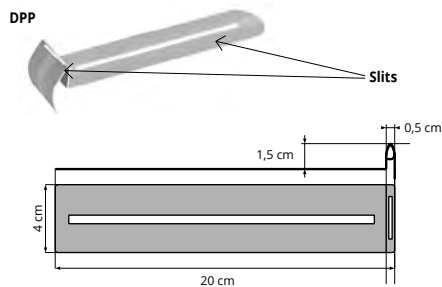

PROSUPPORT TUBE SYSTEM OPTIONAL

ADJUSTING KEY (only for head PSTH 04)

Article

PSTAK



ADJUSTABLE SPACER TABS 4 mm
polypropylene - Pack 80 pcs

Article	L x H mm	Pcs/pack
---------	----------	----------

PSTJ

80 x 20 80

Spacer tabs 80 mm long to be fixed on the self-levelling head, which allow the fixing of wooden, WPC and aluminium joists of max width 80 mm.



Items not for sale individually. Minimum order one pack.

FIXING CLIP FOR TILES - WIND-PROOF

Pack 40 pairs

Article	L x H mm	pairs/pack
---------	----------	------------

PSTWP

20 x 60 40


Fastening clip to fix the tiles and block the floor in case of strong wind. The clips must be inserted inside the cross joint or along the perimeter of the floor.



Items not for sale individually. Minimum order one pack.


PRORAIL SYSTEM

PRORAIL SYSTEM SYSTEM is a modular system composed of aluminium joists to lay floating floors of any size, to create steady and modular substructures together with PROSUPPORT TUBE and PROSUPPORT SLIM. The system consists of two aluminium joists, PRORAIL and PRORAIL RET, one fastening ring PRORAIL RING, two cross spacers with removable flaps PRORAIL SPACER and one anti-noise and anti-slip rubber PRORAIL RUBBER

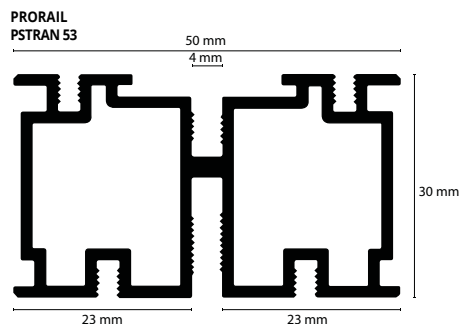


PRORAIL - SHAPED JOIST
aluminium - Pack 10 Pc - Bar length 2,7 Lm

Article	L x H (mm)	Pc/Pack		
PSTRAN 53	50 X 30	10		



PRORAIL RUBBER - RUBBER INSERT
rubber - Roll length 110 ML

Article	L roll lm			
PSTRI	110			

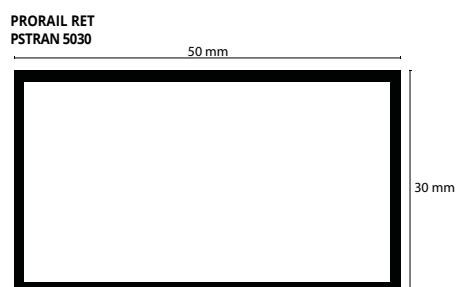

PRORAIL RET - SMOOTH JOIST
aluminium - Pack 10 Pc - Bar length 2,7 ML

Article	L x H (mm)	Pc/Pack		
PSTRAN 5030	50 X 30	10		




PRORAIL RING - JOIST FASTENING RING
polypropylene - Pack 40 Pc

Article	Ø mm	Pc/Pack		
PSTRR	135	40		

PRORAIL SYSTEM LAYING PATTERN

Material required for 1 qm of the below pattern:
-3 pcs PROSUPPORT TUBE/PROSUPPORT TUBE SLIM
-3 pcs fastening rings PRORAIL RING
-2.7 lm PRORAIL joist
-4 lm PRORAIL RUBBER

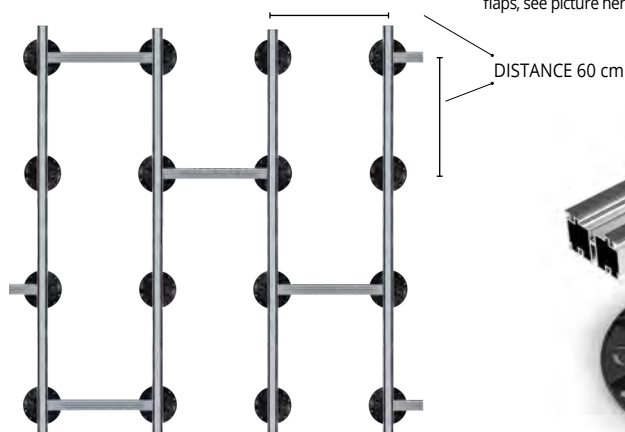

TECHICAL LAYING INSTRUCTIONS

1. Choose the support PROSUPPORT TUBE or PROSUPPORT SLIM of the required height;
 2. Set the fastening ring PRORAIL RING on the supports;
 3. Set the joist PRORAIL (*) or the joist PRORAIL RET on the ring;
 4. Insert the rubber PRORAIL RUBBER inside the grooves of the joist PRORAIL;
 5. Set the cross spacers PRORAIL SPACER following the laying pattern;
- (*) It is possible to fix the joist PRORAIL on the supports fixing it into the spacer flaps, see picture hereunder.




PRORAIL SPACER
PSTRS 02



PRORAIL SPACER
PSTRS 04

PRORAIL SPACER - CROSS SPACER with removable flaps
polypropylene - Pack 100 Pc

Article	thickness (mm)	Pc/Pack		
PSTRS 02	2	100		
PSTRS 04	4	100		

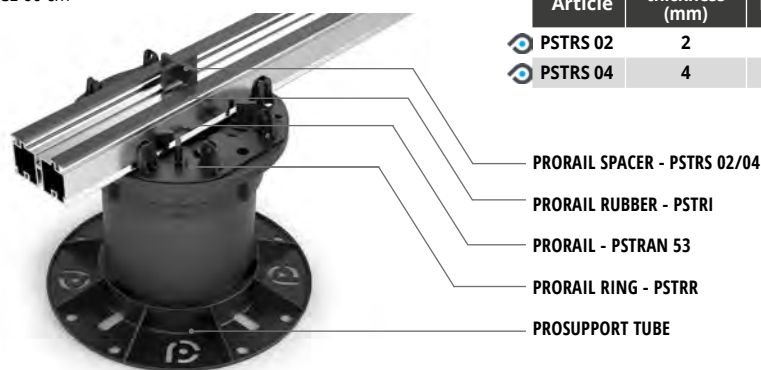

FIXING WITH PRORAIL JOIST:

Prosupport tube/slim + Prorail + Prorail spacer + Prorail rubber




FIXING WITH RING AND PRORAIL JOIST:

Prosupport tube/slim + Prorail ring + Prorail + Prorail spacer + Prorail rubber



FIXING WITH RING AND PRORAIL RET SMOOTH JOIST :

Prosupport tube/slim + Prorail ring + Prorail ret

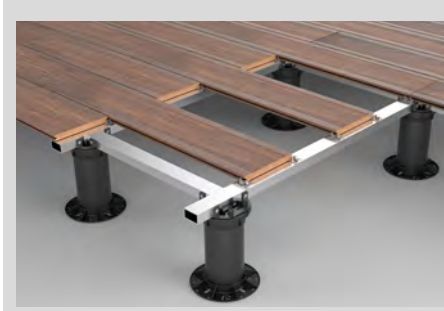

PROSUPPORT TUBE SLIM is a modular system to make outdoor floating floors from 10 to 40 mm height, it is composed of two bases of 10 mm height, levellers of 10 mm thickness and anti-noise and anti-slip disks. Thanks its modularity the system allows to make, from a height of 10 mm, all heights with 2 mm interval using the levellers.

PROSUPPORT SLIM SYSTEM





BASE WITH FLAPS
PSTSB 02 - 2 mm



BASE WITH FLAPS
PSTSB 04 - 4 mm



LEVELLER
PSTSL 02 - 2 mm

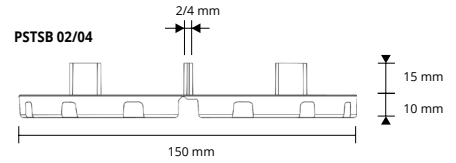

BASE with flaps 2/4 mm
polypropylene - Pack 120 Pcs.

Article	Thickness (mm)	Pcs/pack
PSTSB 02	2	120
PSTSB 04	4	120

LEVELLER
Polystyrene - Pack 120 Pcs.

Article	Thickness (mm)	Pcs/pack
PSTSL 02	2	120




ANTI-NOISE AND ANTI-SLIP DISK
PSTSG

ANTI-NOISE AND ANTI-SLIP DISK
rubber - pack. 120 pcs


Article	H/Ø mm	Pcs/pack
PSTSG	H 1,5 - Ø 150	120

LAYING EXAMPLE

Example 1:
final height 12 mm
PSTB 04 + PSTSPL 02




Example 2:
final height 24 mm
2 x PSTB 04 + 3 x PSTSPL 02



TECHINCAL LAYING INSTRUCTIONS

1. Place the bases with the flaps (max 4 pcs) **PROSUPPORT SLIM** till the required height;
2. If necessary put on the bases the levellers to have the required height (max 4 pcs)
3. Put on the support the anti-noise and anti-slip rubber disk

Example 3:
final height 30 mm
3 x PSTB 04



PROSUPPORT SYSTEM

BASE + SCREW + EXTENSION
+ SELF - LEVELLING OR FIXED HEAD

PROSUPPORT SYSTEM is a pedestal support system for outdoor raised floors. **PROSUPPORT SYSTEM** height is fully adjustable from a minimum of 35 mm to a maximum of 500 mm. **PROSUPPORT SYSTEM** is a modular fully adjustable system made of Polypropylene suitable for outdoor areas like roof tops, terrace, pool surroundings, pedestrian walkways, decks and patios. Available in the self-leveling head version and flat head version.

FIXED HEAD PACK KIT (without head)

polypropylene - box 40 pcs
(base + screw: PSRG3555, PSRG5570, PSRG70110, PSRG11150)
(base + screw + extension + screw: PSRG15170, PSRG17200)

Article	H (mm)	Pcs/pack
PSRG3555	35/55	40
PSRG5570	55/70	40
PSRG70110	70/110	40
PSRG11150	110/150	40
PSRG15170	150/170	40
PSRG17200	170/200	40

Items not for sale individually. Minimum order one pack.
One pack is composed of 40 complete kit.

HOW TO ORDER


1) Choose the code of the KIT without the head in the desired height (Ex: PSRG5570) 2) Choose the code of the desired head (Ex: PSRG 04)

EXAMPLE - To order 80 pieces

of Prosupport with self-leveling head with 4 mm thick flaps and variable height from 70 to 110 mm

WRITE IN THE ORDER:

2 packs of 40 pcs code PSRG70110
+ 2 packs of 40 pcs code PSRG 04

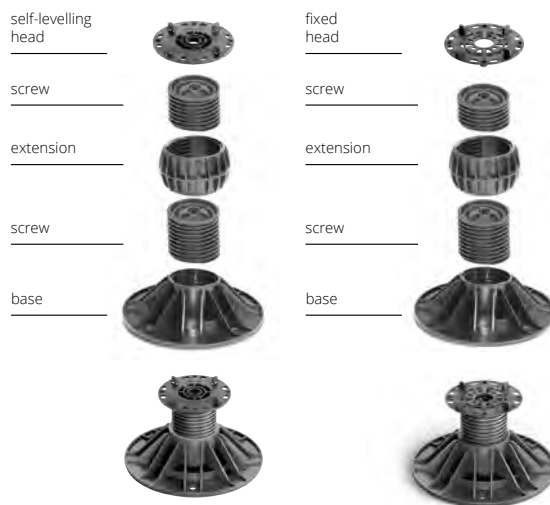


FIXED HEAD PACK KIT

(with head PSRG 04)
polypropylene - box 50 pcs
(5 pack with 10 pcs)

Article	H (mm)
PSRG3555/50	35/55
PSRG5570/50	55/70
PSRG70110/50	70/110
PSRG11150/50	110/150

PROSUPPORT SYSTEM HEIGHTS (Higher heights up to 500 mm on demand, price to be agreed. Production delay 4/5 weeks.)

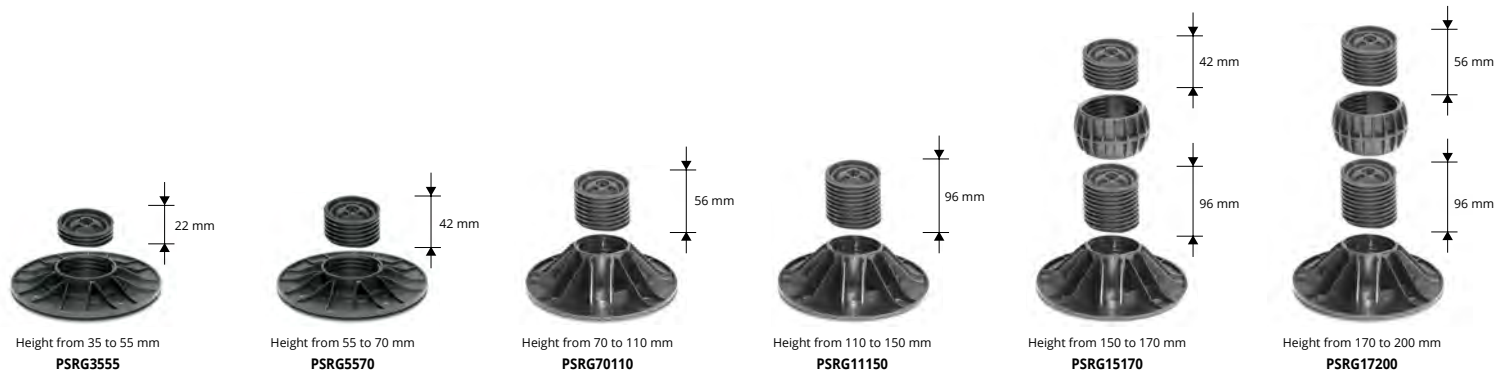


SELF - LEVELLING HEAD with removable flaps 2/4 mm

polypropylene - pack 40 Pcs (box 40 pcs)

Article	Flap thick. (mm)	Pcs/pack
PSRG 02	2	40
PSRG 04	4	40

Items not for sale individually. Minimum order one pack.
One pack is composed of 40 pcs.

SELF - LEVELLING HEAD

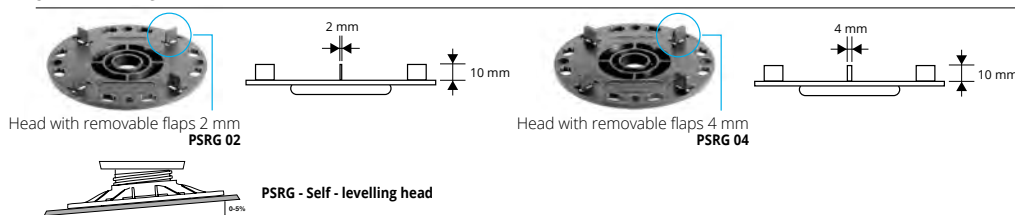


FIXED HEAD with removable flaps 2/4 mm

polypropylene - pack 40 Pcs (box 40 pcs)

Article	Flap thick. (mm)	Pcs/pack
PSTP 02	2	40
PSTP 04	4	40

Items not for sale individually. Minimum order one pack.
One pack is composed of 40 pcs.

FIXED HEAD

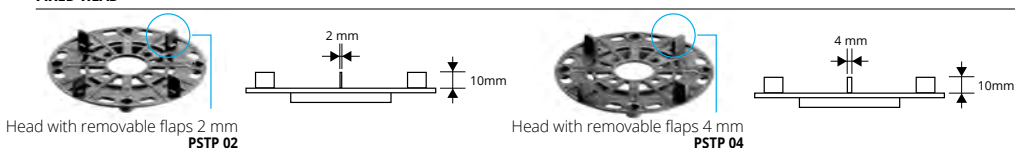

© 2020 All rights reserved by Progress Profiles, Printed in Italy

PROSUPPORT SYSTEM OPTIONAL

ADJUSTABLE SPACER TABS 4MM - polypropylene

length 60 mm - Pack. 80 Pcs (box 80 pcs)

Article	L x H (mm)		
ALDPS 60	60 x 20		

Spacer tabs, 60 mm length, to be fixed on the self-leveling head. They allow the application of wooden, WPC and Aluminium joists with a maximum width of 80 mm, for the laying of wooden and WPC flooring.



RUBBER DISK for laying on bituminous roof membrane

H 2 mm - Pack. 100 Pcs (box 100 pcs)

Article	H (mm)		
LVGG 02	2		

Rubber disc, 2 mm thick, to be applied under the support (SQG 15) to protect the bituminous membrane.



ANTI-NOISE AND ANTI-SLIP RUBBER DISK

H 3 mm - Ø 110 - Pack. 180 Pcs (box 180 pcs)

Article	H (mm)/Ø		
GARPS 3110	H 3 - Ø 110		

Rubber disk designed to reduce noise up to 25 db and prevents slipping of the tiles. Height 3 mm and diameter 110 mm. To be placed on the self-leveling or fixed head.



SPACER FOR APPLICATION ON GRAVEL

Pack. 100 Pcs (box 100 pcs)

Article			
DILV			

Transparent plastic cross spacer for laying on gravel or irregular surfaces.



FLANGE LOCKING DEVICE - POLYPROPYLENE

H 8 mm - Ø 75 - Pack. 250 Pcs (box 250 pcs)

Article	H (mm)/Ø		
AFBPS 875	H 8 - Ø 75		

Locking Flange prevents the rotation of the screw to avoid flooring movements over time. Height 8 mm and diameter 75 mm. To be placed at the bottom of the screw.



ADJUSTING KEY (only for PSRG 04 and PSTP 04)

Article			
PSAK			



PROSUPPORT ECO is an adjustable support system for the realization of outdoor floating floors from a minimum height of 35 mm to a maximum of 110 mm. The flat head is adjustable in height and is equipped with removable spacers. The extensions have a height of 25 and 50 mm. The system, made in polypropylene (PP), is suitable for outdoor areas, terraces, pool pavements and pedestrian walkways.

PROSUPPORT ECO

POLYPROPYLENE



HOW TO ORDER

- 1) Choose the code of the desired BASE KIT with head (Es.: PSEC 3045)
- 2) Choose the code of the desired extra extension (Es.: PRSEC 50)

EXAMPLE

To order 60 pieces of Prosupport ECO with head 4 mm thick flaps and variable height from 85 to 110 mm

WRITE IN THE ORDER:

2 Packs of 30 pcs code PSEC 3045
+ 2 Packs of 30 pcs code PRSEC 50

HIGHER HEIGHTS ON DEMAND (UP TO A MAXIMUM OF 500 MM), PRICE TO BE AGREED. PRODUCTION DELAY 4/5 WEEKS.

BASE KIT WITH HEAD and removable flaps 2 / 4 mm

polypropylene - pack. 30 Pcs (box 30 kit)

Article	Flap thickness (mm)	Pcs/pack		
PSEC 30452	2	30		
PSEC 3045	4	30		

Items not for sale individually. Minimum order one pack. One pack is composed of 30 complete kit.

EXTRA EXTENSIONS PROSUPPORT ECO

polypropylene - pack. 30 Pcs (box 30 pcs)

Article	H (mm)	Pcs/pack		
PRSEC 25	25	30		
PRSEC 50	50	30		

Items not for sale individually. Minimum order one pack. One pack is composed of 30 pcs.

BASE KIT



Height from 35 to 60 mm
PSEC 30452 (flaps 2 mm)
PSEC 3045 (flaps 4 mm)

EXTRA EXTENSION




Extra extension H 25 mm
PRSEC 25



Extra extension H 50 mm
PRSEC 50

EXAMPLES BASE KIT + EXTENSION

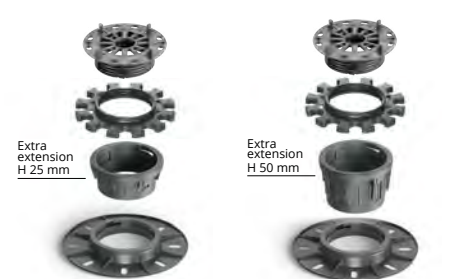

Example height from 60 to 85 mm
PSEC 30452 (flaps 2 mm)
or
PSEC 3045 (flaps 4 mm)
+
PRSEC 25 (extra extension 25 mm)

Example height from 85 to 110 mm
PSEC 30452 (flaps 2 mm)
or
PSEC 3045 (flaps 4 mm)
+
PRSEC 50 (extra extension 50 mm)

SUPPORT and **LEVELLER** are suitable for the realization of outdoor floating floors. The support, in polyethylene, has a height of 15 mm. The rubber leveler, with a thickness of 3 mm, can be applied on the supports up to a maximum of 2. **SUPPORT** and **LEVELLER** are suitable for outdoor areas, terraces, pool edges and pedestrian crossings.

SUPPORT AND LEVELLER

POLYETHYLENE

SQUARES SUPPORT

boxes of 350 Pcs

Article	Thick. mm		
SQG 15	15		

ITEMS NOT FOR SALE INDIVIDUALLY.



SUPPORT

SQUARES LEVELLER

boxes of 100 Pcs

Article	Thick. mm		
LQG 03	3		


ITEMS NOT FOR SALE INDIVIDUALLY.




LEVELLER



SQG 15



LQG 03



LAYING INSTRUCTIONS





1. Lay the supports on the waterproofing membrane.
2. To reach the desired height or compensate different heights, if necessary, place 1 or 2 rubber levelers on the support.
3. Lay the floating flooring.

PROSUPPORT PROFILE T & N

VARNISHED ALUMINIUM
NATURAL ALUMINIUM

PROSUPPORT PROFILE T & N is a profile for the protection and finishing of the external edge of raised floors in ceramic, wood and composite materials. The vertical section of the profiles features a specially designed fins that create a dovetail cladding system. This dovetail cladding system allows for the adhesive used to fix the covering to also mechanically bond to the profiles. The profile is also available with a decorative edge of 2 cm height (PROSUPPORT PROFILE T).

PATENTED

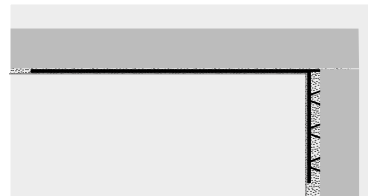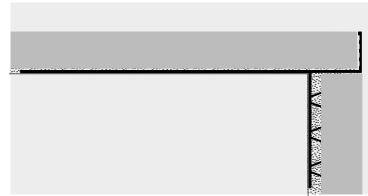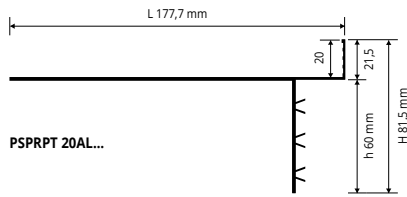

PROSUPPORT PROFILE T - VARNISHED ALUMINIUM

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	h mm
PSPRPT 20AL...	177,7x81,5	60

COLOURS (EMBOSSED)



PROSUPPORT PROFILE N - NATURAL ALUMINIUM

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	L
PSPRP 15560AL	60	156,5

COLOURS



LAYING INSTRUCTIONS

1. Choose "PROSUPPORT PROFILE" desired model.
2. Cut "PROSUPPORT PROFILE" to the desired length and put on the supports and aligning.
3. Lay the floor by adjusting the height of the supports until completely leveling.
4. Cut the tiles of the correct size to close the perimeters of the floating floor.
5. Fix on the vertical surface of the profile the tiles using a suitable adhesive.


PROSUPPORT PROFILE A & B

VARNISHED ALUMINIUM, NATURAL ALUMINIUM

PROSUPPORT SYSTEM A & B Perimeter profile to protect and finish the outer edge of raised floors of different types, ceramic, wood, stone etc. The **PROSUPPORT PROFILE A** consists in an "L"-shaped horizontal flat base to insert and anchor above the **PROSUPPORT** Self-levelling head and a vertical visible part to insert in the vertical "L"-shaped element (as indicated in the drawing).

Use: Perimeter profile to protect and finish the outer edge of raised floors of different types, ceramic, wood, marble etc. The **PROSUPPORT PROFILE** consists in an "L"-shaped horizontal flat base to insert and anchor above the **PROSUPPORT** Self-levelling head and a vertical visible part to insert in the vertical "L"-shaped element (as indicated in the drawing)

PROSUPPORT A






PROSUPPORT B

PFPSAL... 1060

PFPSAL... 1080


PFPSAL... 10100



PUNCHED AND PERFORATED PROSUPPORT A NATURAL ALUMINIUM - length 2,7 lm - pack. 20 Pcs

Article	L x H
BPPSAN 15015	150 X 15
BPPSAN 15020	150 X 20
BPPSAN 15025	150 X 25

COLOURS




TOP PROFILE PROSUPPORT B - VARNISHED ALUMINIUM length 2,7 lm

Article	H1
PFPSAL... 1060 (Pack. 20 Pcs)	60
PFPSAL... 1080 (Pack. 10 Pcs)	80
PFPSAL... 10100 (Pack. 10 Pcs)	100

COLOURS (EMBOSSED)



* ON DEMAND (EMBOSSED)

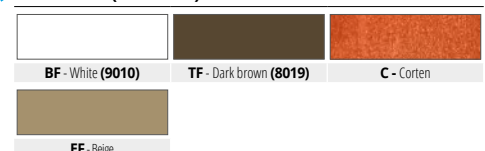

© 2020 All rights reserved by Progress Profiles, Printed in Italy


Leveling system for tiles composed of 3 elements: wedge, leveler and plier.
The levelers are available for grout lines of 1/1.5/2 and 3 mm and are suitable for tiles with thickness from 3 to 12 mm and from 12 to 20 mm. The wedge, with a length of 90 mm and a width of 22 mm, is inserted during the laying inside the leveler and thanks to the plier we get a complete flatness between adjacent tiles. When the adhesive is hardened, kick the wedges and the protruding part of the levelers along the grout line.

PROLEVELING WEDGE SYSTEM

PATENTED

PROLEVELING WEDGE SYSTEM

Article	Description	h. mm	Thick. mm	Pcs/pack	Pcs/Box
PRLW	Leveling wedge	-	-	100	2500
PRLW 1	Linear leveler thick 1 mm	3-12	1	200	3000
PRLW 15	Linear leveler thick 1,5 mm	3-12	1,5	200	3000
PRLW 2	Linear leveler thick 2 mm	3-12	2	200	3000
PRLW 3	Linear leveler thick 3 mm	3-12	3	200	3000
PRLW 120	Linear leveler thick 1,5 mm	12-20	1,5	100	2500
PRLW 220	Linear leveler thick 2 mm	12-20	2	100	2500

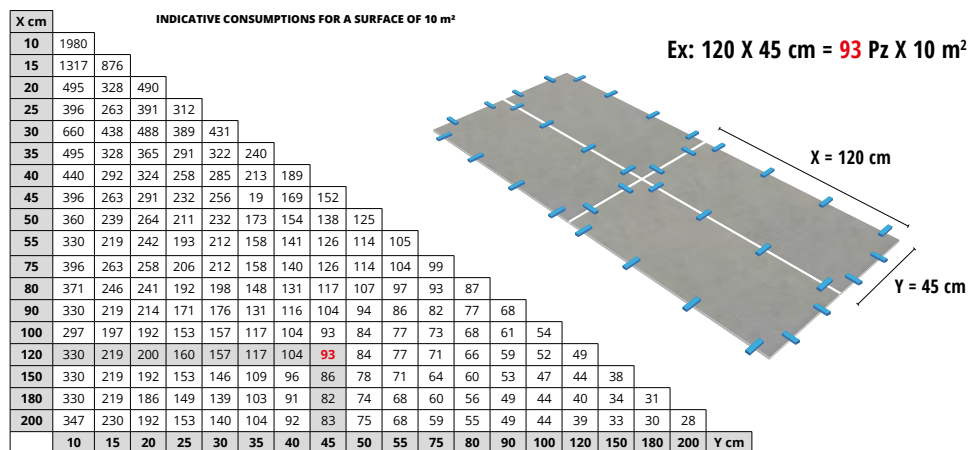

TRACTION PLIER for PROLEVELING WEDGE SYSTEM

Article	Pcs/pack
PRLWP	1




MULTISPACER Removable and reusable spacer for joints of tiled floors and walls. Its little tabs and open shape allows various uses with a perfect joint and view of the junctions among tiles during the laying.

MULTISPACER

PATENTED

MULTISPACER

Article	Thick. mm	Pcs/pack	Pcs/Box
MSP 1	1	100	2000
MSP 2	2	100	2000
MSP 3	3	100	2000
MSP 5	5	100	2000

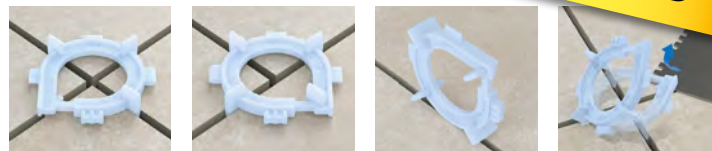

The **CROSS-SHAPED** and **T-SHAPED SPACERS** are perforated, weatherproof and made in top quality material with choice of colour. They are used to provide regular gaps in floors and coverings and thanks to the anti-floating perforations remain in the correct laying position. Available in every required thickness 1 - 2 - 3 - 4 - 5 - 7 - 10 mm. Levelling wedges are also available for compensating differences in level that emerge during laying. The **Y-SHAPED SPACERS** have to be used to separate hexagonal tiles in floors and walls. Available in thickness 2 and 3 mm.

SPACERS LEVELLING WEDGES

PERFORATED SPACERS CROSS-SHAPED

boxes with bags of 250 Pcs each

Article	Thick. mm	Pcs/Box
RC 1	1	20.000
RC 2	2	15.000
RC 3	3	15.000
RC 4	4	15.000
RC 5	5	15.000
RC 7	7	10.000
RC 10	10	5.000

PERFORATED SPACERS T-SHAPED



boxes with bags of 250 Pcs each

Article	Thick. mm	Pcs/Box
RT 1	1	20.000
RT 2	2	15.000
RT 3	3	15.000
RT 4	4	15.000
RT 5	5	15.000
RT 7	7	10.000
RT 10	10	5.000

Y-SHAPED SPACERS FOR HEXAGONAL TILES

boxes with bags of 250 Pcs each

Article	Thick. mm	Pcs/Box
RY 2	2	10.000
RY 3	3	10.000

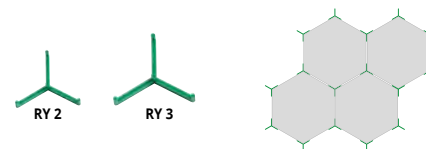

SPACERS / SQ.M

TILE FORMAT cm x cm	60 x 60	60 x 30	40 x 40	40 x 30	40 x 20	33 x 33	30 x 30	30 x 20	25 x 25	20 x 20	15 x 15	13 x 26	13 x 13	10 x 20	10 x 10
CROSS-SHAPED SPACERS No. / Sq.m	3	6	7	9	12	9	11	17	16	25	44	30	60	50	100
T-SHAPED SPACERS No. / Sq.m	6	12	14	18	24	18	22	34	32	50	88	60	120	100	200


Y-SHAPED SPACERS

2 spacers for each tile multiplied by the amount of tiles per square meter


LEVELLING WEDGES

boxes with bags of 500 Pcs

Article	Thick mm	Pcs/Box
PCU 5	0-5	10.000



MAGNET KIT



MAGNET KIT - 4 magnets and 4 plates
for ceramic inspection panel - packs of 10 kits

Article	
KMD	

SCISSORS FOR PVC PROFILES



SCISSORS
for cutting PVC profiles

Article	
FTPP	

PROECOFON

EXPANDED POLYETHYLENE CLOSED - CELL

PROECOFON is a roll of closed-cell polyethylene used as edging between the wall and screed or where there are expansion joints. It should be used in all floor-laying work to ensure long life of the floor.



CLOSED-CELL EXPANDED POLYETHYLENE

Article	Thick. x H mm	lm/roll		
PEF 550A	5 X 50	25		
PEFPU 510A	5 X 10	2,7		
PEF 5100A	5 X 100	100		

For perimeter areas and joints.
PEFPU 510A for Proterrace Drain Drip

EXEMPLE OF LAYING



PROBAND FIX

MONOCOMPONENT WATERPROFF
SEALANT



SEALANT MONOCOMPONENT WATERPROOF

Pack of 12 cartridges

Article	Colours	Cartridge lm		
PRBFXB	White	300		
PRBFXG	Grey	300		

DISPENSING GUN FOR SEALANT CARTRIDGES

Article	Pc/Pack		
PRBFXGUN	1		

SEALANT MONOCOMPONENT WATERPROOF CARTRIDGE

Pack of 12 cartridges

Article	Colours	Cartridge lm		
PRBFXUB	White	600		
PRBFXUG	Grey	600		

COLOURS

B - White	G - Grey

Technical data:

Appearance:	white or gray thixotropic paste
Temperature range for application:	+ 5 °C / + 40 °C
Temperature range:	- 40 °C / + 90 °C
Curing:	≈ 2 mm / 24 h
Commissioning:	≈ 7 days

Suggestions for the installation:

In general cementitious support must be free from dust, oil and grease, dry and free from any visible moisture, free of loose or imperfectly anchored parts such as residual traces of cement, lime and paint, which must be totally removed. In case of contact with eyes, rinse immediately with water and seek medical advice. Avoid contact with skin and keep out of reach of children.

• Use

Balconies, terraces, bathrooms, kitchens, saunas, swimming pools and exterior surfaces of any size.

• Don't use

On bitumen membranes.
To seal proband with PRODESO®.

PROPOLISH

WHITE CREAM - BASED SURFACTANTS
SUITABLE FOR CLEANING

White cream - based surfactants, amines and inert powder, suitable for cleaning, degreasing and polishing of stainless steel surfaces and opaque/matt brass. The product, ready to use, does not contain acids and alkalis and does not leave marks after use. It does not emit harmful substances



Article	Pack. g.	Pcs/Pack		
PRLISH	250	6		

PROCARE CLEAN

CLEANING SPRAY

Cleaning spray ready to use suitable for cleaning of stainless steel, brass and aluminum profiles, from residual surface oxide and limestone. The product deposit a protective film that prevents the deposit of limestone and soap residues. Its periodic use allows to obtain bright and cleaner surfaces for long period. Suitable also for glasses, mirrors and bathroom fittings.



Article	Pack. lm	Pcs/Pack.		
PRCLEAN	750	6		

TROWEL in steel foil 3x3, support in polished aluminium with electro welded fixing. Rubber grip fixed with an anti-rotation system. Particularly suitable for the laying of the waterproofing system PROFOIL.


TROWEL

STAINLESS STEEL

TROWEL STEINLESS STEEL

Box 6 Pcs

Article	Tooth	Dimensions mm	Pcs/Box
PFTT33	3X3	280X120	6

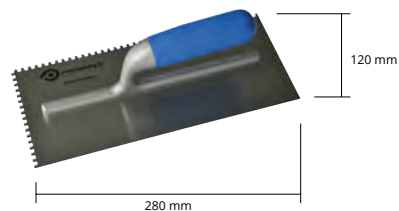

TROWEL in steel foil 5x7, support in polished aluminium with electro welded fixing. Rubber grip fixed with an anti-rotation system. Particularly suitable for the laying of the waterproofing and uncoupling systems PRODESO® and PRODESO® HEAT & PRODESO® HEAT GRIP.


TROWEL

STAINLESS STEEL

TROWEL STEINLESS STEEL

Box 6 Pcs

Article	Tooth	Dimensions mm	Pcs/Box
PFTT57	5X7	280X121	6

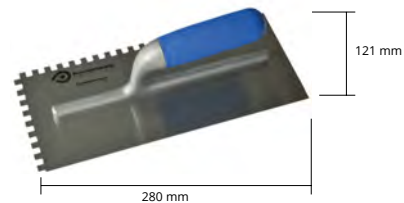

TROWEL in steel foil 10x10, support in polished aluminium with electro welded fixing. Rubber grip fixed with an anti-rotation system. Particularly suitable for the laying of tiles above the waterproofing and uncoupling systems PRODESO® and PRODESO® HEAT & PRODESO® HEAT GRIP.


TROWEL

STAINLESS STEEL

TROWEL STEINLESS STEEL

Box 6 Pcs

Article	Tooth	Dimensions mm	Pcs/Box
PFTT1010	10X10	280X122	6

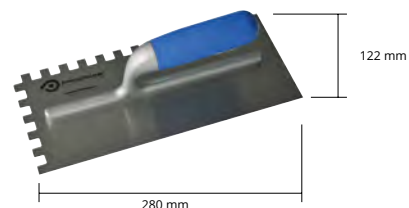


TROWEL in PVC size 10x10 cm, resistant to solvents, with a triangular teeth of interaxle spacing of 5 mm, 4 mm and 3 mm. To be used for the application of adhesives PROBAND FIX.

TROWEL

PVC

TROWEL

Article	Dimensions mm
PRSPD 10	100x100



ROLLER in nylon, 40 cm long, fixed to a varnished metal or stainless steel 304 frame, suitable for pressing the PRODESO®, PRODESO® HEAT & PRODESO® HEAT GRIP and PROFOIL. The roller is equipped with an extendable grip, length-adjustable and with an L base that allows to load 1 bag of adhesive to obtain the correct and homogenous pressing of the membranes. A tripod allows to keep the roll in the right position while loading the bag.

ROLLER



VARNISHED STEEL OR STAINLESS STEEL

ROLLER IN STAINLESS STEEL


L 40 cm

Article	L mm	Finish
PSM	400	varnished
PSMAC	400	stainless steel



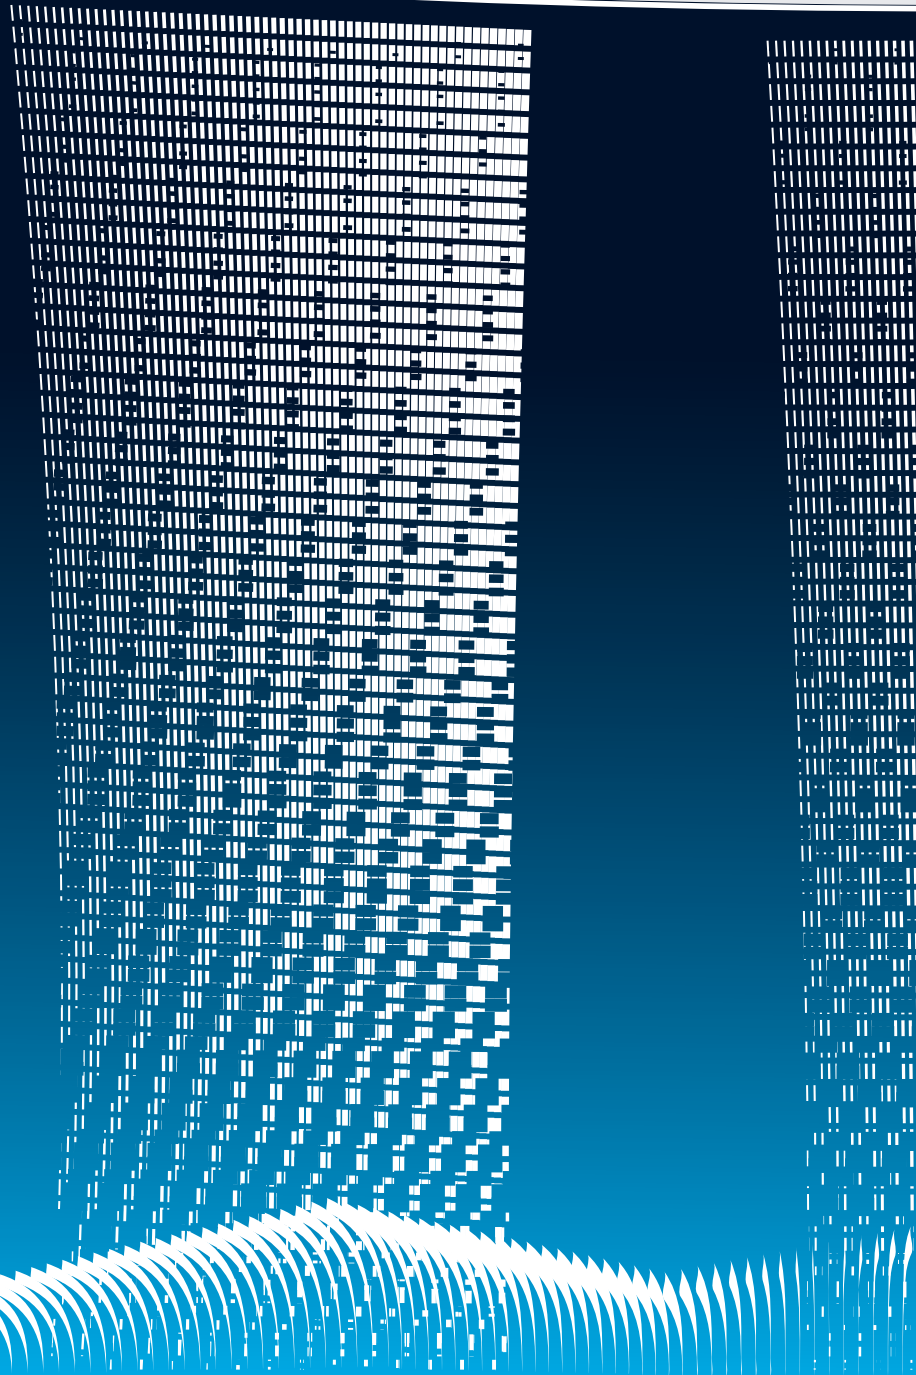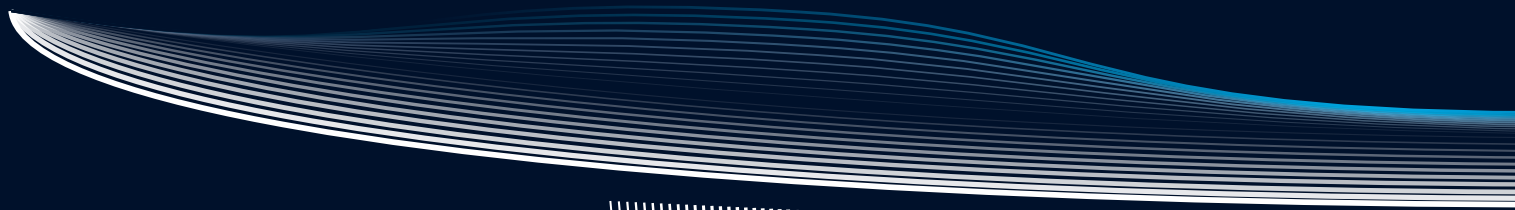


BUILDING SYSTEMS

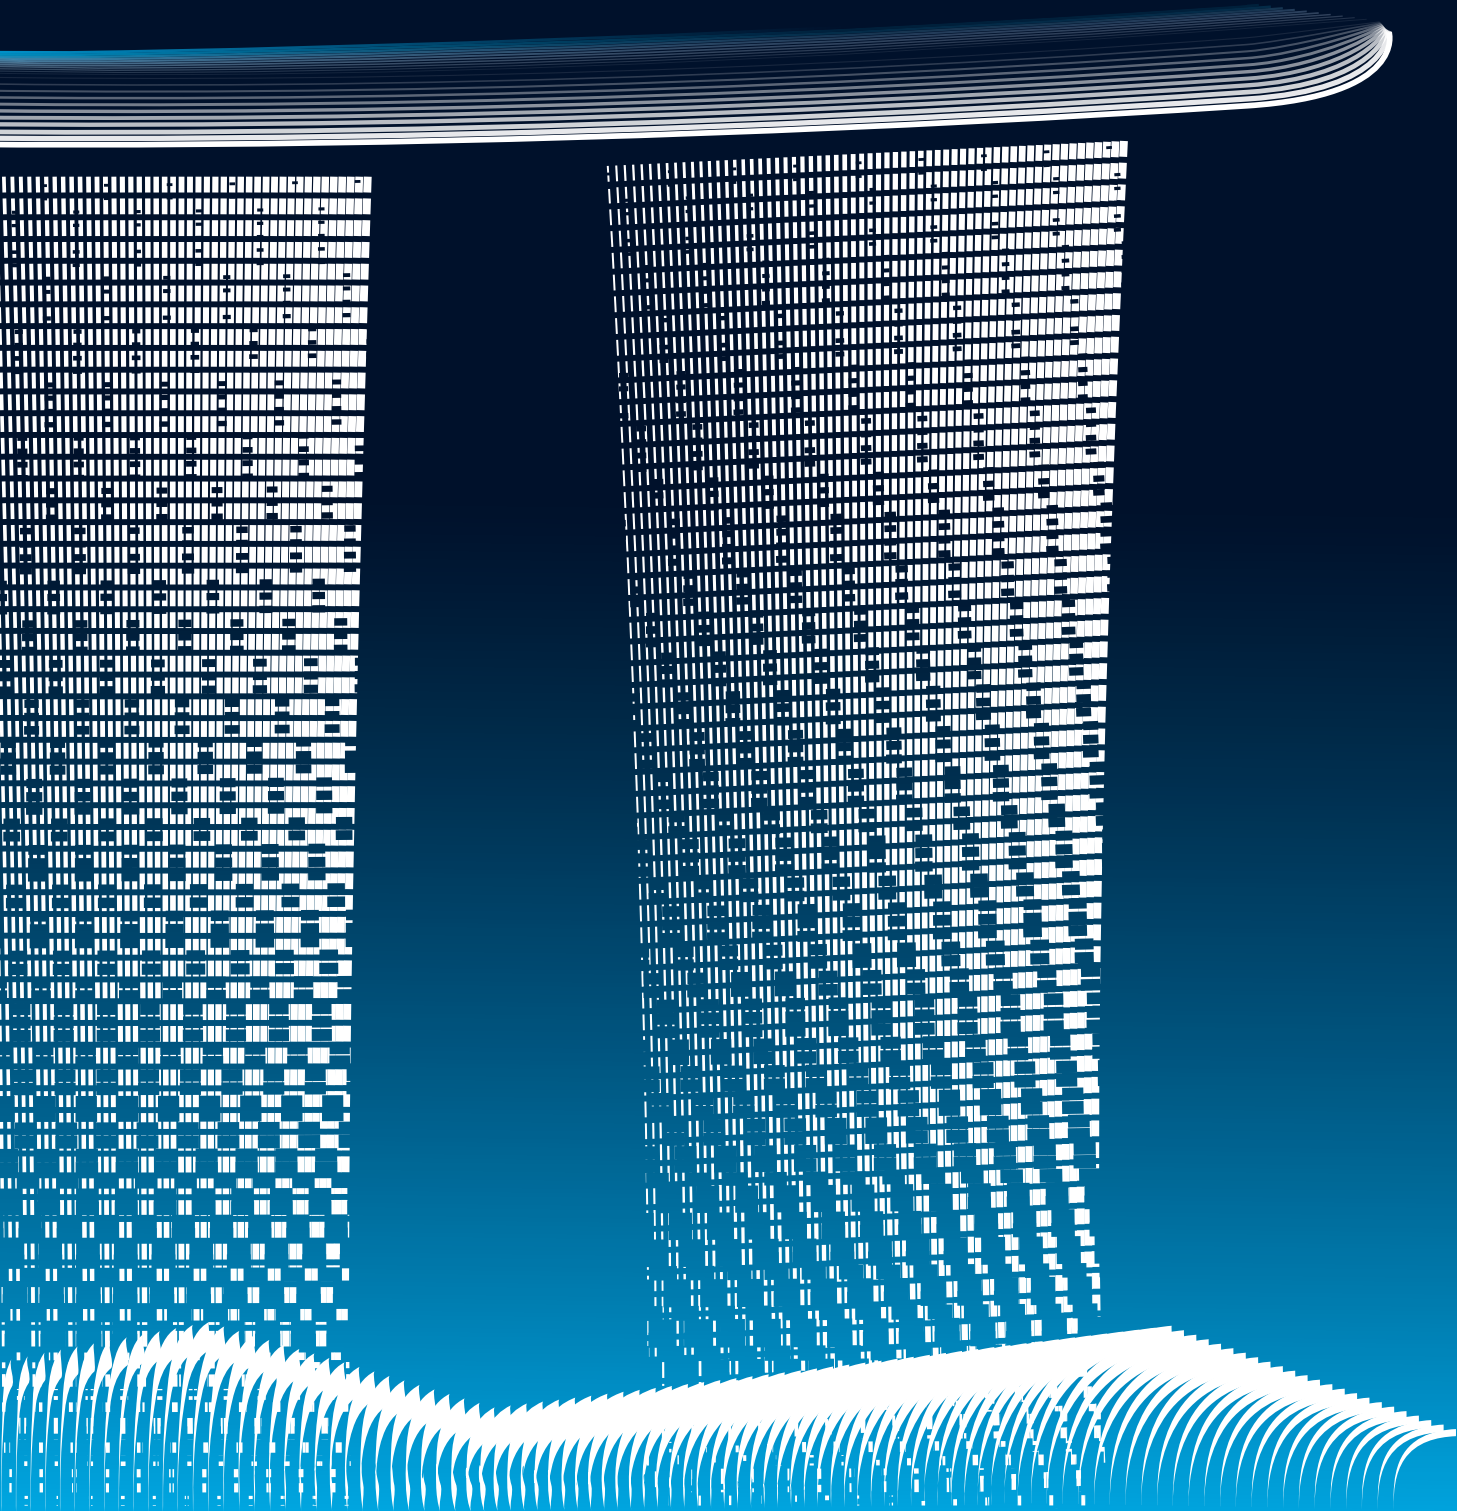

SNAP-ON STRAND SHEATH

GREY RIGID PVC

The **SNAP-ON PVC STRAND SHEATH** serves to cover/neutralise the reinforcement strands inside the prestressed beams; the sheath cancels out the stress that the strands transmit to the beam, thereby permitting the positive to be changed to left-handed moments. Available in various diameters and lengths.

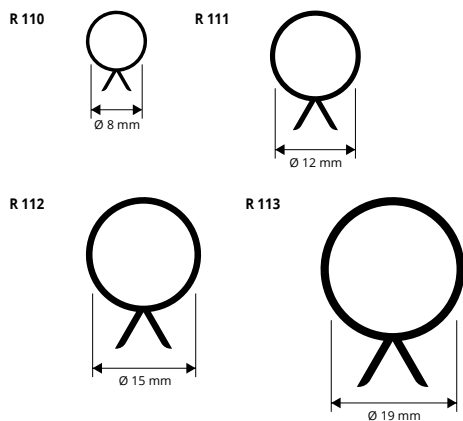


GREY RIGID PVC

bar length 3 lm - pack. 50 Pcs - 150 lm


Article	Ø inches	Ø mm
R 110	3 x 3"	8
R 111	3 / 8"	12
R 112	1 / 2"	15
R 113	0' 6"	19

R 110/ 111 /112: 15.000 lm / pallets
R 113: 10.800 lm / pallets

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




Laying is extremely simple by just positioning the sheath so that the "V" shaped flanges are facing the prestressed reinforcement strands that are already in situ and gently pressing until the sheath snaps on.

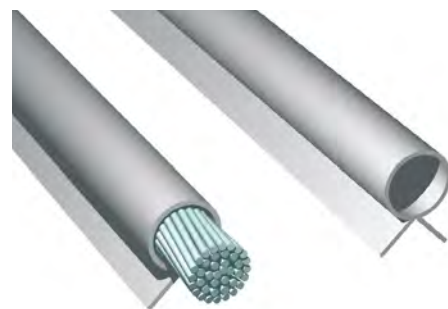

SNAP-ON STRAND TUBE

GREY RIGID PVC

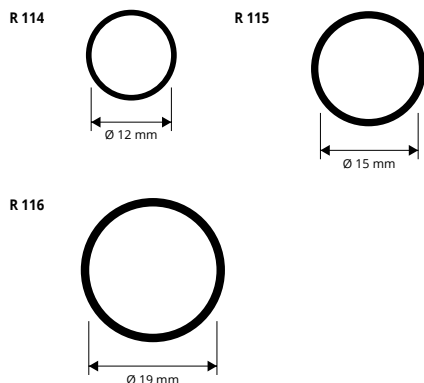


GREY RIGID PVC

bar length 3 lm - pack. 50 Pcs - 150 lm

Article	Ø inches	Ø mm
R 114	3/8"	12
R 115	1/2"	15
R 116	0/6"	19

R 114/ 115: 15.000 lm / pallets
R 116: 12.000 lm / pallets

COLOURS

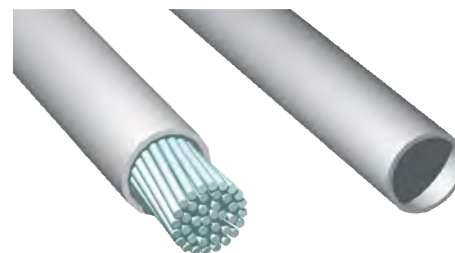


LAYING INSTRUCTIONS

Laying is very simple; just insert the casing over the strands before they are tensioned.

FINNED DISTANCE TUBE

GREY RIGID PVC

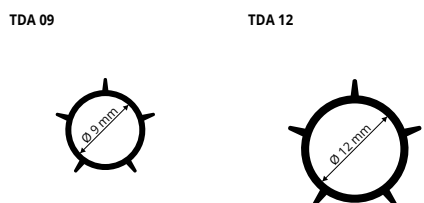

GREY RIGID PVC

bar length 2 lm - pack. 50 Pcs - 100 lm

Article	Ø mm
TDA 09	9
TDA 12	12

TDA 09: 15.000 lm / pallets
TDA 12: 10.000 lm / pallets

COLOURS



LAYING INSTRUCTIONS

Laying is very simple:
1. Just insert the iron rod into the finned tube before closing the reinforcement panel.
2. Upon removing the reinforcement panels, if necessary insert the end plugs.

END CAPS FOR DISTANCE TUBE

GREY HD POLYPROPYLENE




SMOOTH END CAPS - GREY HD POLYPROPYLENE

pack. 1000 Pcs


Article	Ø mm
PPT 09	9
PPT 12	12

RIBBED DISTANCE TUBE


GREY RIGID PVC

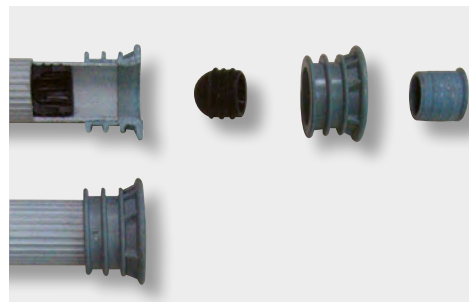


PPD 20



PPD 22



PPD 26



GREY RIGID PVC

bar length 2 lm - pack. 25 Pcs - 50 lm

Article	Ø mm inside		
PPD 20	20		
PPD 22	22		
PPD 26	26		

PPD 20/ PPD 22: 5.000 lm / pallets

PPD 26: 3.000 lm / pallets

COLOURS



WASHERS AND END CAPS FOR DISTANCE TUBE

GREY HD POLYPROPYLENE - PVC / RUBBER

WASHERS - GREY HD POLYPROPYLENE

pack. 1000 Pcs

Article	Ø mm outside		
PPR 20	20		
PPR 22	22		
PPR 26	26		

OUTSIDE WASHERS - GREY HD POLYPROPYLENE

pack. 1000 Pcs

Article	Ø mm		
RETDB 22	26		

INSIDE END CAPS - PVC / RUBBER

pack. 2000 PCS divided into two 1000 Pcs bags

Article	Ø mm		
TIGPC 22	22		

SMOOTH PLUGS - GREY HD POLYPROPYLENE

(PPT 20/ 22/ 26 pack. 2000 Pcs divided into two 1000 Pcs bags)

Article	Ø mm	Pcs/Pack.		
PPT 09	9	1000		
PPT 12	12	1000		
PPT 16	16	1000		*
PPT 20	20	2000		
PPT 22	22	2000		
PPT 26	26	2000		

HOLLOW PLUGS - GREY HD POLYPROPYLENE

pack. 2000 Pcs divided into two 1000 Pcs bags

Article	Ø mm	Pcs/Pack.		
PPTC 22	22	2000		*

SMOOTH PLUG
for walls without plaster



HOLLOW PLUG
for plaster



PPR 20 / 22 / 26



PPT 09 / 12 / 16 / 20 / 22 / 26



RETDB 22





TIGPC 22



DRIP

GREY RIGID PVC

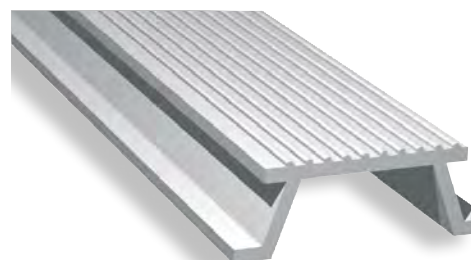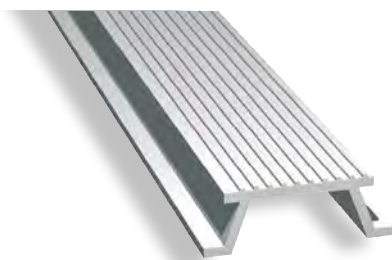

GREY RIGID PVC

bar length 2 lm - pack. 50 Pcs - 100 lm

Article	L x H mm		
GCT 20	20 X 12		
GCT 30	30 X 15		


GCT 20: 15.000 lm / pallets

GCT 30: 10.000 lm / pallets


COLOURS



GCT 20



GCT 30



LAYING INSTRUCTIONS


Must be fixed below the sheathing/armature to create the drip course.

* = Production on demand with minimum quantity of 10000 pcs. Production delay 4/5 weeks. Price to be agreed.

PROFILE WITH TRIANGULAR CHAMFER

GREY RIGID PVC

The **TRIANGULAR CHAMFER** is made in grey rigid PVC in various widths 10-15-20-30 mm and standard length of 2 lm. It is mainly used to chamfer the corners of the concrete pours when making, for example, walls-columns etc. It is strong and easy to lay.

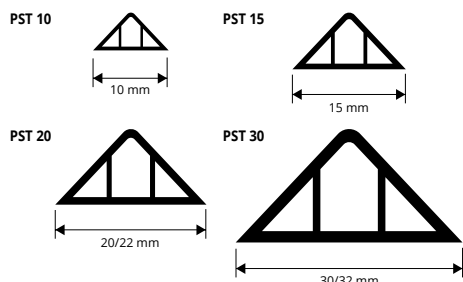

LAYING INSTRUCTIONS

Put the nails into the central part along the profile before pouring the concrete.

GREY RIGID PVC
bar length 2 lm - pack. 50 Pcs - 100 lm


Article	Width mm		
PST 10	10		
PST 15	15		

20.000 lm pallets

GREY RIGID PVC
bar length 2 lm - pack. 50 Pcs - 100 lm


Article	Width mm		
PST 20	20/22		
PST 30	30/32		

PST 20: 15.000 lm / pallets
PST 30: 10.000 lm / pallets

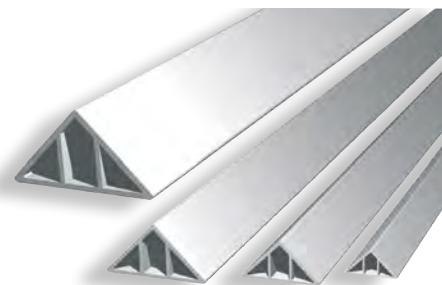

ROUNDED TRIANGULAR CHAMFER FILLET

GREY RIGID PVC

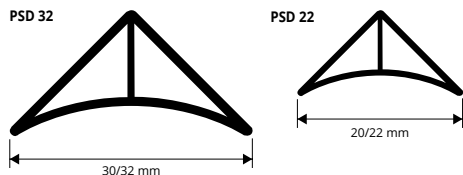

LAYING INSTRUCTIONS

Put the nails into the central part along the profile before pouring the concrete.

GREY RIGID PVC
bar length 2 lm - pack. 50 Pcs - 100 lm

Article	L mm		
PSD 22	20/22		
PSD 32	30/32		

PSD 22: 15.000 lm / pallets
PSD 32: 10.000 lm / pallets

COLOURS



G - Grey



FISHBONE RIBBED JOINT

GREY RIGID PVC

COLOURS



G - Grey


LAYING INSTRUCTIONS

Laying is very simple: just insert the ribbed joint into the gap deliberately left in the concrete or the screed.

GREY RIGID PVC
bar length 2 lm - pack. 50 Pcs - 100 lm

Article	H x L mm		
GRP 25	25 X 5		
GRP 45	45 X 5		

GRP 25: 10.000 lm / pallets
GRP 45: 5.000 lm / pallets

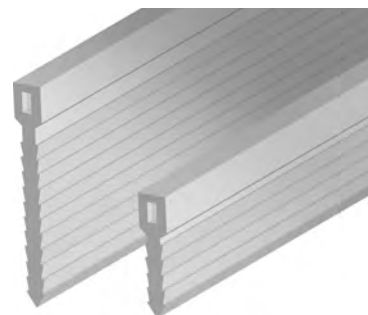

PROFILE WITH DOUBLE CHAMFER - FOR BALCONIES

GREY RIGID PVC

COLOURS



G - Grey

LAYING INSTRUCTIONS

Laying is very simple: just fix it with nails or clamps in the relative formwork prior to pouring the concrete.

GREY RIGID PVC
on demand bar length

Article	H mm		
R 117	80		*

PROFILE SPECIFICATIONS:


- Chamfer angle 45°
- Chamfer length 20 mm
- Bar length on demand
- Weight x metre ≈ 2,3 Kg



The **WATERSTOPS** profiles are made in high-quality polyvinyl chloride (plasticized PVC) and have excellent physical-mechanical properties, strength, flexibility, resistance to ageing and fluid-tightness even under pressure. The "Flat Waterstop" model art. WP is used for adjacent pours of concrete, while the "Waterstop with Bulb" model art. WB is used in concrete casting but as an expansion joint, thanks to the central bulb. They find many applications: floors, underground rooms, trench ducts/ underground passages, face walls, cisterns, silos, swimming pools, tanks, canals, dams, aqueducts, etc. The quality of the materials allows the waterstops to be used on concrete structures exposed to temperatures between -30°C and +70°C, also ensuring good resistance to chemicals in alkaline environments, to brackish waters and to acid solutions.

WATERSTOP

PLASTICIZED PVC BLUE

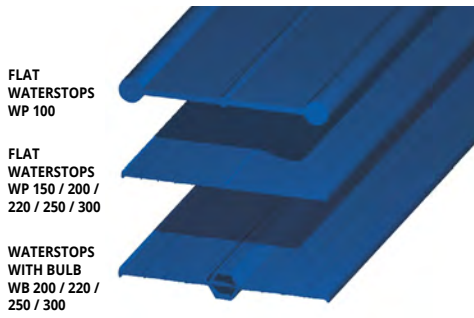

FLAT WATERSTOPS WP 100

FLAT WATERSTOPS WP 150 / 200 / 220 / 250 / 300

WATERSTOPS WITH BULB WB 200 / 220 / 250 / 300



WATERSTOPS WITH BULB - PLASTICIZED PVC BLUE
pack. rolls 25 lm


FLAT WATERSTOPS - PLASTICIZED PVC BLUE
pack. rolls 25 lm (WP 150 - pack. rolls 50 lm)

Article	L mm		
WP 100	100		
WP 150 (50 lm)	150		
WP 200	200		
WP 220	220		*
WP 250	250		
WP 300	300		*


Article	L mm		
WB 200	200		
WB 220	220		
WB 250	250		
WB 300	300		

ANCHORING CLIPS for WATERSTOPS on demand.

ANCHORING CLIPS for WATERSTOPS on demand.

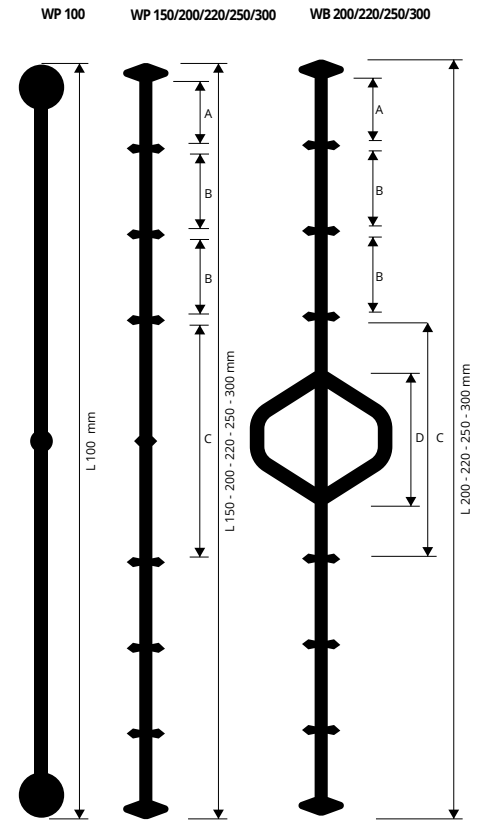


profiles for adjacent pours of concrete

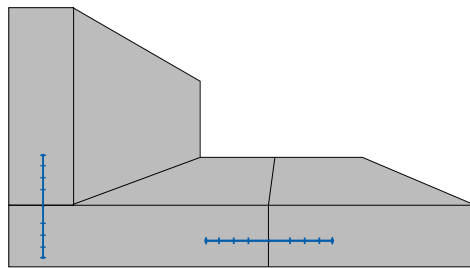

SEALING OF WATERSTOPS

The Waterstops may be welded together to obtain a single piece of the required length. The two parts must be properly cleaned for perfect fluid-tightness of the joints. The waterstops are usually field welded using a normal hot-air heater on the ends of the sections. The bond is accomplished by melting the material and pressing one end over the other.

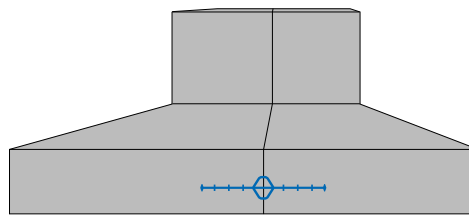

COLOURS



SIZE

ART.	A	B	C	D
WP 100	40 mm			
WP 150	13,3 mm	15,5 mm	45,5 mm	
WP 200	22 mm	22 mm	50 mm	
WP 220	23 mm	25 mm	50 mm	
WP 250	19 mm	21 mm	71,5 mm	
WP 300	20,5 mm	22,5 mm	78 mm	
WB 200	16 mm	18 mm	85 mm	32 mm
WB 220	16 mm	18,5 mm	86 mm	33 mm
WB 250	26 mm	20 mm	84 mm	30 mm
WB 300	26 mm	22 mm	88 mm	34 mm

ANCHORING CLIPS FOR WATERSTOPS

GREY UH POLYPROPYLENE

GREY HD POLYPROPYLENE
pack. 1000 Pcs

Article		
CLPS		





* = Production on demand with minimum quantity of 10 rolls. Production delay 4/5 weeks. Price to be agreed.

PRODISTANZ

GREY HD POLYETHYLENE

PRODISTANZ is a patented new product that simplifies, improves and speeds up the work of securing and preparing shuttering panels used in the casting of concrete; it avoids the cutting and assembling in situ of the tubular water-washer (traditional system). **PRODISTANZ** is recommended for its special, very strong structure, which is resistant to compressive stress and prevents water infiltration thanks to the lateral ribs along the cylindrical part and the horizontal supports and circles. It consists of a single plastic element and is available in a wide range of lengths 15-20-25-30-35-40 cm (in packs of 100 Pcs.). They come with watertight plugs in a choice of two types. Watertight caps at 18 Atm. / Bar.

spacers

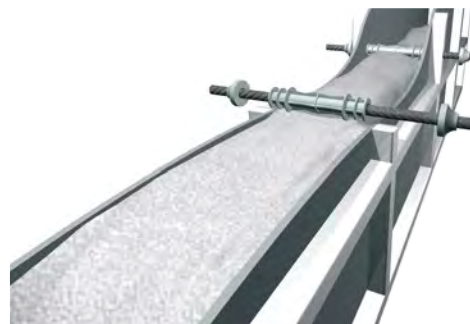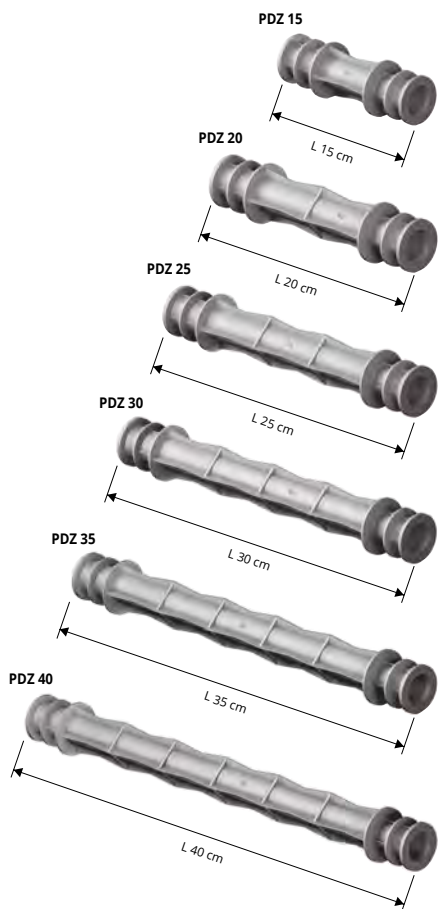

GREY HD POLYPROPYLENE
pack. 100 Pcs + 200 end caps

Article	L cm		
PDZ 15	15		
PDZ 20	20		
PDZ 25	25		
PDZ 30	30		
PDZ 35	35		
PDZ 40	40		

SIMPLE FAST ECONOMIC

- Exclusive patented product
- High resistance to compressive stress and to water infiltration
- Fast, assured work, without waste, cutting costs or pipe scraps
- Extremely easy to use
- Vast range available: 15-20-25-30-35-40 cm
- Innovative design - guaranteed
- Quality - Constant colour and quality



END CAPS AND JOINTS FOR PRODISTANZ

GREY HD POLYPROPYLENE - PVC/RUBBER

TIGPC 22



GPDZ 22



PPTC 22



PPTC 22 hollow plug for plaster



Hollow plug: for better anchorage of the plaster. (new) standard.

HOLLOW END CAPS - GREY HD POLYPROPYLENE

pack. 2000 Pcs divided into two 1000 Pcs bags

Article	Ø mm	Pcs/Pack.		
PPTC 22	22	2000		*

SMOOTH PLUGS - GREY HD POLYPROPYLENE

pack. 2000 Pcs divided into two 1000 Pcs bags

Article	Ø mm	Pcs/Pack.		
PPT 22	22	2000		

INSIDE END CAPS - PVC/RUBBER



pack. 2000 Pcs divided into two 1000 Pcs bags

Article	Ø mm		
TIGPC 22	22		

JOINT - GREY HD POLYPROPYLENE

pack. 1000 Pcs divided into two 500 Pcs bags

Article	Ø mm		
GPDZ 22	22		


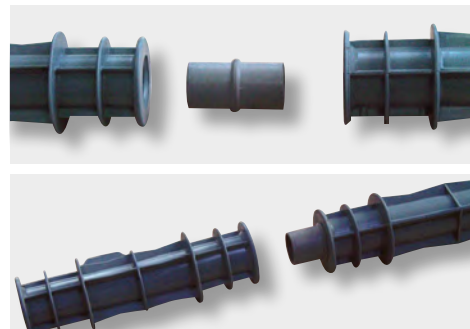
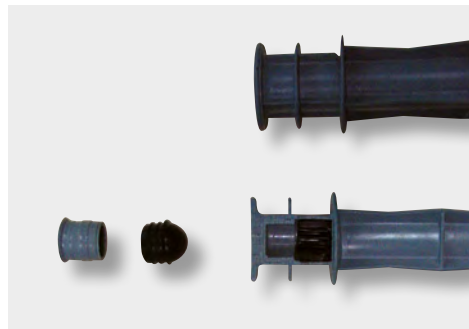


* = Production on demand with minimum quantity of 10000 pcs. Production delay 4/5 weeks. Price to be agreed.

The linear spacer **RAPY 100** is strong and resistant, capable of bearing heavy loads thanks to its shape and size. The lateral and horizontal holes allow perfect penetration of the concrete. Upside down it can be used on insulating panels for floors. Spacers may be joined together longitudinally with a simple slot-in system. Ideal for precasting and civil industry, it ensures stability and invisible finish. On demand available in 50 cm cut.

RAPY 100 FOR HEAVY MESH

GREY HD POLYPROPYLENE

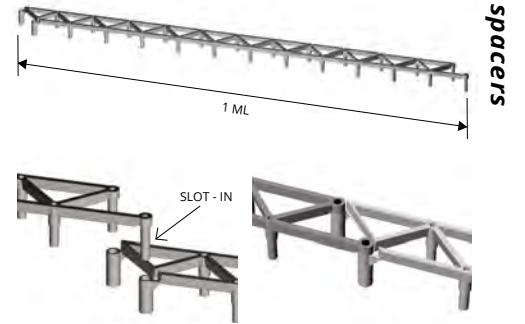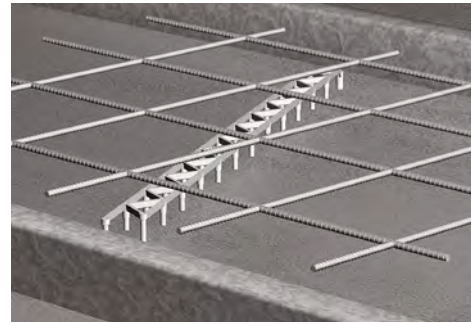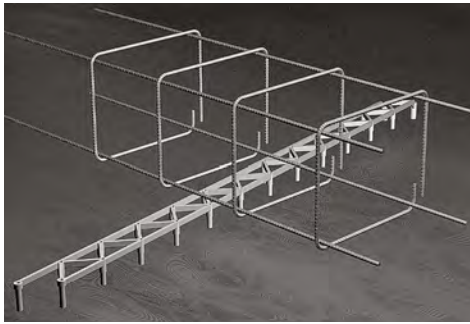

GREY HD POLYPROPYLENE
length 1 lm - pack. 80 lm

Article	H mm		
PLF 20	20		
PLF 25	25		
PLF 30	30		

Maximum weight:
3000 kg a piece (bar length: 1lm) equally distributed.

GREY HD POLYPROPYLENE
length 1 lm - pack. 60 lm

Article	H mm		
PLF 35	35		
PLF 40	40		
PLF 45	45		
PLF 50	50		
PLF 55	55		
PLF 60	60		



Strong and very resistant linear spacer, to be joined lengthwise and have several lengths. The new shape allows to combine high technical performances to a costs optimization.

RAPY 100 ECO

GREY HD POLYPROPYLENE

RAPY 100 ECO
length 1 lm - pack. 64 lm

Article	H mm		
PLFE 20	20		
PLFE 25	25		
PLFE 30	30		
PLFE 35	35		
PLFE 40	40		

ARTICLES NOT FOR SALE SINGLY

RAPY 100 ECO
length 1 lm - pack. 64 lm

Article	H mm		
PLFE 45	45		*
PLFE 50	50		**
PLFE 55	55		**
PLFE 60	60		**

ARTICLES NOT FOR SALE SINGLY



The **RAPY 200** spacer is sturdy, resistant and easy to place. Ideal for reinforced horizontal, vertical and sloped structures. The side and horizontal holes allow it to perfectly penetrate into the concrete. When flipped over, it can be used for insulation panels, floors and precast structures. On demand available at 1 metre.


RAPY 200

GREY HD POLYPROPYLENE

GREY HD POLYPROPYLENE
length 2 lm - pack. 96 lm

Article	H mm		
PLF 20R	20		
PLF 25R	25		
PLF 30R	30		
PLF 40R	40		

Maximum weight: 3000 kg a piece (bar length: 2 lm) equally distributed.
The spacer is made up of two 1 lm pieces joined together.

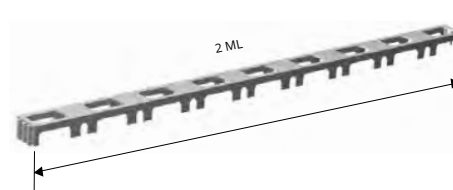

Spacer for horizontal use for heavy reinforcement and meshes; it withstands heavy incidental weights and loads with great stability.


MULTIPIEDE

GREY HD POLYETHYLENE

GREY HD POLYPROPYLENE
bar length 50 cm

Article	H mm		
DMP 20 (100 Pcs)	20		*
DMP 25 (100 Pcs)	25		**
DMP 30 (75 Pcs)	30		**


Maximum weight:
2.500 kg a piece (bar length: 50 cm) equally distributed.

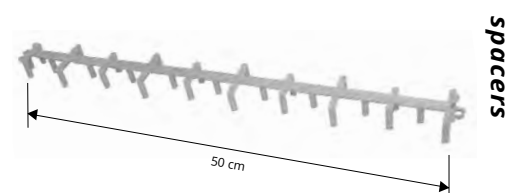

TYPE "PAV" WHEEL

GREY HD POLYETHYLENE

spacers for electrically welded mesh

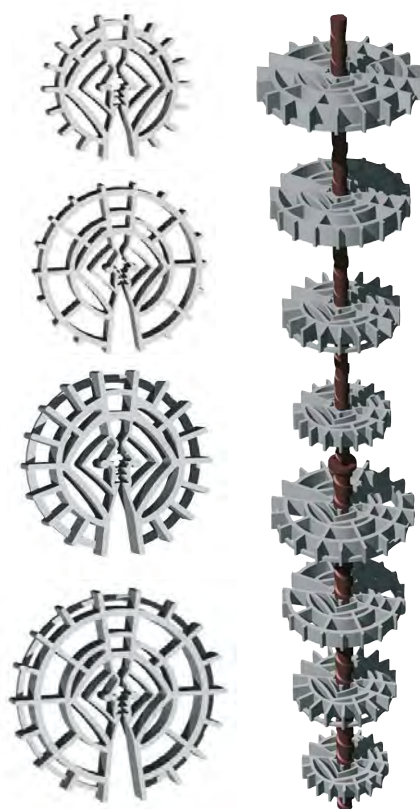

GREY HD POLYPROPYLENE
pack. 2000 Pcs

Article	Formwork spacer mm	Ø rod mm		
PPV 10	10	4/8		
PPV 15	15	4/8		



FORMWORK
DISTANCE



GREY HD POLYPROPYLENE
pack. 1000 Pcs

Article	Formwork spacer mm	Ø rod mm		
PPV 20	20	4/8		
PPV 25	25	4/12		
PPV 30	30	4/12		

GREY HD POLYPROPYLENE
pack. 500 Pcs


Article	Formwork spacer mm	Ø rod mm		
PPV 40	40	8/16		
PPV 50	50	8/16		

**NEW PATENTED UNIVERSAL MODEL FOR RODS Ø 4/12 MM.
THE ADVANTAGES OF THE NEW PAV RANGE ARE AS FOLLOWS:**
1st The only universal spacer for 4 to 12 mm rods.
2nd Easy to insert.
3rd Innovative and technical design.

TYPE "PAU" TOWER

GREY HD POLYETHYLENE

spacers for electrically welded mesh

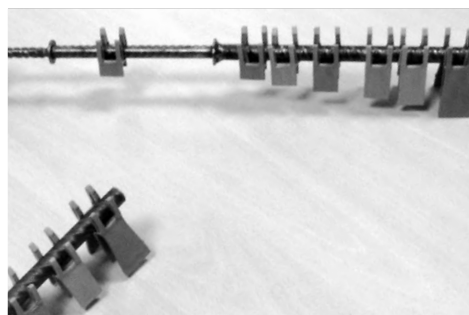


GREY HD POLYPROPYLENE
pack. 4000 Pcs (PPU 10) - pack. 3000 Pcs (PPU 15)

Article	Formwork spacer mm	Ø rod mm		
PPU 10	10	4/12		
PPU 15	15	4/12		

GREY HD POLYPROPYLENE
pack. 1000 Pcs

Article	Formwork spacer mm	Ø rod mm		
PPU 30	30	4/12		
PPU 40	40	4/12		

**NEW PATENTED UNIVERSAL MODEL FOR RODS Ø 4/12 MM.
THE ADVANTAGES OF THE NEW PAV RANGE ARE AS FOLLOWS:**
1st The only universal spacer for 4 to 12 mm rods.
2nd Easy to insert.
3rd innovative and technical design.

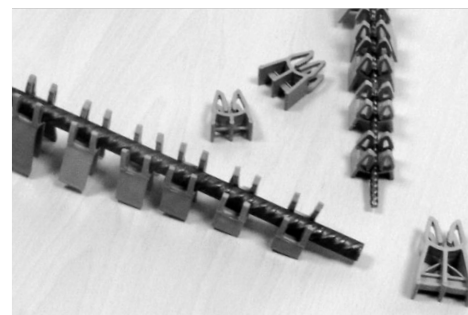

GREY HD POLYPROPYLENE
pack. 2000 Pcs

Article	Formwork spacer mm	Ø rod mm		
PPU 20	20	4/12		
PPU 25	25	4/12		

The **CIRCULAR PAD** spacer is for horizontal use with two removable circles for lightweight mesh.
The **CIRCULAR PAD** spacer has been made with two large circles to occupy more space.

CIRCULAR "PAD"

GREY HD POLYPROPYLENE

GREY HD POLYPROPYLENE - with 2 circles
pack. 250 Pcs

Article	Formwork spacer mm		
PAD 15	15		*
PAD 20	20		*

GREY HD POLYPROPYLENE - with 2 circles
pack. 200 Pcs

Article	Formwork spacer mm		
PAD 25	25		*
PAD 30	30		*



spacers

SPACER for vertical and horizontal meshes. complete with hooks fixing to mesh.
dimensions 192 x 90 mm.


SPACER FOR VERTICAL/HORIZONTAL MESH

GREY HD POLYETHYLENE

GREY HD POLYETHYLENE

length 192 mm - width 90 mm

Article	H mm		
DVO 10 (Pack. 400 Pcs)	10		*
DVO 15 (Pack. 400 Pcs)	15		*
DVO 20 (Pack. 300 Pcs)	20		*
DVO 25 (Pack. 120 Pcs)	25		*
DVO 30 (Pack. 250 Pcs)	30		
DVO 35 (Pack. 200 Pcs)	35		*

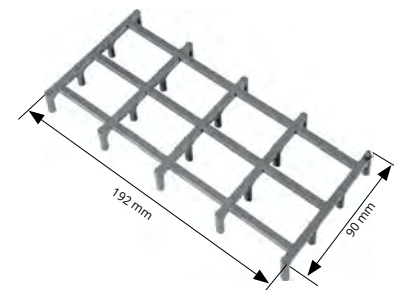

spacers


SPACER FOR GLASS BRICK

HD STYROFOAM

WHITE HD STYROFOAM

pack. 600 Pcs

Article	Thick mm		
DSVT	10		*

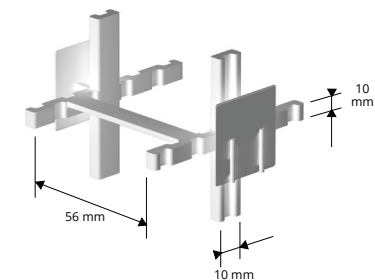


spacers

With the **DOPPY** type spacer with double slot, two Ø 4 to 8 mm mesh reinforcements may be kept simultaneously at the same distance from the formwork.

TYPE "DOPPY" WITH DOUBLE SLOT

GREY HD POLYPROPYLENE

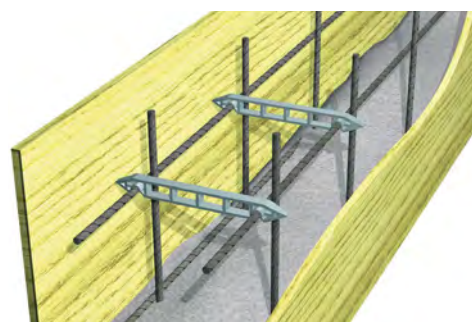

GREY HD POLYPROPYLENE - for mesh up to Ø 8 mm


pack. 500 Pcs

Article	mesh dist. L mm		
PPY 15	100		*

GREY HD POLYPROPYLENE - for mesh up to Ø 8 mm

pack. 250 Pcs

Article	mesh dist. L mm		
PPY 20	150		*
PPY 25	200		*
PPY 30	250		*

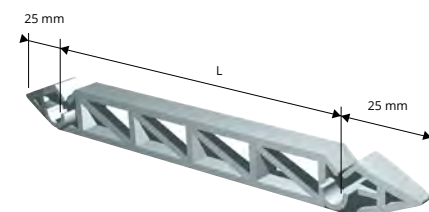

spacers


* = Production on demand with minimum quantity of 10000 pcs. Production delay 4/5 weeks. Price to be agreed.

PROTECTIVE CAPS FOR RODS FOR ADJACENT POURS

HD POLYPROPYLENE

The **PROTECTIVE CAPS** have been created to comply with the safety regulations as per Italian law 81/2008. They protect the end of the protruding rods, thereby preventing injury to operators. Two types for different diameters are available.

laying products

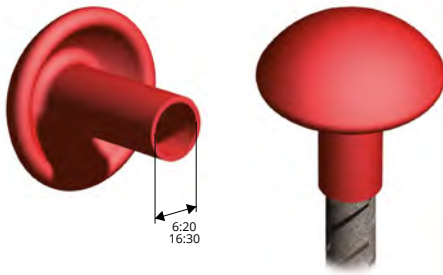

HD POLYPROPYLENE - colour red


pack. 200 Pcs (divided into two 100 Pcs bags)

Article	Ø mm		
PCPF 620	6/20		
PCPF 1630	16/30		

FLAT SPACER FOR MOUNTING PREFABRICATED PANELS

HD POLYPROPYLENE

laying products

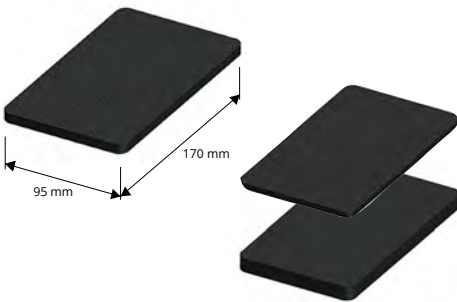

HD POLYPROPYLENE

size 170 X 95 mm - pack. 400 Pcs

Article	Thick mm.		
PPN 02	2		*

HD POLYPROPYLENE

size 170 X 95 mm - pack. 100 Pcs

Article	Thick mm.		
PPN 10	10		*

HD POLYPROPYLENE


size 170 X 95 mm - pack. 200 Pcs

Article	Thick mm.		
PPN 05	5		*

WEDGE SHIMS

HIGH STRENGTH PLASTIC

laying products

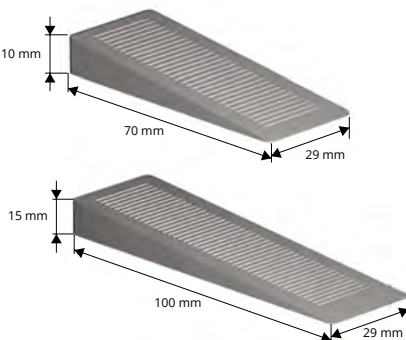

HIGH STRENGTH PLASTIC - standard colour grey

pack. 100 Pcs

Article	H mm		
SAC 10	10		*
SAC 15	15		*

The **PAX** spacer is a sturdy spacer used for horizontal mesh; its shape allows the use of \varnothing 10 / 16 mm mesh.

TYPE "PAX" STURDY

GREY HD POLYETHYLENE

GREY HD POLYETHYLENE - \varnothing rod 10/16 mm

pack. 2000 Pcs

Article	Formwork spacer mm		
PPX 15	15		*

GREY HD POLYETHYLENE - \varnothing rod 10/16 mm

pack. 1000 Pcs

Article	Formwork spacer mm		
PPX 20	20		*
PPX 25	25		*
PPX 30	30		*
PPX 40	40		*



spacers for

The **PAL** spacer is a lightweight spacer used to join the iron mesh framework of floor slabs, maintaining the distance from the formwork.

TYPE "PAL" FOR FLOOR SLABS

GREY HD POLYPROPYLENE

GREY HD POLYPROPYLENE - \varnothing rod 6+5 mm

pack. 2000 Pcs

Article	Formwork spacer mm		
PPO 15	15		*
PPO 20	20		*

GREY HD POLYPROPYLENE - \varnothing rod 6+5 mm

pack. 1000 Pcs

Article	Formwork spacer mm		
PPO 25	25		*



welded mesh

The **PAS** spacer is a sturdy spacer used for heavy reinforcement and large diameter rods.

TYPE "PAS" CHAIR

GREY HD POLYETHYLENE

GREY HD POLYETHYLENE - \varnothing rod 0/28 mm

pack. 2000 Pcs - divided into two 1000 Pcs bags

Article	Formwork spacer mm		
PPS 15	15		*
PPS 20	20		*
PPS 25	25		*

GREY HD POLYETHYLENE - \varnothing rod 0/28 mm

pack. 1000 Pcs - divided into two 500 Pcs bags

Article	Formwork spacer mm		
PPS 30	30		*
PPS 40	40		*
PPS 50	50		*



The **PAG** spacer is a sturdy spacer used for heavy reinforcement and large diameter rods and is fitted with a hook for securing the rod.

TYPE "PAG" CHAIR

GREY HD POLYETHYLENE

GREY HD POLYETHYLENE - \varnothing rod 0/28 mm

pack. 1000 Pcs

Article	Formwork spacer mm		
PPG 15	15		*
PPG 20	20		*
PPG 25	25		*
PPG 30	30		*

GREY HD POLYETHYLENE - \varnothing rod 0/28 mm

pack. 500 Pcs

Article	Formwork spacer mm		
PPG 40	40		*
PPG 50	50		*




* = Production on demand with minimum quantity of 10000 pcs. Production delay 4/5 weeks. Price to be agreed.

GASKETS FOR PRECAST FORMS


PVC / RUBBER

gaskets for industrial precast forms




PVC / RUBBER
length rolls 50 lm

Article	
M 232	*

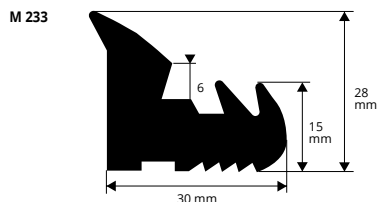




PVC / RUBBER
length rolls 50 lm

Article	
M 233	*




PVC / RUBBER - weight 650 g / lm
length rolls 50 lm

Article	
M 234	*
M 234 A	*
M 234 B	*

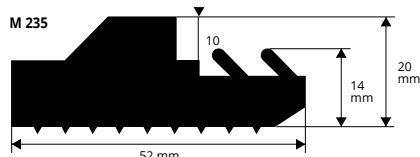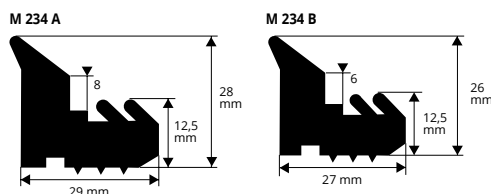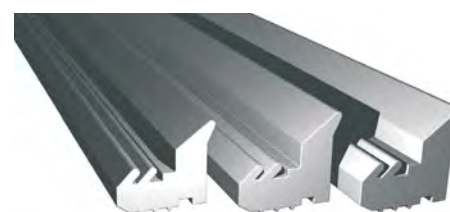



PVC / RUBBER - weight 980 g / lm
length rolls 50 lm

Article	
M 235	*



PVC / RUBBER - weight 270 g / lm
length rolls 50 lm

Article	
M 236	*
M 236 A	*
M 236 B	*

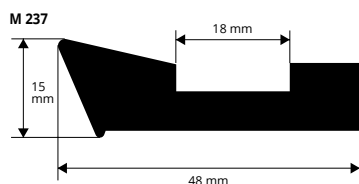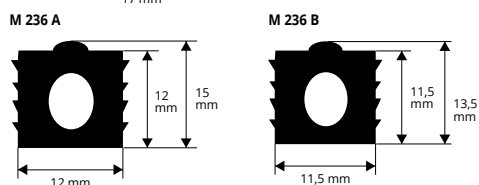

PVC / RUBBER - weight 510 g / lm
length rolls 50 lm

Article	
M 237	*




© 2019 All rights reserved by Progress Profiles, Printed in Italy

GASKETS FOR PRECAST FORMS

PVC / RUBBER



gaskets for industrial precast forms

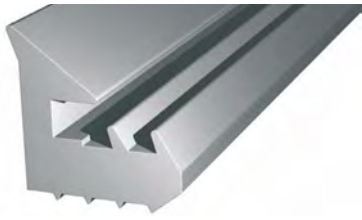

PVC / RUBBER - weight 695 g / lm
length rolls 50 lm

Article	
M 238	*


M 238

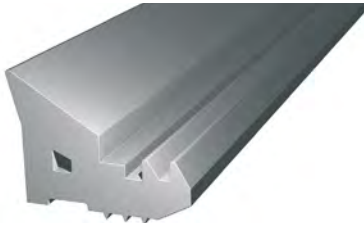

PVC / RUBBER - weight 880 g / lm
length rolls 50 lm

Article	
M 239	*


M 239



PVC / RUBBER
length rolls 50 lm




Article	
M 240	*
M 240 A	*
M 240 B	*

M 240



M 240 A


M 240 B

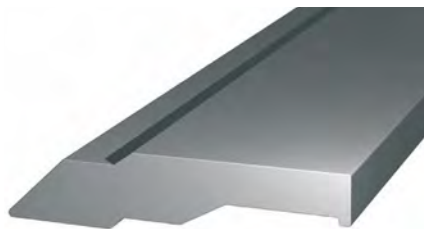

PVC / RUBBER
length rolls 50 lm

Article	
M 241	*



M 241



PVC / RUBBER - weight 695 g / lm
length rolls 50 lm

Article	
M 242	*


M 242

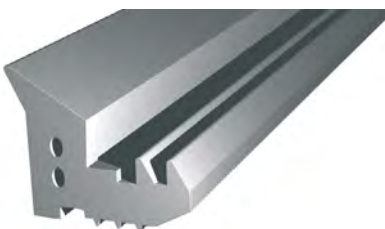

PVC / RUBBER - weight 630 g / lm
length rolls 50 lm

Article	
M 243	*

M 243





* = Production on demand with minimum quantity of 50 lm. Production delay 4/5 weeks. Price to be agreed.

GASKETS FOR PRECAST FORMS


PVC / RUBBER

gaskets for industrial precast forms




PVC / RUBBER - weight 180-330 g / lm
length rolls 50 lm

Article	
M 244	*
M 244 A	*

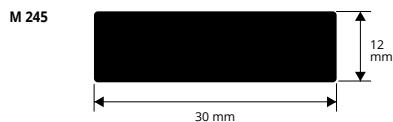



PVC / RUBBER
length rolls 50 lm

Article	
M 245	*





PVC / RUBBER - weight 330 g / lm
length rolls 50 lm

Article	
M 246	*

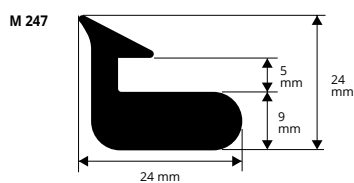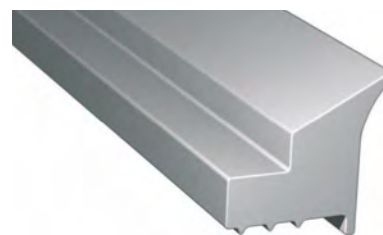


PVC / RUBBER - weight 335 g / lm
length rolls 50 lm

Article	
M 247	*

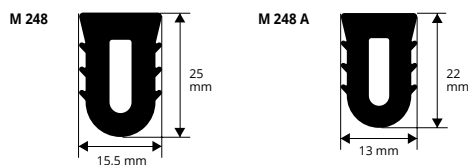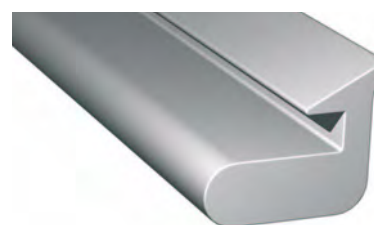

PVC / RUBBER - weight 270 g / lm
length rolls 50 lm

Article	
M 248	*
M 248 A	*



PVC / RUBBER - weight 220 g / lm
length rolls 50 lm

Article	
M 249	*



* = Production on demand with minimum quantity of 50 lm. Production delay 4/5 weeks. Price to be agreed.

GASKETS FOR PRECAST FORMS

PVC / RUBBER



gaskets for industrial precast forms



PVC / RUBBER
length rolls 50 lm

Article	
M 250	*



M 250

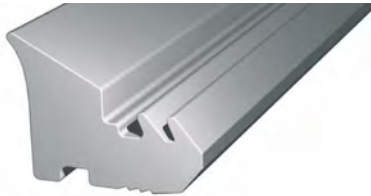

PVC / RUBBER
length rolls 50 lm

Article	
M 251	*


M 251

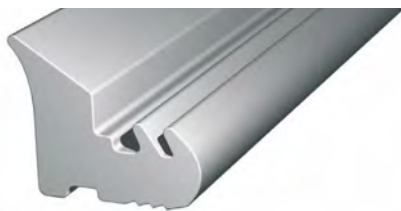

PVC / RUBBER
length rolls 50 Lm

Article	
M 252	*


M 252



PVC / RUBBER
length rolls 50 lm

Article	
M 253	*



M 253



PVC / RUBBER
length rolls 50 lm

Article	
M 254	*


M 254

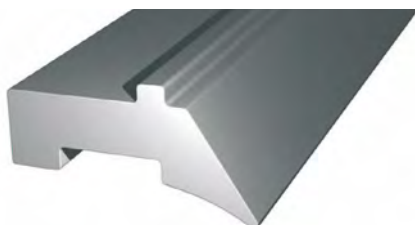

PVC / RUBBER
length rolls 50 lm

Article	
M 255	*

M 255

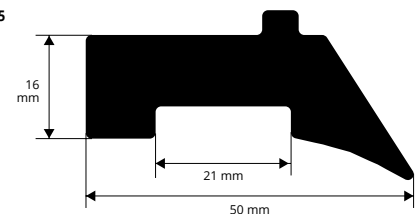


* = Production on demand with minimum quantity of 50 lm. Production delay 4/5 weeks. Price to be agreed.

GASKETS FOR PRECAST FORMS

PVC / RUBBER


gaskets for industrial precast forms

M 256




PVC / RUBBER
length rolls 50 lm

Article	
M 256	*

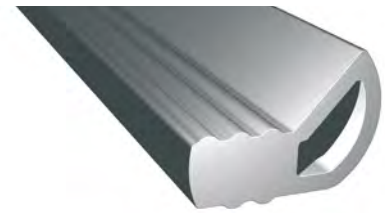


M 257




PVC / RUBBER
length rolls 50 lm

Article	
M 257	*

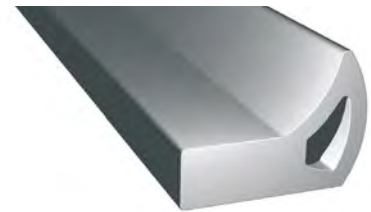


M 258




PVC / RUBBER
length rolls 50 lm

Article	
M 258	*

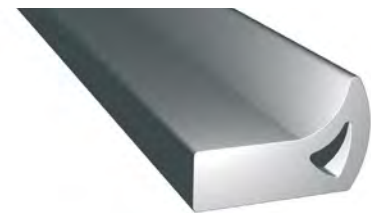

M 259




PVC / RUBBER - weight 750 g / lm
length rolls 50 lm

Article	
M 259	*




M 260



PVC / RUBBER - weight 350 g / lm
length rolls 50 lm



Article	
M 260	*

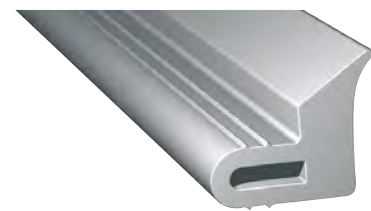

© 2020 All rights reserved by Progress Profiles, Printed in Italy

GAP-COVERING BALLOON SHEATH

COEXTRUDED FLEXIBLE VINYL RESIN

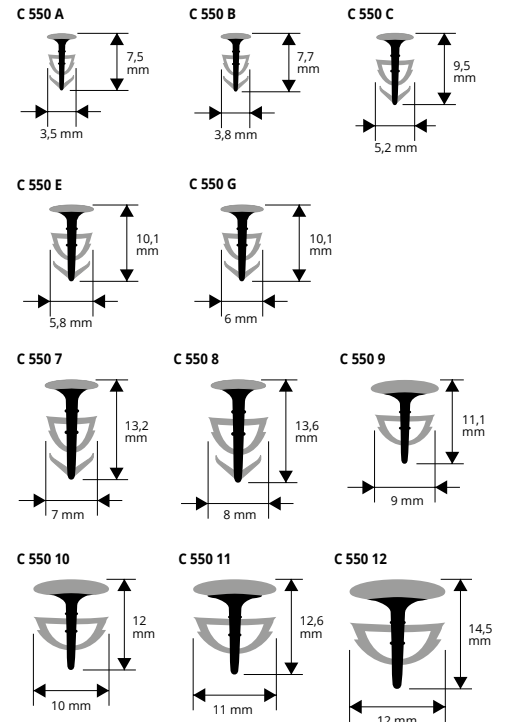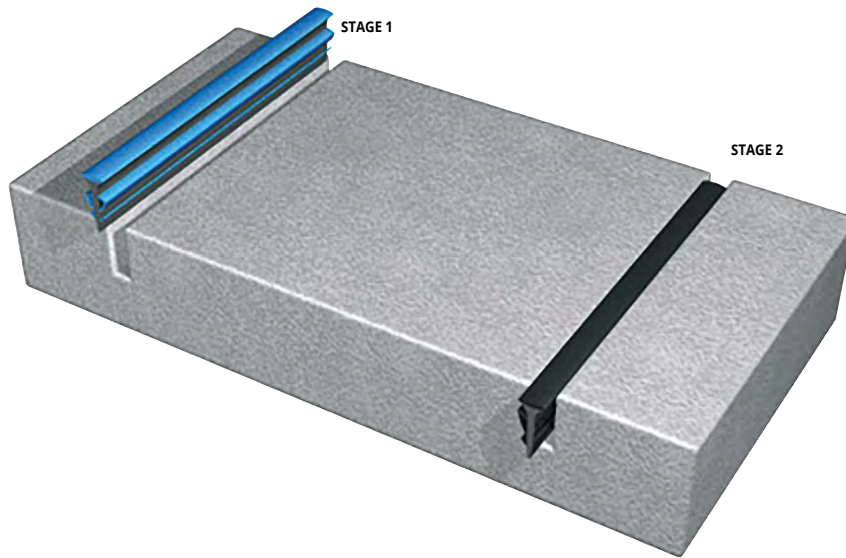

For industrial floors - FLEXIBLE VINYL RESIN

pack. roll 250 lm

Article	sheath L mm	disk thick mm		
C 550 A..	3,5	2,4 (diamond)		*
C 550 B..	3,8	2,8 (diamond)		*
C 550 C..	5,2	3,2 (diamond)		*
C 550 E..	5,8	3,6/3,8 (diamond)		*
C 550 G..	6	4,2 (diam./sanding)		*

MINIMUM QUANTITY 20 ROLLS = 5000 lm per colour and dimension.
Available for every type of diamond and abrasive disk.

For larger gaps - FLEXIBLE VINYL RESIN

pack. roll 200 lm

Article	sheath L mm	disk thick mm		
C 550 7..	7	5/6		*
C 550 8..	8	6/7		*

For larger gaps - FLEXIBLE VINYL RESIN

pack. roll 150 lm

Article	sheath L mm	disk thick mm		
C 550 9..	9	7/8		*
C 550 10..	10	8/9		*

For larger gaps - FLEXIBLE VINYL RESIN

pack. roll 100 lm

Article	sheath L mm	disk thick mm		
C 550 11..	11	9/10		*
C 550 12..	12	10/11		*

The inserted joints have a wider upper flat part to cover the splintering of the floor created by the disk during cutting.


Available in the colours: G - Y - R - N - B. The code of the selected colour must be added to the article code. E.g.: C 550 A.. (chosen colour Grey) C 550 AG.

COLOURS



RESOLVES THE FOLLOWING PROBLEMS:

- Perfectly covers the gap made with any type of disk and remains for a long time at floor level without sinking.
- Thanks to the central semi-rigid shank, the sheath cannot contract in the joint areas.
- When the disk is worn, the sheath need not be changed because it adapts to even the narrowest gaps.
- Also available for larger gaps from 6 mm to 12 mm.
- Very easy to lay.

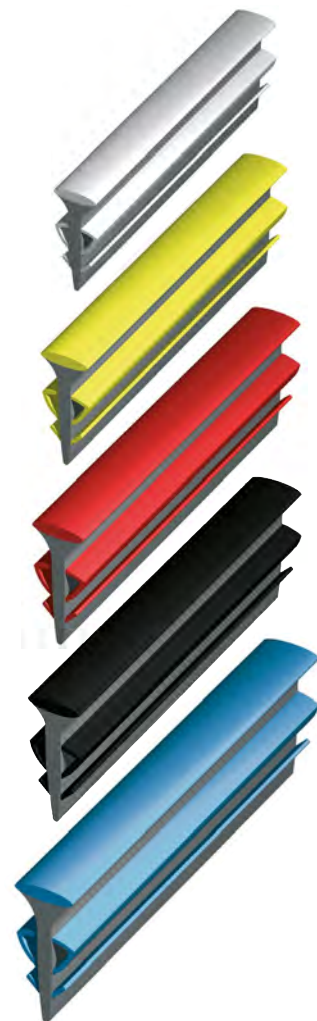


* = Production on demand with minimum quantity of 5000 lm. Production delay 4/5 weeks. Price to be agreed.

PAVIJOINT


GREY RIGID PVC

PAVIJOINT is a rigid PVC profile with the upper part in elastic PVC/rubber, which absorbs the stress of the floor movements. Two T-irons are inserted inside the profile to strengthen it and to unite two short rods; through holes are also made for the rods 80 cm apart. The **PAVIJOINT** totally replaces the conventional aluminium beams used for shuttering the concrete cast, thereby avoiding demoulding of the cast and cutting of the joint with diamond-slitting disks in a delicate point such as construction joints.


construction joints for industrial floors

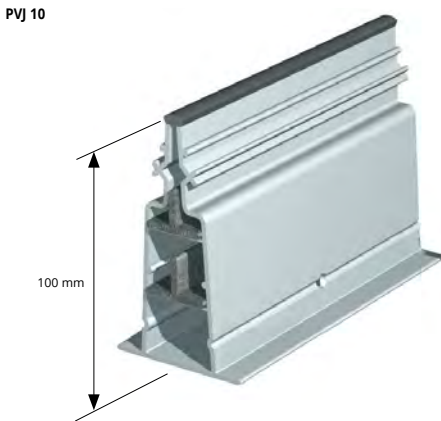

FLOOR TYPE OF LAYING:
example of laying for heights between 15 and 20 mm

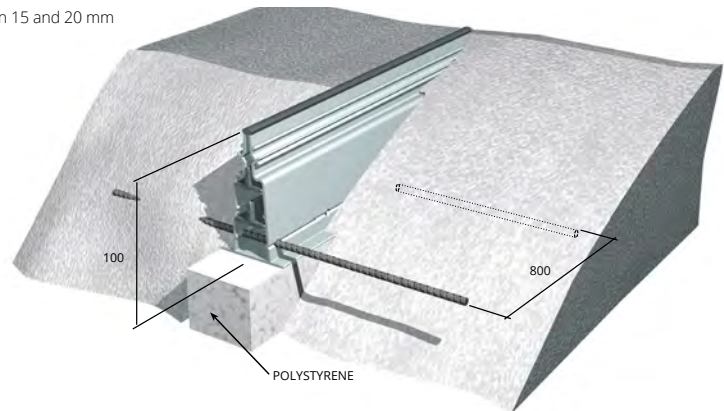

FLOOR SLAB TYPE OF LAYING:
example of laying for height of 10 mm

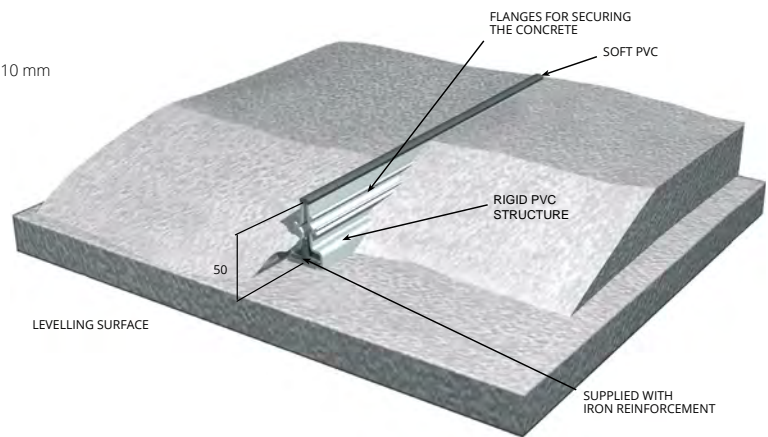

COMPLETE PAVIJOINT - RIGID VINYL RESIN
bar length 3,10 lm

Article	H mm	
PVJ 10	100	*

PHYSICAL-MECHANICAL CHARACTERISTICS OF RIGID PVC

PROPERTIES	U. M.	RESULTS	METHOD
Specific weight	gr/cm ³	1.45 +/- 0.020	ASTM=D 792
Tensile yield strength	N/mm ²	49	ASTM=D 638
Ultimate tensile stress	N/mm ²	44	ASTM=D 638
Ultimate tensile stress	%	4%	ASTM=D 638
Flexural yield strength	N/mm ²	94	ASTM=D 790
Flexing resistance	N/mm ²	3240	ASTM=D 790
Impact strength	J/m a 23°C	44	ASTM=D 256
Softening temperature	Vicat°C	83 50N	ASTM=D 1525

MECHANICAL CHARACTERISTICS OF SOFT PVC/RUBBER

PROPERTIES	U. M.	RESULTS	METHOD
Specific weight	gr/cm ³	1.25 +/- 0.02	ISO 1183
Hardness	Sh A 15"	67 +/- 2	ISO 868
Ultimate tensile strength	N/mm ²	> 16	ISO 527
Ultimate elongation	%	> 350	ISO 27

* = Production on demand with minimum quantity of 100 lm. Production delay 4/5 weeks. Price to be agreed.

LAYING ACCESSORIES

GREY RIGID PVC



RIBBED DISTANCE TUBE (to neutralise the short rods)
RIGID PVC - bar length 2 lm - pack. 20 Pcs - 50 lm

Article	Ø mm outside	
PPD 20	20	
PPD 22	22	

PLUGS FOR FINNED TUBE - GREY HD POLYETHYLENE
pack. 2000 Pcs divided in two 1000 Pcs bags

Article	Ø mm	
PPT 20	20	
PPT 22	22	

CORNER JOINTS FOR SECURING PAVIJOINT - pack. 20 Pcs

Article		
SQBD		*

* = Production on demand with minimum quantity of 10000 pcs. Production delay 4/5 weeks. Price to be agreed.

The **SHEATH LAYING TROLLEY** was designed to lay different sizes of bubble sheathing easily and correctly. It is supplied with the accessories indicated in the photo (except for the pliers).

SHEATH LAYING TROLLEY

FOR INDUSTRIAL FLOORS

SHEATH LAYING TROLLEY FOR INDUSTRIAL FLOORS
with accessories (extra weight - slurry dragger)

pallet

Article	
CPGC	



START OF LAYING



EASY TO USE



GROUT DRAGGER FOR MORE CONTROLLED LAYING



ROLL-LIFTING FEET



EXTRA WEIGHT




LIGHTWEIGHT FOR MOBILITY

Laying products

© 2010 All rights reserved by Progress Profiles. Printed in Italy

DIAMOND - SLITTING DISKS

FOR CUTTING GREEN CEMENT

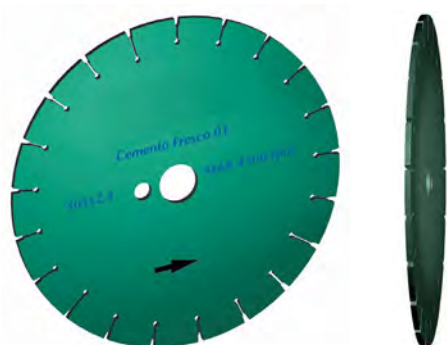


DIAMOND-SLITTING DISKS FOR CUTTING GREEN CEMENT
Ø inside 25,4 mm

Article	thick mm	Ø outside mm	
DD 240	2,4	305	*
DD 280	2,8	305	*
DD 2835	2,8	350	*
DD 3235	3,2	350	*


ON DEMAND. PRODUCTION DELAY 4/5 WEEKS.

* = Production on demand with minimum quantity of 10 pcs. Production delay 4/5 weeks. Price to be agreed.

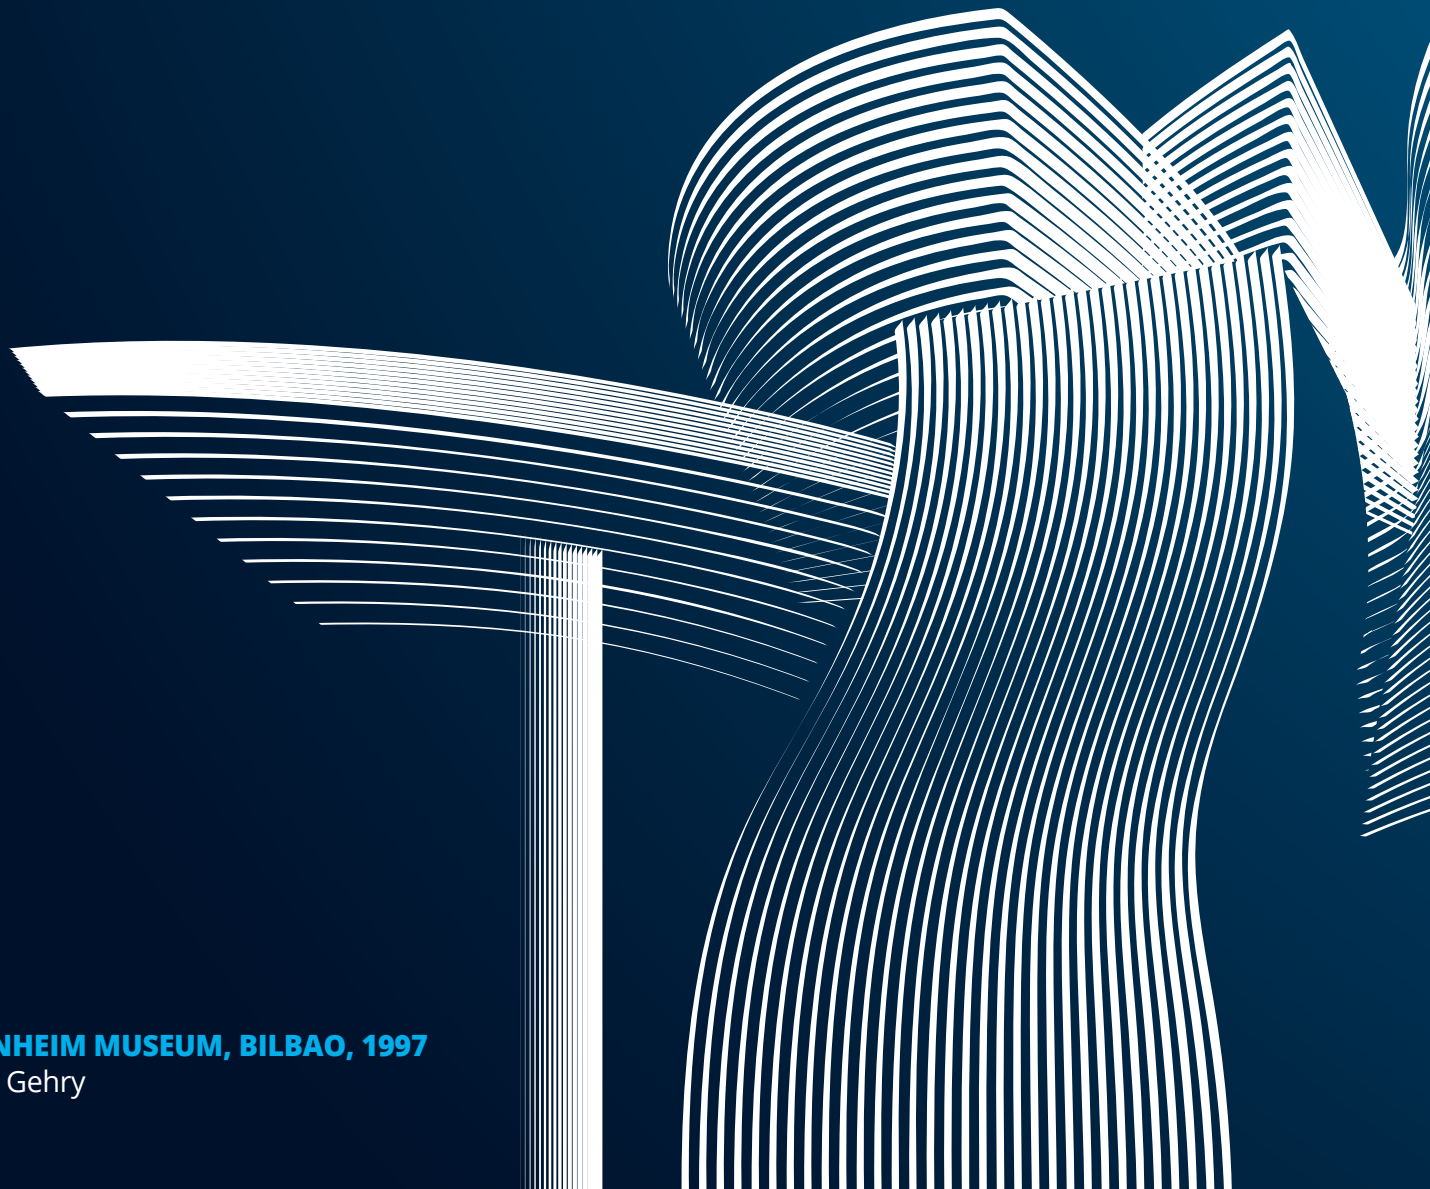

GUGGENHEIM MUSEUM, BILBAO, 1997
Frank O. Gehry

MARKETING AND SALES STAND SYSTEMS

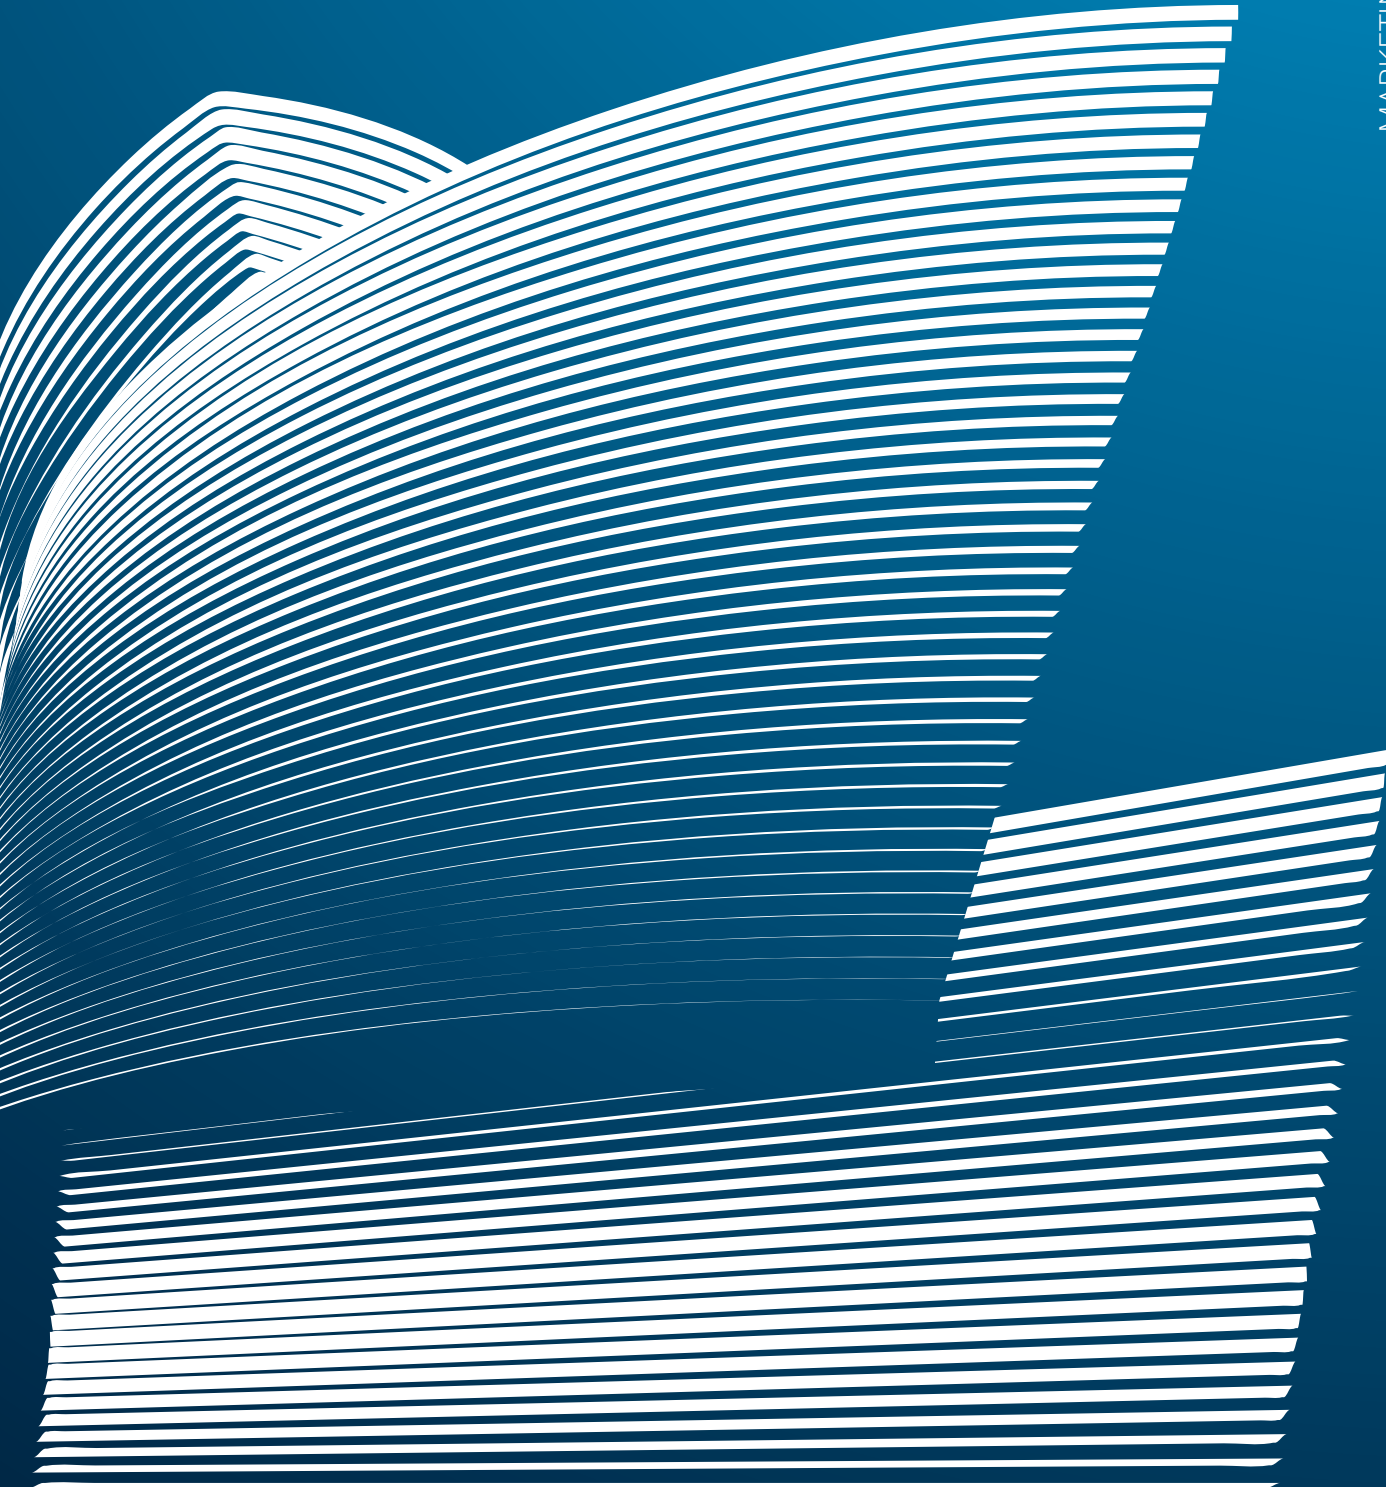

EXPOSURE DISPLAY / WALL UNIT FOR SHOWROOM



© 2020 All rights reserved by Progress Profiles, Printed in Italy

EXPOSURE DISPLAY / WALL UNIT FOR SHOWROOM


W 208 cm x H 240 cm

Description	Article
<i>Exposure display / wall unit</i>	ESHSPAN 250
The exposure display / wall unit is complete with	
19 Sample board PESP	PESP 1 + 19
1 Display PROLEVELING SYSTEM	PNPLSE
1 Brchure display PROLEVELING SYSTEM	PBPLS
50 Flyer PROLEVELING SYSTEM	FLYPLSE 18
3 Finishes case:	
- PROJOLLY finishes case	COFPJ
- PROJOLLY SQUARE finishes case	COFPJQ
- PROTERMINAL finishes case	COFPT
2 Photo book	BOAM
1 Exposure display PROSHOWER with Design grid	PSHWDL 70 + PSHWD 70
1 Brchures exposure	ESPB
3 Sample board PROLISTEL	PESPPLT - PESPPLT15 - PESPPLTP
3 Sample board SKIRTING	PESPBT - PESPPK - PESPPKCH
Description	Article
Please order separately 10 brochures	BR2019E

SQUARE SHOW CASE WITH DRAWERS FOR PROFILES FOR SHOW ROOM

SQUARE SHOW CASE WITH 10 DRAWERS
length 39,5 cm - width 39,5 cm - height 109 cm
(*Brochure and flyers not included)

Article
ESPQCE

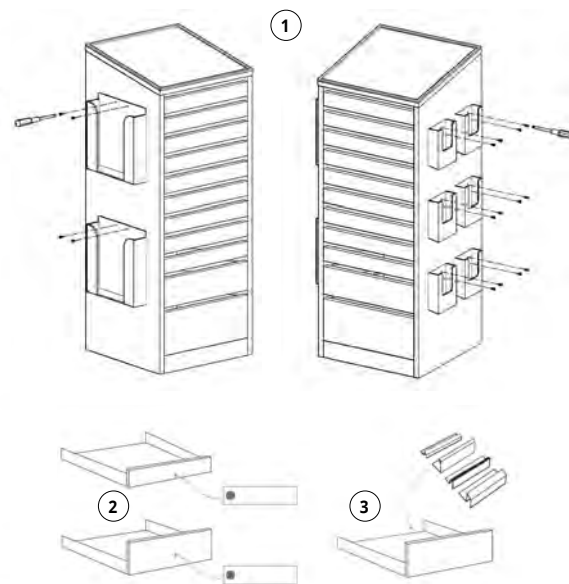

LAYING INSTRUCTIONS

1. Screw the plexiglass brochure racks in the existing holes.
2. Attach the labels on the front of the drawers.
3. Place the profiles inside the drawers.


SET OF SAMPLES AVAILABLE FOR 10 DRAWERS

Set	Samples Description
1	PROFILES FOR WALLS - Projolly Triangle - Printer - Proterminal Int - Prolistel Channel - Prolistel ACC, P ALL, Led - Profinlist 20 - Proedge AC, OT - Praround - Probord
2	PROFILES FOR WALLS - Proseal 50, 25 - Proshell - Proshell All - Printer KL - Prokerlam SQ - Prokerlam Line - Prokerlam Jolly - Protap - Protap T - Proshell R, D
3	PROFILES FOR FLOORS - Proterminal Curve - Projolly Curve - Proslider Curve - Prolevigal - Proelegant - Profinal - Prosquare - Proangle - Projoint - Procanal - Proflat
4	PROFILES FOR FLOORS - Proslider - Procarpet - Proslider LR - Proskid - Proskid ALL - Prolevall 29, 33, 305 - Pronivo - Protrans
5	PROFILES FOR FLOORS - Profloor - Propress - Proslider - Prolinoleoum - Procover - Promoquette Gin - Promoquette Clip - Promoquette - Promoquette Fix
6	PROFILES FOR FLOORS + JOINTS - Proplate - Prolevall 38 - Proflex - Proflex ALN - Prodilal - Mortar-laid Joints
7	STAIR NOSING PROFILES - Prostair - Prostyle - Prostyle Grip - Prostair - Prostair 50 - Probrastep - Probrastep - Protermstep ACC, ALL - Prostyle
8	STAIR NOSING PROFILES - Prostair Led - Proststep Ins - Prostyle KL - Prostair KL 20 - Prowalk - Proend Ins, Grip - Proend 50 - Proend - Tube 12 - Tube plugs 12 - Eyelet - Hinge support
9	TERRACES - Prot Terrace Drain - Prot Terrace PCG, ALT, pc, PCJ, ECO
10	SKIRTING - Proskirting INS, ISP - Punched support - Proskirting - Proskirting Shell, Led - Cable glands support - Polycarbonate flat - Proskirting Giled - Top Giled
11	SKIRTING - Skirting 40, 60, 100, 7016, 7011 - Support clip - Skirting 60 Flex - Covecap - Skirting
12	PROFILES FOR PARQUET - Proscrow Base - Proscrow 44, 33, 50 - Proinsert Base 45, 40 - Pin Insert - Top Sol 40 P, 30 P - Terminal Pin - Zero Curve - Style Stair - Style Stair L - Terminal - Base LVT 30, 23 - LVT Top, Terminal, Zero Curve


NOTES:

Labels will delivering with the profiles samples, but in a separated pack.


(*) Write the brochures and flyers codes of the systems to be displayed (see pg. 311)

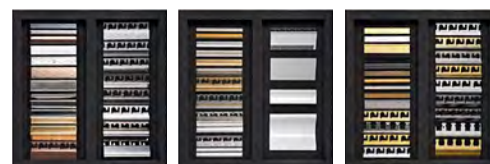


1 - Profiles for walls 2 - Profiles for walls 3 - Profiles for floors

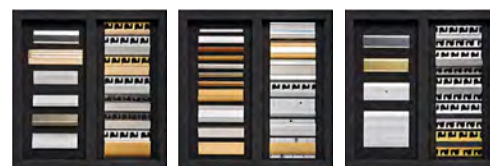

4 - Profiles for floors 5 - Profiles for floors 6 - Profiles for floors + joints

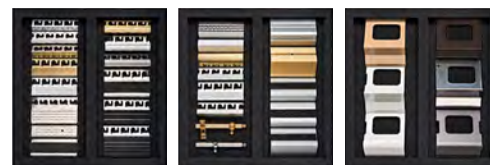

7 - Stair nosing profiles 8 - Stair nosing profile 9 - Terraces

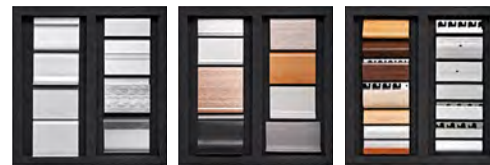

10 - Skirting 11 - Skirting 12 - Profiles for parquet

ROTATING DISPLAY EXPOSURE STAND FOR SHOW ROOM




ROTATING DISPLAY EXPOSURE STAND FOR SHOW ROOM
(with 18 sample boards) - diameter 81 cm - height 224 cm

Article

ESPGSM18

The rotating display allows to exposed 18 removable boards with images of different settings. (On the order write the number of the 18 chosen boards PESP ..., see on page 309). The sample boards are 19. When the display is ordered, specify the desired 18 sample boards according to sales requirements.

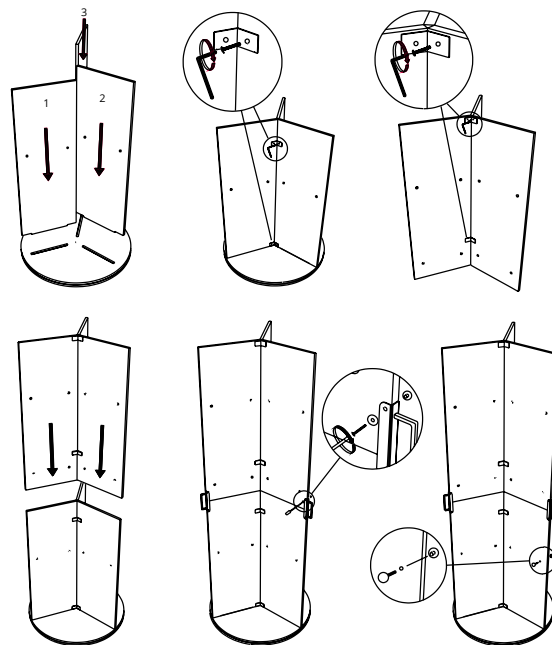


SMALL EXPOSURE STAND

SMALL EXPOSURE STAND (with 4 sample boards)
width 33 cm - depth 50 cm - height 60 cm

Article

CURAS (with 4 boards)

It allows to expose 4 easily removable boards at your choice. (On the order write the number of the 4 chosen boards PESP ..., see on page 309). The sample boards are 19. When the stand is ordered, specify the desired 4 sample boards according to sales requirements.

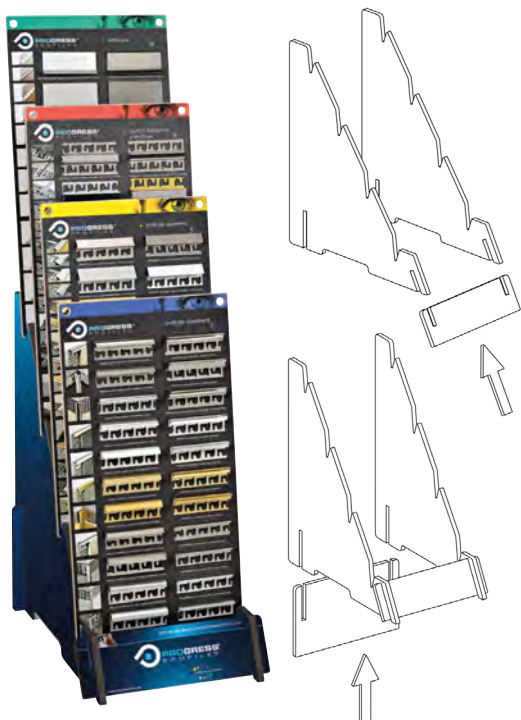

TROLLEY

TROLLEY (with 18 sample boards)
width 50 cm - depth 35 cm - height 63 cm

Article

TRAG18

(boards PESP, see on page 309)
(On the order write the number of the 18 chosen boards PESP ..., see on page 309)



© 2020 All rights reserved by Progress Profiles. Printed in Italy

SAMPLE BOARD
width 30 cm - height 56 cm

Article
PESP 1/ 2/ 3/ 4/ 5/ 6/ 7/ 8/ 9/ 10/ 11/ 12/ 13/ 14/ 15/ 16/ 17/ 18/ 19

For the composition of the display ESPGSM and CURAS, choose the boards you wish with the reference number.



Sample board n° 1
Projolly Square, Profinist, Prolistel, Procanal



Sample board n° 2
Projolly Square, Prolistel, Profinist



Sample board n° 3
Projolly, Projolly Quart, Printer, Proterminal




Sample board n° 4
Probord, Proedge, Proshell, Prosguscio, Proround, Probath, Proseal, Protrop, Prokerlam



Sample board n° 5
Proterminal, Profinal, Proelegant, Prolevigal, Procanal, Projoint, Proangle, Profilat



Sample board n° 6
Proslider, Procarpet, Proskid, Proslider, Procover, Propress, Proplate

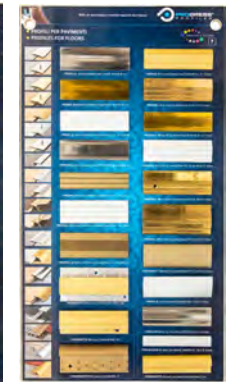

Sample board n° 7
Prosol, Prolevall, Protrans, Pronivo, Promoquette, Profior, Prolinoleum, Pronivo



Sample board n° 8
Prostair, Prostyle, Prostep, Protermstep, Probrastep




Sample board n° 9
Prostyle, Prowalk, Proend, Prostair, Tube and Accessories



Sample board n° 10
Proflex, Prodilal, Adhesiv-laid Joint, Mortar-laid Joint



Sample board n° 11
Proexpan, GNS, GDA, Proplate

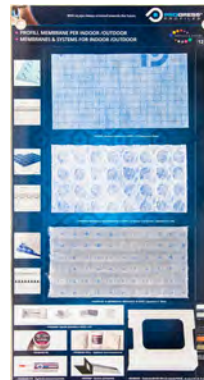

Sample board n° 12
Profofil, Prodeso, Prodrain 10, Proband, Proband BU, Proband Koll, Proband Fix Prodrip, Prot Terrace



Sample board n° 13
Prot Terrace



Sample board n° 14
Skirting 40/ 60/ 80/ 100



Sample board n° 15
Proskirting, Giled, Shell, Led, Flat, INS, ISP, Channel, Line



Sample board n° 16
SOL 40P, Terminal Pin, Zero Curve, Style Stair, Terminal, SOL 30, Profior Line, SOL 50, Proscrow



Sample board n° 17
Curve Profiles - Proterminal, Projolly, Profinal, Proslider, Procover, Proelegant, Terminal Do it yourself profiles - Tube, Corner, Canal, Flat, Curve Profile



Sample board n° 18
Triangular Chamfer, Rapy 100/200, Ribbed Distance, Rounded Triangular Chamfer, Prodistanz, Waterstop, Snape-on Strand, PAU/PAV spacers



Sample board n° 19
Projolly Triangle, Proterminal Int, Prolistel channel, Proskirting 40, Skirting 7011/16, Proseal flex, Protrop T, Style stair L, Proside walk

PRODUCT BOARD PROLEVELING SYSTEM DISPLAY SPACERS

DISPLAYS EXPOSURES

Article	
ESPPLS 50	
ESPPLS 70	
PNPLS... (2 Pcs)	
PNPLWS... (2 Pcs)	
PNPSRE (80 x 57 cm)	
PNPLSA3 (29,7 x 42 cm)	
ESPD	

EXHIBITION BOARD

PNPSRE



PROLEVELING SYSTEM DISPLAY ESPPLS 70



ESPPLS 50



PROLEVELING SYSTEM BOARD PNPLSE



PROLEVELING SYSTEM BOARD PNPLSA3



SPACERS DISPLAY (ACCESSORIES EXCLUDED)

ESPD



PROLEVELING WEDGE SYSTEM BOARD PNPLWSE



PROLISTEL AND SKIRTING DISPLAY

PROLISTEL AND SKIRTING COUNTER DISPLAY


Article	
ESPBLSH	



PROLISTEL width 30 cm - height 38 cm

Article	
PESPPLT	
PESPPLT15	
PESPPLTP	

PESPPLT



PESPPLT15




PESPPLTP



SKIRTING width 30 cm - height 38 cm

Article	
PESPBT	
PESPCK	
PESPCKCH	

PESPBT



PESPCK



PESPCKCH



GENERAL CATALOGUE / PRICE LIST

Article

CAT2020E



CATALOGUE PRODESO HEAT GRIP SYSTEM

Article


CATDESHG20



CATALOGUE PRODESO SYSTEM

Article

CATDESE 20

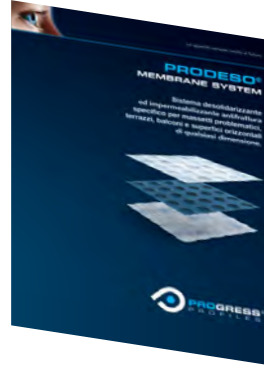

CATALOGUE PROSHOWER SYSTEM

Article

CATPSW20E



BROCHURES

Article

BR2019E



CATALOGUE PRODESO HEAT SYSTEM

Article

CATDESHE 20



DEPLIANT PROSUPPORT TUBE SYSTEM

Article

CATPSUPT 20



PHOTO BOOK

Article

BOAM



COUNTER DISPLAY FOR BROCHURES

Article


ESPBE



SYSTEMS CATALOGUE

Article

BRSYS 20/21



DEPLIANT FLYER 10 X 21 cm

Article

- FLYPDESHG20E (50 Pcs)
- FLYPDESE 20 (50 Pcs)
- FLYPSHE 20 (50 Pcs)
- FLYPPFPE 20 (50 Pcs)
- FLYPPDFPE 20 (50 Pcs)
- FLYPLSE 20 (50 Pcs)
- FLYPSUPE 20 (50 Pcs)
- FLYPLEDE 20 (50 Pcs)
- FLYPDSDE 20 (50 Pcs)
- FLYPLMTFXE 20 (50 Pcs)

COUNTER DISPLAY FOR FLYER

Article

PBPLS

Order the customization sticker separately in line with the exposed flyer



FLYPDESHG20E



Prodeso Heat System & Prodeso Heat Grip System

FLYPDESE 20



Prodeso Membrane

FLYPSHE 20



Proshower system

FLYPPFPE 20



Profoil Panel System
Pro Goboard Panel System

FLYPPDFPE 20



Prot Terrace

FLYPLSE 20



Proleveling System

FLYPSUPE 20



Prosupport System

FLYPLEDE 20




Proled System

FLYPDSDE 20



Prodeso Sound

FLYPLMTFXE 20



Promultifix System

PROSHOWER SYSTEM DISPLAY

EXPOSURE DISPLAY PROSHOWER SYSTEM FOR SHOWROOM
(with PROSHOWER BASE L + SET OF AVAILABLE GRIDS)
width 100 cm x 36 cm - height 73 cm

Article
ESPSHW 70 + (COLGPSHW 70)



FRONT



BACK



SET OF AVAILABLE GRIDS


PROSKIRTING GILED DISPLAY

PROSKIRTING GILED PANEL (accessories excluded)
width 70 cm - height 92 cm

Article
ESPGLED



FRONT



BACK

PROSKIRTING LED DISPLAY

PROSKIRTING LED PANEL (accessories excluded)
width 70 cm - height 92 cm

Article
ESPLED



SWITCHED OFF



SWITCHED ON



BACK OF PROSKIRTING LED BOARD

SAMPLES AND WOODEN

PROFILES FOR LAMINATE, PARQUET AND CARPETED FLOORS

Article	
TUBLAM (profiles samples)	
CCOLL (standard wood samples)	
CCOLLR (on demand wood samples)	65,00



TUBLAM



CCOLLR

CCOLL

EXPOSURE DISPLAY PROTERRACE

EXPOSURE DISPLAY PROTERRACE WITH 5 BROCHURE

Article
ESPFDP
FLYPDPPE 20 (50 Pcs)



EXPOSURE DISPLAY PROSUPPORT TUBE

EXPOSURE DISPLAY PROSUPPORT TUBE WITH 5 BROCHURE

Article
ESPST
FLYPSUPTI 20 (50 Pcs)



© 2020 All rights reserved by Progress Profiles, Printed in Italy

PRODESO® HEAT SYSTEM PRODESO® SYSTEM

EXPOSURE PRODESO® HEAT SYSTEM
width 60 cm - depth 60 cm - height 206 cm

Article	
ESPPDHE595	



EXPOSURE PRODESO® HEAT SYSTEM

Article	
SPCPDESH	



EXPOSURE PRODESO®

Article	
SPCPDESE	



MEMBRANES CASE

Article	
COFME	



EXPOSURE PRODESO® HEAT / PRODESO® / PROTERRACE
width 60 cm - depth 60 cm - height 206 cm

Article	
ESPPDHTE	



© 2019 All rights reserved by Progress Profiles. Printed in Italy

SAMPLE CASES

FINISHES CASES

Article	
COFPJ	Projolly / Projolly Quart
COFPJQ	Projolly Square
COFPT	Proterminal
COFSTL	Stone Line



COLOUR RANGE KEYRINGS

PROFILES RANGE / LOW THICKNESS JOINTS

RANGE PROJOLLY AND/OR PROJOLLY ECO
RANGE PROJOLLY MARBLE AND/OR PROJOLLY MARBLE ECO

Article	
COLBS	
COLPJ	
COLPJM	
COLPJQ	
COLPJQT	



COLBS



COLPJ



COLPJM

GADGETS

PENS

Article

⦿ PENNA 2,50



CUTTER

Article

⦿ CUTTER



POST IT

Article

⦿ BLOCCHETTO ADESIVO



WORK PENCIL

Article

⦿ MATITA



MOUSEPAD

Article

⦿ MOUSEPAD 9,00



HEADPHONES

Article

⦿ AURICOLARI



USB PENDRIVE

Article

⦿ USB



TAPE

Article

⦿ FLESSOMETRO



RAIN PONCHO

Article

⦿ PONCHO



MULTIPURPOSE KNIFE

Article

⦿ COLTELLINO



PROFILE MEASUREMENT RULER

Article

⦿ RIGHELLO



ECOGREEN BOTTLE

Article

⦿ BORRACCIA



UMBRELLA

Article

⦿ OMBRELLO



CHANGE GIVER TAB

Article

⦿ RENDIRESTO



POUCH

Article

⦿ MARSUPIO BASIC



REFLECTING WRIST

Article

⦿ FASCIA LED



CAP

Article

⦿ CAP



PLANNING 2020

Article

⦿ PLAN



MULTIPURPOSE BAND

Article

⦿ FASCIA



PORTFOLIO A4

Article

⦿ CARTELLA MEETING



© 2019 All rights reserved by Progress Profiles, Printed in Italy

T-SHIRT

Article	Description
TSHIRT S	T-SHIRT WHITE S
TSHIRT M	T-SHIRT WHITE M
TSHIRT L	T-SHIRT WHITE L
TSHIRT XL	T-SHIRT WHITE XL
TSHIRT XXL	T-SHIRT WHITE XXL



POLO

Article	Description
POLOB M	POLO STRETCH WHITE M
POLOB L	POLO STRETCH WHITE L
POLOB XL	POLO STRETCH WHITE XL
POLOB XXL	POLO STRETCH WHITE XXL
POLOBN M	POLO STRETCH BLU NAVY M
POLOBN L	POLO STRETCH BLU NAVY L
POLOBN XL	POLO STRETCH BLU NAVY XL
POLOBN XXL	POLO STRETCH BLU NAVY XXL
POLOCB M	POLO SHIRT WHITE M
POLOCB L	POLO SHIRT WHITE L
POLOCB XL	POLO SHIRT WHITE XL
POLOCB XXL	POLO SHIRT WHITE XXL
POLOCBN M	POLO SHIRT BLU NAVY M
POLOCBN L	POLO SHIRT BLU NAVY L
POLOCBN XL	POLO SHIRT BLU NAVY XL
POLOCBN XXL	POLO SHIRT BLU NAVY XXL



VEST PROGRESS PROFILES

Article	Description
GILET M	VEST M
GILET L	VEST L
GILET XL	VEST XL
GILET XXL	VEST XXL



PILE PROGRESS PROFILES

Article	Description
PILE M	FLEECE SWEATSHIRT M
PILE L	FLEECE SWEATSHIRT L
PILE XL	FLEECE SWEATSHIRT XL
PILE XXL	FLEECE SWEATSHIRT XXL



PROPOSALS OF SHOWROOM EQUIPMENT

Placement of marketing materials and sales support materials in a showroom - Proposal 01



- Rotating display exposure (18 sample boards)
- Panel products for showroom
- Brochures display Proleveling
- Panel Proleveling
- Display with base (6 panels)
- Counter display catalogs A5
- Finishes case
- Photo book

Optional materials on customer's request only



170-200
BASE
220-250

Back - panels and desks are not included

Placement of marketing materials and sales support materials in a showroom - Proposal 02



- Square display
- Panel products for showroom
- Brochures display Proleveling
- Panel display Proleveling
- Display with base (6 panels)
- Counter display catalogs A5
- Finishes case
- Photo book

Optional materials on customer's request only



170-200
BASE
220-250

Back - panels and desks are not included

Placement of marketing materials and sales support materials in a showroom - Proposal 03



- Small exposure stand with sample boards
- Panel products for showroom
- Brochures display Proleveling
- Panel display Proleveling
- Display with base (6 panels)
- Counter display catalogs A5
- Finishes case
- Photo book

Optional materials on customer's request only



120-150
BASE
220-250

Back - panels and desks are not included

Placement of marketing materials and sales support materials in a showroom - Proposal 04



- Small exposure stand with sample boards
- Panel products for showroom
- Brochures display Proleveling
- Panel display Proleveling
- Display with base (6 panels)
- Counter display catalogs A5
- Finishes case
- Photo book
- LCD

Optional materials on customer's request only



120-150
BASE
350-400

Back - panels and desks are not included

© 2020 All rights reserved by Progress Profiles, Printed in Italy

MODULAR DISPLAY SYSTEM FOR SHOWROOM

The **MODULAR DISPLAY SYSTEM WITH INTECHANGEABLE BOARDS** is composed by an metal base, 225 cm height, 93 width and 44 cm deep. It is possible to fix to this framework boards with pictures, samples and fixing patterns of profiles. A shelf with a fixing example of the most common profiles showed on the boards above is in the middle of the framework. Thanks to the pictures of fixing patterns, profiles samples and fixing examples, the modular display allows the customer to have an overall view of the use of the Progress Profiles products and systems. The modularity and the small size of the display allows its positioning in all showroom and sales point. Thanks to the modularity of the boards, the customer can choose the boards according to the products he wants to show. The system is easy to update with new finishes and products.


© 2020 All rights reserved by Progress Profiles. Printed in Italy



MODULAR DISPLAY WITH VIDEO



MODULAR DISPLAY WITH STEPS

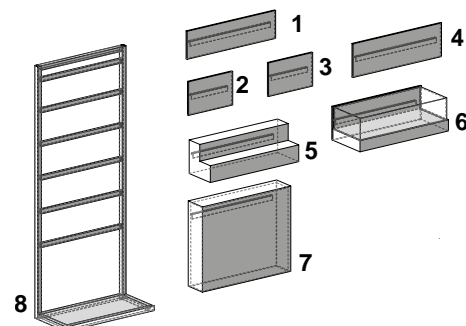

- 01 Design part H 24,9 x 92,9 x 1,6
- 02 Monitor part LCD H 29,9 x 46,4 x 1,6
- 03 Display part H 29,9 x 46,4 x 1,6
- 04 Display part H 29,9 x 92,9 x 1,6
- 05 Step part H 29,9 x 92,9 x 29,9
- 06 Showcase part H 29,9 x 92,9 x 40
Teca Plexiglass H 19,9 x 91 x 37,3
- 07 Base part length 20 cm, H 75,9 x 92,9 x 20
- 08 Base framework

Article	Description	Video
LGN	Modular display SOL 40	YES
GIU1	Modular display Joints 1	YES
GIU2	Modular display Joints 2	
CRV	Modular display Bendable	YES
PLV	Modular display Proleveling	YES
PSP	Modular display Prosupport	YES
PSH1	Modular display Proshower 1	YES
PSH2	Modular display Proshower 2	
B1	Modular display Skirting Boards 1	YES
B2	Modular display Skirting Boards 2	
PTR	Modular display Prot Terrace	YES
RIV2	Modular display Profiles for walls 2	
RIV1	Modular display Profiles for walls 1	YES
RIV3	Modular display Profiles for walls 3	
PAV1	Modular display Profiles for floors 1	YES
PAV2	Modular display Profiles for floors 2	
GR1	Modular display Stair nosings profiles 1	YES
GR2	Modular display Stair nosings profile 2	

DISPLAYS FOR PROFILES

PEP EXPOSURE DISPLAY "PEP" (accessories excluded)
width 100 cm - depth 50 cm - height 230 cm

Article	
PEP	



PEPINS EXPOSURE DISPLAY "PEPINS" (accessories excluded)
width 100 cm - depth 50 cm - height 230 cm

Article	
PEPINS	



PEPINSP EXPOSURE DISPLAY "PEPINSP" (accessories excluded)
width 100 cm - depth 50 cm - height 230 cm

Article	
PEPINSP	



ESPSP EXPOSURE DISPLAY "ESPSP" (accessories excluded)
width 100 cm - depth 75 cm - height 240 cm

Article	
ESPSP	




© 2020 All rights reserved by Progress Profiles, Printed in Italy

DISPLAYS FOR PROFILES

ESPF

EXPOSURE DISPLAY ESPF (accessories excluded)
width 65 cm - depth 20 cm - height 112 cm

Article	
ESPF	

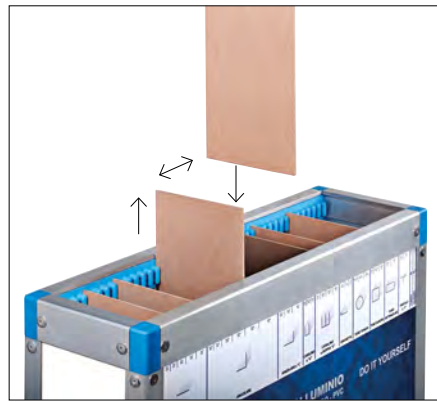

INSTRUCTIONS:
The displays ESPF and ESPF 2 are delivered with detachable internal hooks in order to show in the best way the profiles according to the sales need.

ESPF 2

EXPOSURE DISPLAY ESPF 2 (accessories excluded)
width 65 cm - depth 40 cm - height 112 cm

Article	
ESPF 2	



© 2020 All rights reserved by Progress Profiles. Printed in Italy

PEM

EXPOSURE DISPLAY "PEM" (accessories excluded)
width 120 cm - depth 61 cm - height 160 cm

Article	
PEM	



ESPF 2015

EXPOSURE DISPLAY ESPF 2015 (accessories excluded)
width 100 cm - depth 28 cm - height 81 cm

Article	
ESPF 2015	



ESPF 2 2015

EXPOSURE DISPLAY ESPF 2 2015 (accessories excluded)
width 100 cm - depth 56 cm - height 81 cm

Article	
ESPF 2 2015	



GENERAL TERMS AND CONDITIONS OF SALES PROGRESS PROFILES S.P.A.

These general terms and conditions (hereafter "General Terms and Conditions of Sales") govern the contractual relationships of the products manufactured or marketed (hereafter "Product/s" or "Good/s") by the company PROGRESS PROFILES S.P.A. (hereafter "Vendor") to its customers (hereafter individually "Buyer" or "Customer") (Buyer and Vendor also referred to jointly as "Parties" and individually as "Party"). These General Terms and Conditions of Sales do not apply to sales to consumers.

1) EFFECTIVENESS OF THE GENERAL TERMS AND CONDITIONS

These General Terms and Conditions of Sales apply even if not explicitly referred to and signed in individual orders. Any provisions in derogation of the requirements herein shall be effective only if expressly accepted in writing by the Parties. Any general terms and conditions of the Customer will not apply, even partially, unless they have been expressly accepted in writing by the Vendor. These General Terms Conditions of Sales are effective until they have been expressly revoked by the Vendor or are replaced by new terms and conditions that will become effective from their signing.

2) ORDER

The Goods object of each sale between the Buyer and the Vendor are described in the purchase order ("Order") that the Buyer sends directly or indirectly through its representatives to the Vendor. The Order is considered irrevocable for the Buyer if confirmed by the Vendor through the Order Confirmation, preform invoice.

3) CONTRACT

The sales contract of the Goods ("Contract") is governed by the Order, by the Order Confirmation and these General Terms and Conditions. The sending of an Order by the Customer implies his/her full acceptance of these General Terms and Conditions of sales and of any of the specific ones related to the Order itself. The Contract is completed with the acceptance of the Order by Order Confirmation, communicated in writing by the Vendor to the Buyer or, failing that, with the execution of the Order by delivering the Goods to the carrier or forwarder. Any changes to the Contract, proposed by the Buyer, will result in changes to the same only if accepted in writing by the Vendor.

4) DELIVERY TERMS, TRANSPORT OF GOODS

The delivery terms of the Goods will be agreed from time to time in the individual Order and relative Order Confirmation. The delivery terms must always be considered indicative, not essential, and are not binding for the Vendor. Any variations requested in the production phase, nonetheless relieve the Vendor from complying with the agreed terms. In this case the terms and conditions of delivery will be renegotiated. If the Buyer expressly requests an express delivery service in the Order, the Vendor will indicate, in the Order Confirmation the cost for this service which shall be considered accepted, if not contested in writing by the Buyer to the Vendor. Any reference to delivery terms (e.g. EXWORKS, CIF, FOB and others) contained in the Order and in the Order Confirmation refers to the Incoterms® of the International Chamber of Commerce, in the text in force on the date of the Order Confirmation. If a sale has been agreed with transport via carrier, regardless of the Party that appoints the carrier, the risks are transferred to the Customer with the delivery of the Goods to the first carrier: any claims for breakages, deterioration, tampering or deficiencies must be reported by Buyer to the carrier in accordance with the law, providing the Vendor with appropriate information. The Vendor is therefore entitled to reasonably anticipate or postpone the delivery of all or part of the Goods, without this entitling the Buyer to request full or partial termination of the Sales Contract or to claim compensation or indemnity and without the Buyer refusing delivery of the Goods. We shall not be liable for any delays in shipments which will not entitle the Customer to claim damages and/or penalties, to delay payments or reject the Goods. It is understood, however, that maximum effort shall be ensured in the execution of the Order on the agreed dates.

5) FORCE MAJEURE

The occurrence of causes not dependent on the will of the Parties, such as strikes of any kind, earthquakes, fires, floods, lack of motive power or energy, lack or scarcity of raw materials, breakdowns and breakages at the Vendor's production facilities, delays in granting authorizations by the Authorities, embargo or other measures of national or supranational Authorities and other impediments independent of the will of the Parties, which make delivery temporarily impossible or excessively expensive, the delivery time will be extended by a period equal to the duration of the impediment, the Party, upon becoming aware of the impediment, will communicate within a reasonable time to the other Party the existence of the impediment and, where this is not already implicit in the type of impediment, the probable effects it shall have on the delivery obligation. Similarly, the Party will inform the other Party of the removal of the impediment. It is understood that neither the Customer nor the Vendor can demand compensation or indemnity of any kind due to the occurrence of the circumstances provided for in article 5.

6) REFUSAL TO RECEIVE DELIVERY

Where the Buyer refuses to receive the delivery of all or part of the Goods only, the Vendor may, at its own unquestionable choice, demand performance of the Contract, or declare its total or partial termination. In either case, the Vendor retains the right to claim compensation for damages. Any responsibility of the Vendor for risks and costs deriving from or inherent to the stock of the Goods is expressly excluded, which shall be entirely charged to the Buyer.

7) DESCRIPTIVE DRAWINGS AND DOCUMENTS

The dimensions, sections, drawings, colours, finishes, prices and the other data included in the catalogues, prospectuses, circulars, advertisements, illustrations and price lists of the Vendor are approximate indications. These data is not binding except to the extent that they are expressly provided for in the Order Confirmation or in the Contract. Any photographs included in the offer and/or the Vendor's Order Confirmation are not binding and are for illustrative purposes only.

8) PRICES, PAYMENTS AND DEFINITION OF DEFAULT INTERESTS

The prices of the Products are those indicated in the price list of the Vendor in force on the date of submission of the Order, subject to different prices negotiated between the Parties and resulting in the Order Confirmation. The prices of the Goods are net of taxes, duties or customs duties, they are always Ex Works and do not include installation or transport. Payments must be made by the Customer in the manner and at the times established in the Order Confirmation. Delayed payments will be charged with default interest at the rate established by Italian Legislative Decree no. 231/2002 as amended, from the day following the payment deadline. It is understood that any complaints or disputes do not entitle the Customer to suspend or in any case delay the payments of the Products in dispute or, let alone other supplies. More generally, no action or exception can be made or opposed by the Customer until after the full payment of the Products for which this claim or exception is intended to be performed. In addition, the Customer is not authorized to make any deduction from the agreed price (e.g. in case of alleged Product defects), unless previously agreed in writing with the Vendor.

9) SUSPENSION OF PERFORMANCE AND TERMINATION

The non-payment, even partial, of supplies or any amount due by the Buyer, or the total or partial non-fulfillment of contractual obligations or agreed conditions for the supply, automatically authorizes the Vendor to suspend further shipments or cancel any Orders in progress, or to subordinate the delivery of the Products to the provision of adequate guarantees of payment, and exonerate the Vendor from any ongoing commitment with the same Customer at any time and without prior notice. The Vendor has a similar right whenever changes occur to the Buyer, in its structure or corporate structure, in the composition of its governing or management bodies, in its financial situation, equity or commercial image, as well as in the case of lodging or submission of proof of debt in bankruptcy, pending enforcement or precautionary procedures, suspensions, difficulties or delays in the performance of obligations assumed, including to third parties, of facts referring to the Buyer that may be detrimental to the successful completion of the Contract and/or detrimental to commercial interests of the Vendor.

10) CHANGES - CONFORMITY

The Vendor reserves the right to make non-decisive changes to models, measures, materials always within the tolerances of use and without obligation of communication to the Buyer by sending the Order, the Customer declares to have verified that the Goods described in the Order comply with any legal, regulatory or administrative provisions in force in their country or in another country of destination of the Goods, applicable to the import, sale and use of the Goods. In no case will the Vendor be held responsible for any non-compliance with these legal provisions, regulations or administrative provisions. It is the Buyer's obligation to indicate to the Vendor in the Order any provision of law or regulation and/or any standard applicable to the Goods ordered if different from those applicable in Italy and/or indicated in the Vendor's Offer. In this case, the prices of the Goods will not be those indicated in article 8, but will be agreed between the Parties for each supply. It is understood that, in the absence of such indications, the Vendor will not be in any way responsible for the non-compliance or non-conformity of the Goods supplied to laws, regulations, standards or administrative provisions and the Buyer shall be obliged to keep the Vendor indemnified from any damage or claim that the Vendor, or its staff or administrators, may suffer, even against claims made by third parties, due to such shortcomings.

11) WARRANTY AND LIMITS

In the terms provided for in article 11, the Vendor undertakes to deliver the Products as agreed and exempt from manufacturing defects. The warranty does not cover aesthetic defects, meaning finishes difference or shades in the outward appearance of the products. The Vendor is also not responsible for defects in conformity and defects in the Products due to normal wear. The Vendor likewise is not liable for defects in conformity of the Products and defects caused by non-compliance, even partial, of the rules provided in the instruction manual/product data sheet, maintenance and/or cleaning with unsuitable products and/or materials and from incorrect choice by the Customer of the Product ordered for the purpose and intended use. This warranty does not extend to defects due to tampering or improper use of the Products, negligent preservation thereof, causes of force majeure. The Vendor assumes no responsibility for damages resulting from the installation of the Products supplied. The Vendor declines all responsibility for any damage that may, directly or indirectly, derive from persons or things as a result of failure to comply with all the requirements indicated in the documentation accompanying the Products, and in particular that concern the warnings regarding installation, use and maintenance.

12) REPORTING OF FAULTS AND DEFECTS

The Products purchased must be verified and checked by the Buyer upon receipt. Any apparent defects of the Goods supplied (packaging status, quantity, species, or external characteristics of the Products, etc.) must, under penalty of forfeiture, be contested at the time of delivery directly to the carrier on the transport document and notified not later than 7 (seven) days to the Vendor by registered letter with return receipt or other means of communication that assures the proof and date of receipt (e.g. Certified Electronic Email). After this deadline, the Products will be considered for all purposes accepted; furthermore, the use and/or installation and/or laying of the Products presenting apparent defects, excludes the possibility of disputes or complaints concerning the defects themselves. Any hidden defects (defects not identifiable through diligent control at the time of receipt of the Products) must be notified by the Buyer, under penalty of forfeiture, to the Vendor by registered letter with return receipt or other means of communication that assures the proof and date of receipt (e.g. Certified Electronic Email), within 8 (eight) days of discovery and in any case no later than 12 (twelve) months from delivery to the Buyer. It is understood that the successful use and/or installation and/or laying of the Products that have manifested defects, excludes the possibility of disputes or complaints concerning the defects themselves, implying acceptance of the Products for all purposes. Each complaint must accurately specify the defect found; the Products object of the dispute must always be made available to the Vendor's agents for their verification. Any complaints or disputes will not entitle the Buyer to suspend or delay payments due to the Vendor in any way. Following a regular complaint by the Customer, within the terms indicated above, the Vendor will only perform the free replacement of the Product recognized as defective by the Vendor, Product that will be accepted in return from the same Vendor only in original packaging, undamaged and complete. Any disputes concerning a single delivery do not exonerate the Customer from the obligation to withdraw the remaining quantity of Products provided for by the specific Order, or by other Orders distinct from the one in question, nor do they entail the termination of the Contract.

13) LIMITATION OF LIABILITY

Any compensation for defective goods to be paid to the Buyer cannot in any case exceed the consideration paid and relative to the quantity of defective Goods. This warranty lasts 12 (twelve) months from the delivery of the Goods, it shall replace and supersede all legal guarantees and/or responsibilities provided by law and excludes any other responsibility of the Vendor, however, originating from the Goods supplied or their resale; in particular, the Buyer cannot make further claims for indemnity or compensation for damages, direct or indirect, of any nature, price reduction or termination of the Contract. Following the term of the warranty, no claim can be made against the Vendor.

14) RETENTION OF TITLE

This sale is carried out with retention of title (art. 1523 Italian Civil Code et seq.); therefore the Products remain the property of the Vendor until full payment of the price by the Buyer. Failure to pay, even partially, entitles the Vendor to reserve the right to undertake any other action, to directly recover the Goods under consideration in the supply, even if held by third parties. The Buyer acquires the property right of the Goods only following full payment of the related price to the Vendor in addition to ancillary charges, but assumes the risks from the time of delivery and will be liable for any damage or loss of the Goods (for example due to poor maintenance or negligence).

15) INDUSTRIAL AND INTELLECTUAL PROPERTY

Any distinguishing mark and/or production and commercial technology of the Vendor, whether registered and/or patented or not, must be treated as confidential by the Customer and must not be used or disclosed without the prior written authorization of the Vendor. All printed matter and other documents (price lists, catalogues or other similar documents, even on IT and digital support) relating to the Products are the exclusive property of the Vendor, covered by copyright. Their reproduction, even if only partial, is prohibited unless previously authorized by the Vendor. The Vendor warns against the unauthorized use of its own brand, and/or other trademarks shown on the Products or connected to the Products supplied, and/or distinguishing names or marks, as well as patents, models and drawings relating to their Products.

16) APPLICABLE LAW AND EXCLUSIVE JURISDICTION


Except when agreed in these General Terms and Conditions of Sales, the Italian law shall apply to these General Terms and Conditions of Sales and to each Sales Contract completed between Vendor and Buyer. The application of the United Nations Convention on contracts for the international sales of movable property, adopted in Vienna on 11.4.1980, is expressly excluded. For any dispute connected or arising from these General Terms and Conditions of Sales and/or Orders and/or Contracts, the Court of Treviso (Italy) shall have exclusive jurisdiction.

17) PRIVACY

In the execution of these General Terms and Conditions and/or of each Contract, personal and contact data (personal data, company e-mails, company telephones, smartphones) may be communicated to each other between Vendor and Buyer, or in any case made available to the respective contacts. For business use, etc.) of administrators, employees and collaborators who, depending on the duties and tasks assigned, manage the Contract and/or execute it. Therefore, both parties will process such personal data to the extent that they are strictly necessary for the execution of all aspects of the Contract (if any); and with their transfer, in consideration of the execution of the Contract, also in extra EU countries. Data shall be retained until the completion of the reciprocal services covered by the Contract and subsequently on the basis of the prescribed terms for the deeds and documents of the entrepreneur. The individual employee or collaborator can exercise all the rights listed in articles 15 to 21 of Regulation EU 2016/679, without prejudice, however, to the limits deriving from the legitimate interest of the employer.

Place and date **Asolo, 01/04/2019**

Signature of Progress Profiles SPA




Signature of the Buyer




Pursuant to and for the purposes of articles 1341 and 1342 of the Italian Civil Code, the Buyer declares to have read all the terms and conditions of this Contract and to expressly approve the following clauses: 4 (DELIVERY TERMS, TRANSPORT OF GOODS), 5 (FORCE MAJEURE), 6. (REFUSAL TO RECEIVE DELIVERY), 8 (PRICES, PAYMENTS AND DEFINITION OF DEFAULT INTERESTS) 9 (SUSPENSION OF PERFORMANCE AND TERMINATION) , 10 (CHANGES AND CONFORMITY) 11 (WARRANTY AND LIMITS), 12 (REPORTING OF FAULTS AND DEFECTS) 13 (LIMITATION OF LIABILITY), 16(APPLICABLE LAW AND EXCLUSIVE JURISDICTION).

Place and date **Asolo, 01/04/2019**

Signature of Progress Profiles SPA



Signature of the Buyer



WATCH OUT FOR DAMAGE

OPERATIONS TO BE CARRIED OUT IN PRESENCE OF THE CARRIER

1

VIRRESS / PROFILES SPA (DATI IN CALCE)			
NEL D.D.T. E COMUNICATI ENTRO 48 ORE.			
LINEE	PESO LORDO/BRUTO IN KG	PESO NETTO/NET IN KG	NUMERO COLLI
04	9,00	9,00	3,00
FIRMA DEL COMPILATORE			
FIRMA DEL VET			

1. Verify whether the number of packages corresponds to the number indicated in the transport documents

2

DESCRIZIONE	Q.TA	UNITA'	VALORE
RACCORDO INTERNO BATTERICOA 2,40mm ARGENTO 20	20	MC	54
PROFILES-ACC-8110mm ARGENTATO-E	1	MC	21
LINEA 2.7 MC-TRIPROFEDRADO			
PROFILES SQUARE-ACC-8110mm ACCIAIO INOX AISI			
304 LINEA SQUARE 2.7 MC			
PER ORDINE 2424			
PROFILES SQUARE-ACC-8110mm ACCIAIO INOX AISI			

MERCE ACCETTATA CON
RISERVA PER
INVOLUCRO DANNEGGIATO

2. Verify the state of the outer packaging and on the carrier bulletin write: *"accepted with reserve"* specifying the type of anomaly

3



3. Open the packaging and verify the goods

4

IN CASO DI RECLAMI INVIARE UN FAX AL N° +39 0423 950 979

MODULO RISOLUZIONE N.C. MATERIALE - PARTE A

Si prega di compilare il presente modulo in ogni sua parte

Partita IVA Cliente	Nome Cliente	Indirizzo	Telefono	Fax
0241178142	HARBO CASE	Via GIULIO 5	0423-3042	0423-312110
Coordinate Bancarie	Agente	Alti	N° conto	

Abbilitazione contabile

Materiale danneggiato

Materiale mancante

Materiale non conforme per:

- qualità

- quantità

Descrizione materiale

Cod / Articolo	Descrizione
PISAA H: 40	

4. Fill in the *"n.c. resolution form"* (see next page)

5

IN CASO DI RECLAMI INVIARE UN FAX AL N° +39 0423 950 979

MODULO RISOLUZIONE N.C. MATERIALE - PARTE A

Si prega di compilare il presente modulo in ogni sua parte

Partita IVA Cliente	Nome Cliente	Indirizzo	Telefono	Fax
0241178142	HARBO CASE	Via GIULIO 5	0423-3042	0423-312110
Coordinate Bancarie	Agente	Alti	N° conto	

Abbilitazione contabile

Materiale danneggiato

Materiale mancante

Materiale non conforme per:

- qualità

- quantità

Descrizione materiale

Cod / Articolo	Descrizione
PISAA H: 40	

5. Send the *"n.c. resolution form"* and a copy of the reserve made to the carrier to fax number +39 0423 950979 or by e-mail to: cservice@progressprofiles.com

In the event of damage or any other anomaly, if no reserve has been specified on the transport document, you will not be entitled to any compensation.

The reserve is a right enshrined in the Civil Code (art. 1688).

IN THE CASE OF COMPLAINT, SEND A FAX TO No. +39 0423 950 979
or E-MAIL: cservice@progressprofiles.com

FORM FOR NON-CONFORMING MATERIAL - PART A

Please fully complete this form

Business name:

Customer Name _____

Street _____

District _____ Zip Code _____

Province _____

e@mail _____

VAT No. _____

Tel. _____ Fax _____

Reason for complaint:

damaged material

missing material

correct documents (confirm/transport documents) but
non-conforming material

Material non-conforming in: quality

quantity

Dispatch references:

Preform Invoice _____ ORD. N° _____

Date _____

Name of carrier _____

Description of material

Cod. / Article							Description	U.M.	Quantity

Required action:

Return of goods




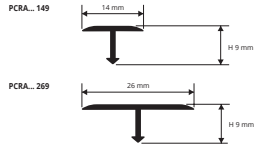


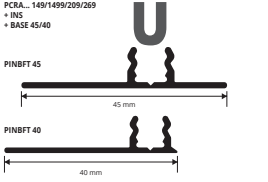
Sending of material

Date and place _____

Signature of agent in confirmation

Signature of customer in acceptance

GUIDE TO CONSULTATION

application example	description	finish	name																												
	<p>SOL 40P Adesivo è un profilo coprigiunto/coprisoglia in alluminio rivestito in 77 finiture legno (45 a richiesta) molto resistente all'usura, al calpestio, ai raggi UV e ai prodotti normalmente usati per la pulizia dei pavimenti. Facile da posare e abbinare con qualsiasi finitura in legno, la superficie è gofrata con porro aperto. Consigliato per coprire giunti fra pavimenti in laminato, legno, ceramica, ecc.</p> <p>ALLUMINIO RIVESTITO 77 finiture legno (45 a richiesta) con ADESIVO thermo packed - largh. 40 mm - lungh. barre 2,7 ml - conf. 40 PZ - 108 ml</p> <table border="1"> <thead> <tr> <th>Articolo</th> <th>L mm</th> </tr> </thead> <tbody> <tr> <td>PNSP... 40 PA</td> <td>40</td> </tr> </tbody> </table> <p>ALLUMINIO RIVESTITO 77 finiture legno (45 a richiesta) con ADESIVO thermo packed - largh. barre 0,90 ml - 20 PZ</p> <table border="1"> <thead> <tr> <th>Articolo</th> <th>L mm</th> </tr> </thead> <tbody> <tr> <td>PNSP... 409 PAS</td> <td>40</td> </tr> </tbody> </table> <p>ALLUMINIO RIVESTITO 77 finiture legno (45 a richiesta) con ADESIVO thermo packed - largh. barre 1 ml - 20 PZ</p> <table border="1"> <thead> <tr> <th>Articolo</th> <th>L mm</th> </tr> </thead> <tbody> <tr> <td>PNSP... 4010 PAS</td> <td>40</td> </tr> </tbody> </table> <p>Disponibile nelle finiture legno: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W. La sigla della finitura scelta va aggiunta alla sigla dell'articolo. Es.: PNSP... 40 PA (finitura scelta Faggio scuro) PNSP04W 40 PA.</p>	Articolo	L mm	PNSP... 40 PA	40	Articolo	L mm	PNSP... 409 PAS	40	Articolo	L mm	PNSP... 4010 PAS	40	<p>SOL 40P AUTOADESIVI ALLUMINIO RIVESTITO 77 FINITURE LEGNO (45 a richiesta)</p>  <p>ESEMPI E ISTRUZIONI TECNICHE DI POSA</p>  <p>1. Scegliere il SOL 40 adesivo della finitura desiderata. 2. Tagliare il profilo alla lunghezza richiesta e pulire, sgrassare e asciugare il piano verificando che la temperatura di applicazione non sia inferiore a 15°. 3. Rimuovere la carta protettiva dell'adesivo e posare il profilo correttamente con una pressione verticale manuale uniforme senza muovere il profilo, e senza l'utilizzo di martelli in ferro/acciaio.</p>	<p>PROCOVER WOOD ALLUMINIO RIVESTITO 77 FINITURE LEGNO (72 a richiesta)</p>  <p>ESEMPI E ISTRUZIONI TECNICHE DI POSA</p>  <p>1. Scegliere il "PROCOVER" nella larghezza corrispondente alla fuga fra i due pavimenti da collegare considerando un appoggio laterale di 2/3 mm. 2. Riempire la fuga con silicone monocomponente o con il collante usato per la posa del pavimento. 3. Affondare il profilo nella colla facendo attenzione che appoggi con entrambi i lati sui rivestimenti da collegare.</p>																
Articolo	L mm																														
PNSP... 40 PA	40																														
Articolo	L mm																														
PNSP... 409 PAS	40																														
Articolo	L mm																														
PNSP... 4010 PAS	40																														
<p>technical information, codes, dimensions and prices</p>	<p>type of profile</p> <p>technical drawings</p>	<p>examples and instructions for laying methods</p>	<p>available finishes</p> <p>accessories</p> <p>technical drawings</p> <p>technical information, codes, dimensions and prices</p> <p>page</p>																												
<p>PROCOVER WOOD è un profilo coprigiunto in alluminio rivestito con pellicola molto resistente in 77 finiture legno (72 a richiesta). Viene applicato alla fine della posa fra due pavimentazioni contigue poste su uno stesso livello, con una fuga tra 6 e 24 mm fra i due pavimenti posati a colla. Protegge i bordi esterni del pavimento/rivestimento. È facile da posare ed esteticamente gradevole. Il design del profilo con la freccia inferiore nel gambo verticale permette un miglior ancoraggio con il silicone/colla.</p> <p>ALLUMINIO RIVESTITO 77 finiture legno (72 a richiesta) thermo packed - largh. barre 2,7 ml - conf. 40 PZ - 108 ml</p> <table border="1"> <thead> <tr> <th>Articolo</th> <th>L x H mm</th> </tr> </thead> <tbody> <tr> <td>PCRA... 149</td> <td>14 x 9</td> </tr> <tr> <td>PCRA... 269</td> <td>26 x 9</td> </tr> </tbody> </table> <p>Disponibile nelle finiture legno: 05W - 11W - 28W - 29W - 30W. La sigla della finitura scelta va aggiunta alla sigla dell'articolo. Es.: PCRA... 149 (finitura scelta Faggio scuro) PCRA04W 149.</p> <p>GAMMA COLORI</p> <table border="1"> <thead> <tr> <th>05W</th> <th>11W</th> <th>28W</th> <th>29W</th> <th>30W</th> </tr> </thead> <tbody> <tr> <td>Rovere chiaro (doppi)</td> <td>Decapè sbiancato</td> <td>Rovere Aspen</td> <td>Rovere bianco</td> <td>Rovere grigio</td> </tr> </tbody> </table> <p>A richiesta è possibile realizzare altre finiture della gamma colori: minimo d'ordine 100 pz. Tempi di produzione 4/5 settimane. Prezzo da concordare. Per finiture a campione contattare l'ufficio commerciale per quantità minime, tempistiche e costi.</p> <p>INSERTO PROCOVER RESINA VINILICA / GOMMA NERA</p> <p>Profilo a "U" in Resina Vinilica/Gomma per inserimento PROCOVER con base Proinsert System da PINBFT 45 o PINBFT 40.</p> <p>RESINA VINILICA/GOMMA lungh. 2,7 ml (solo in rotoli)</p> <table border="1"> <thead> <tr> <th>Articolo</th> <th>Larg. mm</th> </tr> </thead> <tbody> <tr> <td>PCPCR</td> <td>45</td> </tr> <tr> <td></td> <td>40</td> </tr> </tbody> </table> <p>PROINSERT BASE 45 E BASE 40 - ALLUMINIO FORATO - TRANCiato lungh. barre 2,7 ml - conf. 20 PZ - 54 ml</p> <table border="1"> <thead> <tr> <th>Articolo</th> <th>Larg. mm</th> </tr> </thead> <tbody> <tr> <td>PINBFT 45</td> <td>45</td> </tr> <tr> <td>PINBFT 40</td> <td>40</td> </tr> </tbody> </table>   <p>PER H: MIN. 9 mm MAX. 12 mm</p> <p>PROGRESS PROFILES 237</p>				Articolo	L x H mm	PCRA... 149	14 x 9	PCRA... 269	26 x 9	05W	11W	28W	29W	30W	Rovere chiaro (doppi)	Decapè sbiancato	Rovere Aspen	Rovere bianco	Rovere grigio	Articolo	Larg. mm	PCPCR	45		40	Articolo	Larg. mm	PINBFT 45	45	PINBFT 40	40
Articolo	L x H mm																														
PCRA... 149	14 x 9																														
PCRA... 269	26 x 9																														
05W	11W	28W	29W	30W																											
Rovere chiaro (doppi)	Decapè sbiancato	Rovere Aspen	Rovere bianco	Rovere grigio																											
Articolo	Larg. mm																														
PCPCR	45																														
	40																														
Articolo	Larg. mm																														
PINBFT 45	45																														
PINBFT 40	40																														

© 2020 All rights reserved by Progress Profiles. Printed in Italy

CODE COMPOSITION

EXAMPLE REGARDING METAL PROFILE:

PLSOL 308FS

base code | chosen finish | height or width | self pack | perforated

EXAMPLE REGARDING PLASTIC PROFILE:

PEG 25-01A

base code | height or width | adhesive | chosen colour

EXAMPLE REGARDING PAINTED ALUMINIUM:

PEGA 25-01A

base code | height or width | aluminium | chosen colour

SELF PACK and ECO BLISTER

The **SELF PACK** range consists of blister profiles with adhesive labels with all the explanations for the interpretation of technical information regarding our profiles (code, length, finish, etc.). In the perforated version, screws and plugs are included. The **ECO BLISTER** range consists of blister profiles without explanation label but provided only with an EAN barcode. In the perforated version, screws and plugs are not included. Both have 4 colours to identify the 4 types of profiles (blue for window sill covers, red for fitting terminals, yellow for step covers, and beige for the proinsert system).

© 2020 All rights reserved by Progress Profiles. Printed in Italy

THRESHOLD-COVER PROFILES	TRANSITION PROFILES	STEP NOSING	PROINSERT SYSTEM
Prosol Proplate Provevall	Provevall 29/33/305 Proskid Progress 712 Profloor Promoquette Promoquette Fix	Proend Grip Proend Ins Proend Prowalk Tube for runners Progrip	Sol 30 self-adhesive Zero Curve self-adhesive Profixer Line System Sol 40P Terminal Pin Zero Curve Terminal
ARTICOLO PLSOTA 3010 103 cm	ARTICOLO PLVA 339 90 cm	ARTICOLO PWKA 309 90 cm	ARTICOLO PISPCNC 40795 90 cm
OTTONE LUCIDO POLISHED BRASS LAITON BRASS MESSING GLANZEND	OTTONE BRASS LAITON MESSING	OTTONE BRASS LAITON MESSING	NOCE ROSATO RED WALNUT NOYER ROSE NUSS ROSE
AUTOADESIVO SELF-ADHESIVE AUTOADHESIF SELBSTKLEBEND	AUTOADESIVO SELF-ADHESIVE AUTOADHESIF SELBSTKLEBEND	AUTOADESIVO SELF-ADHESIVE AUTOADHESIF SELBSTKLEBEND	AUTOADESIVO SELF-ADHESIVE AUTOADHESIF SELBSTKLEBEND
MADE IN ITALY	MADE IN ITALY	MADE IN ITALY	MADE IN ITALY

Labels on the packs include: **SELF PACK**, **PROGRESS PROFILES**, **SERIE PROSOL**, **ARTICOLO PLSOTA 3010**, **103 cm**, **OTTONE LUCIDO**, **POLISHED BRASS**, **LAITON BRASS**, **MESSING GLANZEND**, **AUTOADESIVO**, **SELF-ADHESIVE**, **AUTOADHESIF**, **SELBSTKLEBEND**, **MADE IN ITALY**.

Labels on the packs include: **SELF PACK**, **PROGRESS PROFILES**, **SERIE PROVEVALL**, **ARTICOLO PLVA 339**, **90 cm**, **OTTONE BRASS**, **LAITON**, **MESSING**, **AUTOADESIVO**, **SELF-ADHESIVE**, **AUTOADHESIF**, **SELBSTKLEBEND**, **MADE IN ITALY**.


Labels on the packs include: **SELF PACK**, **PROGRESS PROFILES**, **SERIE PROWALK**, **ARTICOLO PWKA 309**, **90 cm**, **OTTONE BRASS**, **LAITON**, **MESSING**, **AUTOADESIVO**, **SELF-ADHESIVE**, **AUTOADHESIF**, **SELBSTKLEBEND**, **MADE IN ITALY**.

Labels on the packs include: **SELF PACK**, **PROGRESS PROFILES**, **SERIE SOL 40P COMPLETE**, **ARTICOLO PISPCNC 40795**, **90 cm**, **NOCE ROSATO**, **RED WALNUT**, **NOYER ROSE**, **NUSS ROSE**, **AUTOADESIVO**, **SELF-ADHESIVE**, **AUTOADHESIF**, **SELBSTKLEBEND**, **MADE IN ITALY**.

Labels on the packs include: **PHOTOS**, **ARTICLE**, **SIZE**, **CODE**, **FIXING SYSTEM**, **PROFILE LENGTH**, **MATERIAL**, **FINISHES**, **EAN CODE**.

LAYING INSTRUCTION

LAYING INSTRUCTIONS: SELF-ADHESIVE

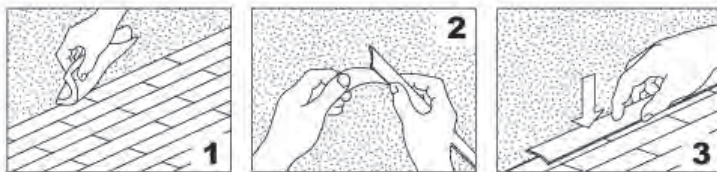

- 1) Clean the adhesion area. The surface must be dry, dust free, grease free, and non-friable.
- 2) Remove the protective paper.
- 3) Lay the profile and press evenly on the entire length.

LAYING INSTRUCTIONS: WITH SCREWS/PLUGS



- 1) Drill holes in the floor taking care that they match the holes on the profile.
- 2) Insert the plugs in the holes.
- 3) Tighten the profile.

Progress Profiles SpA
Via Le Marze 7
31011 ASOLO (TV) Italy

Tel. +39 0423 950398
Fax +39 0423 950979
Certified company UNI EN ISO 9001:2015

P.I. IT 03481880262 - R.E.A. TV 275319
C.F. e Iscr. Reg.Impr. TV 03481880262
Cap. soc. € 120.000,00 i.v.
N. Meccanografico TV 44685

IMPORTANT:

Every time a price list will be given to your Client, we ask you to fill in this form and deliver it to the company Progress® Profiles s.p.a. fax: +39 0423 950 979 or mail: cservice@progressprofiles.com

Kind regards

President & CEO
Dennis Bordin

Place _____

Date _____

Name Agent _____

To the attention of Mr. _____

Name Client _____

Reference person _____

(Stamp)

With the present we give the following material _____

Catalogue / List _____ N° _____ Pcs _____

Discounts _____

Note _____

PROGRESS® PROFILES OFFICIAL CATALOGUE Rev.00_20 - distribution of this catalogue is un controlled - Approval and issue: *Dennis Bordin* (D. Bordin) - Check: *M. Torresan* (M. Torresan)

Kind regards

© 2020 All rights reserved by Progress Profiles. Printed in Italy

FINISHED PRODUCT AND RAW MATERIALS FEATURES

STAINLESS STEEL:

The steel profiles are realised through cold shaping of constant thickness sheets, therefore, differentiating from the corresponding version in aluminium and brass realised by hot extrusion, despite maintaining the applicative and dimensional features. The stainless steel is efficiently resistant to mechanical stresses, particularly suitable in the chemical, food, hospital sector for responding to hygienic, duration and resistance to chemical agents requisites. Normally produced with Polished finish, it is possible to realise a brushed finish that is implemented with the partial removal of material using nylon fibre and quartz rotary brushes that confer a brushed/satin matt look to the surface, without altering its features. The ultra-glossy finish happens by means of special brushes to create mirror polished finishes.

Produced in different chemical compositions, below are the main features:

AISI	DIN	*C	Cr	Ni	*Si	*Mn	Mo
430	1,4016	0,10	16,0+18,0	-	1,0	1,0	-
304	1,4301	0,06	18,0+20,0	8,0+10,5	1,0	2,0	-
316L	1,4404	0,03	16,0+18,0	11,0+13,0	1,0	2,0	2,0+2,5

* Maximum admitted values

STAINLESS STEEL AISI 430 – EN X 8 CR 17 – DIN 1.4016:

Chromium stainless steel forming part of the FERRITE category, despite being considered stainless it can easily be stained in presence of particularly aggressive products, and be contaminated by oxidising generated by other materials.

STAINLESS STEEL AISI 304 – EN X 5 CRNI 18 10 – DIN 1.4301:

Nickel/chromium stainless steel forming part of the AUSTENITIC category is the most diffused and used alloy in the manufacturing of products with highly technical and performing features. Highly resistant to most chemical products it can superficially stain or darken; a normal polishing (e.g. sidol/ smac) product is sufficient to give it back its original state.

In presence of oxidising stains in the Brushed/satin version due to the brushes, simply use a wirewool.



STAINLESS STEEL AISI 316 – EN X 2 CRNIMO 17 12 – DIN 1.4404:

Stainless steel AISI 316 is part of the AUSTENITIC category that is characterised by the internal presence of Molybdenum besides Nickel-Chromium, this feature confers an excellent resistance of the material in limit conditions, which the presence of Chlorine and Salt.

APPLICATION FIELDS:

Material	Indoor	Outdoor	Floor	Wall	Heavy traffic	High chemical attack (*)	Food Contact	Pools	Thermal environments	Marine environments
STAINLESS STEEL AISI 316	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
STAINLESS STEEL AISI 304	yes	yes	yes	yes	yes	no	yes	no	no	no
STAINLESS STEEL INOX 1.4016	yes	no	yes	yes	no	no	no	no	no	no
NATURAL BRASS	yes	yes	yes	yes	yes	no	no	no	no	no
CHROME BRASS	yes	no	yes	yes	no	no	no	no	no	no
POLISHED VARNISHED BRASS	yes	no	no	yes	no	no	no	no	no	no
NATURAL ALLUMINIUM	yes	yes	yes	yes	yes	no	no	no	no	no
VARNISHED ALLUMINIUM	yes	yes	no	yes	no	no	no	no	no	no
WOOD EFFECT FINISHES ALLUMINIUM	yes	no	yes	yes	no	no	no	no	no	no
ANODIZED / POLISHED / BRUSHED ALLUMINIUM	yes	no	yes	yes	no	no	no	no	no	no
VINYL RESIN (PVC)	yes	no	no	yes	no	yes	no	yes	yes	yes

(*) In the case of applications in environments where they are used special chemicals aggressesve, consult the technical department.

BRASS:

The brass profiles are characterised by a high resistance to mechanical stresses making it particularly suitable in heavy traffic applications like, for example, industrial applications with frequent pedestrian crossings. The brass is resistant to the main chemical agents intervening in ceramic coating applications. The surface of the profile, in presence of humidity or particularly aggressive agents, can show superficial oxidising phenomenon that can be removed by using a normal polishing product (e.g. Sidol and Smac).

The profiles can be realised by means of hot extrusion and cold shaping of constant thickness sheets.

EXTRUSION ALLOY Cu Zn 43 Pb2 Al EN 12167 CW 624N

**Cu%	*Pb%	*Sn%	*Fe%	*Ni%	**Al%	Other%	Zn%
55-57	1,6-3	0,30	0,30	0,30	0,05-0,5	0,2	Remainder

** Indicative values * Maximum admitted values

LAMINATING ALLOY Cu Zn 37 EN 1652 CW 508L

**Cu%	*Pb%	*Fe%	Zn%	Impurity%
67	0,1	0,1	Remainder	0,30

** Indicative values * Maximum admitted values

POLISHED BRASS:

The polished finish is realised with special machines with springs/brushes that mechanically polish the surface without altering the intrinsic features of the material. A partial darkening of the surface in presence of oxidising materials is a phenomenon that can be contrasted using normal polishing products (e.g. Sidol and Smac).

CHROMIUM BRASS:

The finish is obtained by beams of galvanic process that confers a brilliant look similar to the ultra-glossy stainless steel. The treatment confers an excellent aesthetical look, excellent resistance to chemical aggressions but limited resistance to mechanical superficial impacts and persistent abrasion.



FINISHED PRODUCT AND RAW MATERIALS FEATURES

ALUMINIUM:

Primary alloy suitable for complex extrusions, it is highly resistant and has excellent superficial finish at natural state making it ideal for successive finishing processes: Anodizing, Polishing, Painting. Hot hardened and tempered it reaches a Brinnel Hp hardness degree around 70 kg/mm².

Aluminium ALLOY Mg 0,7 Si 0,4 Conventional Designation: P-Al Mg Si UNI 3569-66 UNI 6060

*Cu%	*Mn%	*Zn%	*Ti%	*Cr%	Si%	Mg%	*Fe%	Al%
0,10	0,10	0,15	0,10	0,10	0,3-0,6	0,35-0,6	0,1-0,3	Remainder

* Maximum admitted values

TILTEX & ANODIZED ALUMINIUM:

Anodic oxidation process against corrosion from atmospheric agents not combined with galvanic processes. The profiles are treated with preventive processes making them evenly matt. They are subsequently coloured by means of electro-chemical oxidation in the standard Silver, Gold, Bronze, Sand, Champagne colours with a thickness of about 15-20 micron.

The Anodized Copper and Titanium finishes are firstly superficially polished and, subsequently, subjected to the above process.

All TILTEX finishes are firstly subjected to a special superficial brushing and, subsequently, to the above process.

BRUSHED & POLISHED ALUMINIUM:

It is made of a special preventive mechanical-chemical polishing treatment and subsequent anodic bath in Chrome and Gold colours. The obtained profiles maintain the same resistance to corrosion features of the anodized profiles, but with a brilliant aesthetical aspect, making them similar to the polished surfaces.

The Polished Copper and Titanium finishes are firstly subjected to superficial polish and, subsequently, to the above process.

All BRUSHED finishes are subjected to a special superficial brushing and, subsequently, to the above process.



THERMOPLASTIC VINYL RESIN:



RVA: RIGID THERMOPLASTIC SHOCKPROOF NON TOXIC VINYL RESIN:

Purposely studied material for optimising the performing features of rigid profiles for permanent indoor application with aesthetical and long-lasting requirements. Realised starting from primary pigments and resin, their PVC composition makes it suitable for a high range of applications up to a temperature of +50/60°C. The raw material used guarantees excellent resistance to U.V. rays, to limited chemical impacts and stagnation of fungus and bacteria.

FEATURES	TEST	UNIT OF MEASURE	INDICATIVE VALUE
Specific weight	ASTM D 792	gr/cm ³	1,43 +/-0,02
Rockwell Hardness	ASTM D 785		108
VICAT Point	ISO 306	°C	83,7
Tensile strength at break	ASTM D 638	Mpa	50
Elongation at Break	ASTM D 638	%	100
IZOD Resistance with Cut	ASTM D 256	J/m	60
Yielding strength point	ASTM D 638	Mpa	48
Flammability	UL 94	CLASS	VO
Reaction to UV Rays	-	-	EXCELLENT RESISTANCE

RVF: FLEXIBLE NON-TOXIC VINYL RESIN (PLASTICISED THERMOPLASTIC):

Same chemical features of RVC with which it is perfectly compatible in the CO-EXTRUSION process used by ourselves in most of the dilatation, fitting joints. Thanks to the nature of the used plasticisers, the material maintains its own essential flexible features in time.

FEATURES	TEST	UNIT OF MEASURE	INDICATIVE VALUE
Specific weight	CEI 20-34	gr/cm ³	1,24 +/-02
Hardness	ISO 868	Sh-A	70 +/-2
Breaking load	ISO 527	N/mm ²	> 13
Elongation at Break	ISO 527	%	300
Thermal stability at 200°C	ISO 182	min.	25
Apparent Rigidity Module	ISO R 458	Mpa	310
Cold Flex temperature	ISO R 458	C°	-30

PAINTED ALUMINIUM:

The painting process is made of a chromium phosphate-based pre-treatment, of an electrostatic polyester-powder based paint with highly resistant features to U.V. rays and to atmospheric agents. The coating thickness covers the entire profile surface having an average thickness of approx. 50-70 micron. A hot mesh polymerisation process is also carried out for maximum guarantee of the chemical-mechanical resistance.

RVC: CO-EXTRUDED THERMOPLASTIC VINYL RESIN FOR CO-EXTRUSION:

Primary resin with chemical composition similar to RVA is characterised by a high resistance and optimised compatibility with regard to long-lasting adherence with plasticised resins used in the co-extrusion process, meaning the permanent joining of two materials with different degrees of Shore hardness.

FEATURES	TEST	UNIT OF MEASURE	INDICATIVE VALUE
Specific weight	ISO 1183	gr/cm ³	1,40 +/-0,5
Hardness	ISO 868	Sh-A	75 +/-2
Breaking load	ISO 527	Mpa	> 18
Elongation at Break	ISO 527	%	> 350
Stiffening temperature	ISO 1183	°C	-40 +/- 2

EPDM AND NEOPRENE VULCANISED RUBBER:

The vulcanised rubber is a modified mix of EPDM and NEOPRENE of Grey or Black colour: below are the particular features:

Excellent mechanical properties in a working temperature interval from -35°C t + 100°C; Resistance to aqueous, oily and hydrocarbon fluids. Low permanent deformation with compression and pulling. Excellent resistance to ageing. Excellent resistance to dynamic fatigue and laceration. The intrinsic features of the material make it particularly suitable in the realisation of profiles where high stresses in time are requested, both indoor and outdoor.

FEATURES	TEST	UNIT OF MEASURE	INDICATIVE VALUE
Specific weight	DIN 53420	gr/cm ³	1,21
Hardness	DIN 53505	Shore A	60 +/-3

RESISTANCE TO CORROSIVE AGENTS:

Below is the indicative resistance towards the main diluted chemical agents and elements. Normally, the PVC products must never come into contact with Aromatic hydrocarbons, Ketones and Esters.

For further information on the materials write to our technical department.

CORROSIVE AGENT	RIGID VINYL RESIN CONCENTRATION (RVA)
Weak acids reaction	Null
Weak acids reaction	Null
Reaction to alcohol, aliphatic hydrocarbons, oils	Null
Reaction to Ketones, esters, aromatic hydrocarbons	DISSOLUTION
Flammability	CLASS VO UL94
Reaction to UV Rays	excellent resistance

STEEL

Polished stainless steel AISI 304/1.4301-V2A	AC	
Super polished stainless steel AISI 304/1.4301-V2A	ACML	
Satin finish stainless steel AISI 304/1.4301-V2A	ACS	
Sanded stainless steel AISI 304/1.4301-V2A	ACSB	
Polished stainless steel AISI 316L/1.4404-V4A	ACM	

BRASS

ON	Natural brass	
OL	Polished brass	
OC	Chromed brass	
OB	Antique brass	

ALUMINIUM

Natural aluminium	AN	
Anodised silver aluminium	AA	
Polished chrome aluminium	BC	
Brushed silver aluminium	BS	
Brushed silver tiltex aluminium	BX	
Anodised copper aluminium	AR	
Polished copper aluminium	BR	
Brushed copper aluminium	RS	
Brushed copper tiltex aluminium	RX	
Brushed black aluminium	NS	
Anodised black aluminium	NE	
Polished black aluminium	BN	

AT	Anodised titanium aluminium	
BT	Polished titanium aluminium	
TS	Brushed titanium aluminium	
TX	Brushed titanium tiltex aluminium	
AO	Anodised Gold aluminium	
BO	Polished Gold aluminium	
BOS	Brushed Gold aluminium	
AB	Anodised Bronze aluminium	
DB	Anodised dark Bronze aluminium	
BRA	Anodised antique bronze aluminium	
BRAS	Brushed antique bronze aluminium	
CH	Anodised champagne aluminium	
SB	Anodised sand aluminium	

VARNISHED ALUMINIUM

White (9016)	01	
Matt White (9016)	010	
White ivory (9001)	0106	
Light grey (7035)	02	
Stone grey (7030)	03	
Quartz grey (7039)	0211	
Asphalt grey (7043)	0311	
Ivory (1015)	06	
Klinker red (8004)	10	
Black (9005)	11	
Bahama beige	17	
Tuscany grey	03TU	
Tuscany beige	05TU	
Tuscany bronze	20TU	

VARNISHED ALUMINIUM STONE LINE

Stone white	SL01	
Stone cream	SL02	
Stone greyvory	SL03	
Stone sand	SL04	
Stone gray	SL05	
Stone cristal gray	SL06	
Stone antragray	SL07	

VARNISHED ALU. (only Proterrace)

B	White (9010)	
G	Grey (7038)	
T	Dark brown (8019)	
E	Beige (1019)	

VARNISHED ALU. (embossed)

BF	White (9010)	
GF	Grey (7038)	
A	Anthracite grey	
TF	Dark brown (8019)	
C	Corten	
EF	Beige (1019)	

MARBLED

MARBLED on demand

Carrara white	MC		MNA	Navona**	
Real yellow beige	MB		MBC	Polished chrome**	
Sky blue	MA		MBD	Bardiglio**	
Portugal pink	MR		MGV	Veined grey**	
Guatemalan green	MV		MGVC	Light veined grey**	
Aquamarine green	MVA		MBPS	Salt-and-pepper beige**	
Soft blue	MAS		MCRI	Ivory cream**	
Soft pink	MRS		MCRC	Light cream**	
Soft beige	MBS		MBO	Polished gold**	
Soft green	MVAS		MAM	Macauba blue**	
Travertino light	MTC		MAB	Blue**	
Travertino dark	MTS		MBDX	Burgundy**	
			MVBL	Brazil green**	

**Production on demand with a minimum order of 800 pcs. Production delay 4/5 weeks. Price to be agreed

METALS

WOOD

similar finishes are indicated between brackets

Dark beech 04W	Light oak (strip) 05W	Dark oak (walnut) 06W	Light cherry (strip) 07W
Dark cherry (board) 08W	Red walnut (Merbau-apple-walnut) 09W	Wengé (panga-panga-wengé) 10W	Bleached decapè 11W
Indonesian teak 13W	Light zebrano 18W	Powder oak 21W	Bleached fir 25W
Aspen oak 28W	White oak 29W	Grey oak 30W	Victoria oak 31W
Pink oak 32W	Sawed oak 33W	Havana oak 34W	Edimburgo oak 35W
American oak 36W	Carvi oak 37W	Queens oak 38W	Grey elm 39W
Brown oak 40W	Ice oak 41W	Grace oak 42W	Manhattan oak 43W
Honey oak 44W	Morocco oak 45W	Black decapè 46W	Black oak 47W
Cork oak 48W	Sand oak 49W	50W	51W
52W	53W	54W	55W
56W	57W	58W	59W
60W	61W	62W	63W
64W	Tripoli 65W	66W	67W
68W	69W	70W	71W
72W	Bangkok 73W	74W	75W Liotard
76W	77W	78W	79W
80W	81W	82W	83W
84W	85W	86W	87W
88W	89W	90W	93W New white
Mahogany* M	Natural Oak**		

(for a precise assessment of colours and finishes, request the wood finishes sample range)
 *available only with Angle bar AGEM 25 and Skirting BTPRM 70
 **available only with Proslider wood, Prostair wood and wood z, Prostep wood, Prostyle wood

Rigid PVC

White ice 00	15 Brown
White 01	16 Blue
White ivory 0106	17 Bahama beige
Light grey 02	18 Grey
Cement grey 03	19 Beige**
Light beige 04	20 Dark ivory**
Dark beige 05	21 Light pink**
Ivory 06	22 Dark pink**
Pink 07	23 Dark antique pink**
Sky blue 08	24 Dark sky blue**
Yellow 09	25 Brick red**
Red 10	26 Turquoise green**
Black 11	27 Dark green**
Silver 12	28 Hazel brown**
Gold 13	29 Dark brown**
Green 14	

**Production on demand with a minimum order of 800 pcs. Production delay 4/5 weeks. Price to be agreed

Flexible / Expanded PVC

White B
Light grey GC
Dark grey GS
Brown Only for Flexible PVC M
Dark Brown Only for Flexible PVC T
Black N

INSERTS steps - vinyl rubber

A Ivory
G Grey
B Beige
N Black

INSERTS joints - vinyl rubber

G Grey
N Black

JOINTS rigid part - rigid PVC / flexible part - plastified PVC

Dark grey Dark grey GS 51 E 86	GL 50 E 82 Light grey Light grey
Dark grey Transparent GT 51 E 80	

JOINTS rigid part - rigid PVC / flexible part - plastified PVC

Brick red * Transparent RT 52 E 80	MT 53 E 80 * Brown Transparent
White * White BIBI	N * Black Black
Beige * Beige BB 54 54	* Production on demand with a minimum order of 400 pcs. Production delay 4/5 weeks. Price to be agreed

PRODILAT & JOINTS flexible part - EPDM

Grey G	N Black
------------------	----------------

