


Geberit Delta concealed cistern 12 cm, 6 / 3 litres, with front actuation



Example image

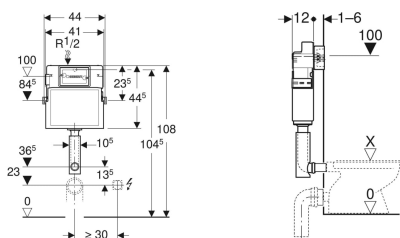

Application purposes

- For masonry walls
- For installation in part or room-height prewall installations
- For installation in room-height installation walls
- For floor-standing and wall-hung WCs
- For single flush, dual flush or stop-and-go flush

Characteristics

- Concealed cistern with front actuation
- Concealed cistern, fully insulated against condensation

Scope of delivery

- Angle stop valve R 1/2", compatible with MF, with adapter ring
- Protection box for service opening
- 2 distance bolts
- Flush bend with recess shells
- Protection plug
- 2 slotted flat irons
- 2 fixing brackets
- Fastening material

- Immediate post flush possible with factory setting
- Flush bend fitted
- Water supply connection on the rear or top centre
- Connection hose on angle stop valve can be attached without tools

Technical data

Flow pressure	0.1-10 bar
Flush volume, factory setting	6 and 3 l
Flush volume large, adjustment range	4.5 / 6 / 7.5 l
Flush volume small, adjustment range	3-4 l

Art. no.	B	H	T
109.100.00.1	41 cm	44.5 cm	12 cm



- Actuator plate has to be ordered separately