


Geberit urinal flush control with electronic flush actuation, battery operation, cover plate type 50

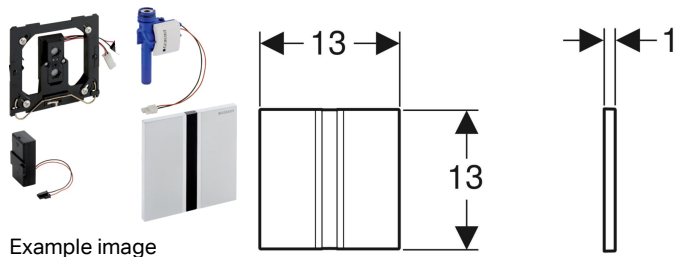

Application purposes

- For automatic flush actuation of urinals

Characteristics

- Cover plate with securing bar
- Water-saving hybrid mode can be set
- Adjustable interval flush
- Preflush can be set
- Warning when the battery is low
- Valve-closing function when battery is flat
- Device settings and operation with mobile device via integrated Bluetooth® interface (from 01/04/2022)
- Compatible with Geberit Control App from 01/04/2022
- Functions can be set and queried with the Geberit Service Handy
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set
- Tap group II in accordance with DIN 4109

Technical data

Battery type	Alkaline (1.5 V AA)
Service life, supplied battery	~ 2 years
Protection degree	IP45
Operating voltage	3 V DC
Power consumption	< 0.5 W
Flow pressure	1-8 bar
Maximum test pressure, water	16 bar
Maximum test pressure, air / inert gas	3 bar
Flow rate at 1 bar without flow limiter	0.3 l/s
Flow rate at 1 bar with flow limiter	0.18 l/s
Interval flush time, factory setting	5 s
Detection time, factory setting	7 s
Flush time, adjustment range	1-15 s
Flush time, factory setting	7 s

Scope of delivery

- Cover plate type 50 with IR window
- Infrared control, premounted on mounting frame
- Solenoid valve
- Battery compartment
- 2 alkaline manganese batteries type AA 1.5 V
- Fastening material

Art. no.	Colour / surface	Material designation
116.036.GH.1	chrome-plated, brushed	Die-cast zinc
116.036.QB.1	red gold / brushed, easy-to-clean coated	Die-cast zinc
116.036.QD.1	black chrome / brushed, easy-to-clean coated	Die-cast zinc
116.036.QF.1	brass / brushed, easy-to-clean coated	Die-cast zinc