


Geberit urinal flush control with electronic flush actuation, battery operation, rear water supply connection

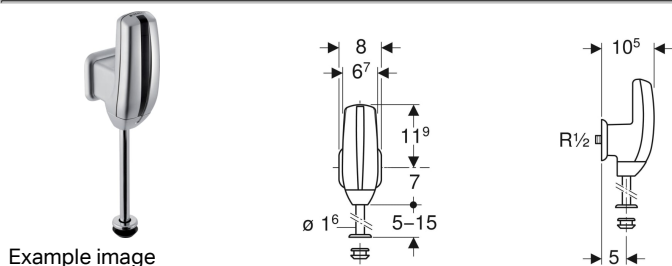

Application purposes

- For automatic flush actuation of urinals
- For replacing manual surface-mounted urinal flushing valves
- For renovations, conversions and new buildings
- For concealed water supply connections at the rear
- For rooms with low minimum distance to opposite wall

Characteristics

- Adjustable interval flush
- Preflush can be set
- Standard 9-V lithium or alkaline battery can be used
- Warning when the battery is low
- Valve-closing function when battery is flat
- Functions can be set and queried with the Geberit Service Handy

Technical data

| | |
|---------------------------------|--------------|
| Battery type | HR22 (9 V) |
| Operating voltage | 9 V DC |
| Power consumption | 1 W |
| Flow pressure | 1-8 bar |
| Storage temperature | -20 – +70 °C |
| Operating temperature | 1–40 °C |
| Detection time, factory setting | 7 s |
| Flush time, adjustment range | 4-15 s |
| Flush time, factory setting | 7 s |

Scope of delivery

- Tap housing
- Infrared control
- Solenoid valve
- Lithium battery, type U9VL
- Wall connection flange R 1/2"

| Art. no. | Colour / surface | Material designation |
|--------------|--------------------|----------------------|
| 115.805.46.1 | matt chrome-plated | Die-cast zinc |