


**Geberit installation set for shower channels of the CleanLine series, for screed height at inlet 90–220 mm**

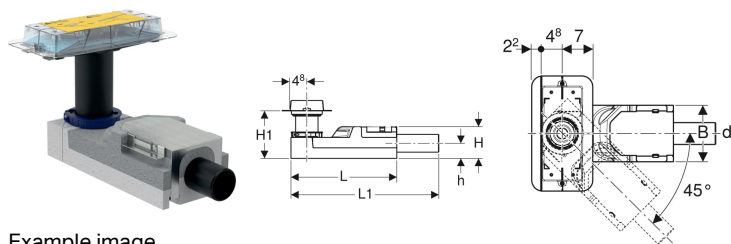

Example image

**Application purposes**

- For drainage of Geberit shower channels of the CleanLine series
- For composite seals
- For screed height ≥ 90 mm at inlet

**Characteristics**

- Quality-monitored in accordance with EN 1253-3

**Scope of delivery**

- Protection box cover with reference line
- Thin bed bonding flange
- Trap made of PE-HD

- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Base unit made of EPS, for sound decoupling and receiving the trap

**Technical data**

Discharge rate	0.8 l/s
Depth of water seal	50 mm

**To order additionally**

- Shower channel of the CleanLine series

- Fastening material
- Distance plate, thickness 2 cm

Art. no.	DN	d, ø	L	L1	B	H	H1	h
154.150.00.1	50	50 mm	30 cm	35.8 cm	13 cm	9 cm	9-22 cm	4.2 cm

**Accessories**

- Geberit shower channel CleanLine80
- Geberit shower channel CleanLine, tile-bearing



- Consider screed height of the base unit with tile sizes < 5 cm. Have product material and thickness of the screed defined by tiler.