


Geberit shower channel CleanLine20

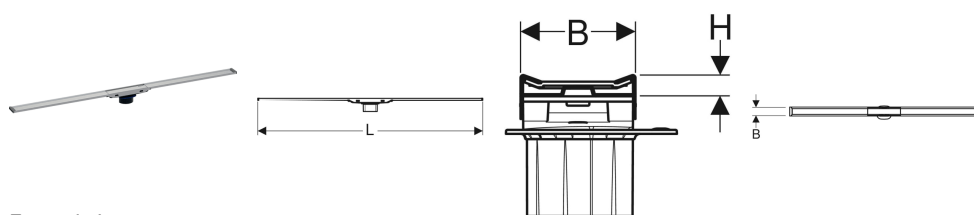

Example image

Application purposes

- For drainage of floor-even showers
- For installation in the room or on the wall
- For installation in thin bed mortar
- For composite seals
- Suitable for barrier-free construction

Characteristics

- Quality-monitored in accordance with EN 1253-3

Scope of delivery

- Comb insert
- Inlet connection piece with compensation ring

- Shower channel can be cut to length
- Suitable for tile structures on floor 8–35 mm
- Shower channel can be aligned in height, inclination and offset
- Easy cleaning
- Water drainage above the composite seal
- Load-bearing capacity, class K 3 (3 kN)

Technical data

Product material | CrNiMo steel 1.4404 (EN 10088)

- 2 end pieces, pluggable
- Suction cup

To order additionally

- Installation set for shower channels of the CleanLine series

Art. no.	Colour / surface	L	B	H
154.450.KS.1	Frame: stainless steel electropolished Surface: stainless steel brushed	30-90 cm	4.3 cm	0.8 cm
154.451.KS.1	Frame: stainless steel electropolished Surface: stainless steel brushed	30-130 cm	4.3 cm	0.8 cm
154.453.KS.1	Frame: stainless steel electropolished Surface: stainless steel brushed	30-160 cm	4.3 cm	0.8 cm
154.450.00.1	Frame: stainless steel coated / black Surface: stainless steel brushed	30-90 cm	4.3 cm	0.8 cm
154.451.00.1	Frame: stainless steel coated / black Surface: stainless steel brushed	30-130 cm	4.3 cm	0.8 cm
154.453.00.1	Frame: stainless steel coated / black Surface: stainless steel brushed	30-160 cm	4.3 cm	0.8 cm



- Natural stone tiles in the shower area may discolour